


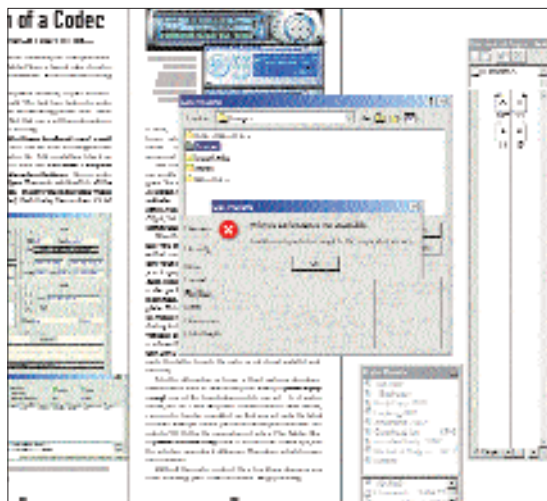

The error that appears when attempting to access a network drive

insufficient system resources, which means you may have a memory leak. As a system's resources vary from one moment to another, you actually might be able to access network drives after a few minutes or seconds. An immediate solution is to close unimportant applications to free some resources, and try accessing the files again.

If this does not help, or if you have nothing else open anyway, the next best thing is to restart Windows. For a more permanent solution, you need to find the

faulty module, program, application, or driver that is causing the memory leak. The leak is caused because of a driver or an application that uses the memory to function, but does not release it as soon as the work is complete. This builds up over time, until all the system resources are utilised, causing errors. This is why the problem is temporarily solved when you restart—the memory is cleared and reallocated.

You can use Performance Monitor to detect faulty applications, or use **Poolman.exe** to detect driver problems—this is found in the **Support\Tools** folder on the Windows CD-ROM.

If you find a program that's causing the problem, make sure to remove any service related to that process. Next, remove any other program or application interacting with the same process, and finally, remove the faulty process itself.

You should also send a detailed e-mail to the vendor or manufacturer of that application to inform them of your problem. Hopefully, they will find a solution, and prevent others from facing the same.

Adding more cards

I have a Pentium IV 1.8 GHz Processor and an 845 GLVA Intel original motherboard, which has inbuilt audio and video. I want to know if I can install external audio or video cards on this motherboard, and whether I need to change any BIOS settings. Is there any way of knowing the speed of the DDR-RAM that my system currently has?

Tathagata Ray

Sorry, your motherboard does not have an AGP slot, so you're stuck with the integrated graphics chipset. If you want, you can install a PCI video card such as a TV-tuner card to get better graphics. For a better sound solution, you can use an add-on PCI sound card, and all you need to do is disable the on-board sound card from the BIOS.

Windows does not provide a reliable utility to check the RAM clock speed, but you can see it when you start your system. At the first screen, where you see the RAM count taking place, you can also see the RAM clock speed. Another option is to use a freeware utility called WCPUID (www.hoda.com), to see the RAM clock speed.

Driver shop

Two months ago, I bought a new PC with a Pentium 4 2.4 GHz processor, 512 MB of DDR RAM, an 80 GB Seagate Barracuda, on an ASUS P4S533 MX Motherboard. I bought an nVidia Riva TNT 2 graphics card with 32 MB of video RAM. I want to know whether my card supports OpenGL. Also, my ASUS motherboard has the SoundMax Sound chipset. The drivers provided with the motherboard CD are incorrect. Where can I get the latest drivers?

Anshuman

The nVidia TNT2 card that you have on your PC has full support for OpenGL. Install the latest drivers from www.nvidia.com for maximum game performance. For better performance, we suggest a new generation graphics card, based on the GeForce or Radeon chipset.

You can get the latest SoundMax drivers from <http://www.asus.com.tw/support/download/item.aspx?ModelName=P4S533-MX&Type=Latest>.

Long story short


I recently upgraded my home PC, taking your advice for the latest motherboard, processor and graphics. My configuration

Enlarge my X screen

I recently installed Red Hat Linux 9.0, and noticed that the X-window GUI screen occupies less than my monitor viewable area—an inch on both the left and the right. I have an ASUS motherboard with an Intel 845GL chipset, 128 MB of DDR RAM and on-board 8 MB VGA. My monitor is a 15-inch LG Studio-works 520Si. Are there some extra parameters to be given in XF86Config?

Sandeep

The problem is that the screen resolution is too high—reducing it to 1,024 x 768 or 800 x 600 will solve your problem. Since you're using Red Hat 9, you don't have to worry about adding extra parameters to the XF86Config file—this was the only way out with previous Red Hat versions. Red Hat 9 has an excellent GUI configuration tool called 'redhat-config-xfree86' that can be invoked by typing the same at the

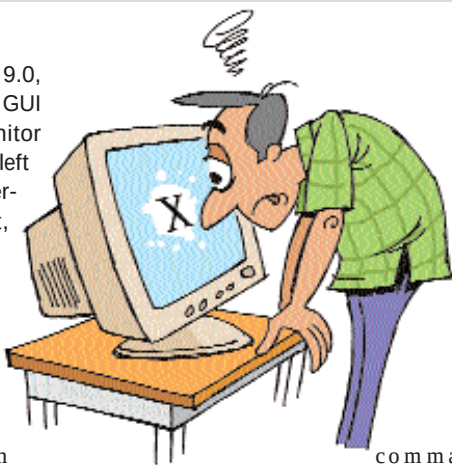

Illustrations: Mahesh Benkar

command prompt. You can also type it in the dialog box that comes up after clicking on the Run... option under the Main Menu, or go to **Main Menu > System Settings > Display**. Adjust the resolution using the drop-down box, and then restart the X server by either logging in again, or by using **[Ctrl] + [Alt] + [Backspace]**. This will solve your problem.