

UI/UX DESIGN SPECIFICATION

QMS — Design Language, Pages & Components

Version 1.0 | Sep 2026 | Implementation: Tailwind CSS v4, React 19 client components

1. Design Language

1.1 Color tokens (application)

Token	Value	Usage
Primary / success	 #1D9E75	Primary buttons, approved states, brand links
Page background	 #EEF2FA	App canvas
Surface (cards)	 #FFFFFF	Cards, tables, modals
Danger	 #C1614F	Errors, delete, overdue, critical
Warning / amber	 #D9A441	Pending, not-started, medium severity
Info / blue	 #4C7EA8	In-progress, low severity
Text	 #0F172A / #64748B	Heading / muted body
Border / divider	 #E5EDF5	Cards, table rows

1.2 Module accent colors


Module	Accent	Icon
Documents	 #4A5D7A	doc
CAPA	 #1D9E75	cap
Non-conformances	 #C1614F	nc
Audits	 #D9A441	audit
Training	 #7A5FB8	train

1.3 Typography & shape

- **Fonts:** Geist (default Next font) with Geist Mono for code/ids.
- **Radii:** cards `rounded-2xl` (16px); buttons `rounded-xl` (12px); badges pill-shaped.
- **Spacing:** 4px scale; page padding `p-6/p-8` ; card padding `p-4/p-6` .
- **Shadows:** subtle (no hard borders under cards except tables).

2. Information Architecture

Login → Dashboard (/)
└─ Record modules: Documents · CAPA · NCRs · Audits · Training (list / new / detail / edit)

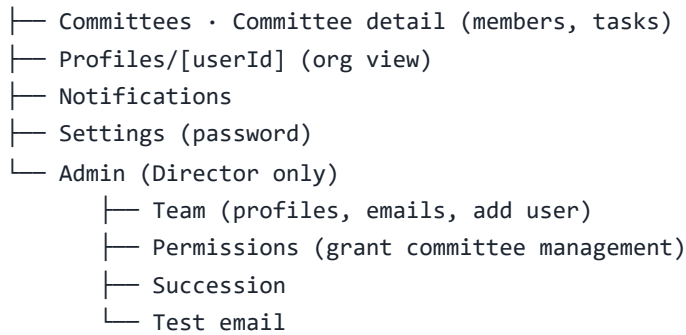

Public: /login • /register • /forgot-password • /reset-password • /unauthorized

3. Page-by-Page Design

3.1 Login / Register / Reset

- **Login:** centered card, email + password fields, "Sign in" primary button, links to register and forgot-password. Autofocus email.
- **Register:** creates a profile; returns auto-generated credentials on success (show once).
- **Forgot/Reset:** email input → token flow → new password with confirmation (min length, match validation).
- **Unauthorized:** friendly access-details page explaining the viewer's scope.

3.2 Dashboard

- Header with product mark, nav, notifications bell (unread count), user menu (profile, settings, sign out).
- **TeamRollups** for team-lead+: stat cards (Open CAPAs, Open NCRs, Open audits, Overdue training) with module icons.
- **PersonProgress:** per-report completion bars.
- Module list with open-count badges and contextual "New record" button (hidden for monitor-only).

3.3 Record list (per module)

- Filter by status; each row: title + status badge + assignee + key field (revision / priority / severity / date / course).
- Row click → detail. Module accent shown on icon chip.
- No-create state for monitor-only: list without action button.

3.4 Record detail

- Header: module badge, title, status `StatusBadge`, assignee, key attributes.
- **Action area:** contextual — Assignee: Edit / Submit; Manager chain / Director: Approve + Request revision via `ApprovalPanel`; others: read-only.
- Permission denial shows a white "Unauthorized / view access details" card, not raw errors.
- Tabs/sections: Comments (threaded, own+viewable), History (event log with from→to status, author, timestamp, comment).

3.5 New / Edit record

- Form: title, assignee (only valid subordinate targets), module fields, status. Validation inline.
- Monitor-only attempt shows a permission notice — no form.

3.6 Committees

- List page: cards with name, description, members count, created-by, tasks summary.
- Detail: members grid with head marker + Manage members controls (permission-gated); task board grouped by status with complete/approve actions.

- Permission-gated "Create", "Add member", "Assign task" buttons only for committee managers/heads.

3.7 Admin (Director)

- **Team:** profile cards with roleTitle, reportsTo, editable *email* field (on-blur save), "Add user" inline form.
- **Permissions:** toggle `canManageCommittees` for users (validation against top-authority).
- **Succession:** pick successor to move leadership (reportsTo reassignment).
- **Test email:** send a sample email to profile email to validate Resend config.

4. Component Library

Component	Behavior / States
<code><ModuleIcon /></code>	SVG glyph per module, size <code>sm md lg</code>
<code><StatusBadge /></code>	Pill with status→color mapping + <code>normalizeStatus()</code> fallback
<code><ApprovalPanel /></code>	Approve / Request revision actions with comment; only for approvers
<code><QmsShell /></code> (components/qms.tsx)	Layout shell: nav, header, permission-aware actions
Cards / StatCard	White card, icon + label + bold value
Forms	Labeled inputs, inline errors, primary submit
Empty / Loading / Error	Skeleton pulse loading; app-level error boundary; not-found page

5. Interaction & UX Rules

- **Visibility of permission:** users never see create/edit/approve controls they cannot use (graceful degradation).
- **Feedback:** success/error toasts (or inline) after every mutation; email failures — if any — shown as a warning, action still completes.
- **Referral:** redirect to `/login?callbackUrl=...` for unauthenticated visitors; preserve the intended page after login.
- **Loading:** route-level skeletons (no flash of content); profile list awaited before showing action buttons.
- **Delete:** soft-delete confirmed before hiding; record detail 404s after deletion.
- **Spacing/scan:** consistent 12px+ vertical rhythm; keep critical actions within one reading height on desktop.

6. Accessibility Checklist

- All form fields have labels; inputs provide `aria`-friendly naming.
- Buttons are clearly focusable; visible focus ring on keyboard navigation.
- Color is never the only signal — status pills include text labels.
- Contrast: text on white $\geq 4.5:1$; accents used for emphasis, not body text.

7. Responsive Behaviour

- Multi-column stat grids collapse (`sm:grid-cols-2 xl:grid-cols-4`).
- Tables become stacked/cards on mobile; nav collapses to a compact sheet.

- Forms max-width centered on large screens (`max-w-xl/2xl`) with full-width inputs on mobile.