



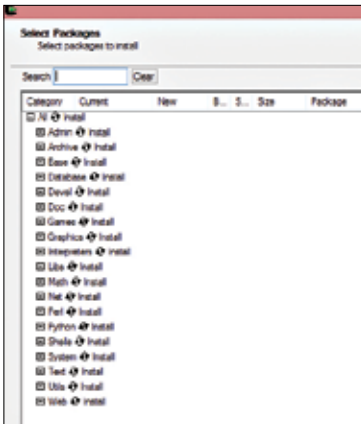

Select Default in Package installation

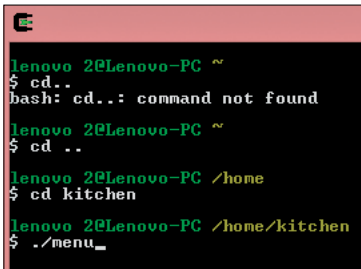

Switch to Kitchen using the cd command and get the Kitchen menu

folder. Rename it to kitchen. Go to cygwin and navigate to the Home folder.

Tip: Use command 'cd' (change directory) to navigate. `cd ..` goes one level up and `cd <folder name>` changes the directory.

Type in the command line `./menu` and kitchen will start loading.

The kitchen menu will load and give a host of options. This is where we will start to build the ROM. Place the zip file of the ROM you have downloaded in the kitchen folder. In cygwin, choose option 1 (type 1) and press enter. The zip file will be extracted and you will have a working folder.

Alternatively, you can also use ASSAYED KITCHEN from XDA forum. After extracting it, run the assayd.exe file. This will create 3 new folders- Place, Ready and Work. **Place** folder contains the base ROM zip files or your firmware zip files. This folder essentially

contains the base ROM/ FIRMWARE, that you are going to work upon. You will need to put the firmware zip in this folder. This firmware will act as the base, on which you will make modifications and make your own ROM. **Ready** folder will contain your ROM zip files. This essentially has your ROM zips that you will make and flash on your device

**Work** folder contains the ROM files. As the name suggests, this folder is the one, you will be working on. Keep the downloaded ROM zip in the Place folder.

In the Assayd kitchen menu, type 1 and press enter. PLACE\_Folder is the default option so just press Enter. In the list of firmware available, select your ROM by typing 1 and hit enter. The extraction will be underway and the files will be unzipped to the Work folder.