

followed by the selection of a time zone and its confirmation. Now, you can select the current date and the local time.

You can now enable services from a given list, such as `sshd`, `mouse`, `ntpd`, `ntpddate`, and `sumpdev`. In the next menu, you can configure the security options you want to enable in your system. You can also add user accounts to your system and carry out the final configuration.


After these steps have been completed, you can complete the installation and reboot.

Configuring network interfaces

Regardless of whether you will be installing from the internet, you will need a network interface at some point in time. After you have completed the installation, the FreeBSD installation will show you a list of the network interfaces it found on your system.

You can scan for wireless interfaces as well. You can generally identify networks through their SSID. Once you have identified the SSID, select the network, and you will be prompted to enter the password. Now you can choose whether you want IPv4 configured for the interface. If you have an ethernet connection, the installer brings you directly to this step without choosing among networks.

If a DHCP server is available, you can next choose the IPv4 DHCP configuration of the network. You will need to enter the web's IP address and the default router, and the network's subnet mask.

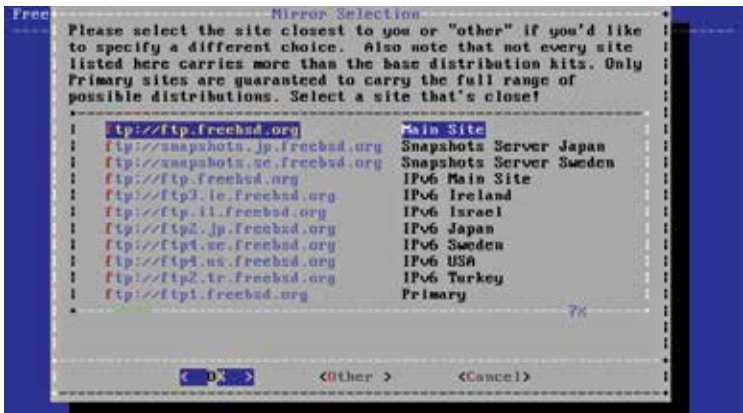

Mirror Selection in FreeBSD