


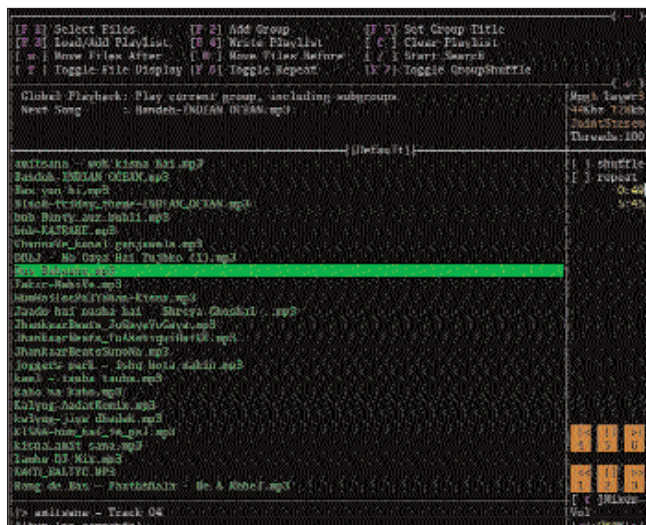

The playlist get maximum space at the centre and controls are located on its border

Player Control

Even if the mouse is enabled, it cannot be used to click on buttons. The entire control for this application is possible only via the keyboard. The top of the screen lists all the keys in order to play the music file. The right pane contains buttons for play, pause, forward, etc. and it also displays the toggle switch for repeat and shuffle. In between the top and right pane is an empty area (when run for the first time) where the playlist will appear after selection of media files. MP3Blaster supports OGG, WAV, Sid, and of course,

MP3. Below are the list of keys you will need to operate the player:

Once you enter a folder view using [F1] or [F3], the function of certain keys listed above changes. For example, [F6] gets assigned to “Convert MP3 to WAV,” and [F7] is assigned to “Add URL (shoutcast).” Look at the key list given on the player’s interface—the playback keys will never change. Use [Q] to exit the player.

Tricks with ifconfig

This is a versatile command. It is mainly used to deal with network adapters such as displaying

the address and details of an adapter, say eth0. It can also be used to shut down an active adapter or bring up a deactivated one. But very few are aware that it can be used to spoof the MAC address of your Ethernet controller.

This command followed with the interface name and parameter “up” or “down” will start or shut down the interface specified.

#ifconfig eth0 down + [Enter] will shut down the Ethernet service.

#ifconfig eth0 up + [Enter] will bring up the Ethernet connection on your PC.

Assuming that you have only one network interface i.e. eth0, we shall try a different trick with the ifconfig command.

We all know that ifconfig by itself will display the details of all the installed interfaces. Use it to get the MAC address of your Ethernet card, as shown in Table 1 below.

Select the line ‘HWaddr 00:0C:76:52:E6:F5’ using your mouse (note that your interface address will be different from ours). Open a text file using any text editor and paste this line by clicking the middle button of your mouse (applicable for a three-button scroll mouse; else enable emulate three-button feature) or if you have

emulated three-button feature, then click both the left and right buttons simultaneously to paste it. Name the file ‘MAC address-original’ or something similar so that you will remember this file contains the real address. Although the original MAC address is restored on restarting the PC, we maintain this step so that we can restore the MAC address manually, without restarting.

To spoof the MAC address, you need to shut down the interface and then change the address, and finally, activate the interface connection. Here’s how to go about doing it:

#ifconfig eth0 down + [Enter]

#ifconfig eth0 hw ether 00:00:00:00:00:00 + [Enter]

#ifconfig eth0 up + [Enter]
Now check if the changes are made:

#ifconfig + [Enter]
You will see Table 2

You can even change the “inet addr” (IP address) and “Mask” (subnet mask) directly using the ifconfig command:

#ifconfig eth0 10.10.124.28 + [Enter]

This will change the IP address. And

#ifconfig eth0 netmask 255.0.0.0 + [Enter]

will change the subnet mask from 255.255.0.0 (/16) to 255.0.0.0 (/8). ■

Player Control

- [F1] To select music files using the inbuilt file browser. After selection, hit [F1] again to add to the playlist.
- [Spacebar] To select or deselect music files
- [F4] To create a playlist. Name the file with a .lst extension
- [C] To clear the playlist
- [F3] To load a playlist
- [F6] Toggle repeat
- [F7] Toggle shuffle
- [F] Toggle file or screen display
- Playback (Numeric keypad keys)**
 - [4] Previous track
 - [5] Play/pause
 - [6] Next track
 - [1] Rewind a track
 - [2] Stop a track
 - [3] Forward a track
- Sound mixer settings**
 - [T] Toggle mixer: Volume, PCM, IGain, Spkr, Line-in, etc.
 - [>] Increase the level of a mixer setting, for example, Volume
 - [<] Decrease the level of a mixer setting, for example, volume

Table 1	eth0	Link encap:Ethernet HWaddr 00:0C:76:52:E6:F5 inet addr:128.128.255.51 Bcast:128.128.255.255 Mask:255.255.0.0 inet6 addr: fe80::20c:76ff:fe52:e6f5/64 Scope:Link UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1 RX packets:375613 errors:0 dropped:0 overruns:0 frame:0 TX packets:2467 errors:0 dropped:0 overruns:0 carrier:0 collisions:0 txqueuelen:1000 RX bytes:26276079 (25.0 MiB) TX bytes:494497 (482.9 KiB) Interrupt:11 Base address:0xaf00

Table 2	eth0	Link encap:Ethernet HWaddr 00:00:00:00:00:00 inet addr:128.128.255.51 Bcast:128.128.255.255 Mask:255.255.0.0 inet6 addr: fe80::20c:76ff:fe52:e6f5/64 Scope:Link UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1 RX packets:375613 errors:0 dropped:0 overruns:0 frame:0 TX packets:2467 errors:0 dropped:0 overruns:0 carrier:0 collisions:0 txqueuelen:1000 RX bytes:26276079 (23.5 MiB) TX bytes:494497 (477.2 KiB) Interrupt:11 Base address:0xaf00