

# Cucumber Report

13-Mar-2023, 5:04:50 PM

Start : Mar 13, 5:04:10.077 PM

End : Mar 13, 5:04:50.438 PM

Duration : 40.361 s

Features

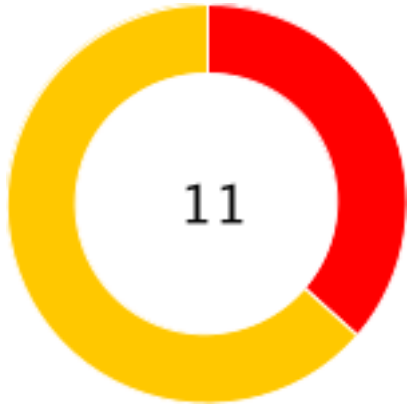
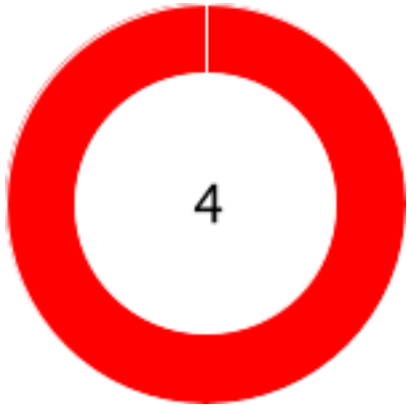
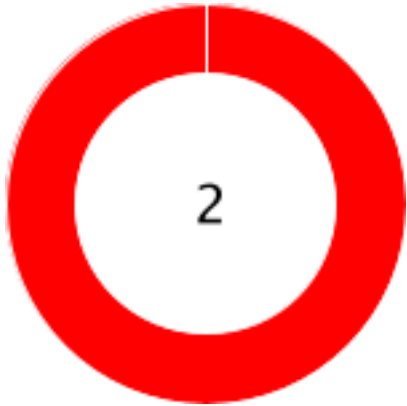
Scenarios

Steps

PASSED - 0  
FAILED - 2  
SKIPPED - 0

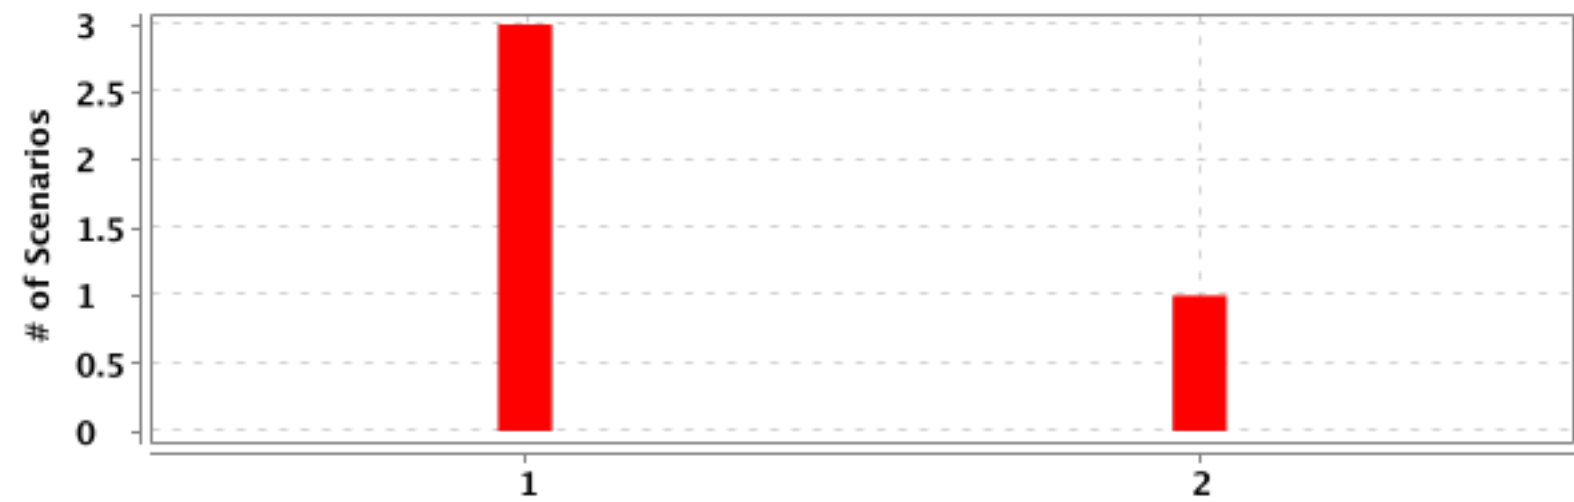
PASSED - 0  
FAILED - 4  
SKIPPED - 0

PASSED - 0  
FAILED - 4  
SKIPPED - 7

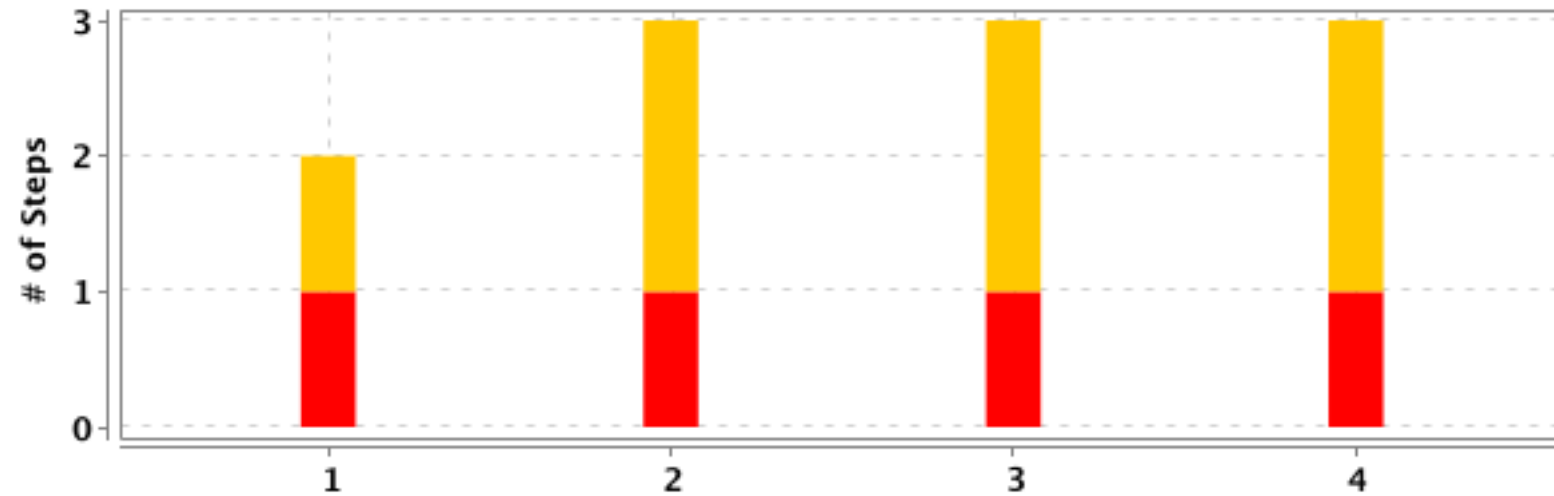


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>To verify the login feature</u>	40.348 s	3	0	3	0	8	0	3	5
<u>To verify the logout feature</u>	0.002 s	1	0	1	0	3	0	1	2

<b>Tag</b>	<b>Scenario</b>				<b>Feature</b>			
<b>Name</b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>
@Smoke	4	0	4	0	2	0	2	0
@Login	1	0	1	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>To verify the login feature</u>	3	0	3	0	40.348 s
2	<u>To verify the logout feature</u>	1	0	1	0	0.002 s

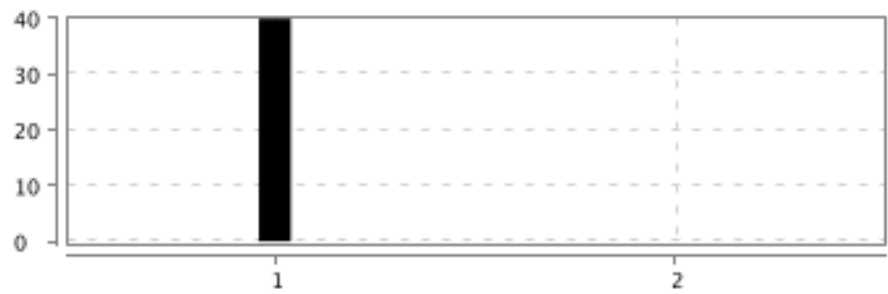



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>To verify the login feature</u>	<u>To verify that the login button is disabled</u>	2	0	1	1	39.865 s
2	<u>To verify the login feature</u>	<u>To verify that the login with invalid credentials</u>	3	0	1	2	0.007 s
3	<u>To verify the login feature</u>	<u>To login the login with valid credentials</u>	3	0	1	2	0.451 s
4	<u>To verify the logout feature</u>	<u>To logout the app</u>	3	0	1	2	0.002 s

## To verify the login feature

<b>FAILED</b>	<b>DURATION - 40.348 s</b>	Scenarios Total - 3 Pass - 0 Fail - 3 Skip - 0		Steps Total - 8 Pass - 0 Fail - 3 Skip - 5	
/ 5:04:10.077 PM // 5:04:50.425 PM /					

## To verify that the login button is disabled

FAILED	DURATION - 39.865 s		Steps Total - 2 Pass - 0 Fail - 1 Skip - 1	
/ 5:04:10.081 PM // 5:04:49.946 PM /				
To verify the login feature				
@Smoke				

#	Step / Hook Details	Status	Duration
1	<p>Given User opens the app</p> <pre>org.openqa.selenium.SessionNotCreatedException: Unable to create a new remote session. Original error: unexpected end of stream on Connection{0.0.0.0:4723, proxy=DIRECT hostAddress=/0.0.0.0:4723 cipherSuite=none protocol=http/1.1} Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'FULL636-PRO.local', ip: '2409:40f4:1005:c4ad:bc87:9ab2:2d42:177%en0', os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '12.5', java.version: '11.0.17' Driver info: driver.version: IOSDriver     at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession(AppiumCommandExecutor.java:208)     at io.appium.java_client.remote.AppiumCommandExecutor.createSession(AppiumCommandExecutor.java:217)     at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:239)     at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)     at io.appium.java_client.DefaultGenericMobileDriver.execute(DefaultGenericMobileDriver.java:41)     at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1)     at io.appium.java_client.ios.IOSDriver.execute(IOSDriver.java:1)     at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:213)     at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:336)     at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:131)     at io.appium.java_client.DefaultGenericMobileDriver.&lt;init&gt;(DefaultGenericMobileDriver.java:37)     at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:88)</pre>	<b>FAILED</b>	39.852 s

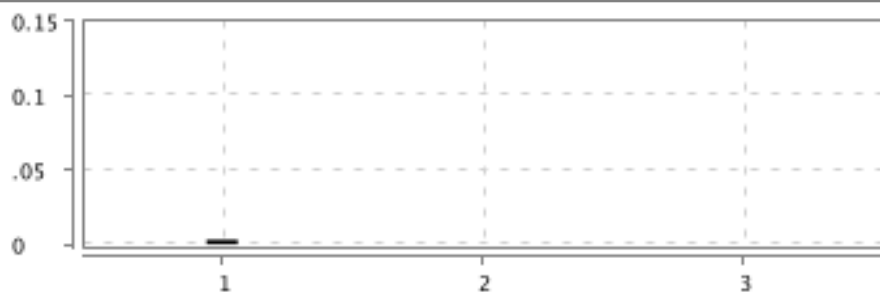

#	Step / Hook Details	Status	Duration
	<p>at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:98)</p> <p>at io.appium.java_client.ios.IOSDriver.&lt;init&gt;(IOSDriver.java:90)</p> <p>at containerBCapp.Baseclass.DesiredCap.LaunchIosApp(DesiredCap.java:25)</p> <p>at containerBCapp.Baseclass.CommonUtilities.lauchTheApp(CommonUtilities.java:39)</p> <p>at containerBCappStepDefinition.LoginStepdefiniton.user_opens_the_app(LoginStepdefiniton.java:15)</p> <p>at ?.User opens the app(file:///Users/ajith/Desktop/ContainerBuildAutomation/FeatureFiles/01_Login.feature:5)</p> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)</p> <p>at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)</p> <p>at java.base/java.lang.reflect.Method.invoke(Method.java:566)</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor\$1.createSession(AppiumCommandExecutor.java:186)</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor.createSession(AppiumCommandExecutor.java:217)</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:239)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)</p> <p>at io.appium.java_client.DefaultGenericMobileDriver.execute(DefaultGenericMobileDriver.java:41)</p> <p>at io.appium.java_client.AppiumDriver.execute(AppiumDriver.java:1)</p> <p>at io.appium.java_client.ios.IOSDriver.execute(IOSDriver.java:1)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:213)</p> <p>at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:336)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:131)</p> <p>at io.appium.java_client.DefaultGenericMobileDriver.&lt;init&gt;(DefaultGenericMobileDriver.java:37)</p> <p>at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:88)</p> <p>at io.appium.java_client.AppiumDriver.&lt;init&gt;(AppiumDriver.java:98)</p> <p>at io.appium.java_client.ios.IOSDriver.&lt;init&gt;(IOSDriver.java:90)</p> <p>at containerBCapp.Baseclass.DesiredCap.LaunchIosApp(DesiredCap.java:25)</p> <p>at containerBCapp.Baseclass.CommonUtilities.lauchTheApp(CommonUtilities.java:39)</p> <p>at containerBCappStepDefinition.LoginStepdefiniton.user_opens_the_app(LoginStepdefiniton.java:15)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)</p> <p>at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)</p> <p>at java.base/java.lang.reflect.Method.invoke(Method.java:566)</p> <p>at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)</p> <p>at io.cucumber.java.Invoker.invoke(Invoker.java:24)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p> <p>at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)</p> <p>at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)</p> <p>at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:57)</p>		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:95) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:566) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:135) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:673) at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:220) at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:945) at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:193) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:146) at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1541) at org.testng.TestRunner.privateRun(TestRunner.java:808) at org.testng.TestRunner.run(TestRunner.java:603) at org.testng.SuiteRunner.runTest(SuiteRunner.java:429) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:423) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:383) at org.testng.SuiteRunner.run(SuiteRunner.java:326) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1249) at org.testng.TestNG.runSuitesLocally(TestNG.java:1169) at org.testng.TestNG.runSuites(TestNG.java:1092) at org.testng.TestNG.run(TestNG.java:1060) at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115) at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251) at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77) Caused by: java.io.IOException: unexpected end of stream on Connection{0.0.0.0:4723, proxy=DIRECT hostAddress=/0.0.0.0:4723 cipherSuite=none protocol=http/1.1} at okhttp3.internal.http1.Http1Codec.readResponseHeaders(Http1Codec.java:208) at okhttp3.internal.http.CallServerInterceptor.intercept(CallServerInterceptor.java:88) </pre>		



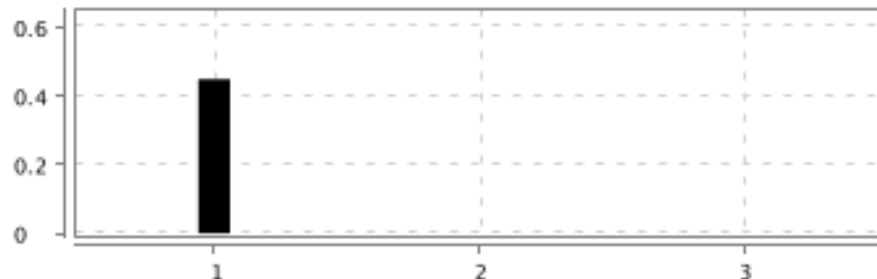

#	Step / Hook Details	Status	Duration
	<pre> at okhttp3.internal.http.RealInterceptorChain.proceed(RealInterceptorChain.java:147) at okhttp3.internal.http.RealInterceptorChain.proceed(RealInterceptorChain.java:121) at org.openqa.selenium.remote.internal.OkHttpClient\$Factory\$1.lambda\$createClient\$1(OkHttpClient.java:152) at okhttp3.internal.http.RealInterceptorChain.proceed(RealInterceptorChain.java:147) at okhttp3.internal.connection.ConnectInterceptor.intercept(ConnectInterceptor.java:45) at okhttp3.internal.http.RealInterceptorChain.proceed(RealInterceptorChain.java:147) at okhttp3.internal.http.RealInterceptorChain.proceed(RealInterceptorChain.java:121) at okhttp3.internal.cache.CacheInterceptor.intercept(CacheInterceptor.java:93) at okhttp3.internal.http.RealInterceptorChain.proceed(RealInterceptorChain.java:147) at okhttp3.internal.http.RealInterceptorChain.proceed(RealInterceptorChain.java:121) at okhttp3.internal.http.BridgeInterceptor.intercept(BridgeInterceptor.java:93) at okhttp3.internal.http.RealInterceptorChain.proceed(RealInterceptorChain.java:147) at okhttp3.internal.http.RetryAndFollowUpInterceptor.intercept(RetryAndFollowUpInterceptor.java:126) at okhttp3.internal.http.RealInterceptorChain.proceed(RealInterceptorChain.java:147) at okhttp3.internal.http.RealInterceptorChain.proceed(RealInterceptorChain.java:121) at okhttp3.RealCall.getResponseWithInterceptorChain(RealCall.java:200) at okhttp3.RealCall.execute(RealCall.java:77) at org.openqa.selenium.remote.internal.OkHttpClient.execute(OkHttpClient.java:103) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:105) ... 71 more Caused by: java.io.EOFException: \n not found: limit=0 content=... at okio.RealBufferedSource.readUtf8LineStrict(RealBufferedSource.java:237) at okhttp3.internal.http1.Http1Codec.readHeaderLine(Http1Codec.java:215) at okhttp3.internal.http1.Http1Codec.readResponseHeaders(Http1Codec.java:189) * Not displayable characters are replaced by '?'. </pre>		
	AFTER_STEP - containerBCappHooks.Hooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.002 s
	<pre> java.lang.NullPointerException at containerBCappHooks.Hooks.screenShot(Hooks.java:14) </pre>		
2	Given The login button should be disabled with email and password field empty	SKIPPED	0.000 s

### To verify that the login with invalid credentials

<div>FAILED</div> <div>DURATION - 0.007 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 5:04:49.962 PM // 5:04:49.969 PM /				
To verify the login feature				
@Smoke				

#	Step / Hook Details	Status	Duration
1	And Enters the invalid email and invalid password  <pre>java.lang.NullPointerException   at java.base/java.util.Objects.requireNonNull(Objects.java:221)   at org.openqa.selenium.support.ui.FluentWait.&lt;init&gt;(FluentWait.java:106)   at org.openqa.selenium.support.ui.WebDriverWait.&lt;init&gt;(WebDriverWait.java:85)   at org.openqa.selenium.support.ui.WebDriverWait.&lt;init&gt;(WebDriverWait.java:45)   at containerBCapp.Baseclass.CommonUtilities.getMobileElement(CommonUtilities.java:83)   at containerBCapp.Baseclass.CommonUtilities.sendKey(CommonUtilities.java:105)   at containerBCapp.Methods.LoginMethods.enterInvalidCredentials(LoginMethods.java:51)   at containerBCappStepDefinition.LoginStepdefinition.enters_the_invalid_email_and_invalid_password(LoginStepdefinition.java:45)   at ?.Enters the invalid email and invalid password(file:///Users/ajith/Desktop/ContainerBuildAutomation/FeatureFiles/01_Login.feature:10)   * Not displayable characters are replaced by '?'. </pre>	FAILED	0.003 s
	AFTER_STEP - containerBCappHooks.Hooks.screenShot(io.cucumber.java.Scenario)  <pre>java.lang.NullPointerException   at containerBCappHooks.Hooks.screenShot(Hooks.java:14) </pre>	FAILED	0.001 s
2	And Taps on the login button	SKIPPED	0.000 s
3	Then User should see a warning toast	SKIPPED	0.000 s

### To login the login with valid credentials

FAILED	DURATION - 0.451 s		Steps Total - 3 Pass - 0 Fail - 1 Skip - 2	
/ 5:04:49.974 PM // 5:04:50.425 PM /				
To verify the login feature				
@Smoke @Login				

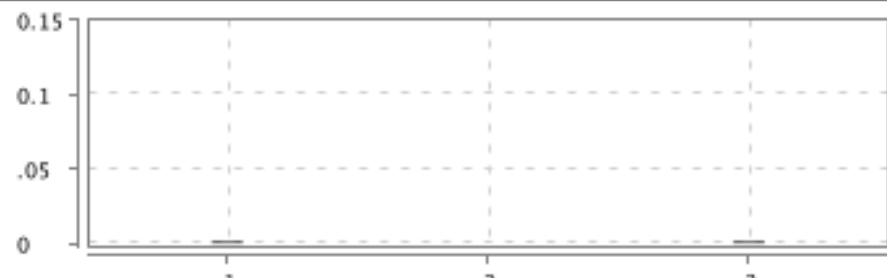

#	Step / Hook Details	Status	Duration
1	And Enters the valid email and valid password  <pre>java.lang.NullPointerException   at java.base/java.util.Objects.requireNonNull(Objects.java:221)   at org.openqa.selenium.support.ui.FluentWait.&lt;init&gt;(FluentWait.java:106)   at org.openqa.selenium.support.ui.WebDriverWait.&lt;init&gt;(WebDriverWait.java:85)   at org.openqa.selenium.support.ui.WebDriverWait.&lt;init&gt;(WebDriverWait.java:45)   at containerBCapp.Baseclass.CommonUtilities.getMobileElement(CommonUtilities.java:83) </pre>	FAILED	0.449 s

#	Step / Hook Details	Status	Duration
	at containerBCapp.Baseclass.CommonUtilities.sendKey(CommonUtilities.java:105) at containerBCapp.Methods.LoginMethods.enterTheCredentials(LoginMethods.java:16) at containerBCappStepDefinition.LoginStepdefinition.enters_the_valid_email_and_valid_password(LoginStepdefinition.java:21) at ?.Enters the valid email and valid password(file:///Users/ajith/Desktop/ContainerBuildAutomation/FeatureFiles/01_Login.feature:16) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - containerBCappHooks.Hooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.000 s
	java.lang.NullPointerException at containerBCappHooks.Hooks.screenShot(Hooks.java:14)		
2	And Taps on the login button	SKIPPED	0.000 s
3	Then User should be logged in successfully	SKIPPED	0.000 s

### To verify the logout feature

FAILED	DURATION - 0.002 s	Scenarios		Steps	
/ 5:04:50.436 PM // 5:04:50.438 PM /		Total - 1		Total - 3	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 2	

### To logout the app

FAILED		DURATION - 0.002 s			Steps Total - 3 Pass - 0 Fail - 1 Skip - 2	
/ 5:04:50.436 PM // 5:04:50.438 PM /						
To verify the logout feature						
@Smoke						

#	Step / Hook Details	Status	Duration
1	Given User taps on the settings button	FAILED	0.001 s
	java.lang.NullPointerException at java.base/java.util.Objects.requireNonNull(Objects.java:221) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:106)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:85) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:45) at containerBCapp.Baseclass.CommonUtilities.getMobileElement(CommonUtilities.java:83) at containerBCapp.Baseclass.CommonUtilities.tapTheElement(CommonUtilities.java:100) at containerBCapp.Methods.LogoutMethods.tapMoreButton(LogoutMethods.java:14) at containerBCappStepDefinition.LogoutStepdefiniton.user_taps_on_the_settings_button(LogoutStepdefiniton.java:13) at ?.User taps on the settings button(file:///Users/ajith/Desktop/ContainerBuildAutomation/FeatureFiles/02_Logout.feature:5) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - containerBCappHooks.Hooks.screenShot(io.cucumber.java.Scenario)  java.lang.NullPointerException at containerBCappHooks.Hooks.screenShot(Hooks.java:14)	FAILED	0.000 s
2	And User tap on the logout button	SKIPPED	0.000 s
3	Then User should be logged out successfully	SKIPPED	0.001 s