

On the rightmost side you will find your email ID. When you click on it, it will show a 'Sign Out' menu.

Next, click on *Start new project* and assign it a project name, such as 'Digital_Clock'. Click 'Ok'. In the next screen, you will see four panes: *Palette*, *Viewer*, *Components* and *Properties*.

Within the *Palette* pane, you will discover several options. Select *Label* and drag it into the *Viewer* pane (which contains the mobile device image).

In the *Viewer* screen, this will appear as 'Text for Label1'. In the *Components* pane, it will be labelled as 'Label1' and in the *Properties* pane as 'Label1'. The

label serves the purpose of displaying text, and your screen will now resemble Figure 2. Note that there is a vertical scroll bar at the right edge.

In the *Components* pane, under *Screen1*, you can see the name 'Label1'. Use the *Rename* button to change it to 'Clock_Label'. You will notice that it updates to the same name in the *Properties* pane as well. In this pane, you can set the properties of the 'Clock_Label'. Modify the *BackgroundColor* to black (you can change it to any colour), set the *FontSize* to 40, and adjust the *Height* and *Width* to *Fill parent*.

Remove the 'Text for Label1' to leave the 'Text' property blank. Change 'TextAlignment' to 'Center : 1' and *TextColor* to *White*. Make sure that *Visible* property is checked, and leave other items at their default values. You can get more information by clicking the question mark in the *Palette* against each item.

In the *Palette*, click on *Sensors* and drag 'Clock' into the screen area in the *Viewer*. This will appear as a non-visible component at the bottom of the *Components* pane, listed as *Clock1* below *Clock_Label*. Make sure that in the *Properties* pane, under *Clock1*, *TimerAlwaysfires* and *TimerEnabled* are checked. Set the 'TimerInterval' to 1000, so the timer event triggers every 1000 milliseconds (1 second). This setup will result in a screen resembling Figure 3.

In Figure 3, just below your email ID, there are two tabs – *Designer* and *Blocks*. Up to this point, you have been operating in *Designer* mode. Now switch to 'Blocks'. In the *Blocks* mode, you will find two panes – *Blocks* and *Viewer*. This *Viewer* is different from the *Viewer* in the *Designer* mode.

In the *Blocks* pane, you will see the 'Clock_Label' and 'Clock1', created in the *Designer* mode. Click on 'Clock1'. You will get a number of blocks in the *Viewer* pane. Select the 'when Clock1.Timer' block. Similarly, click on 'Clock_Label' in the *Blocks* pane

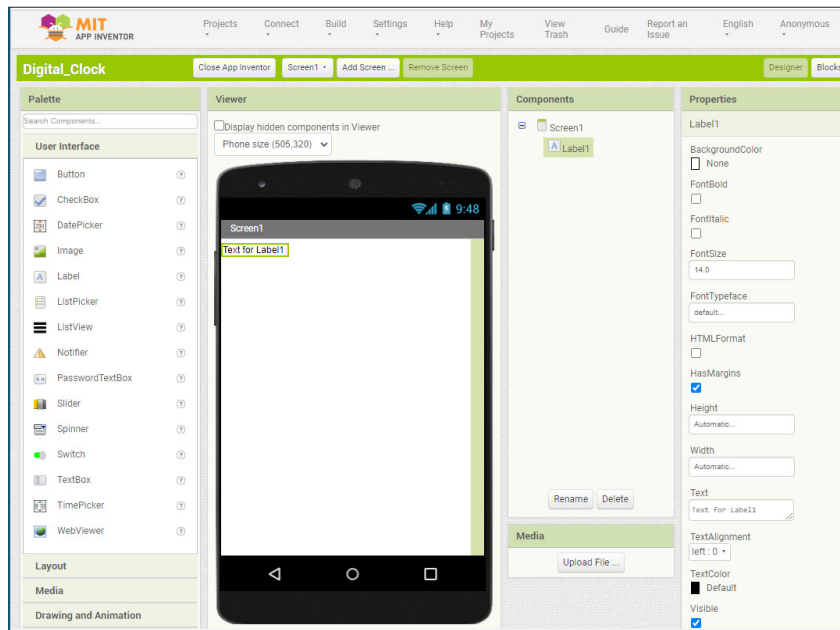


Figure 2: First screen

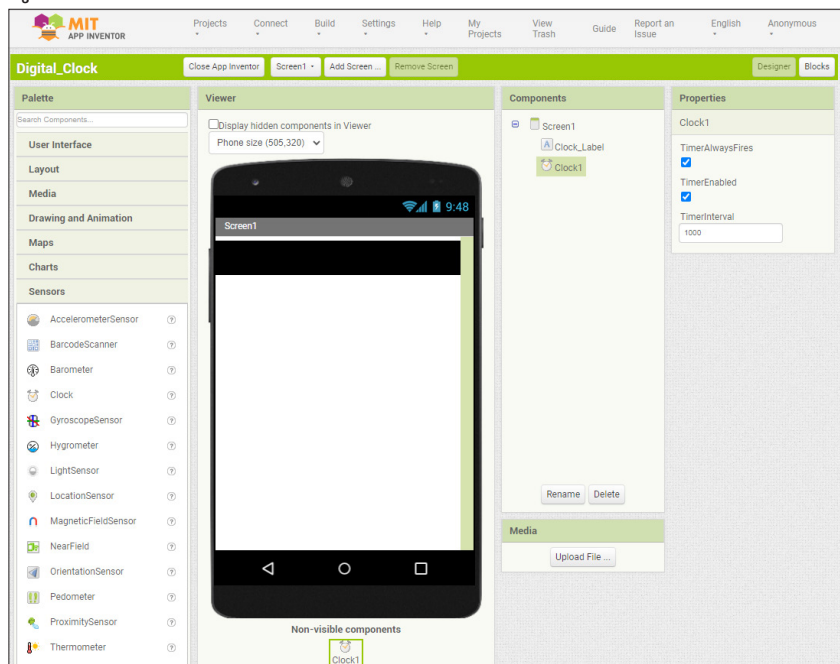


Figure 3: Screen with timer