

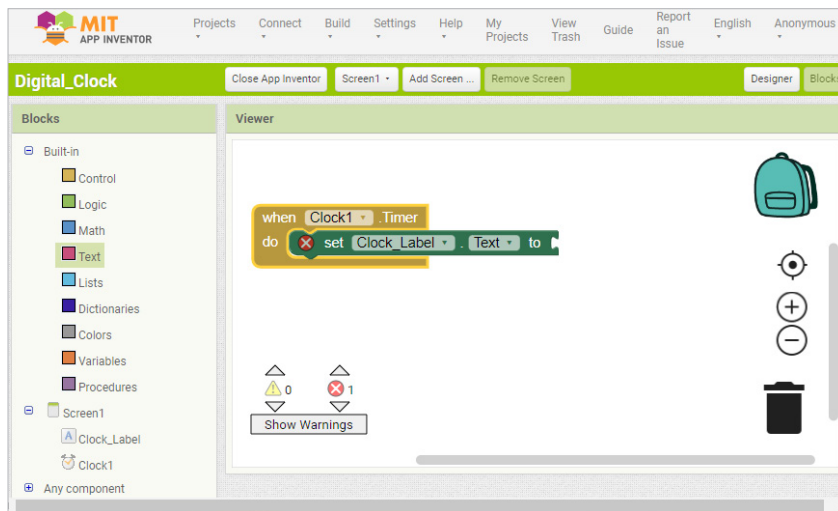


Figure 4: App with code block

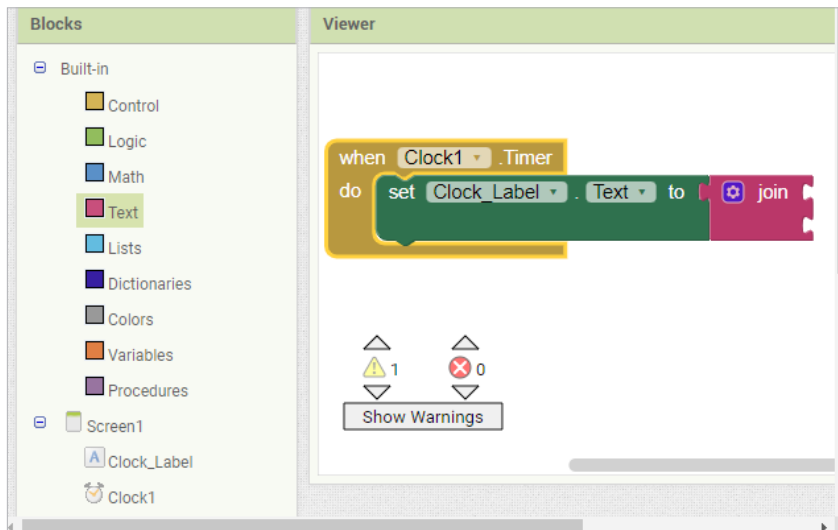


Figure 6: Joining blocks

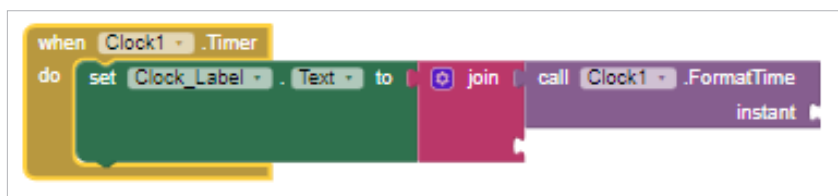


Figure 7: Attaching call block

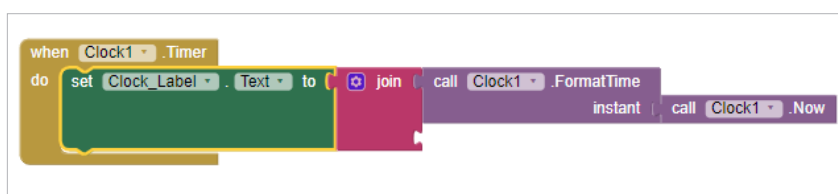


Figure 8: Attaching instant

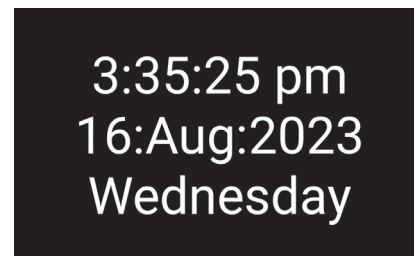


Figure 5: Output

and select the 'set Clock_Label.Text to' block. Drag this block into the 'when Clock1.Timer' block to create a seamless connection. Your screen should now resemble Figure 4.

Notice the cross mark in the 'set Clock_Label.Text to' block. This is because this block is not completely filled up. You can see the open end. Also notice the 'Show Warnings' message indicating one error. Remember we have set the 'Timer Interval' to 1 second. So, the 'Clock1.Timer' will be triggered every second, and we have to display the time and date as the 'Label' text. Figure 5 demonstrates the desired final output.

Adding strings

The final output consists of three lines, so our 'Clock_Label.Text' will consist of three strings.

In the 'Blocks' pane, under 'Built-in', locate 'Text' and select it. In the Viewer you will find a 'join' block which can be used for combining strings. Drag and connect this block to the open end of 'Clock_Label.Text to' as shown in Figure 6.

The first string we will add is the time. Click on 'Clock1' (in the Blocks pane) and drag 'call Clock1.FormatTime' to attach it to the first socket of the 'join' block as shown in Figure 7.

Similarly, click on 'Clock1' again and drag 'call Clock1.Now' to connect to the 'instant'.

With the time string complete, proceed to add the date string on the next line. To achieve this, we have to add a new line character. Click on