

Figure 1: Device management

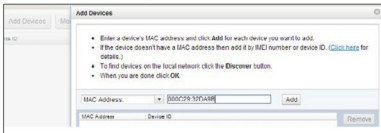


Figure 2: Adding devices to Device Cloud




Figure 3: My Account

```
static uint8_t const device_mac_addr[MAC_ADDR_LENGTH] =
{0x00, 0x0C, 0x29, 0x32, 0xDA, 0x9B};
static connector_callback_status_t app_get_mac_
addr(connector_config_pointer_data_t * const config_mac)
{
//error "Specify device MAC address for LAN connection"
ASSERT(config_mac->bytes_required == MAC_ADDR_LENGTH);
config_mac->data = (uint8_t *)device_mac_addr;
return connector_callback_continue;
}
```

Now go to `/connector/public/step/samples/connect_to_device_cloud.c`. Here we will define how to connect to Device Cloud.

To connect, you need to create a free Device Cloud Developer account. Go to <http://www.etherios.com/products/devicecloud/developerzone>. You can connect up to five devices with a Developer Edition account. When registering, choose the cloud instance appropriate for you, either Device Cloud US (login.etherios.com) or Device Europe (login.etherios.co.uk). When you log in you'll see a dashboard (Figure 1) with a single window for managing

all your devices.

In Device Cloud, a device is identified using a Device ID, which is a globally unique 16-octet value identifier, normally generated out of IMEI or MAC addresses.

To access a device from Device Cloud, we need to add the device using MAC/IMEI to Device Cloud. Once added, Device Cloud will generate a Device ID.

You need one more identifier to get Etherios Cloud Connector to connect to Device Cloud, e.g., a VendorID, which can be found in My Account (Figure 3).

Vendor ID won't be available by default. You need to click *Generate/Provision Vendor ID* to get a unique Vendor ID for the account.

Now go to `/connector/public/step/samples/connect_to_device_cloud/connector_config.h` and make the following changes:

```
#define ENABLE_COMPILE_TIME_DATA_PASSING
#define ENV_LINUX
#define CONNECTOR_CLOUD_URL login.etherios.com
or
#define CONNECTOR_CLOUD_URL login.etherios.co.uk
#define CONNECTOR_VENDOR_ID 0x84000026
```

Save and build the application as follows:

```
athomas@ubuntu:~/connector/public/step/samples/
connect_to_device_cloud$ make clean all
```

The above command will create a binary file which can be executed now:

```
athomas@ubuntu:~/connector/public/step/samples/connect_to_
device_cloud$ ./connector
Start Cloud Connector for Embedded
Cloud Connector v2.2.0.1
dns_resolve_name: ip address = [83.138.155.65]
app_tcp_connect: fd 3
app_network_tcp_open: connected to login.etherios.co.uk
Send MT Version
Receive Mt version
Send keepalive params
Rx keepalive parameter = 60
Tx keepalive parameter = 90
Wait Count parameter = 5
Send protocol version
Receive protocol version
Send identity verification
Sending Device ID = 00 00 00 00 00 00 00 00 0C 29 FF FF
32 DA 9B
```