



Figure 2: Choosing base template



Figure 3: Software selection

Software selection

This is where your customisation begins. To add software packages to your distro, just click the *Software* tab. The software page will show you which packages are selected. You can add software by searching in the *Search for software* section, or you can browse through the software groups to find the appropriate packages. You can add software repositories if you want, and you can even upload your own RPM packages for installation. There is a catch. During this process, SUSE Studio allows you to choose only 200 packages; so please be very selective. See figure 3.

Configuration

While configuring, you have several options. Under *General*, the *Default locale* option enables you to choose your language and the keyboard layout, while *Default timezone* sets your region and time zone. Under *Network configuration*, you have plenty of options, such as manual configuration or configuration during first boot. Use *Network Manager* for network configuration and discover network settings

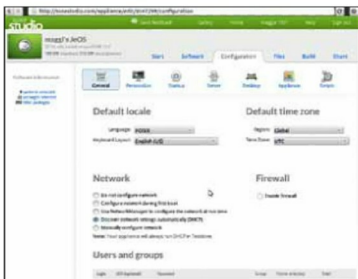


Figure 4: Configuration



Figure 5: Personalisation

automatically (DHCP). If you're not sure what to choose, I recommend the DHCP option. Under *Firewall*, you can enable the firewall, if you want to.

Under *Users and Groups*, you can set up users for your distro; for each, you need to provide a login name, user ID (optional), password, group, home directory and shell.

Personalisation

The 'Personalisation' screen (Figure 5) allows you to customise the appearance of your distro. You can upload your own logo for your appliance, or choose one of the default logos. SUSE has a bright green default background, which is great—but you can change it to your own. You can preview your changes for the different stages—boot selection, booting, console and log-in.

Setting up the database

To set up a database server, click the *Server* tab, which offers MySQL and PostgreSQL. If you didn't add the respective packages in the software selection, an error message will prompt you to add them, then and there.