



5

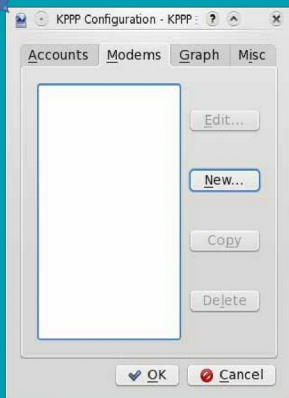

5. On the KPPP Configuration window, go to the Modem tab and click *New* to get the *New Modem* window.

7



7. Click the *Modem Commands* button.


8



8. In the "Initialisation string 2" section, enter: `AT+CGDCONT=1,"IP","accesspoint name"`

Note: If you're a CDMA user, leave the "Initialisation string 2" command vacant.

6



6. Type your modem's name here (say, the name of your handset manufacturer) and select `/dev/ttyACM0` from the drop-down menu beside the modem device option. Now, go to the *Modem* tab.

9

Click *OK* (on the three windows) till you get back to the primary KPPP screen (shown in step 1) where you'll enter the login ID and password.

- GSM users enter the number zero (0) for both the login ID and password.
- CDMA users need to enter their mobile phone number in both the login ID and password fields.

10

All you need to do now is click the *Connect* button. Wait for 2-3 seconds, and you will be connected to the Internet!

So, there you go. Was it so hard to do without the software provided by your handset manufacturer? **END** 

Dr. CNS Murthy & Ambuj Dubey

Dr. Murthy is the director of Chameliadevi Institute of Technology & Management (CITM), Indore. He has been working on Linux for the last 20 years. Ambuj is a final year student pursuing BE in Electronics and loves to play with Linux distros and FOSS.