

Browse - select the desired image file, and then expand the file as prompted.

For this lab, Cisco 3725 and 2600 IOS images are used.

3. Populate the 3725 router with supported cards. The default card is GT96100-FE, a two-port 10/100 Fast Ethernet. In addition, the following models are supported.
 - a. Network adapters (any two of the following):
 - NM-1FE-TX: One fast Ethernet (10/100)
 - NM-4t: 4-port asynchronous (serial) module
 - NM16-ESW: 16-port 10/100 EtherSwitch modules for Cisco ISR series
 - b. WIC modules (any three of the following):
 - WIC-1T
 - WIC-2T
4. Set the idle PC value. When a router is just started, CPU utilisation of the computer system may rise to 100 per cent and the system may become very slow. To avoid this, the *idlepc* setting is necessary. 'Select Idle-PC value' displays the default value. Use the 'Idle-PC finder' button to check whether it is suitable. Often, the default idle PC value is suitable.
5. Save the configurations by clicking **OK** and proceed further.
6. Follow Steps 2 through to 5 to add a 2600 series router image.
7. Configure the topology. Drag and drop as many routers you wish to use in the topology, and use the **Add a Link** button to connect them by cable. This test lab has the 2600 Router R1 Ethernet0/0 to 3725 router R2 FastEthernet0/0. Note that when you move the cursor on the router, its status and configuration is displayed in the adjacent black window.
8. Use topology devices.
 - Click on the **Start / Resume all devices** (the green > button on top) to start all devices.
 - Click on the >_ button to trigger console connection to all devices.
 - Click on the red square button to stop routers.

Do not forget to save your project by using the **File – save** project menu. Go ahead and configure these routers for your test labs.

Changing the configuration of these router images including network/WIC modules, RAM and Flash is possible from the **Edit** menu. You can even change the base MAC ID of the router under the **Advanced** button.

Keep a watch on this column for updates in exciting world of GNS3. 


By: Rajesh Deodhar

The author is an IS auditor, network security consultant and trainer with 25+ years industry experience. He is an industrial electronics engineer with CISA, CISSP and DCL certification. Please feel free to contact him on [rajesh at omegasystems dot co dot in](mailto:rajesh.at.omegasystems dot co dot in).

www.opensourceforu.com

efyGROUP
INDIA

Open Source Is Hot In The IT World

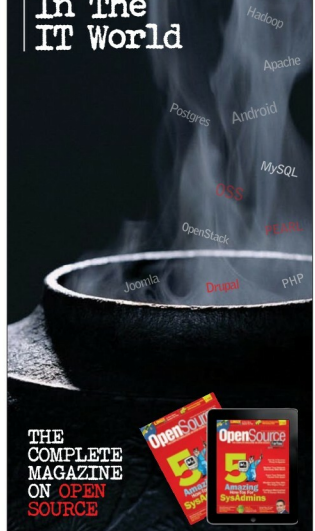

THE COMPLETE MAGAZINE ON OPEN SOURCE

>> To find dealers to buy copy from news-stand, visit: www.ezine.lfymag.com

>> To subscribe, visit: pay.efyindia.com

>> To buy an ezine edition, visit: www.magzter.com choose Open Source For You