ARKIV GRAPH

Connected evidence for AI tools

MIT TypeScript SDK / CLI / MCP

AI Passport: the working reference app

The problem

A copied approval can outlive its review

AI-tool builders and security reviewers

Bytes match.
Is permission still current?



Hashes identify content. They do not discover current reviews.

The graph layer

Typed nodes + directed edges + a complete signed manifest



Node: id · type · digest Edge: from · to · relation

Manifest: every member + signature + deadline

ARKIV

Indexed public entities
Creator + expiry + queries

GRAPH SDK

Signed membership
Bounded local traversal

AI PASSPORT

Review admission
Context + source checks

Current evidence, each request

Authenticated root updates

2 signed revisions · 8 entities · 1 transaction

Review withdrawal

A accepts B accepts

Withdrawal observed

B refuses A refuses



Actual project-run transactions. Retained history protects subsequent requests.

One toolkit. Useful AI tools.

AI Passport reference app

Coding handoff


Reviewed context + six guard checks

India number tutor

Exact paise, lakh/crore · English/Hindi

UPI Safety Quest

Learn with sourced guidance; no payment flow

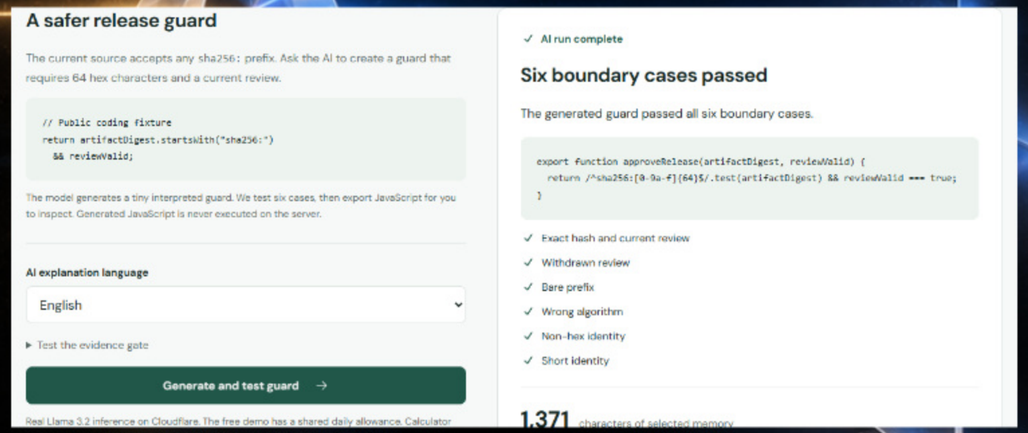

Actual AI Passport capture

Why Arkiv. Why this layer.

Shared, attributable discovery

Readers work without my application API

What Arkiv gains

A graph contract, verified reader tooling
and reusable AI-context adapters

Defensibility today

Integration quality + conformance evidence

Ecosystem moat is a hypothesis. One-operator apps can use a normal database.




Evidence, with its limits

271

Local tests

19

Trust checks

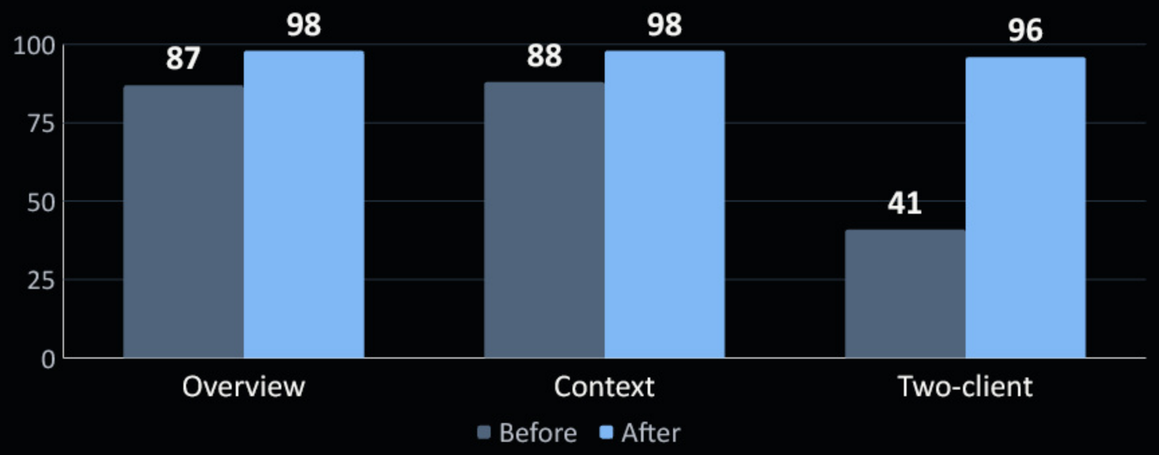

18 simulated mobile audits · median of 3 per route and phase · historical release

2 public npm releases

Download counts unavailable

npm API: HTTP 404 · 16 Oct 2026

No global runtime-read counter
No outside adoption claim

98 / 98 / 96 are lab scores

Build with Arkiv Graph



01 Install the public SDK

npm install @ajnasnb/arkiv-graph@0.4.0

02 Run the complete graph.mjs example

docs/GETTING_STARTED.md → node graph.mjs

03 Review trust policy, then read Arkiv

npx arkiv-graph verify reader.json

MIT · arkiv/schema.md · arkiv/friction.md · Wallet-free reads · RPC completeness is trusted