
Arkiv Graph

Evidence graphs for AI tools

A reusable SDK on Arkiv.
AI Passport is the reference app.

MIT TypeScript SDK
CLI and MCP readers

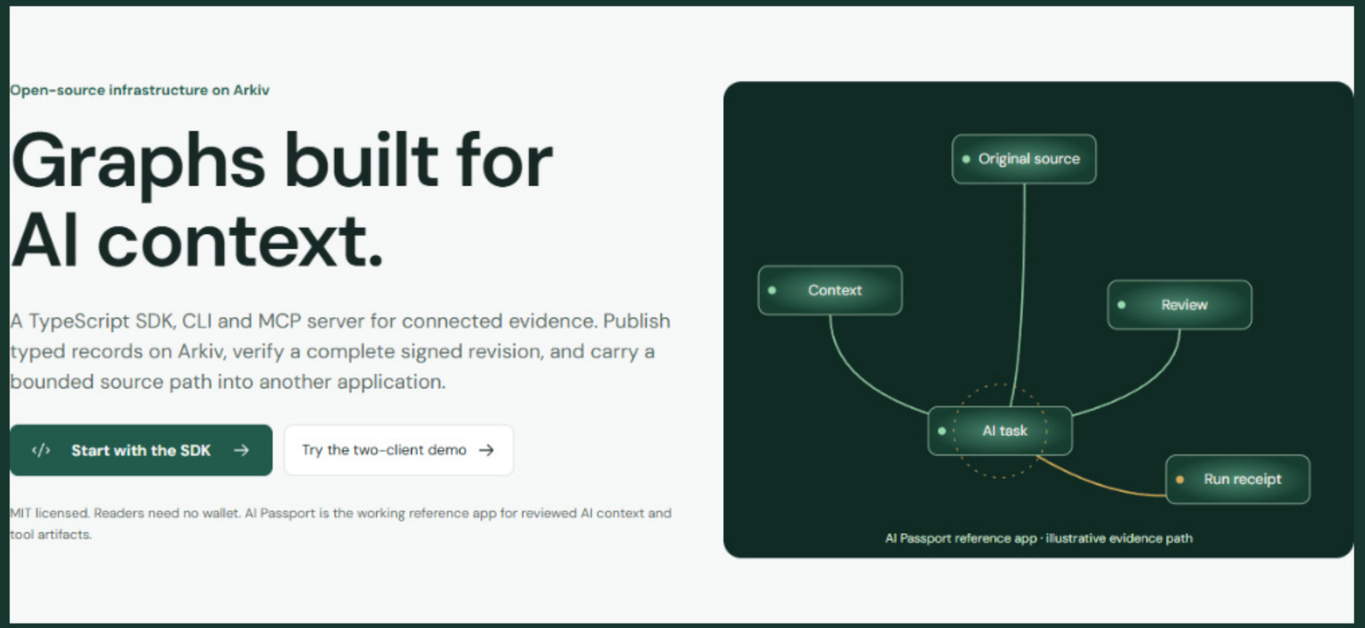

Live product: arkivgraph.ajnasnb.com

The file is unchanged.
The review has been withdrawn.

A second AI tool needs more than the old approval.

Approved

Withdrawn

The handoff

A reviewed packet is copied into another coding tool.

The change

The reviewer withdraws that exact review.

The decision

The next request checks the current evidence again.

Arkiv storage. Local graph readers.

Shared public records

Node
Edge
Signed manifest

Indexed by graph_hash and kind
Filtered by on-chain creator

→

Arkiv Graph SDK

Verify authorship
Reconstruct membership
Traverse under a budget

Optional root registry verifies
linked updates and checkpoints

→

AI Passport

Check current review
Match source bytes
Use selected AI context

Private memory and inference
stay off-chain

```
Node: id, type, digest     Edge: from, to, relation     Manifest: complete member digests
```


Two clients reject a withdrawn review

Recorded lifecycle

A accepted 603794
B accepted 603795

Review withdrawn
at block 603917

A refused 603920
B refused 603919

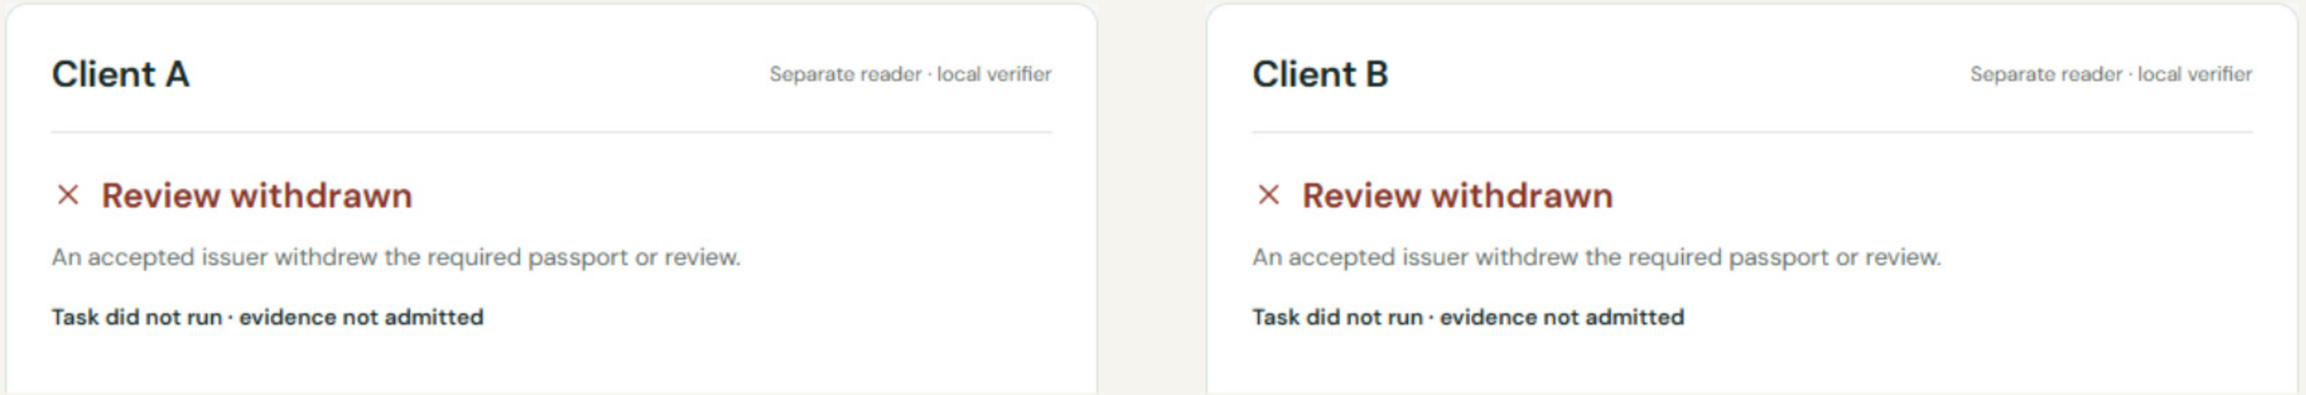

Fresh reads of the completed session. Both clients and wallets are project-operated.

Separate root-update test: 2 signed revisions, 8 entities, 1 transaction.

AI Passport checks context before inference

A coding handoff

Qarinah context links to
the exact source version.
A current review admits the task.

Six guard cases passed

India tools teach exact paise,
lakh/crore and UPI safety
in English and Hindi.



Recorded AI result, 15 Oct 2026

Readers can work without my API

Need	Only my application API	Arkiv + Graph SDK
Read when my API is offline	Requires another backend	Read through configured Arkiv RPC
Find records and reviewers	Operator-specific discovery	Typed queries and creator predicates
Check the selected revision	Implement a reader protocol	Verify complete signed manifest locally


What I add to Arkiv

A common graph contract, conformance checks and reusable SDK, CLI and MCP readers.

Defensibility today comes from integration quality. Independent adoption is still to earn.

Published packages, reproducible checks

Historical Lighthouse performance

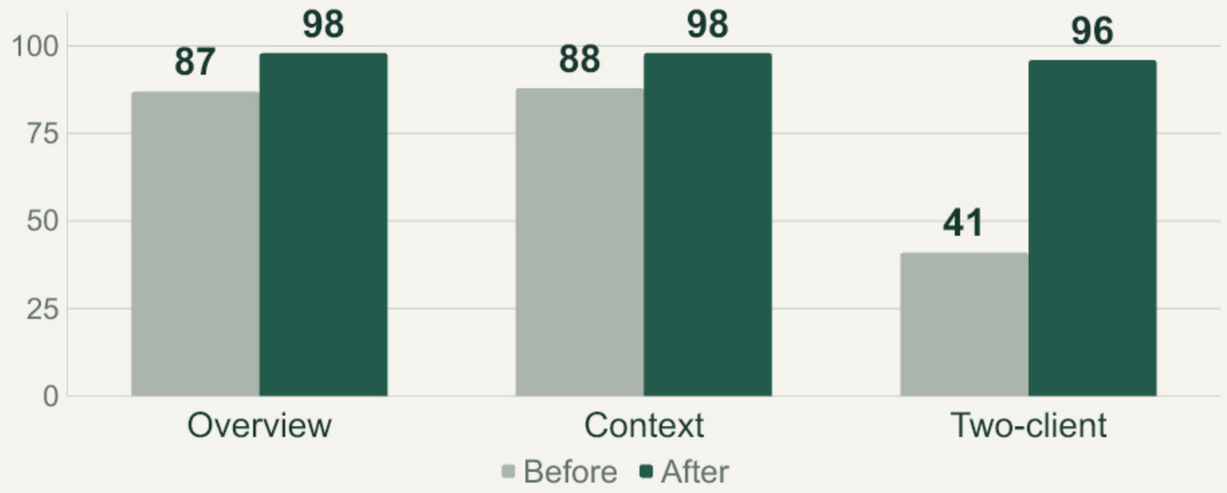

Lighthouse performance score / 100
18 simulated audits. Median of 3 per route and phase.

271 local tests

19 trust safeguard cases

Public npm releases

```
arkiv-graph  0.4.0
ai-passport  0.6.0
```

Download statistics unavailable
Official npm API returned HTTP 404

No outside user count is established.

Developer setup

Local graph example (Node.js 24+)

```
npm init -y
npm install @ajnasnb/arkiv-graph@0.4.0
```

Copy the guide’s complete graph.mjs, then run:

```
node graph.mjs
```

No account, wallet or model is needed for this local example.

arkivgraph.ajnasnb.com/?view=sdk

What I would validate next

An unaided outside integration
A second-provider strategy
Larger graphs and real phones

Current trust boundary

Fresh readers still rely on RPC metadata and unseen-history completeness.