
# Arkiv Graph

## Evidence graphs for AI tools

Shared evidence across tools.
AI Passport shows it in use.

MIT TypeScript SDK
CLI and MCP readers

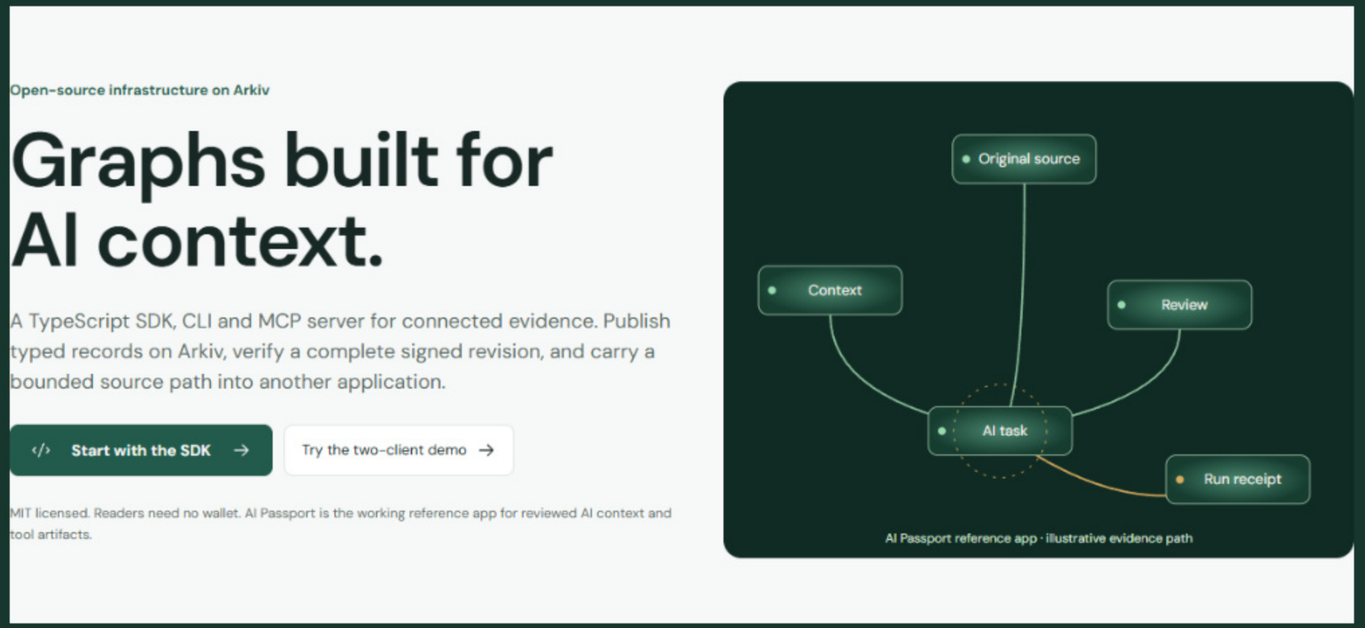


Live product: arkivgraph.ajnasnb.com

# The file is unchanged.
# The review has been withdrawn.

AI tool developers need a fresh review decision before the next task.

## Approved

## Withdrawn

**The handoff**

A reviewed packet is copied into another coding tool.

**The change**

The reviewer withdraws that exact review.

**The decision**

The next request checks the current evidence again.

# Arkiv storage. Local graph readers.

## Shared public records

Node
Edge
Signed manifest

Indexed by graph_hash and kind
Filtered by on-chain creator

→

## Arkiv Graph SDK

Verify authorship
Reconstruct membership
Traverse under a budget

Optional root registry verifies
linked updates and checkpoints

→

## AI Passport

Check current review
Match source bytes
Use selected AI context

Private memory and inference
stay off-chain

```
Node: id, type, digest     Edge: from, to, relation     Manifest: complete member digests
```


# Two clients reject a withdrawn review

## Recorded lifecycle

A accepted 603794
B accepted 603795

Review withdrawn
at block 603917

A refused 603920
B refused 603919

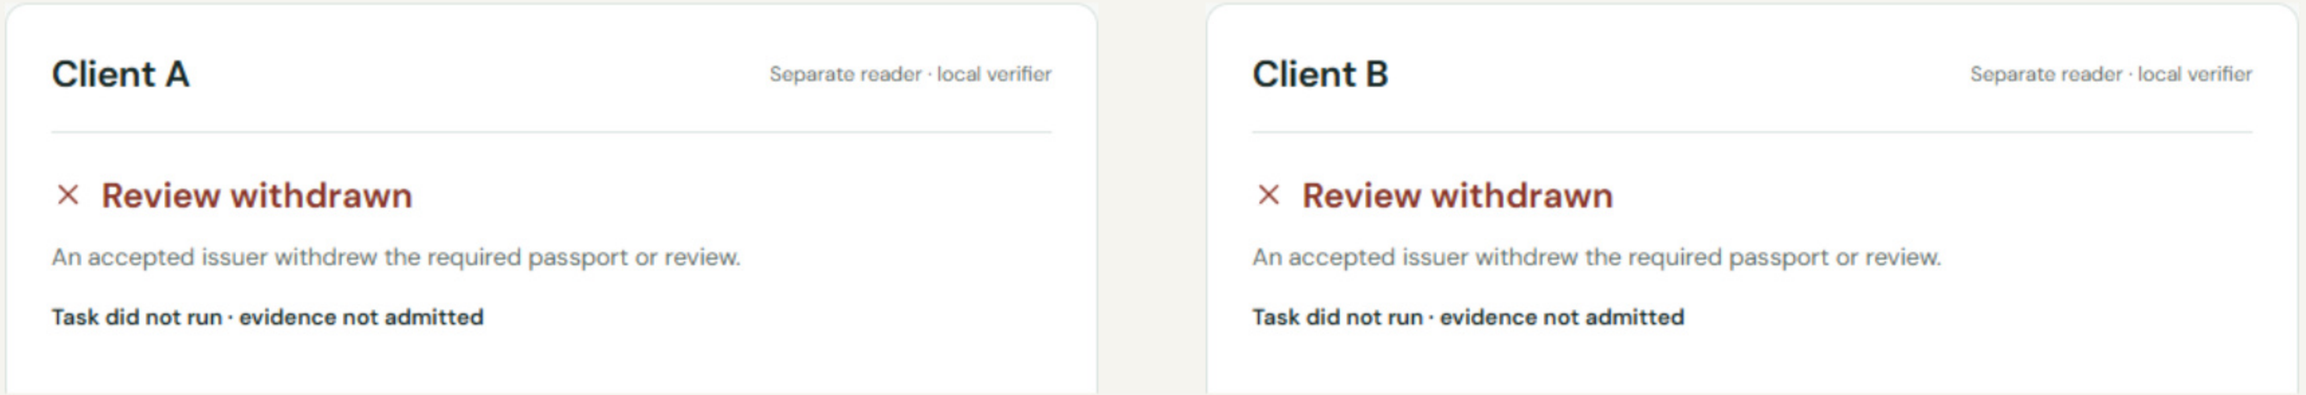


Fresh reads of the completed session. Both clients and wallets are project-operated.

Separate root-update test: 2 signed revisions, 8 entities, 1 transaction.

# AI Passport checks context before inference

## A coding handoff

Qarinah context links to
the exact source version.
A current review admits the task.

## Six guard cases passed

India tools teach exact paise,
lakh/crore and UPI safety
in English and Hindi.




Recorded AI result, 15 Oct 2026

# Readers can work without my API

| Need | Only my application API | Arkiv + Graph SDK |
| --- | --- | --- |
| Read when my API is offline | Requires another backend | Read through configured Arkiv RPC |
| Find records and reviewers | Operator-specific discovery | Typed queries and creator predicates |
| Check the selected revision | Implement a reader protocol | Verify complete signed manifest locally |

**Controlled fetch test**

A clean npm consumer verified both graphs through Arkiv RPC. In-process fetch blocking rejected project API requests.


**What I add to Arkiv**

A common graph contract, conformance checks and reusable SDK, CLI and MCP readers.

Reusable today: graph schema, signed revisions and SDK, CLI and MCP readers.

# Packages and reproducible checks

## Historical Lighthouse performance

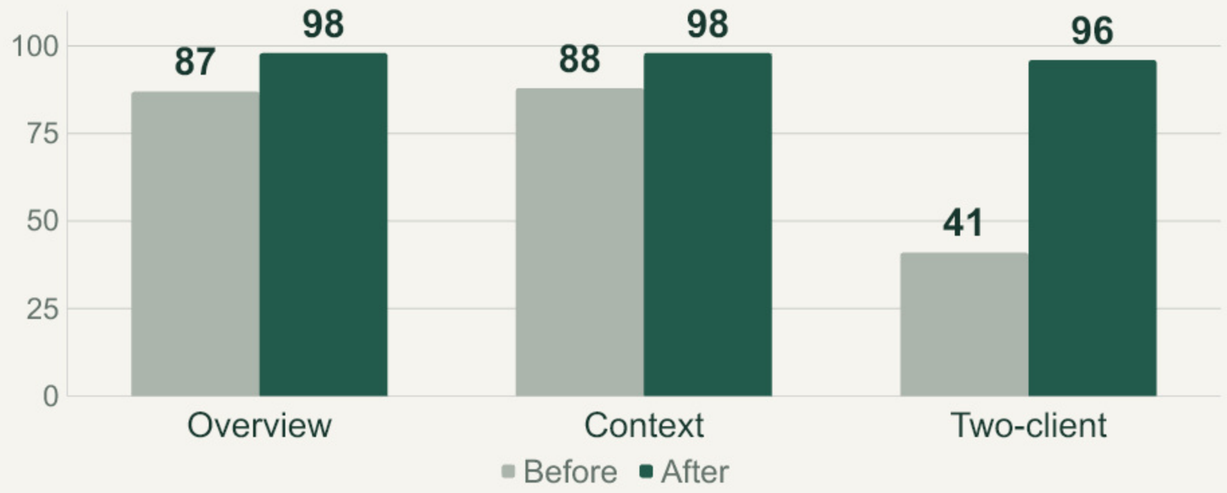


Lighthouse performance score / 100
18 simulated audits. Median of 3 per route and phase.

## 274 local tests

19 trust safeguard cases

## Public npm releases

```
arkiv-graph  0.4.1
ai-passport  0.6.1
```

Anonymous installs verified
SDK, CLI and MCP readers

Package integrity and read receipts are public.

# Developer setup

## Local graph example (Node.js 24+)

```
npm init -y
npm install @ajnasnb/arkiv-graph@0.4.1
```

Copy the guide’s complete graph.mjs, then run:

```
node graph.mjs
```

No account, wallet or model is needed for this local example.

arkivgraph.ajnasnb.com/?view=sdk

## Build with the SDK

Publish a typed graph
Verify an accepted revision
Trace source-linked AI context

**Reader setup**

Pin accepted publishers.
Choose an Arkiv RPC provider.
Keep verified checkpoints.