


Packages

[Link to the website](#)

1. Dynamic color

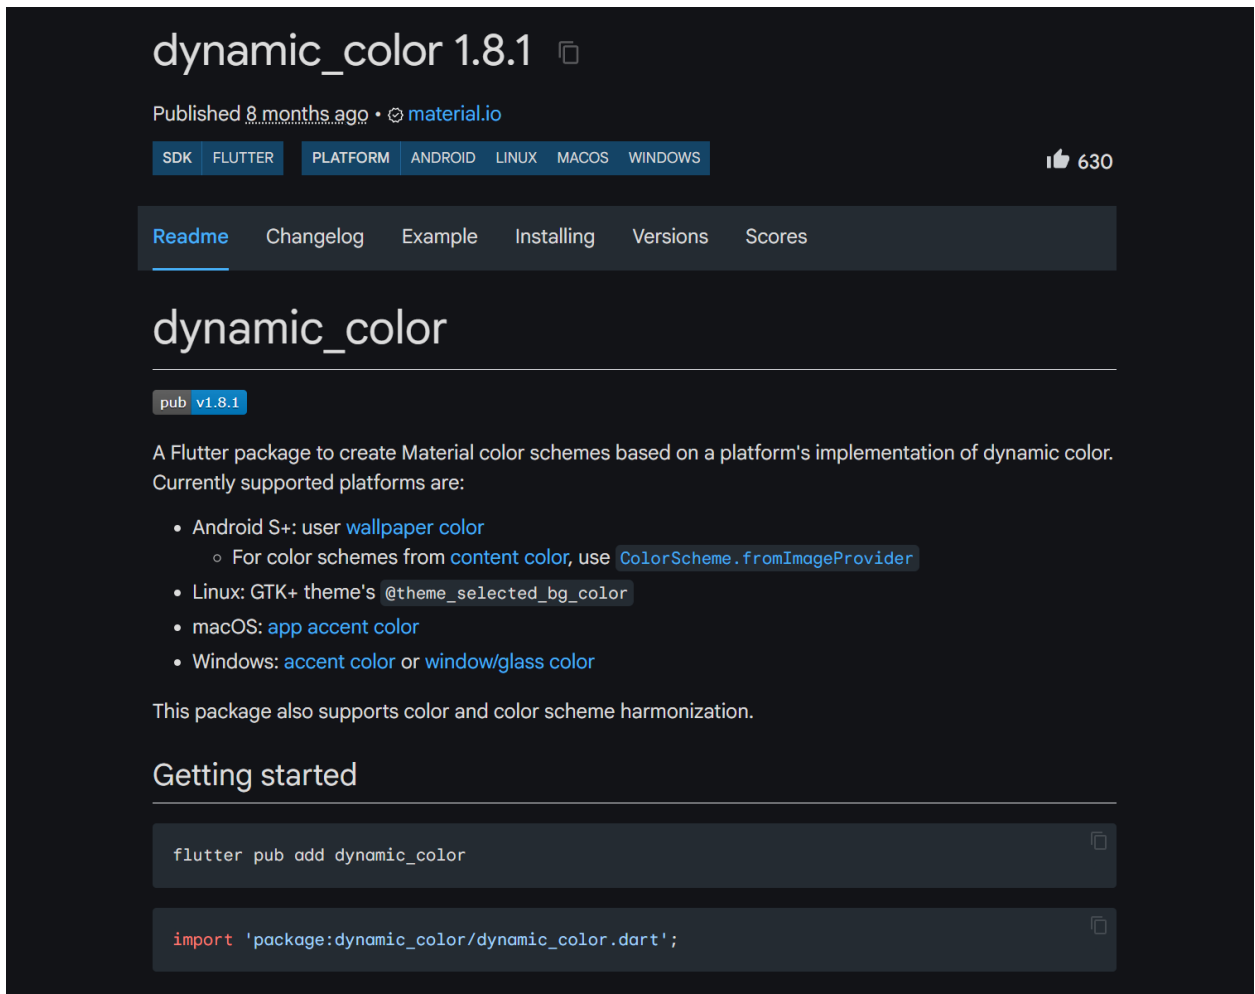

The screenshot shows the pub.dev page for the `dynamic_color` package, version 1.8.1. The page is dark-themed. At the top, it says "dynamic_color 1.8.1" with a copy icon. Below that, it says "Published 8 months ago • © material.io". There are tabs for "SDK", "FLUTTER", "PLATFORM", "ANDROID", "LINUX", "MACOS", and "WINDOWS". The "FLUTTER" tab is selected. To the right, there is a thumbs up icon and the number "630". Below the tabs, there are links for "Readme", "Changelog", "Example", "Installing", "Versions", and "Scores". The "Readme" link is underlined. The main heading is "dynamic_color". Below it, there is a "pub v1.8.1" badge. The description says: "A Flutter package to create Material color schemes based on a platform's implementation of dynamic color. Currently supported platforms are:". There is a bulleted list of supported platforms: Android S+ (using `wallpaper color`), Linux (GTK+ theme's `@theme_selected_bg_color`), macOS (using `app accent color`), and Windows (using `accent color` or `window/glass color`). Below the list, it says "This package also supports color and color scheme harmonization." The section "Getting started" has two code blocks. The first block contains the command `flutter pub add dynamic_color`. The second block contains the import statement `import 'package:dynamic_color/dynamic_color.dart';`.

dynamic_color 1.8.1

Published 8 months ago • © material.io

SDK FLUTTER PLATFORM ANDROID LINUX MACOS WINDOWS

630

Readme Changelog Example Installing Versions Scores

dynamic_color

pub v1.8.1

A Flutter package to create Material color schemes based on a platform's implementation of dynamic color. Currently supported platforms are:

- Android S+: user `wallpaper color`
 - For color schemes from `content color`, use `ColorScheme.fromImageProvider`
- Linux: GTK+ theme's `@theme_selected_bg_color`
- macOS: `app accent color`
- Windows: `accent color` or `window/glass color`

This package also supports color and color scheme harmonization.

Getting started

```
flutter pub add dynamic_color
```

```
import 'package:dynamic_color/dynamic_color.dart';
```

2. Cached_network_image

cached_network_image 3.4.1

Published 20 months ago • baseflow.com

SDK FLUTTER PLATFORM ANDROID IOS LINUX MACOS WEB WINDOWS

👍 6.9K

[Readme](#) [Changelog](#) [Example](#) [Installing](#) [Versions](#) [Scores](#)

Cached network image

pub v3.4.1  codecov unknown  app_facing_package no status

A flutter library to show images from the internet and keep them in the cache directory.

Sponsors



[Try the Flutter Chat Tutorial](#) 

How to use

The `CachedNetworkImage` can be used directly or through the `ImageProvider`. Both the `CachedNetworkImage` as `CachedNetworkImageProvider` have minimal support for web. It currently doesn't include caching.

With a placeholder:

```
CachedNetworkImage(  
  imageUrl: "http://via.placeholder.com/350x150",  
  placeholder: (context, url) => CircularProgressIndicator(),  
  errorWidget: (context, url, error) => Icon(Icons.error),  
),
```

3. Video_player

video_player 2.11.1

Published 39 days ago • flutter.dev

SDK FLUTTER PLATFORM ANDROID IOS MACOS WEB

 3.6K

[Readme](#) [Changelog](#) [Example](#) [Installing](#) [Versions](#) [Scores](#)


Video Player plugin for Flutter

pub v2.11.1

A Flutter plugin for iOS, Android and Web for playing back video on a Widget surface.

Android iOS macOS Web

Support SDK 24+ 13.0+ 10.15+ Any*

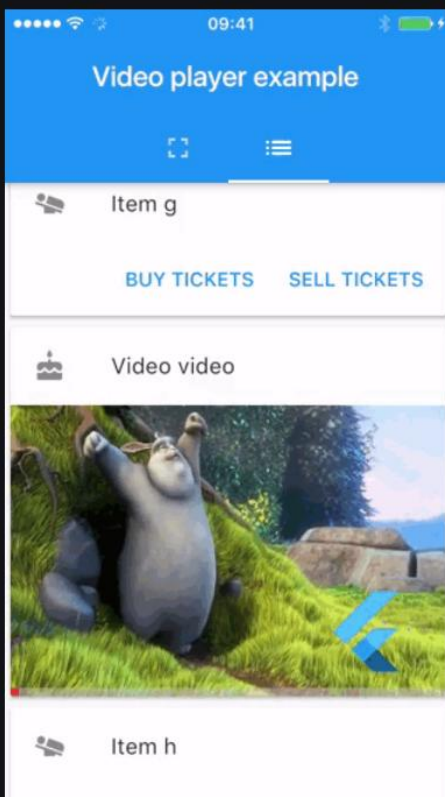

Setup

iOS

If you need to access videos using `http` (rather than `https`) URLs, you will need to add the appropriate `NSAppTransportSecurity` permissions to your app's *Info.plist* file, located in `<project root>/ios/Runner/Info.plist`. See [Apple's documentation](#) to determine the right combination of entries for your use case and supported iOS versions.

Android

If you are using network-based videos, ensure that the following permission is present in your Android Manifest file, located in `<project root>/android/app/src/main/AndroidManifest.xml`:

```
<uses-permission android:name="android.permission.INTERNET"/>
```

macOS

If you are using network-based videos, you will need to add the `com.apple.security.network.client` entitlement

Web

The Web platform does not support `dart:io`, so avoid using the `VideoPlayerController.file` constructor for the plugin. Using the constructor attempts to create a `VideoPlayerController.file` that will throw an `UnimplementedError`.

* Different web browsers may have different video-playback capabilities (supported formats, autoplay...). Check [package:video_player_web](#) for more web-specific information.

The `VideoPlayerOptions.mixWithOthers` option can't be implemented in web, at least at the moment. If you use this option in web it will be silently ignored.

4. Camera

camera 0.12.0+1

Published 30 days ago • flutter.dev

SDK FLUTTER PLATFORM ANDROID IOS WEB

2.5K

[Readme](#) [Changelog](#) [Example](#) [Installing](#) [Versions](#) [Scores](#)

Camera Plugin

pub v0.12.0+1

A Flutter plugin for iOS, Android and Web allowing access to the device cameras.

Android iOS Web

Support SDK 24+ iOS 13.0+ See [camera_web](#)

Features

- Display live camera preview in a widget.
- Snapshots can be captured and saved to a file.
- Record video.
- Add access to the image stream from Dart.

Setup

iOS

Add two rows to the `ios/Runner/Info.plist`:

- one with the key `Privacy - Camera Usage Description` and a usage description.
- and one with the key `Privacy - Microphone Usage Description` and a usage description.

If editing `Info.plist` as text, add:

```
<key>NSCameraUsageDescription</key>
<string>your usage description here</string>
<key>NSMicrophoneUsageDescription</key>
<string>your usage description here</string>
```

Android

The endorsed `camera_android_camerax` implementation of the camera plugin built with CameraX has better support for more devices than `camera_android`, but has some limitations; please see [this list](#) for more details. If you wish to use the `camera_android` implementation of the camera plugin built with Camera2 that lacks these limitations, please follow [these instructions](#).

If you wish to allow image streaming while your app is in the background, there are additional steps required; please see [these instructions](#) for more details.

Web integration

For web integration details, see the `camera_web` package.

Handling Lifecycle states

As of version **0.5.0** of the camera plugin, lifecycle changes are no longer handled by the plugin. This means developers are now responsible to control camera resources when the lifecycle state is updated. Failure to do so might lead to unexpected behavior (for example as described in [issue #39109](#)). Handling lifecycle changes can be done by overriding the `didChangeAppLifecycleState` method like so:

```
@override
void didChangeAppLifecycleState(AppLifecycleState state) {
  final CameraController? cameraController = controller;

  // App state changed before we got the chance to initialize.
  if (cameraController == null || !cameraController.value.isInitialized) {
    return;
  }

  if (state == AppLifecycleState.inactive) {
    cameraController.dispose();
  } else if (state == AppLifecycleState.resumed) {
    _initializeCameraController(cameraController.description);
  }
}
```

Handling camera access permissions

Permission errors may be thrown when initializing the camera controller, and you are expected to handle them properly.

Here is a list of all permission error codes that can be thrown:

- `CameraAccessDenied`: Thrown when user denies the camera access permission.
- `CameraAccessDeniedWithoutPrompt`: iOS only for now. Thrown when user has previously denied the permission. iOS does not allow prompting alert dialog a second time. Users will have to go to Settings > Privacy > Camera in order to enable camera access.
- `CameraAccessRestricted`: iOS only for now. Thrown when camera access is restricted and users cannot grant permission (parental control).
- `AudioAccessDenied`: Thrown when user denies the audio access permission.
- `AudioAccessDeniedWithoutPrompt`: iOS only for now. Thrown when user has previously denied the permission. iOS does not allow prompting alert dialog a second time. Users will have to go to Settings > Privacy > Microphone in order to enable audio access.
- `AudioAccessRestricted`: iOS only for now. Thrown when audio access is restricted and users cannot grant permission (parental control).

5. percent_indicator

percent_indicator 4.2.5

Published 12 months ago • diegoveloper.com

SDK FLUTTER PLATFORM ANDROID IOS LINUX MACOS WEB WINDOWS



2.7K

Readme Changelog Example Installing Versions Scores

Percent Indicator

pub v4.2.5

Circular, Linear and Multi-segment linear percent indicators

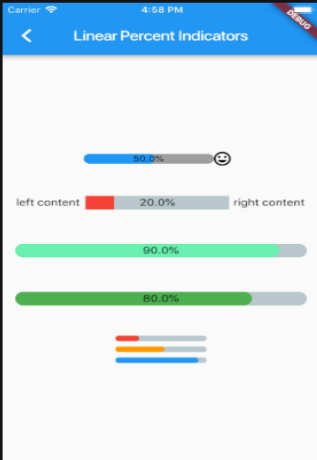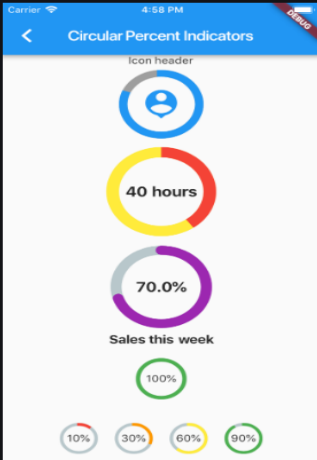

Features

- Circle percent indicator
- Linear percent indicator
- Multi-segment linear indicator
- Toggle animation
- Custom duration of the animation
- Progress based on a percentage value
- Progress and background color
- Custom size
- Left, right or center child for Linear percent indicator
- Top, bottom or center child for Circular percent indicator
- Progress Color using gradients

Getting started

You should ensure that you add the router as a dependency in your flutter project.

```
dependencies:  
  percent_indicator: ^4.2.5
```

6. path_provider

path_provider 2.1.5

Published 17 months ago • flutter.dev

SDK

FLUTTER

PLATFORM

ANDROID

IOS

LINUX

MACOS

WINDOWS

👍 5.5K

Readme

Changelog

Example

Installing

Versions

Scores

path_provider

pub v2.1.5

A Flutter plugin for finding commonly used locations on the filesystem. Supports Android, iOS, Linux, macOS and Windows. Not all methods are supported on all platforms.

Android iOS Linux macOS Windows

Support SDK 16+ 12.0+ Any 10.14+ Windows 10+

Example

```
final Directory tempDir = await getTemporaryDirectory();

final Directory appDocumentsDir = await getApplicationDocumentsDirectory();

final Directory? downloadsDir = await getDownloadsDirectory();
```


7. google_fonts

google_fonts 8.0.2

Published 59 days ago • flutter.dev

SDK FLUTTER PLATFORM ANDROID IOS LINUX MACOS WEB WINDOWS


6.4K

[Readme](#) [Changelog](#) [Example](#) [Installing](#) [Versions](#) [Scores](#)

google_fonts

pub v8.0.2

A Flutter package to use fonts from fonts.google.com.

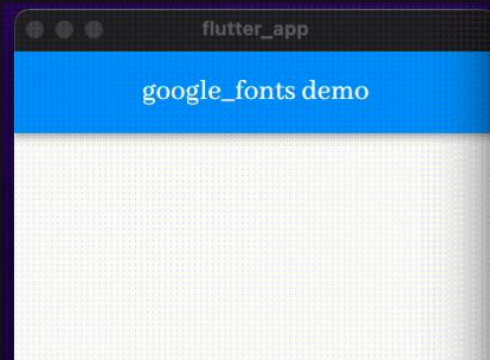

```
12 return MaterialApp(  
13   debugShowCheckedModeBanner: false,  
14   home: Scaffold(  
15     appBar: AppBar(  
16       title: Text(  
17         'google_fonts demo',  
18         style: GoogleFonts.acme(),  
19       ), // Text  
20     ), // AppBar  
21   ), // Scaffold  
22 ); // MaterialApp  
23 }  
24 }
```

Features



- HTTP fetching at runtime, ideal for development. Can also be used in production to reduce app size
- Font file caching, on device file system
- Font bundling in assets. Matching font files found in assets are prioritized over HTTP fetching. Useful for offline-first apps.

8. google_mlkit_pose_detection

google_mlkit_pose_detection 0.14.1

Published 2 months ago • flutter-ml.dev

SDK FLUTTER PLATFORM ANDROID IOS

👍 75

[Readme](#) [Changelog](#) [Example](#) [Installing](#) [Versions](#) [Scores](#)

Google's ML Kit Pose Detection for Flutter


pub v0.14.1 Static code analysis passing stars 1.2k license MIT

A Flutter plugin to use [Google's ML Kit Pose Detection](#) to detect the pose of a subject's body in real time from a continuous video or static image.

PLEASE READ THIS before continuing or posting a [new issue](#):

- [Google's ML Kit](#) was build only for mobile platforms: iOS and Android apps. Web or any other platform is not supported, you can request support for those platform to Google in [their repo](#).
- This plugin is not sponsored or maintained by Google. The [authors](#) are developers excited about Machine Learning that wanted to expose Google's native APIs to Flutter.
- Google's ML Kit APIs are only developed natively for iOS and Android. This plugin uses Flutter Platform Channels as explained [here](#).

Messages are passed between the client (the app/plugin) and host (platform) using platform channels as illustrated in this diagram:

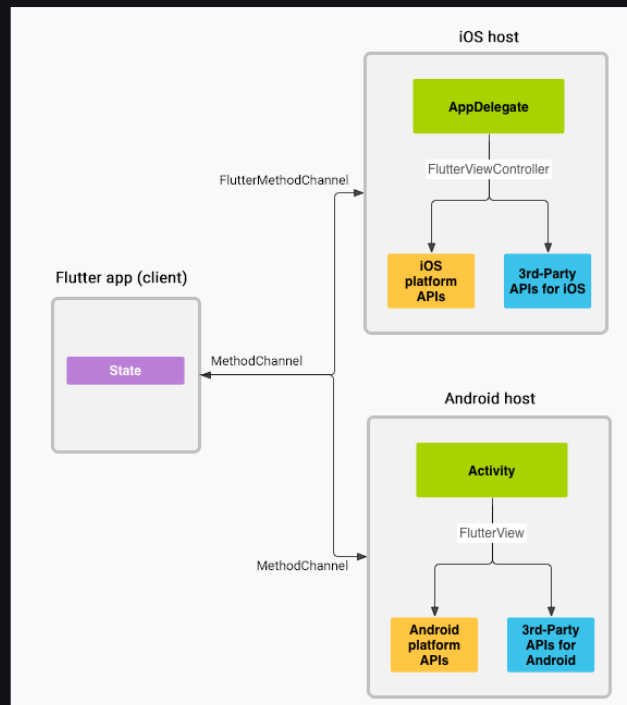

Android

- minSdkVersion: 21
- targetSdkVersion: 35
- compileSdkVersion: 35

Usage

Create an instance of `InputImage`

Create an instance of `InputImage` as explained [here](#).

```
final InputImage inputImage;
```

Create an instance of `PoseDetector`

```
final options = PoseDetectorOptions();  
final poseDetector = PoseDetector(options: options);
```

Process image

```
final List<Pose> poses = await poseDetector.processImage(inputImage);  
  
for (Pose pose in poses) {  
    // to access all landmarks  
    pose.landmarks.forEach((_, landmark) {  
        final type = landmark.type;  
        final x = landmark.x;  
        final y = landmark.y;  
    });  
  
    // to access specific landmarks  
    final landmark = pose.landmarks[PoseLandmarkType.nose];  
}
```

Release resources with `close()`

```
poseDetector.close();
```

9. supabase_flutter

supabase_flutter 2.12.4

Published 3 days ago • © supabase.io

SDK FLUTTER PLATFORM ANDROID IOS LINUX MACOS WEB WINDOWS

👍 954

[Readme](#) [Changelog](#) [Example](#) [Installing](#) [Versions](#) [Scores](#)

supabase_flutter

pub v2.12.4 🧪 Test no status

Flutter Client library for Supabase.

- Documentation: <https://supabase.com/docs/reference/dart/introduction>

Getting Started

Import the package:

```
import 'package:supabase_flutter/supabase_flutter.dart';
```

Initialize Supabase before using it:

```
import 'package:supabase_flutter/supabase_flutter.dart';

void main() async {
  WidgetsFlutterBinding.ensureInitialized();

  await Supabase.initialize(
    url: SUPABASE_URL,
    anonKey: SUPABASE_ANON_KEY,
  );

  runApp(MyApp());
}

// It's handy to then extract the Supabase client in a variable for later uses
final supabase = Supabase.instance.client;
```

10. flutter_tts

flutter_tts 4.2.5

Published 3 months ago • @eyedeadevelopment.com

[SDK](#) [FLUTTER](#) [PLATFORM](#) [ANDROID](#) [IOS](#) [MACOS](#) [WEB](#) [WINDOWS](#)

👍 1.5K

[Readme](#) [Changelog](#) [Example](#) [Installing](#) [Versions](#) [Scores](#)

Text To Speech

PUB

V4.2.5

A flutter text to speech plugin (Swift,Kotlin)

Features

- ✓ Android, iOS, Web, Windows & macOS
 - ✓ speak
 - ✓ stop
 - ✓ get languages
 - ✓ set language
 - ✓ set speech rate
 - ✓ set speech volume
 - ✓ set speech pitch
 - ✓ get voices
 - ✓ set voice
- ✓ Android, iOS, Web & macOS
 - ✓ is language available
- ✓ Android, iOS, Web
 - ✓ speech marks (requires iOS 7+, Android 26+, and default voice engine for web)
- ✓ Android, iOS
 - ✓ synthesize to file (requires iOS 13+)
- ✓ Android, iOS, Web, & Windows
 - ✓ pause
- ✓ Android
 - ✓ set silence
 - ✓ is language installed
 - ✓ are languages installed
 - ✓ get engines
 - ✓ set engine
 - ✓ get default engine
 - ✓ get default voice
 - ✓ set queue mode
 - ✓ get max speech input length
- ✓ iOS
 - ✓ set shared instance
 - ✓ set audio session category

Usage

macOS

```
OSX version: 10.15
```

[Example App](#) from the macOS_app branch

Web

[Website](#) from the example directory.

Progress updates on Web

Progress updates are only supported for native speech synthesis. Use the default engine to ensure support for progress updates. [Chromium#41195426](#)

Android

Change the minimum Android sdk version to 21 (or higher) in your `android/app/build.gradle` file.

```
minSdkVersion 21
```

Update the Kotlin Gradle Plugin Version

Change the version of the Kotlin Gradle plugin to `1.9.10`.

If your project was created with a version of Flutter before 3.19, go to the `android/build.gradle` file and update the `ext.kotlin_version`:

```
ext.kotlin_version = '1.9.10'
```

Otherwise go to `android/settings.gradle` and update the version of the plugin `org.jetbrains.kotlin.android`:

```
id "org.jetbrains.kotlin.android" version "1.9.10" apply false
```

Apps targeting Android 11 that use text-to-speech should declare

`TextToSpeech.Engine.INTENT_ACTION_TTS_SERVICE` in the `queries` elements of their manifest.

```
<queries>
  <intent>
    <action android:name="android.intent.action.TTS_SERVICE" />
  </intent>
</queries>
```

Pausing on Android

Android TTS does not support the pause function natively, so we have implemented a work around. We utilize the native `onRangeStart()` method to determine the index of start when `pause` is invoked. We use that index to create a new text the next time `speak` is invoked. Due to using `onRangeStart()`, `pause` works on SDK versions `>= 26`. Also, if using `start` and `end` offsets inside of `setProgressHandler()`, you'll need to keep a track of them if using `pause` since they will update once the new text is created when `speak` is called after being paused.

```
await flutterTts.pause()
```

11. Postgrest

postgrest 2.7.0

Published 3 days ago • [supabase.io](#)

SDK DART FLUTTER PLATFORM ANDROID IOS LINUX MACOS WEB WINDOWS

👍 133

[Readme](#) Changelog Example Installing Versions Scores

Postgrest Dart

Dart client for [PostgREST](#). The goal of this library is to make an "ORM-like" restful interface.

pub v2.7.0  Test no status

Docs

The docs can be found on the official Supabase website.

- [Dart reference](#)
- [Supabase API guide](#)

License

This repo is licensed under MIT.

Credits

- <https://github.com/supabase/postgrest-js> - ported from postgrest-js library

12. vector_math

vector_math 2.3.0

Published 31 days ago • [google.dev](#)

[SDK](#) [DART](#) [FLUTTER](#) [PLATFORM](#) [ANDROID](#) [IOS](#) [LINUX](#) [MACOS](#) [WEB](#) [WINDOWS](#)

[Readme](#) [Changelog](#) [Installing](#) [Versions](#) [Scores](#)

[Dart](#) [passing](#) [pub](#) [v2.3.0](#) [publisher](#) [google.dev](#) [coverage](#) [27%](#)

Introduction

A Vector math library for 2D and 3D applications.

Features

- 2D, 3D, and 4D vector and matrix types.
- Quaternion type for animating rotations.
- Collision detection: AABB, rays, spheres, ...
- Utilities like color and common rendering related operations
- Flexible getters and setters, for example, `position.xwz = color.grb;`
- Fully documented.
- Well tested.
- Heavily optimized.

Libraries using vector_math

- [Flutter](#)
- [Flame](#)

Examples

1. Using the GLSL getter and setter syntax.

```
import 'package:vector_math/vector_math.dart';

void main() {
  Vector3 x = Vector3.zero(); // Zero vector
  Vector4 y = Vector4.all(4.0); // Vector with 4.0 in all lanes
  x.zyx = y.xzz; // Sets z,y,x the values in x,z,z
}
```

2. Transforming a vector.

```
import 'dart:math';
import 'package:vector_math/vector_math.dart';

void main() {
  // Rotation of PI/2 degrees around the Y axis followed by a
  // translation of (5.0, 2.0, 3.0).
  Matrix4 T = Matrix4.rotationY(PI * 0.5)..translate(5.0, 2.0, 3.0);
  // A point.
  Vector3 position = Vector3(1.0, 1.0, 1.0);
  // Transform position by T.
  T.transform3(position);
}
```


13. Dart:async

[Link for website](#)

Core libraries > dart:async

dart:async

Learn about the major features in Dart's dart:async library.

Asynchronous programming often uses callback functions, but Dart provides alternatives: [Future](#) and [Stream](#) objects. A Future is like a promise for a result to be provided sometime in the future. A Stream is a way to get a sequence of values, such as events. Future, Stream, and more are in the dart:async library ([API reference](#)).

Note

You don't always need to use the Future or Stream APIs directly. The Dart language supports asynchronous coding using keywords such as `async` and `await`. Check out the [asynchronous programming tutorial](#) for details.

The dart:async library works in both web apps and command-line apps. To use it, import dart:async:

```
import 'dart:async';
```

dart

Tip

You don't need to import dart:async to use the Future and Stream APIs, because dart:core exports those classes.

Future

Future objects appear throughout the Dart libraries, often as the object returned by an asynchronous method. When a future *completes*, its value is ready to use.

Using await

Before you directly use the Future API, consider using `await` instead. Code that uses `await` expressions can be easier to understand than code that uses the Future API.

Consider the following function. It uses Future's `then()` method to execute three asynchronous functions in a row, waiting for each one to complete before executing the next one.

```
void runUsingFuture() {  
  // ...  
  findEntryPoint()  
    .then((entryPoint) {  
      return runExecutable(entryPoint, args);  
    })  
    .then(flushThenExit);  
}
```

dart

14. dart:typed_data

[link for website](#)

dart:typed_data library

Lists that efficiently handle fixed sized data (for example, unsigned 8 byte integers) and SIMD numeric types.

To use this library in your code:

```
import 'dart:typed_data';
```

Classes

ByteBuffer

A sequence of bytes underlying a typed data object.

ByteData

A fixed-length, random-access sequence of bytes that also provides random and unaligned access to the fixed-width integers and floating point numbers represented by those bytes.

BytesBuilder

Builds a list of bytes, allowing bytes and lists of bytes to be added at the end.

Endian

Endianness of number representation.

Float32List

A fixed-length list of IEEE 754 single-precision binary floating-point numbers that is viewable as a [TypedData](#).

Float32x4

Four 32-bit floating point values.

Float32x4List

A fixed-length list of [Float32x4](#) numbers that is viewable as a [TypedData](#).

Float64List

A fixed-length list of IEEE 754 double-precision binary floating-point numbers that is viewable as a [TypedData](#).

Float64x2

Float64x2 immutable value type and operations.

Float64x2List

A fixed-length list of [Float64x2](#) numbers that is viewable as a [TypedData](#).

Int16List

A fixed-length list of 16-bit signed integers that is viewable as a [TypedData](#).

Int32List

A fixed-length list of 32-bit signed integers that is viewable as a [TypedData](#).