
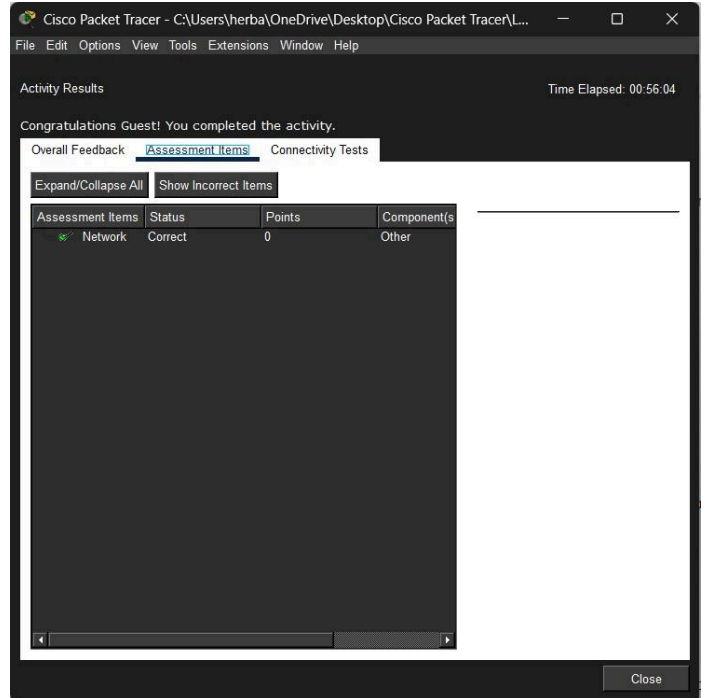


## Module 11 Lab 01 - Packet Tracer - Navigate the IOS

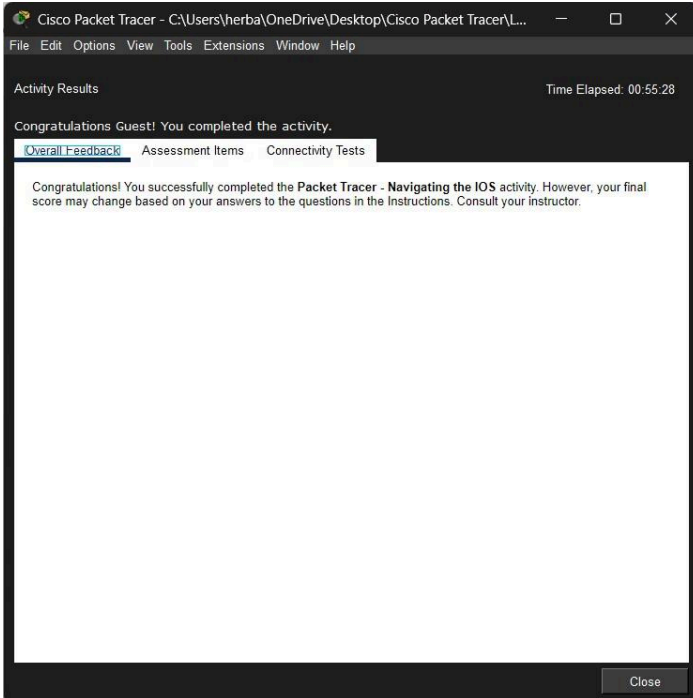

01. What is the setting for bits per second? **9600**

Press ENTER.

02. What is the prompt displayed on the screen? **S1>**

S1> ?

03. Which command begins with the letter 'C'? **connect - Open a terminal connection**

S1> t?

04. Which commands are displayed? **telnet terminal traceroute**

S1> te?

05. Which commands are displayed? **telnet terminal**

S1> ?

06. What information is displayed for the enable command? **enable - Turn on privileged commands**

S1> en<Tab>

07. What displays after pressing the Tab key? **enable**

08. What would happen if you typed te<Tab> at the prompt?% **Ambiguous command: "te"**

press ENTER.

09. How does the prompt change? **S1#**

10. How many commands are displayed now that privileged EXEC mode is active? **27 total,**

10a. (Hint: you could type c? to list just the commands beginning with 'C'. ) **5 that begin with 'C'**

S1# **configure**

11. What is the message that is displayed? **Configuring from terminal, memory, or network [terminal]?**

Press Enter to accept the default parameter that is enclosed in brackets **[terminal]**.

12. How does the prompt change? **Enter configuration commands, one per line. End with CNTL/Z.**  
S1(config)#

S1# **show clock** What information is displayed? **\*21:4:18.693 UTC Sun Feb 28 1993**

13. What is the year that is displayed? **1993**

S1# **clock<ENTER>**

14. What information is displayed? **% Incomplete command.**

S1# **clock ?**

15. What information is displayed? **set Set the time and date**

S1# **clock set ?**

16. What information is being requested? **hh:mm:ss Current Time**

What would have been displayed if only the **clock set** command had been entered, and no request for help was made by using the question mark? **% Incomplete command.**

S1# **cl<tab>**

17. What information was returned? **cl**

S1# **clock**

18. What information was returned? **% Incomplete command.**

S1# **clock set 25:00:00**

19. What information was returned?

**S1#clock set 25:00:00**

**^**

**% Invalid input detected at '^' marker.**

S1# **clock set 15:00:00 32**

20. What information was returned?

**S1#clock set 15:00:00 32**

**^**

**% Invalid input detected at '^' marker.**

Module-11-Lab-01-Packet-Tracer-Navigate-the-IOS-completed