178. Rank Scores

Medium | Topics | Companies

SQL Schema > Pandas Schema >

Table: `Scores`

```
+-------------+---------+
| Column Name | Type    |
+-------------+---------+
| id          | int     |
| score       | decimal |
+-------------+---------+
id is the primary key (column with unique values) for this table.
Each row of this table contains the score of a game. Score is a floating point value with two
decimal places.
```

Write a solution to find the rank of the scores. The ranking should be calculated according to the following rules:

- The scores should be ranked from the highest to the lowest.
- If there is a tie between two scores, both should have the same ranking.
- After a tie, the next ranking number should be the next consecutive integer value. In other words, there should be no holes between ranks.

Return the result table ordered by `score` in descending order.

The result format is in the following example.

Example 1:

Input:

Scores table:

id	score
1	3.50
2	3.65
3	4.00
4	3.85
5	4.00
6	3.65

Output:

score	rank
4.00	1
4.00	1
3.85	2
3.65	3
3.65	3
3.50	4

Day-14 / db leetcode

178 = Rank scores 12/11/26.

We are given a table called scores.

id	Score
1	3.50
2	3.65
3	4.00
4	3.85
5	4.00
6	3.65

We need to assign a rank to every score.
The rules are:-

- higher score gets rank 1
- if 2 scores are equal, they get the same rank
- after a tie, the next rank must be consecutive, no gaps are allowed.
- display scores in descending order.

expected o/p:-

Score	Rank
4.00	1
4.00	1
3.85	2
3.65	3
3.65	3
3.50	4

① First, arrange the scores from highest to lowest:-

4.00, 4.00, 3.85, 3.65, 3.65, 3.50.

now assign ranks:

Score	Rank	explanation
4.00	1	highest score
4.00	1	same score, same rank.
3.85	2	next consecutive rank
3.65	3	next rank
3.65	3	same score, same rank
3.50	4	next consecutive rank.

here, we dont skip any rank.

SQL provides 3 commonly used ranking window functions:

Function	What happens when scores tie?
ROW_NUMBER()	gives diff no. to every row
RANK()	same rank, but skips the next rank
DENSE_RANK()	same rank, doesn't skip the next rank.

no duplicate ranks.

duplicate rank with gaps.

duplicate ranks without gaps.

SELECT → specifies that we want to retrieve data from the table.

SCORE, → selects the score column bcuz the ranking is the scores.

DENSE_RANK() OVER (
ORDER BY score DESC) AS 'rank'

→ OVER() defines the window over which the ranking is calculated.

FROM scores
ORDER BY score DESC;

ORDER BY score DESC → ranks scores from highest to least.

gives the calculated column the name rank.

why DESC? → bcuz the highest score must receive it.

why DENSE_RANK()? → bcuz equal scores must receive the same rank, without leaving gaps.

→ sorts the final o/p from highest score to least score.

the ORDER BY inside OVER() determines the ranking. The final ORDER BY determines the display order.

Accepted 11 / 11 testcases passed

Akankshyaa submitted at Nov 12, 2026 05:38

Solution


Save 41%

Big Diwali Dhamaka

Unlock the Full Experience with Premium for ₹583.25/mo — Ends Nov 8!

Runtime

297 ms | Beats **92.70%**

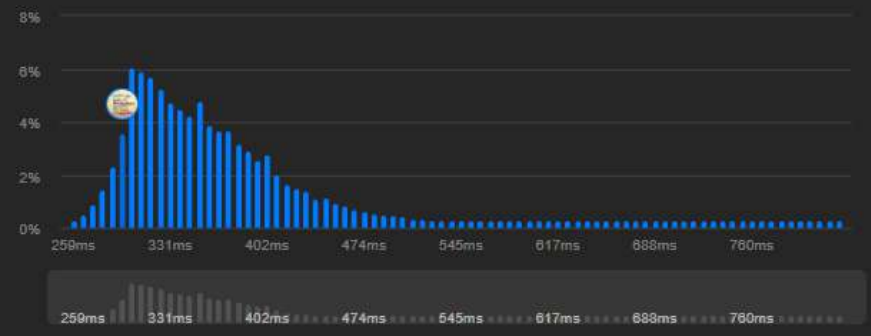

Code | MySQL

```mysql
# Write your MySQL query statement below
SELECT
    score,
    DENSE_RANK() OVER (
        ORDER BY score DESC
    ) AS `rank`
FROM Scores
ORDER BY score DESC;

```

```mysql
# Write your MySQL query statement below
SELECT
    score,
    DENSE_RANK() OVER (
        ORDER BY score DESC
    ) AS `rank`
FROM Scores
ORDER BY score DESC;
```

Saved

Testcase | Test Result

Accepted Runtime: 84 ms

Case 1

Input

Scores =

id	score
1	3.5
2	3.65
3	4
4	3.85
5	4
6	3.65

Output

score	rank
4	1
4	1
3.85	2
3.65	3
3.65	3
3.5	4