



## **How to Connect Wifi Cameras to Wireless Network**

|                 |                                                 |                 |      |              |            |
|-----------------|-------------------------------------------------|-----------------|------|--------------|------------|
| <b>Title:</b>   | How to Connect Wifi Cameras to Wireless Network | <b>Version:</b> | v1.0 | <b>Date:</b> | 09/28/2020 |
| <b>Product:</b> | Cameras                                         |                 |      | <b>Page:</b> | 1 of 3     |

## How to Connect Wifi Cameras to Wireless Network

1. For IPCs that have web page, connect network cable and go to [Configuration]-[Network]-[Advanced Settings]-[Wi-Fi], select a Wi-Fi and input its password

The screenshot displays the Hikvision web interface. The 'Configuration' tab is selected, and the 'Wi-Fi' sub-tab is active. The 'Wireless List' table shows various Wi-Fi networks, with 'TP-LINK\_2.4G' selected. The 'Wi-Fi' configuration form below shows the selected network details and a password field.

| No. | SSID         | Working Mode | Security Mode | Channel | Signal Strength | Speed(Mbps) | Connection Status |
|-----|--------------|--------------|---------------|---------|-----------------|-------------|-------------------|
| 1   | TP-LINK_2.4G | Manage       | WPA2-personal | 1       | 100             | 150         | Connected         |
| 2   | HIK-Office   | Manage       | WPA2-personal | 1       | 100             | 150         | Disconnected      |
| 3   | TPGuest017B  | Manage       | WPA2-personal | 1       | 100             | 150         | Disconnected      |
| 4   | HIK-Office   | Manage       | WPA2-personal | 6       | 98              | 150         | Disconnected      |
| 5   | HIK-Office   | Manage       | WPA2-personal | 1       | 92              | 150         | Disconnected      |
| 6   | HIKVISION    | Manage       | not-encrypted | 6       | 92              | 150         | Disconnected      |
| 7   | HIK-Office   | Manage       | WPA2-personal | 11      | 84              | 150         | Disconnected      |
| 8   | HIK-Office   | Manage       | WPA2-personal | 6       | 82              | 150         | Disconnected      |
| 9   | HIK-Office   | Manage       | WPA2-personal | 11      | 76              | 150         | Disconnected      |
| 10  | 你已进入监控区域     | Manage       | WPA2-personal | 2       | 72              | 150         | Disconnected      |
| 11  | HIKVISION    | Manage       | not-encrypted | 6       | 72              | 150         | Disconnected      |
| 12  | HIK-Office   | Manage       | WPA2-personal | 1       | 68              | 150         | Disconnected      |
| 13  | chang_tp     | Manage       | WPA2-personal | 8       | 62              | 150         | Disconnected      |

**Wi-Fi**

SSID: TP-LINK\_2.4G

Network Mode: ☒ Manage

Security Mode: WPA2-personal

Encryption Type: TKIP

Key 1: \*\*\*\*\*

2. For devices that do not have web page shall connect to Wi-Fi via Hik-Connect APP

|                 |                                                 |                 |      |              |            |
|-----------------|-------------------------------------------------|-----------------|------|--------------|------------|
| <b>Title:</b>   | How to Connect Wifi Cameras to Wireless Network | <b>Version:</b> | v1.0 | <b>Date:</b> | 09/28/2020 |
| <b>Product:</b> | Cameras                                         |                 |      | <b>Page:</b> | 2 of 3     |

**HIKVISION®** Live View Playback Picture Application **Configuration**




SNMP **FTP** Email Platform Access HTTPS QoS 802.1x Integration Protocol

Local  
System  
Network  
Basic Settings  
**Advanced Settings**  
Video/Audio  
Image  
Event  
Storage  
Queue Management


FTP Protocol: FTP  
Server Address: 10.9.97.47  
Port: 21  
User Name: admin  
Password: ••••••  
Confirm: ••••••  
☐ Anonymous  
Directory Structure: Save in the root directory  
Picture Filling Interval: OFF Day(s)  
Picture Name: Default  
☒ Upload Picture  
☐ Enable Automatic Network Replenishment  
Test  
**Save**


**3. Enable the event that you want to trigger capture, and click [Upload to FTP] in the [linkage method], click [save]. You can see the captured pictures under the user path set before.**

- 1) Ensure the camera is at “ready for Wi-Fi connection” status, you will see blue and red flash alternatively for DS-2CXXXX-IDW model, and flash blue for DS-2CV2Qxx and DS-2CV2Uxx model.
- 2) Connect your mobile phone to a Wi-Fi network, tap [Add Device] button in Hik-Connect and scan the QR code on the label of the camera., tap [Connect to a Network] on the results page and follow the instructions on your phone.



|                 |                                                 |                 |      |              |            |
|-----------------|-------------------------------------------------|-----------------|------|--------------|------------|
| <b>Title:</b>   | How to Connect Wifi Cameras to Wireless Network | <b>Version:</b> | v1.0 | <b>Date:</b> | 09/28/2020 |
| <b>Product:</b> | Cameras                                         |                 |      | <b>Page:</b> | 3 of 3     |

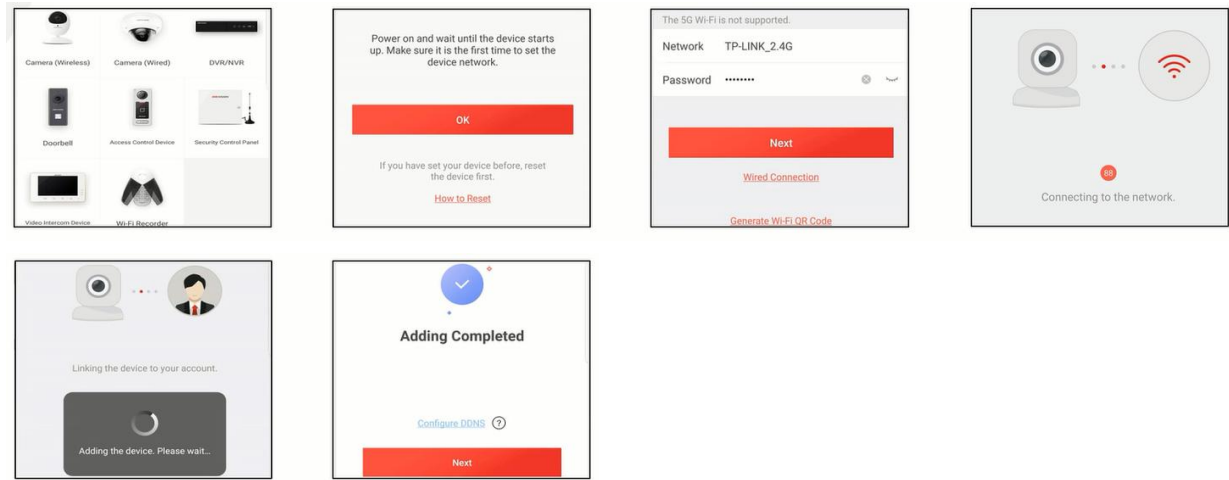

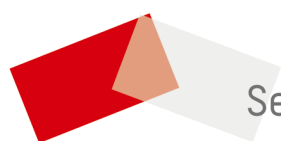

See Far, Go Further