

Project Title: SmartSDLC – AI-Enhanced Software Development Lifecycle.

Introduction:

Team ID : NM2025TMID06811

Team Size : 5

Team Leader : ANANDHA KUMAR S









Team member : DHAYANITHI M

Team member : AKASH M

Team member : GOWSHIK A

Team member : CHANDHIRABABAU M

Sure! Here's a comprehensive explanation of the **SmartSDLC – AI-Enhanced Software Development Lifecycle** project, covering the following:

1.  Project Overview
2.  Architecture
3.  Setup Instructions
4.  Folder Structure
5.  Running the Application
6.  API Documentation
7.  Authentication
8.  User Interface
9.  Testing

1. Project Overview

SmartSDLC is a full-stack software development platform powered by **Artificial Intelligence** that assists developers, testers, and project managers throughout the **Software Development Lifecycle (SDLC)**.


It leverages AI to:

- Extract & validate requirements from natural language input
- Generate system design diagrams and boilerplate code
- Auto-generate test cases

- Predict bugs and deployment issues
- Automate CI/CD pipelines and monitoring

□ 2. Architecture

□ SmartSDLC Modular Architecture

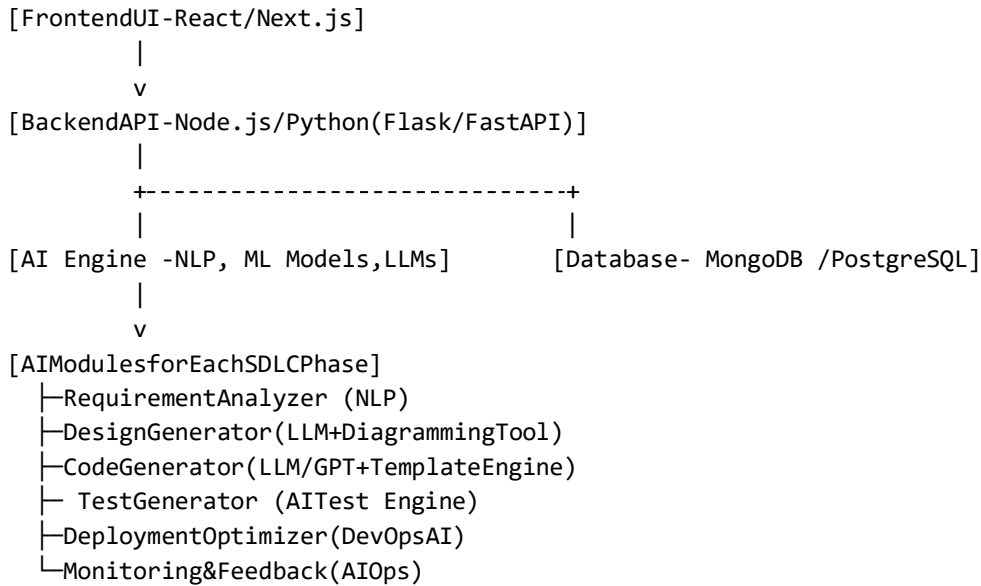

Milestone 1: Model Selection and Architecture

Milestone 1 focuses on selecting the optimal AI models for SmartSDLC, choosing granite-13b-chat-v1 for natural language tasks and granite-20b-code-instruct for code generation. The architecture integrates the backend (FastAPI), frontend (Streamlit), AI layer (Watsonx), and modules (LangChain, GitHub). The development environment is set up with necessary dependencies, API keys, and a modular structure, enabling efficient integration and development in subsequent phases.

Activity 1.1: Research and select the appropriate generative AI model

1. **Understand the Project Requirements:**

Analyze the goals of the SmartSDLC platform, particularly the need for automating SDLC phases like requirement analysis, code generation, test creation, bug fixing, and documentation. This understanding helps narrow down which generative AI models best suit each task.

2. **Explore Available Models:**

Study IBM's Watsonx Granite model documentation to compare available foundation models. Focus on those capable of handling natural language processing and code synthesis, such as granite-13b-chat-v1 for language understanding and granite-20b-code-instruct for structured code generation and summarization.


3. **Evaluate Model Performance:**

Evaluate models based on metrics like accuracy, latency, and quality of generated responses across different SDLC tasks. Use prior benchmarks or run pilot queries (e.g., "generate a function to validate email input") to assess model suitability.


4. **Select Optimal Models:**

Finalize the two best-fit Granite models—granite-13b-chat-v1 for interacting with natural language prompts and granite-20b-code-instruct for multilingual and functional code outputs. These models will power the core logic of SmartSDLC's automation system.

5. **Generating Watsonx AI API key**

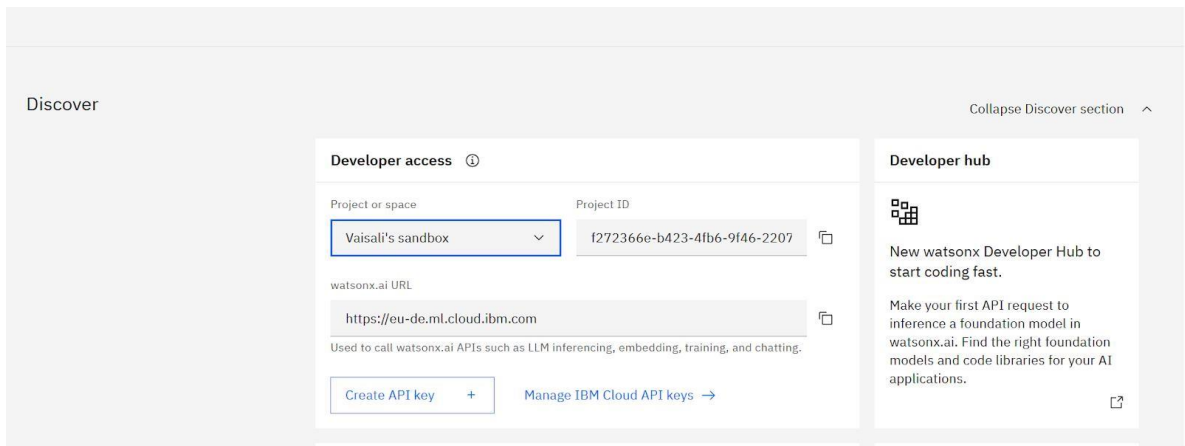

6. Selecting the model

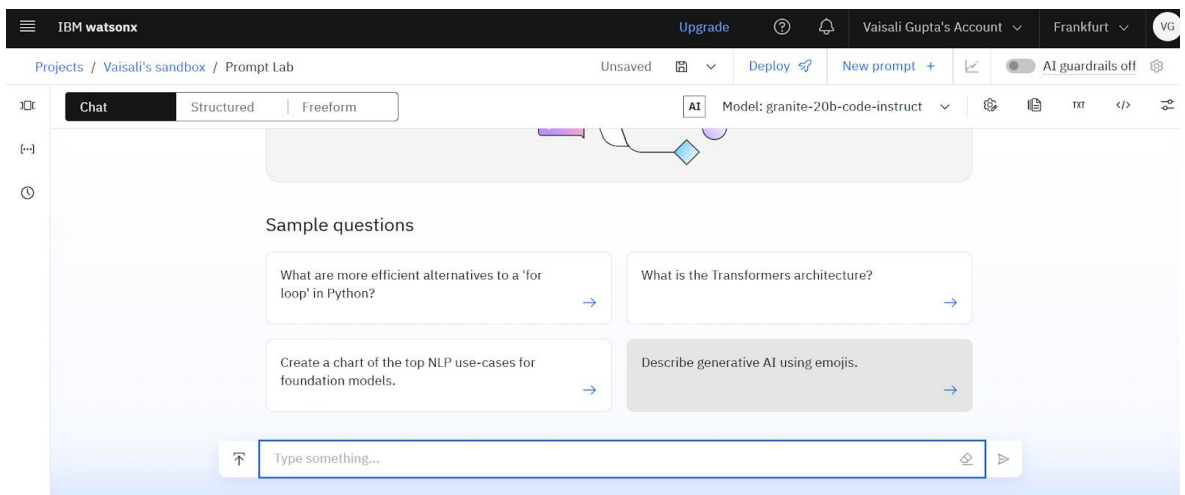

Activity 1.2: Define the architecture of the application.

1. Draft a System Architecture Diagram:

Create a high-level visual representation that includes the backend (FastAPI), the frontend (Streamlit), the AI layer (Watsonx APIs), and service modules (LangChain, GitHub integration). Include flow direction between components such as file uploads, AI interactions, and response rendering.

2. Define Frontend-Backend Interaction:

Detail how the Streamlit UI captures user inputs (PDF uploads, text prompts, buggy code) and sends them to FastAPI endpoints. Also, document how the backend routes handle logic and return structured outputs like user stories or code blocks.

3. **Backend Service Responsibilities:**

Define roles of each backend module:

- a. PDF processing and classification logic (using PyMuPDF).
- b. Prompt generation and API communication with Watsonx.
- c. LangChain agent for orchestration.
- d. Auth module for user sessions and hashed logins.

4. **AI Integration Flow:**

Outline how API calls are made to Watsonx (or optionally LangChain), and how responses are parsed and displayed back to the user. Specify if fallback models or retries will be incorporated.

Activity 1.3: Setup the development

environment:

1. **Install Python and Pip:**

Ensure Python 3.10 is installed for compatibility with Watsonx SDK. Install pip to manage dependencies like FastAPI, Streamlit, and PyMuPDF.

2. **Create a Virtual Environment:**

Use `venv` to create isolated environments for backend and frontend:

```
python -m venv myenv
myenv\Scripts\activate
```

3. **Install Required Libraries:**

Install all required packages such as `fastapi`, `uvicorn`, `pymupdf`, `requests`, `langchain`, `streamlit`, and `ibm-watsonx-ai` using pip. Store these in `requirements.txt`.

4. **Set Up API Keys and Env Files:**


Generate IBM Cloud API key and store it securely in a `.env` file. Include other

configslikemodelIDsandLangChainagentsettings.

5. **OrganizeProjectStructure:**

Setuptheinitialfolderstructureforbothfrontend(smart_sdlc_frontend/)and backend(app/),ensuringproperseparationofapi/,services/,models/,and utils/modules for clean development.

filestructure

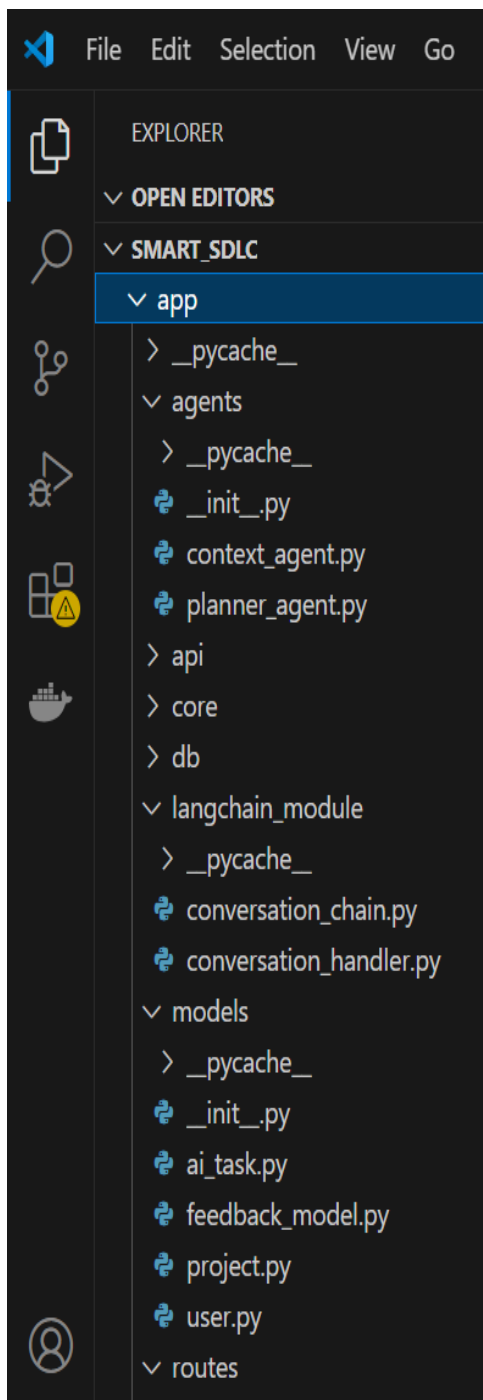

Milestone2:CoreFunctionalitiesDevelopment

Milestone2 involves building the core AI-driven features of SmartSDLC, including requirement analysis, code generation, test case creation, bug fixing, code summarization, chatbot assistance, and GitHub integration. These functionalities are implemented using Watsonx and LangChain via modular service scripts. The FastAPI backend handles routing, authentication, and smooth API interactions, connecting frontend inputs with AI processing and generating structured outputs.

Activity2.1:Developthecorefunctionalities:

This activity focuses on building the logic behind each AI-powered SDLC feature. These functionalities are the heart of SmartSDLC and are implemented using IBM Watsonx and LangChain integration.

1. AI-Powered Requirement Analysis

- **Module:** ai_story_generator.py
- **Description:** Extracts text from uploaded PDFs and uses AI to classify each sentence into SDLC phases (Requirements, Design, Development, etc.). Then it converts relevant sentences into structured user stories to be used in planning or code generation.

```
@router.post("/upload-pdf")
async def upload_pdf(file: UploadFile = File(...)):
    contents = await file.read()

    with open("temp.pdf", "wb") as f:
        f.write(contents)

    doc = fitz.open("temp.pdf")
    full_text = "".join([page.get_text() for page in doc])
    doc.close()
```

```
app > services > ai_story_generator.py
1 # services/ai_story_generator.py
2
3 def generate_user_story(requirement: str) -> str:
4     # Dummy version - you can replace with Watsonx/OpenAI later
5     return f"As a user, I want to {requirement.lower()} so that I can achieve my goal."
6
```

2. Multilingual Code Generation

- **Module:** code_generator.py

- **Description:** Takes task descriptions or user stories and generates clean, production-ready code in Python or other languages using granite-20b-code-instruct. Ideal for initial development tasks or boilerplate generation.

```
app > services > code_generator.py
1  def generate_code_snippet(requirements: str, language: str = "python") -> dict:
2      # Placeholder for Watsonx code generation
3      code = f"# Auto-generated {language} code\nprint('Hello from SmartSDLC!')"
4      return {
5          "language": language,
6          "code": code,
7          "description": f"Code generated from requirements: {requirements}"
8      }
```

3. AI-Driven Test Case Generation

- **Module:** Likely part of code_generator.py
- **Description:** Generates unit tests or integration test cases based on the generated or user-provided code. Helps developers quickly validate core logic.

4. Bug Fixing and Code Correction

- **Module:** bug_resolver.py
- **Description:** Takes buggy code snippets and automatically identifies and fixes errors using AI. Returns a clean version of the code along with optional explanations.

```
app > services > bug_resolver.py
1  def resolve_bugs(buggy_code: str) -> dict:
2      fixed_code = buggy_code.replace("prtn", "print") # dummy correction
3      return {
4          "fixed_code": fixed_code,
5          "description": "Fixed common syntax error(s)."
6      }
```

5. Code Summarization and Documentation

- **Module:** doc_generator.py
- **Description:** Extracts summaries or generates documentation-style descriptions of code blocks. Helps with code readability and maintainability.

```
app > services > doc_generator.py
1  def generate_docstring(code: str) -> dict:
2      return {
3          "docstring": '"""This function prints a hello message."""',
4          "readme": "# SmartSDLC Project\nThis project was generated using AI for rapid SDLC workflows."
5      }
6
```

6. Chatbot Assistance

- **Modules:** conversation_handler.py, chat_routes.py
- **Description:** A floating AI chatbot helps users navigate the platform, answer questions, or give suggestions on SDLC tasks. Powered by LangChain and Watsonx integration.

```

app > langchain_module > conversation_handler.py
1  from app.langchain_module.conversation_chain import chat_with_granite
2
3  # Expanded SDLC-related keywords (case-insensitive)
4  SDLC_KEYWORDS = [
5      "requirement", "user story", "user stories", "design", "architecture",
6      "development", "coding", "implementation", "programming", "code",
7      "testing", "test case", "test cases", "unit test", "integration test",
8      "bug", "debug", "fix", "error", "quality assurance", "qa",
9      "deployment", "release", "launch", "production",
10     "maintenance", "support", "upgrade", "hotfix", "patch",
11     "documentation", "version control", "repository", "git", "jira", "devops",
12     "sdlc", "software development life cycle", "software process",
13     "agile", "scrum", "waterfall", "kanban", "model", "spiral", "SDLC", "v-model"
14 ]
15
16 # Check if message is SDLC-related
17 def is_sdlc_related(message: str) -> bool:
18     return any(keyword in message.lower() for keyword in SDLC_KEYWORDS)
19
20 # Handle conversation with detailed SDLC guidance
21 def handle_conversation(message: str) -> str:
22     try:
23         if not is_sdlc_related(message):
24             return (
25                 "🤖 I specialize in Software Development Life Cycle (SDLC) topics.\n\n"
26                 "You can ask me about:\n"
27                 "- 🚀 SDLC Phases (Requirements, Design, Development, Testing, Deployment, Maintenance)\n"
28                 "- 📦 Methodologies (Agile, Scrum, Waterfall, V-Model, Spiral, Kanban)\n"
29                 "- 🛠️ Tools (Git, JIRA, Jenkins, Selenium)\n"

```

```

app > langchain_module > conversation_chain.py
1  import os
2  import requests
3  from dotenv import load_dotenv
4
5  # Load environment variables
6  load_dotenv()
7
8  # Fetch credentials from .env
9  API_KEY = os.getenv("WATSONX_API_KEY")
10 PROJECT_ID = os.getenv("WATSONX_PROJECT_ID")
11
12 # Get IAM Token from WatsonX
13 def get_iam_token(api_key: str) -> str:
14     url = "https://iam.cloud.ibm.com/identity/token"
15     headers = {"Content-Type": "application/x-www-form-urlencoded"}
16     data = {
17         "apikey": api_key,
18         "grant_type": "urn:ibm:params:oauth:grant-type:apikey"
19     }
20
21     try:
22         response = requests.post(url, headers=headers, data=data)
23         response.raise_for_status()
24         token = response.json()["access_token"]
25         print("🔑 Token fetched successfully.")
26         return token
27     except Exception as e:
28         print(f"❌ ERROR fetching token {e}")

```

7. Project Feedback and Learning Loop

- **Module:** feedback_routes.py, feedback_model.py


- **Description:** Collects user feedback on AI output and stores it in a database or JSON for improving prompts, models, or usability in future iterations.

```
app > models > feedback_model.py
1 from pydantic import BaseModel
2
3 class Feedback(BaseModel):
4     name: str = "Anonymous"
5     message: str
```

```
app > routes > feedback_routes.py
1 from fastapi import APIRouter, HTTPException
2 from pydantic import BaseModel
3 import json
4 import os
5
6 router = APIRouter()
7
8 # Path to your feedback file inside the db folder
9 FEEDBACK_FILE = "app/db/feedback_data.json"
10
11 # Create the file if it doesn't exist
12 if not os.path.exists(FEEDBACK_FILE):
13     with open(FEEDBACK_FILE, "w") as f:
14         json.dump([], f)
15
16 class Feedback(BaseModel):
17     username: str
18     message: str
19     rating: int # e.g., 1 to 5 stars
20
21 @router.post("/feedback")
22 def collect_feedback(feedback: Feedback):
23     try:
24         # Load existing feedback
25         with open(FEEDBACK_FILE, "r") as f:
26             data = json.load(f)
```

8. GitHub Integration

- **Module:** github_service.py
- **Description:** Automates GitHub workflowssuch as pushing AI-generated code to a repo, opening issues, or syncing generated documentation.

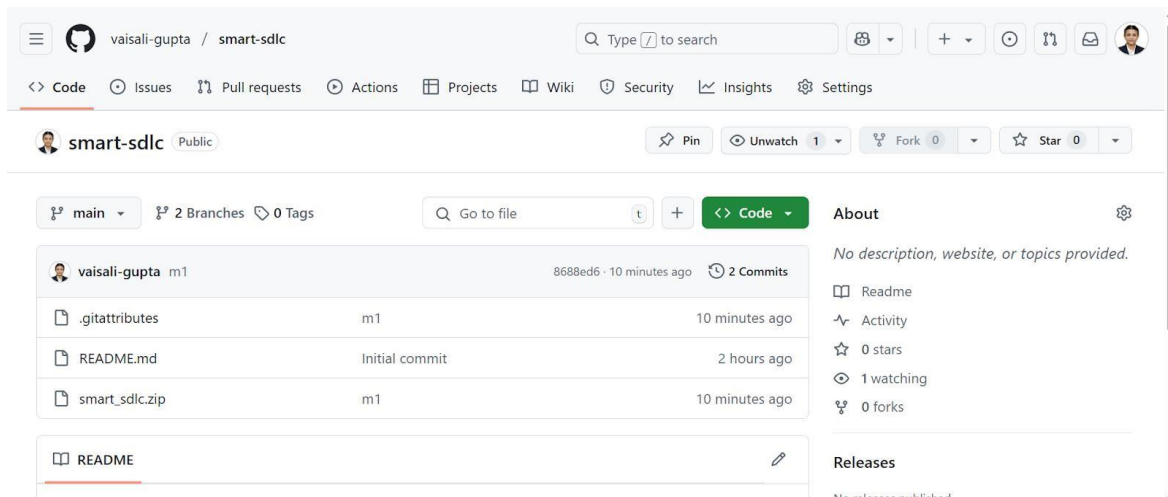

Output:FastAPIBackend

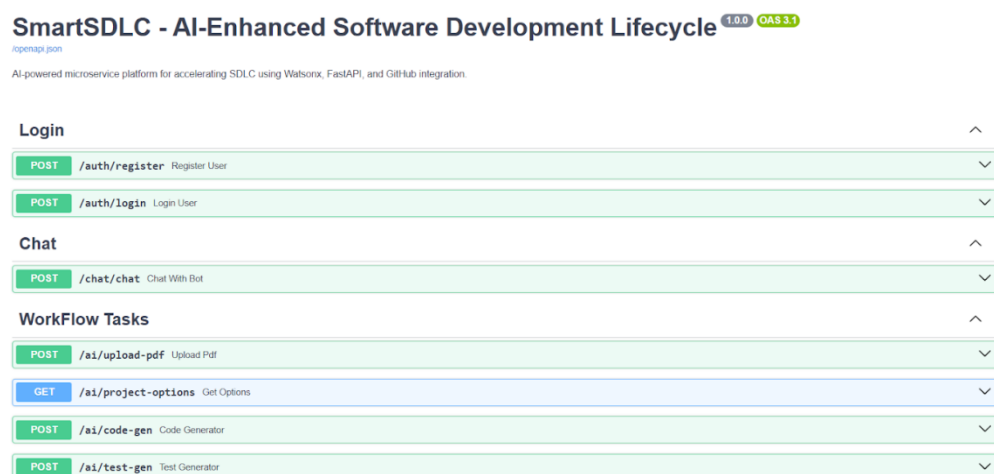


Figure2:SmartSDLCAPIDocumentation–ExploreandinteractwithAI-poweredmicroservices for login, chat, and workflow automation via FastAPI Swagger UI.

Activity2.2:ImplementtheFastAPIbackendto manageroutinganduserinputprocessing, ensuringsmoothAPIinteractions.

Thisactivityfocusesonthe**APIlayerandroutinglogic**thatconnectsuserrequests with the backend services and AI models.

1. Backend Routing

- **Modules:** routes/ai_routes.py, routes/auth_routes.py, routes/chat_routes.py, routes/feedback_routes.py
- **Description:** FastAPI routers handle incoming POST/GET requests from the frontend. Each endpoint corresponds to one feature such as /generate-code, /upload-pdf, /fix-bugs, or /register.

```
# === AI Services ===
@router.post("/code-gen")
def code_generator(requirements: str = Form(...), language: str = Form("python")):
    return generate_code(requirements, language)

@router.post("/test-gen")
def test_generator(code: str = Form(...), language: str = Form("python")):
    return generate_test(code, language)

@router.post("/fix-bugs")
def bug_fixer(buggy_code: str = Form(...)):
    return fix_bugs(buggy_code)

@router.post("/summarize")
def summarize_code(code: str = Form(...)):
    return summarize_documentation(code)
```

2. User Authentication

- **Modules:** auth_routes.py, security.py, user.py
- **Description:** Manages secure user login and registration with hashed passwords. Each request checks the user's session or credentials before executing the corresponding service.

3. Service Layer Logic

- **Modules:** services/
- **Description:** These service modules encapsulate the core business logic for AI processing. Each route calls the appropriate service function with cleaned user input and returns formatted responses.

4. AI & LangChain Integration

- **Modules:** watsonx_service.py, chat_routes.py
- **Description:** These modules handle interaction with external AI services. Inputs from routes are reformatted into prompts, passed to the Watsonx or LangChain model, and the AI responses are processed.

```

app > services > watsonx_service.py
1  import os
2  import requests
3  import logging
4  from dotenv import load_dotenv
5  from app.services.code_generator import generate_code_snippet
6  from app.services.doc_generator import generate_docstring
7  from app.services.bug_resolver import resolve_bugs
8
9  load_dotenv()
10
11 # Watsonx API endpoint
12 WATSONX_API_URL = "https://eu-de.ml.cloud.ibm.com/ml/v1/text/generation?version=2023-05-29"
13
14 # Enable basic logging
15 logging.basicConfig(level=logging.INFO)
16
17 # Function to retrieve a Bearer token from IBM IAM using the API key
18 def get_iam_token() -> str:
19     response = requests.post(
20         url="https://iam.cloud.ibm.com/identity/token",
21         headers={"Content-Type": "application/x-www-form-urlencoded"},
22         data={
23             "grant_type": "urn:ibm:params:oauth:grant-type:apikey",
24             "apikey": os.getenv("API_KEY"),
25         },
26     )
27
28     if response.status_code != 200:
29         logging.error("Failed to get IAM token: %s", response.text)

```

```

app > routes > chat_routes.py
1  # app/routes/chat_routes.py
2
3  from fastapi import APIRouter, Form, HTTPException
4  from app.langchain_module.conversation_handler import handle_conversation
5
6  router = APIRouter()
7
8  @router.post("/chat")
9  def chat_with_bot(message: str = Form(...)):
10     try:
11         response = handle_conversation(message)
12         return {"response": response}
13     except Exception as e:
14         print(f"[X ERROR] {e}")
15         raise HTTPException(status_code=500, detail="Failed to process message.")
16

```

Milestone3:main.pyDevelopment

Milestone 3 focuses on creating and organizing the main control center of the application—the main.py file, which powers the FastAPI backend in SmartSDLC. This milestone involves linking each core SDLC functionality through clearly defined API

routes, ensuring input/output handling is reliable, and preparing the system for frontend interaction. This modular setup will allow seamless integration of Watsonx and LangChain responses while maintaining a clean API surface for the frontend.

Activity 3.1: Writing the Main Application Logic in main.py

1: Define the Core Routes in main.py

- Import and include routers for each of the SmartSDLC's functional areas: requirement analysis, code generation, testing, summarization, bug fixing, authentication, chatbot, and feedback.
- Use FastAPI's `include_router()` method to modularize the route definitions and separate concerns across files.
- Example router mounts:
 - `/ai`: Handles AI-based endpoints like code generation, test creation, bug fixing.
 - `/auth`: Manages login, registration, and user validation.
 - `/chat`: Powers the floating chatbot via LangChain.
 - `/feedback`: Handle submission and storage of feedback.

```
app > main.py
35
36 app.include_router(auth_routes.router, prefix="/auth", tags=["Login"])           # Login & Register
37 app.include_router(chat_routes.router, prefix="/chat", tags=["Chat"])           # Chat operations
38 app.include_router(ai_routes.router, prefix="/ai", tags=["WorkFlow Tasks"])     # Code/Doc generation
39 app.include_router(feedback_routes.router, prefix="/feedback", tags=["Feedback"])
40
41 # Health check or home
42 @app.get("/")
43 def root():
44     return {"message": "Welcome to SmartSDLC 🚀"}
45
46
47
```

2: Set Up Route Handling and Middleware

FastAPI middleware is configured using `CORSMiddleware` to ensure the frontend (e.g., Streamlit) can interact with the backend without cross-origin issues. This is especially useful during development and should be fine-tuned in production.

```
# CORS configuration (adjust in production)
app.add_middleware(
    CORSMiddleware,
    allow_origins=["*"], # Replace with frontend domain like ["http://localhost:3000"]
    allow_credentials=True,
    allow_methods=["*"],
    allow_headers=["*"],
)
```

3: Implement Application Metadata and Root Route

The FastAPI app is created with custom metadata such as a **project title**, **version**, and **description** to help identify the API on interactive Swagger docs (/docs).

```
# Local imports
from app.core.config import settings
from app.db.init_db import init_db
from app.routes import chat_routes, ai_routes, auth_routes, feedback_routes

app = FastAPI(
    title="SmartSDLC - AI-Enhanced Software Development Lifecycle",
    description="AI-powered microservice platform for accelerating SDLC using Watsonx, FastAPI, and GitHub in",
    version="1.0.0"
)
```

Milestone 4: Frontend Development

Milestone 4 focuses on creating a **visually appealing** and **user-friendly interface** for SmartSDLC using **Streamlit**. The UI is designed to provide smooth navigation across SDLC functionalities like requirement classification, code generation, bugfixing, and more. This milestone ensures a responsive, consistent experience while leveraging AI outputs effectively, and includes a built-in chatbot for dynamic user interaction.

Activity 4.1: Designing and Developing the User

Interface

1: Set Up the Base Streamlit Structure

- Create a `main_home.py` file that acts as the dashboard and entry point of the app.
- Add a welcoming hero section with a **Lottie animation**, a title, and a tagline.
- Organize features in a grid layout with clean navigation links to modular pages.

2: Design a Responsive Layout Using Streamlit Components

- Use `st.columns()`, `st.container()`, `st.markdown()` for layout control and consistency.
- Apply custom CSS styling for better fonts, backgrounds, and card shadows.
- Design a flexible layout that works well across different screen sizes and resolutions.

3: Create Separate Pages for Each Core Functionality

- Build feature-specific modules under the `pages/` directory:
 - `Upload_and_Classify.py`: Upload PDF and classify requirements.
 - `Code_Generator.py`: Convert user prompts into working code.
 - `Test_Generator.py`: Generate test cases.
 - `Bug_Fixer.py`: Automatically fix buggy code.
 - `Code_Summarizer.py`: Summarize code into documentation.
 - `Feedback.py`: Collect user feedback.
- Connect each page to corresponding FastAPI endpoints via `api_client.py`.

Activity 4.2: Creating Dynamic Interaction with

Backend

1: Integrate FastAPI with Streamlit for Real-Time Content

- Use `requests.post()` or `requests.get()` inside `api_client.py` to interact with backend routes like `/ai/generate-code`, `/ai/upload-pdf`, etc.
- Ensure user inputs like uploaded files or prompt text are formatted and passed properly.
- Display AI responses using `st.code()`, `st.success()`, and markdown blocks for clarity.

2: Embed a Smart Floating Chatbot

- Add a minimal inline chatbot in `Home.py` using a Streamlit form.
- Use the `/chat/chat` endpoint to send and receive real-time responses.
- Enhance interaction by showing emoji-based avatars and session memory.

Milestone5:Deployment

In Milestone 5, the focus is on deploying the **SmartSDLC application locally** using FastAPI for the backend and Streamlit for the frontend. This involves setting up a secure environment, installing dependencies, connecting API keys for Watsonx, and launching the service to simulate a real-world workflow. This milestone helps ensure that the app can run smoothly in a local setup before shifting to cloud platforms or CI/CD pipelines.

Activity5.1:PreparingtheApplicationforLocal

Deployment

1:Set Up a Virtual Environment

- Create a Python virtual environment to manage dependencies and avoid conflicts with other projects.
- Activate the environment and install dependencies listed in requirements.txt to ensure all libraries (FastAPI, Streamlit, Watsonx SDK, etc.) are available.

2:ConfigureEnvironment Variables

- Set environment variables for sensitive data such as **IBM Watsonx API key**, **model IDs**, and database URLs.
- Create a .env file in your project root to securely store and load these settings during runtime.
 - WATSONX_API_KEY=your_ibm_key_here
 - WATSONX_PROJECT_ID=your_project_id
 - WATSONX_MODEL_ID=granite-20b-code-instruct

These values are loaded using python-dotenv inside your backend (e.g., config.py).

Activity 5.2: Testing and Verifying Local

Deployment

1: Launch and Access the Application Locally

- **Start the FastAPI backend** using `Uvicorn: uvicorn app.main:app --reload`
- **Run the Streamlit frontend:** `streamlit run frontend/Home.py`

Open your browser and navigate to:

- **Streamlit UI:** <http://localhost:8502>
 - **FastAPI Swagger Docs:** <http://127.0.0.1:8000/docs>
 - Test the SmartSDLC feature (requirement upload, code generation, bugfixing, chatbot, feedback) to ensure everything is connected and functioning correctly.
-
- **Run the Web Application**
 - Now type `"streamlit run ???home.py"` command
 - Navigate to the localhost where you can view your webpage

```
(myenv) PS C:\Users\VAISALI GUPTA\OneDrive\Desktop\Trials\smart_sdlc> cd smart_sdlc_frontend
(myenv) PS C:\Users\VAISALI GUPTA\OneDrive\Desktop\Trials\smart_sdlc\smart_sdlc_frontend> streamlit run home.py

You can now view your Streamlit app in your browser.

Local URL: http://localhost:8502
Network URL: http://192.168.0.187:8502
```

Milestone6:Conclusion

The **SmartSDLC** platform represents a significant advancement in the automation of the Software Development Lifecycle by integrating **AI-powered intelligence** into each phase—from requirement analysis to code generation, testing, bug fixing, and documentation. By leveraging cutting-edge technologies like **IBM Watsonx**, **FastAPI**, **LangChain**, and **Streamlit**, the system demonstrates how generative AI can streamline traditional software engineering tasks, reduce manual errors, and accelerate development timelines.

The platform's modular architecture and intuitive interface empower both technical and non-technical users to interact with SDLC tasks efficiently. Features such as requirement classification from PDFs, AI-generated user stories, code generation from natural language, auto test case generation, smart bug fixing, and integrated chat assistance illustrate the power of AI when applied thoughtfully within a development framework.

Overall, SmartSDLC not only improves productivity and accuracy but also sets the foundation for future enhancements like CI/CD integration, team collaboration, version control, and cloud deployment. It is a step toward building **intelligent, developer-friendly ecosystems** that support modern agile development needs with smart automation at its core.

The web application will open in the web browser:

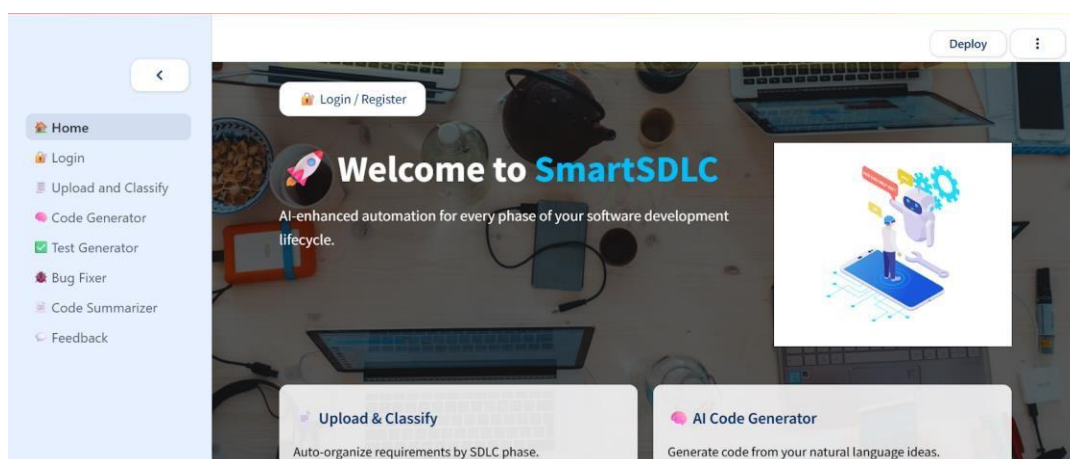


Figure3: "SmartSDLC Dashboard—Your AI-powered command center for accelerating every phase of the software development lifecycle."

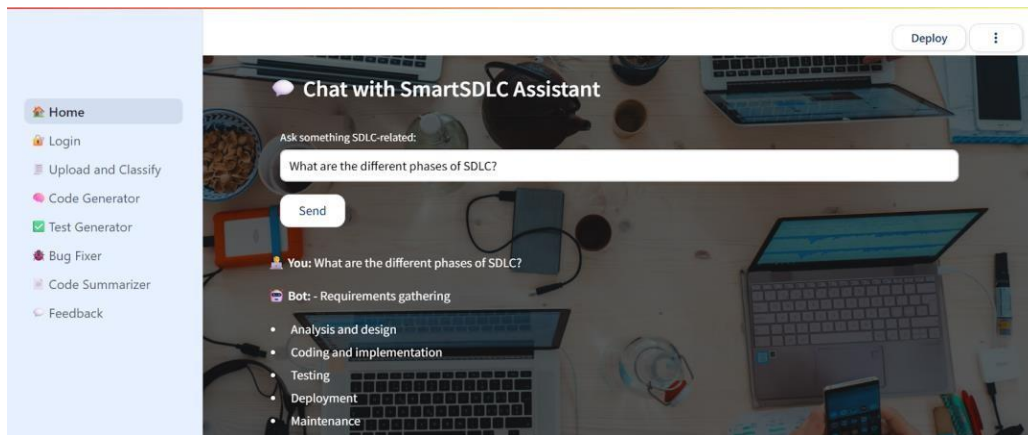


Figure4:"InteractiveChatwithSmartSDLCAssistant –InstantlylearnSDLCconceptsthrough AI-powered conversations."

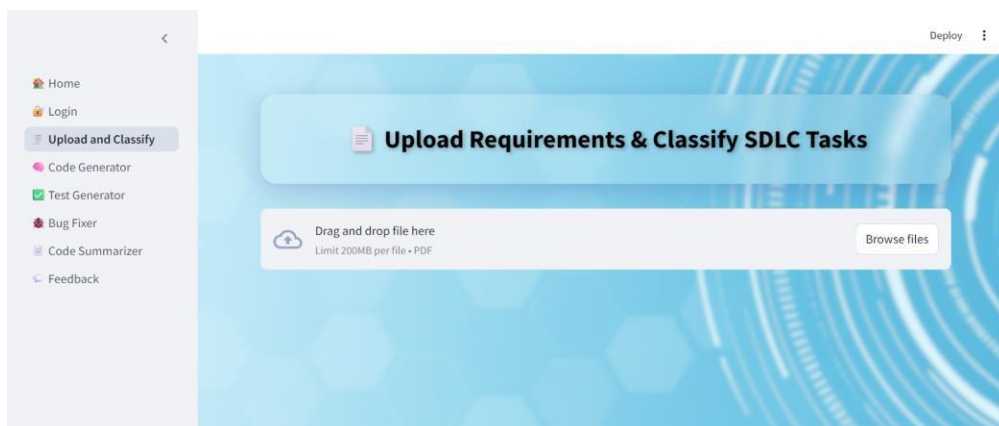


Figure5:Input:"UploadandClassify –EffortlesslyconvertrawPDF requirementsintostructured SDLC tasks using AI."



Figure6:Output:"SmartRequirementClassifier –Instantlyextractandcategorizesoftwaretasks into SDLC phases from your uploaded PDF."

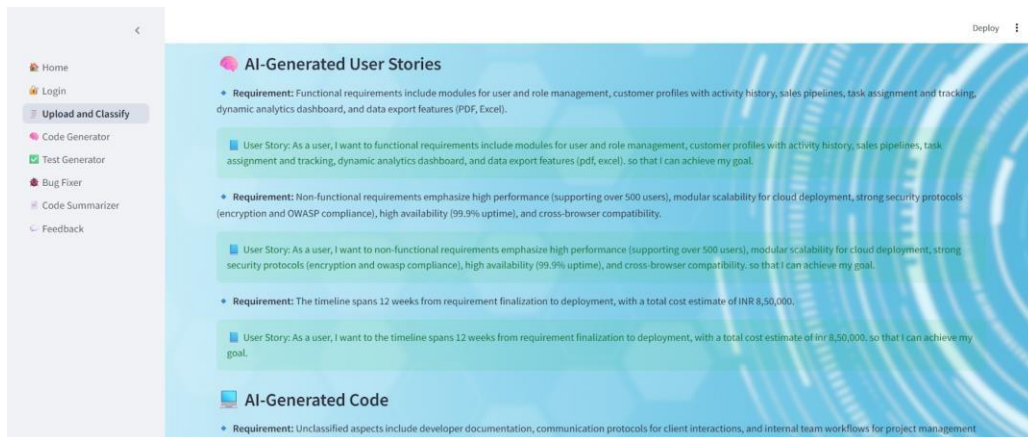


Figure7:"AI-Generated User Stories– Transform raw requirements into structured user-centric stories for agile development."

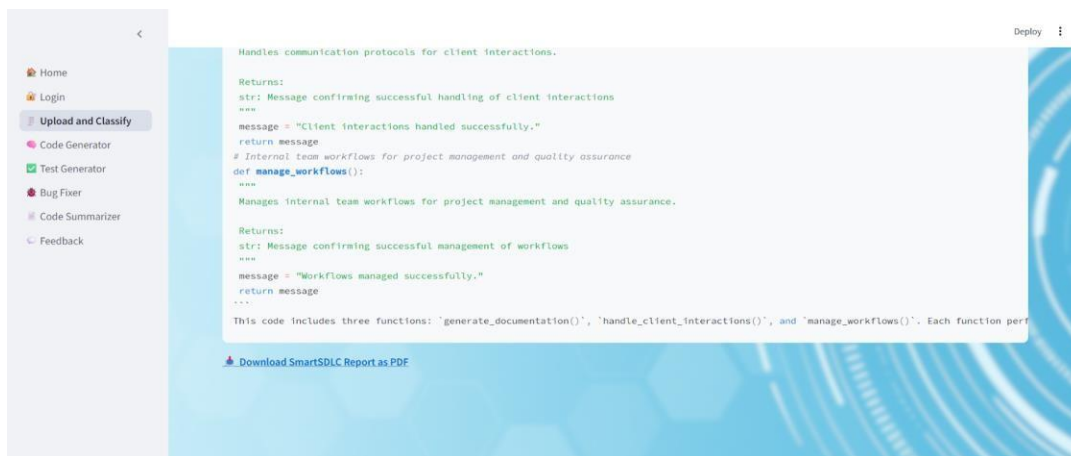


Figure8:"Auto-Generated Summary with Downloadable Insights –Review AI-explained code and export the SmartSDLC report as a professional PDF."

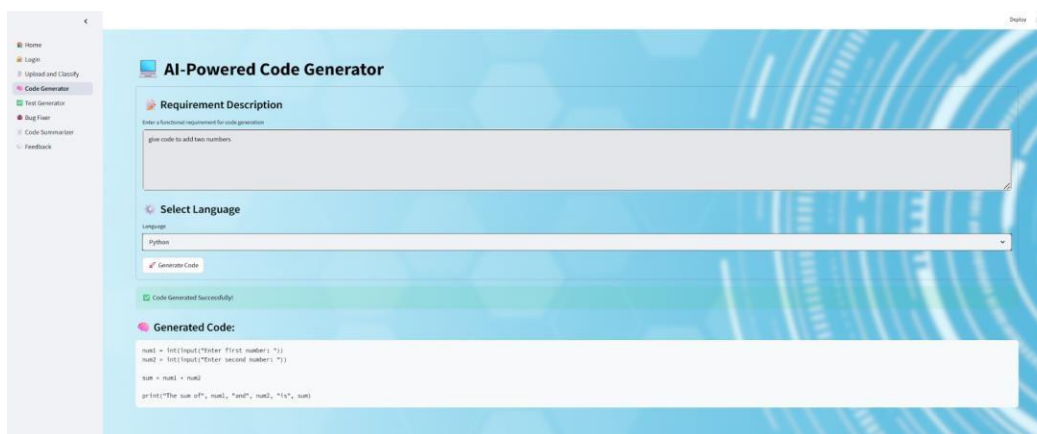


Figure9:"AI Code Generator– Instantly convert natural language requirements into clean, executable code with just one click."

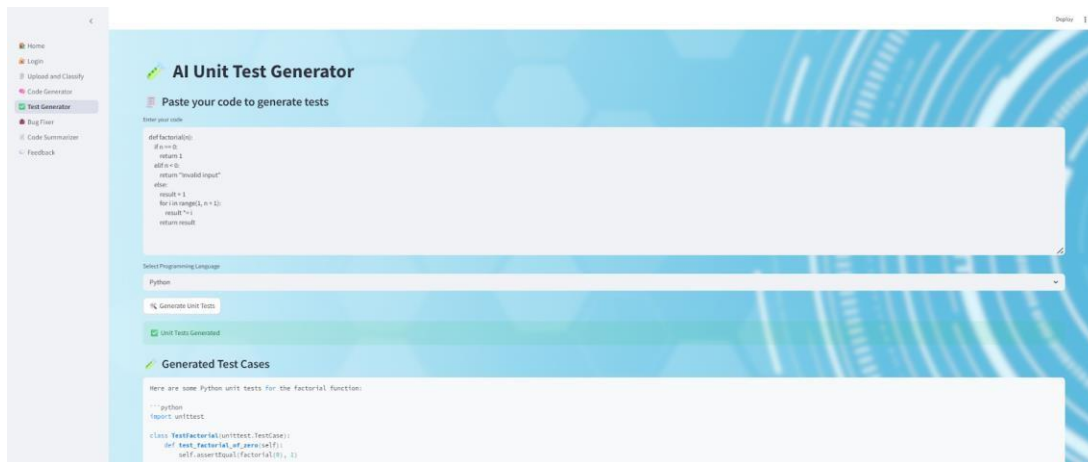


Figure10: AI-powered tool to auto-generate unit tests from user-provided code.

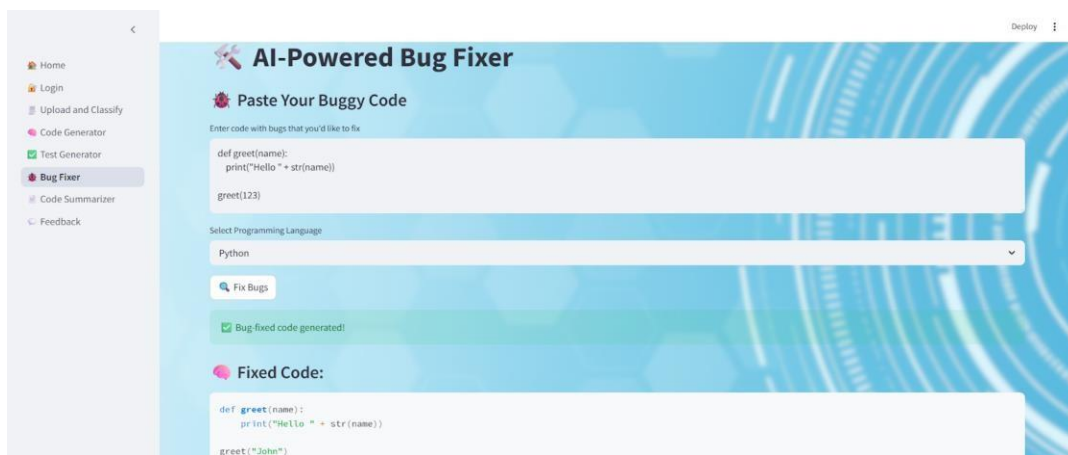


Figure11: "AI-Powered Bug Fixer—Instantly detect and correct code issues for cleaner, error-free execution."

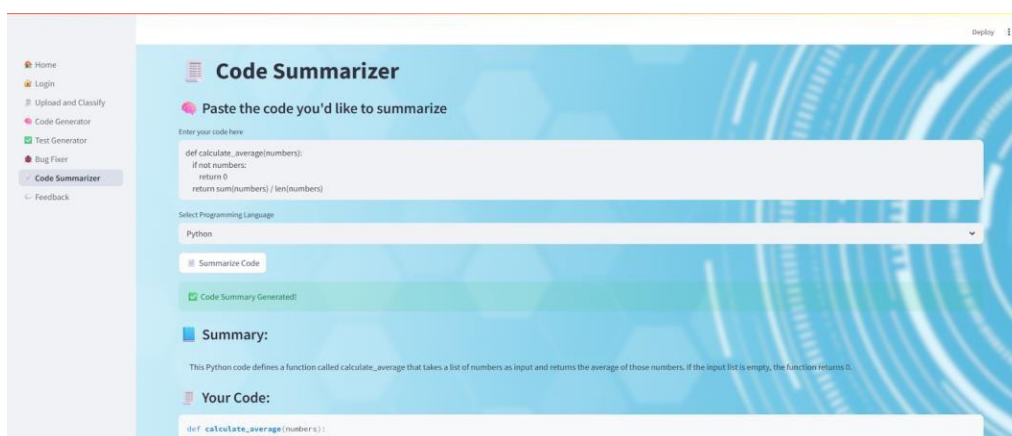


Figure12: "AI-powered Code Summarizer interface displaying generated summary for the provided code snippet."

We Value Your Feedback

Help us improve SmartSDLC

Your Name
Vaisali Gupta

Your Feedback
Excellent integration of AI into key SDLC stages like requirement analysis, code generation, and testing.

Rating (1 = Bad, 5 = Excellent)
1 4 5

Submit Feedback

Figure13: "UsersubmittingfeedbackontheSmartSDLCsystem,highlightingeffectiveAI integration across SDLC phases"

```

1  {
2    "username": "Vaisali Gupta",
3    "message": "Excellent integration of AI into key SDLC stages like requirement analysis, code generation, and testing.",
4    "rating": 4
5  }
6
7

```

Figure14: Userfeedbackdatastoredinfeedback_data.jsonfilewithintheSmartSDLC application's database module.

TechStack

- **Frontend:** React.js/Next.js
- **Backend:** Python(FastAPI)or Node.js(Express)
- **AIModels:** OpenAIGPT/BERT/CustomML models
- **Database:** MongoDB orPostgreSQL
- **CI/CD:** GitHubActions,Docker
- **Authentication:** JWT-basedAuth
- **Testing:** Jest,PyTest,Postman/Newman

3.SetupInstructions

Prerequisites

- Node.js(iffrontend/backendisinJS)
- Python3.9+(for AIandbackend)
- Docker&DockerCompose(optional)
- MongoDBorPostgreSQLinstalled
- .envfilewithenvironmentvariables

InstallationSteps

```
#Clonetherepository
gitclonehttps://github.com/your-org/smartsdlc.gitcd
smartsdlc
```

```
#BackendSetup cd
backend
pipinstall-r requirements.txt
```

```
#FrontendSetup
cd ../frontend
npm install
```

AIModelSetup(optionalifnotusingAPI-basedLLMs)

- DownloadmodelsorconnectOpenAI/GPTAPIs
- SetAPIkeysin .envfiles

4.FolderStructure

```
smartsdlc/
|
├── backend/
|   ├── app/
|   │   ├── api/           #FastAPIroutes
|   │   ├── services/      #Businesslogic,AImodules
|   │   ├── models/        #PydanticmodelsorORM
|   │   ├── utils/         #Helperfunctions
|   │   └── main.py         #Appentrypoint
|   ├── tests/             #Backendtests
|   └── requirements.txt
```

```

|
|— frontend/
|   |— components/           # ReusableUIcomponents
|   |— pages/                # Pages(Next.jsstructure)
|   |— services/             # APIcalls
|   |— styles/
|   |— app.js/ main.jsx
|
|— docs/                     # APIdocs,architecture diagrams
|— docker-compose.yml
|— README.md
|— .env.example

```

5. Running the Application

Start Backend

```
cd backend
uvicorn app.main:app --reload
```

Or, if using Node.js:

```
cd backend
npm start
```

Start Frontend

```
cd frontend
npm run dev
```

Docker (optional)

```
docker-compose up --build
```

6. API Documentation

API docs are auto-generated using **Swagger** (if FastAPI) or **Postman Collection**.

Swagger(FastAPI)

- Visit:<http://localhost:8000/docs>

SampleEndpoints

Method	Endpoint	Description
POST	/api/requirements/analyze	Extracts requirements from text
POST	/api/design/generate	Generates architecture design
POST	/api/code/generate	Generates code from design
POST	/api/test/generate	Generates test cases
GET	/api/monitor/status	Monitors deployed app

7. Authentication

Uses **JWT-based Auth** to protect routes.

AuthFlow

1. User signs up or logs in.
2. Backend issues JWT token.
3. Token is stored in browser (cookies or localStorage).
4. Token is sent in Authorization header for secure API calls.

Authorization: Bearer <your_token_here>

8. User Interface

Frontend Features

- Dashboard for managing projects
- 🗨️ Requirement input UI (text or voice)
- 📐 Visual design generator (UML diagrams)
- 📄 AI-generated code viewer
- Testcase editor
- 📊 Deployment status + logs viewer
- 🔑 Login/Register with JWT Auth

Tools

- React+TailwindCSS
- Chart.js/Mermaid.jsforvisualdiagrams
- Monacoeditorfor codedisplay

9. Testing

BackendTesting

- **PyTest**or**unittest**
- TestAPIroutes,services,andAI modules

```
cdbackend
pytest
```

FrontendTesting





- **Jest+ReactTesting Library**

```
cdfrontend
npm test
```

APITesting

- **Postman**or**Newman**scriptstotestendpoints
- Includedin/docs/api/folder

Summary

Feature	Description
 AI Assistance	IntegratedAlateachSDLC phase
Full-stackApp	Frontend+Backend+DB+AI
 API Docs	Auto-generatedwithSwagger
 Auth	JWT-securedAPIaccess
 Testing	Unit+Integration+API

 DevOpsReady Docker+CI/CDpipelines

