

ASSIGNMENT-4

Date	28October2022
TeamID	PNT2022TMID12298
Name	B Saravanan
MaximumMarks	2 Marks

Question1:

Write code and connections in work for ultrasonic sensor. Whenever distance is less than 100cms send "alert" to ibm cloud and display in device recent events.

CODE:

```
1 #include <WiFi.h> //library for wifi
2 #include <PubSubClient.h> //library for MQTT
3
4
5 void callback(char* topic, byte* payload, unsigned int payloadLength);
6
7 //-----credentials of IBM Accounts-----
8
9 #define ORG "4hn0jp" //IBM ORGANIZATION ID
10 #define DEVICE_TYPE "ULTRASON" //Device type mentioned in ibm watson IOT Platform
11 #define DEVICE_ID "DISTANCEDETECT" //Device ID mentioned in ibm watson IOT Platform
12 #define TOKEN "wu05s7PR)ZSegV&Rx" //Token
13 String data;
14 float dist;
15
16
17 //----- Customise the above values -----
18 char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
19 char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform and format in which data to be send
20 char subscribeTopic[] = "iot-2/cmd/test/fmt/String"; // cmd REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
21 char authMethod[] = "use-token-auth"; // authentication method
22 char token[] = TOKEN;
23 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
24
25
26 //-----
27 WiFiClient wifiClient; // creating the instance for wifiClient
28 PubSubClient client(server, 1883, callback, wifiClient); //calling the predefined client id by passing parameter like server id, port and wifi credential
29
30 int LED = 4;
31 int trig = 5;
32 int echo = 18;
33 void setup()
34 {
35   Serial.begin(115200);
```

esp32-blink.ino • diagram.json • libraries.txt • Library Manager ▼

```
36 pinMode(trig,OUTPUT);
37 pinMode(echo,INPUT);
38 pinMode(LED, OUTPUT);
39 delay(10);
40 wificonnect();
41 mqttconnect();
42 }
43 void loop()// Recursive Function
44 {
45
46     digitalWrite(trig,LOW);
47     digitalWrite(trig,HIGH);
48     delayMicroseconds(10);
49     digitalWrite(trig,LOW);
50     float dur = pulseIn(echo,HIGH);
51     float dist = (dur * 0.0343)/2;
52     Serial.print ("Distancein cm");
53     Serial.println(dist);
54
55
56     PublishData(dist);
57     delay(1000);
58     if (!client.loop()) {
59         mqttconnect();
60     }
61 }
62
63
64
65 /*.....retrieving to Cloud.....*/
66
67 void PublishData(float dist) {
68     mqttconnect();//function call for connecting to ibm
69     /*
70     | creating the String in in form JSon to update the data to ibm cloud
```

```

70      | creating the String in in form JSON to update the data to ibm cloud
71      */
72      String object;
73      if (dist <100)
74      {
75          digitalWrite(LED,HIGH);
76          Serial.println("object is near");
77          object = "Near";
78      }
79      else
80      {
81          digitalWrite(LED,LOW);
82          Serial.println("no object found");
83          object = "No";
84      }
85
86      String payload = "{\"distance\":";
87      payload += dist;
88      payload += ", \"object\":\":";
89      payload += object;
90      payload += "\"}";
91
92
93      Serial.print("Sending payload: ");
94      Serial.println(payload);
95
96
97
98

```

```

esp32-blink.ino • diagram.json • libraries.txt • Library Manager
98
99      if (client.publish(publishTopic, (char*) payload.c_str())) {
100          Serial.println("Publish ok");// if it sucessfully upload data on the cloud then it will print publish ok in Serial monitor or else it will print publish failed
101      } else {
102          Serial.println("Publish failed");
103      }
104
105  }
106  void mqttconnect() {
107      if (!client.connected()) {
108          Serial.print("Reconnecting client to ");
109          Serial.println(server);
110          while (!client.connect(clientId, authMethod, token)) {
111              Serial.print(".");
112              delay(500);
113          }
114
115          initManagedDevice();
116          Serial.println();
117      }
118  }
119  void wificonnect() //function defination for wificonnect
120  {
121      Serial.println();
122      Serial.print("connecting to ");
123
124      WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
125      while (WiFi.status() != WL_CONNECTED) {
126          delay(500);
127          Serial.print(".");
128      }
129      Serial.println("");
130      Serial.println("WiFi connected");
131      Serial.println("IP address: ");
132      Serial.println(WiFi.localIP());

```

esp32-blink.ino • diagram.json • libraries.txt • Library Manager ▾

```
123
124   WiFi.begin("Wokwi-GUEST", "", 6); //passing the wifi credentials to establish the connection
125   while (WiFi.status() != WL_CONNECTED) {
126       delay(500);
127       Serial.print(".");
128   }
129   Serial.println("");
130   Serial.println("WiFi connected");
131   Serial.println("IP address: ");
132   Serial.println(WiFi.localIP());
133 }
134
135 void initManagedDevice() {
136     if (client.subscribe(subscribetopic)) {
137         Serial.println((subscribetopic));
138         Serial.println("subscribe to cmd OK");
139     } else {
140         Serial.println("subscribe to cmd FAILED");
141     }
142 }
143
144 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145 {
146
147     Serial.print("callback invoked for topic: ");
148     Serial.println(subscribetopic);
149     for (int i = 0; i < payloadLength; i++) {
150         //Serial.print((char)payload[i]);
151         data3 += (char)payload[i];
152     }
153
154     // Serial.println("data: "+ data3);
155     // if(data3=="Near")
156     // {
157     // Serial.println(data3);
158     // if(data3=="Near") {
159     //     Serial.println("Near");
160     // }
```

esp32-blink.ino ●


diagram.json ●

libraries.txt ●

Library Manager ▼


```
142 }
143
144 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145 {
146
147     Serial.print("callback invoked for topic: ");
148     Serial.println(subscribetopic);
149     for (int i = 0; i < payloadLength; i++) {
150         //Serial.print((char)payload[i]);
151         data3 += (char)payload[i];
152     }
153
154     // Serial.println("data: "+ data3);
155     // if(data3=="Near")
156     // {
157     // Serial.println(data3);
158     // digitalWrite(LED,HIGH);
159
160     // }
161
162     // else
163     // {
164     // Serial.println(data3);
165     // digitalWrite(LED,LOW);
166
167     // }
168     data3="";
169
170
171 }
```

OUTPUT:

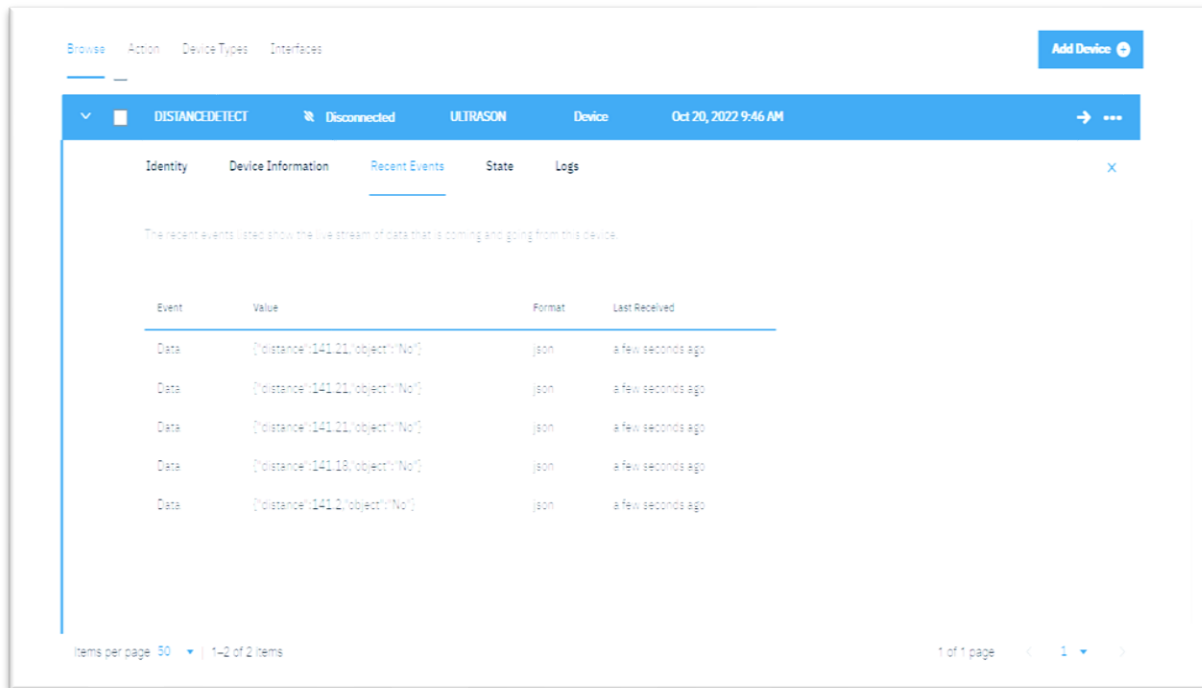

Event	Value	Format	Last Received
Data	{\"distance\":141.21,\"object\":\"No\"}	json	a few seconds ago
Data	{\"distance\":141.21,\"object\":\"No\"}	json	a few seconds ago
Data	{\"distance\":141.21,\"object\":\"No\"}	json	a few seconds ago
Data	{\"distance\":141.18,\"object\":\"No\"}	json	a few seconds ago
Data	{\"distance\":141.2,\"object\":\"No\"}	json	a few seconds ago

DatasendtotheIBMclouddevicewhentheobjecticsfar

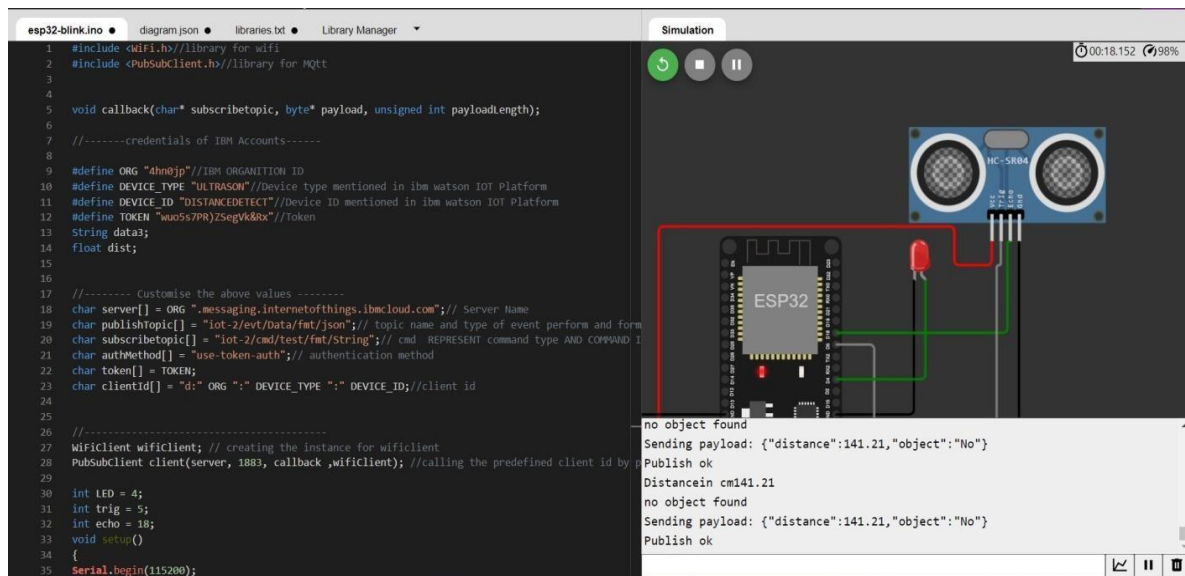

```
1 #include <WiFi.h> //library for wifi
2 #include <PubSubClient.h> //library for MQTT
3
4
5 void callback(char* subscribtopic, byte* payload, unsigned int payloadlength);
6
7 //-----credentials of IBM Accounts-----
8
9 #define ORG "dhn0jp" //IBM ORGANIZATION ID
10 #define DEVICE_TYPE "ULTRASON" //Device type mentioned in ibm watson IOT Platform
11 #define DEVICE_ID "DISTANCEDETECT" //Device ID mentioned in ibm watson IOT Platform
12 #define TOKEN "wuo5s7PR)2sepV&k&Rk" //Token
13 String data3;
14 float dist;
15
16 //----- Customise the above values -----
17 char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
18 char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform and form
19 char subscribTopic[] = "iot-2/cmd/test/fmt/String"; // cmd REPRESENT command type AND COMMAND ID
20 char authMethod[] = "use-token-auth"; // authentication method
21 char token[] = TOKEN;
22 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
23
24 //-----
25
26 WiFiClient wificlient; // creating the instance for wificlient
27 PubSubClient client(server, 1883, callback, wificlient); //calling the predefined client id by
28
29 int LED = 4;
30 int trig = 5;
31 int echo = 18;
32 void setup()
33 {
34   Serial.begin(115200);
```

DatasenttotheIBMCloudDevicewhentheobjectisnear


Whenobjectisneartotheultrasonicsensor

wokwi.com/projects/305566932847821378

esp32-arduino.ino by urish

Simulation

00:12.028 100%

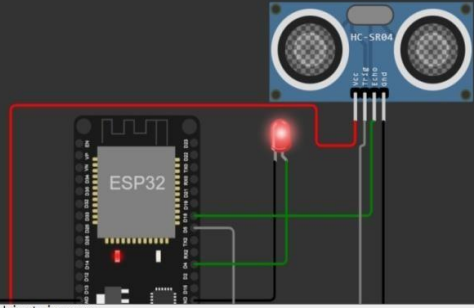

```
object is near
Sending payload: {"distance":97.82,"object":"Near"}
Publish ok
Distance in cm 97.82
object is near
Sending payload: {"distance":97.82,"object":"Near"}
Publish ok
```