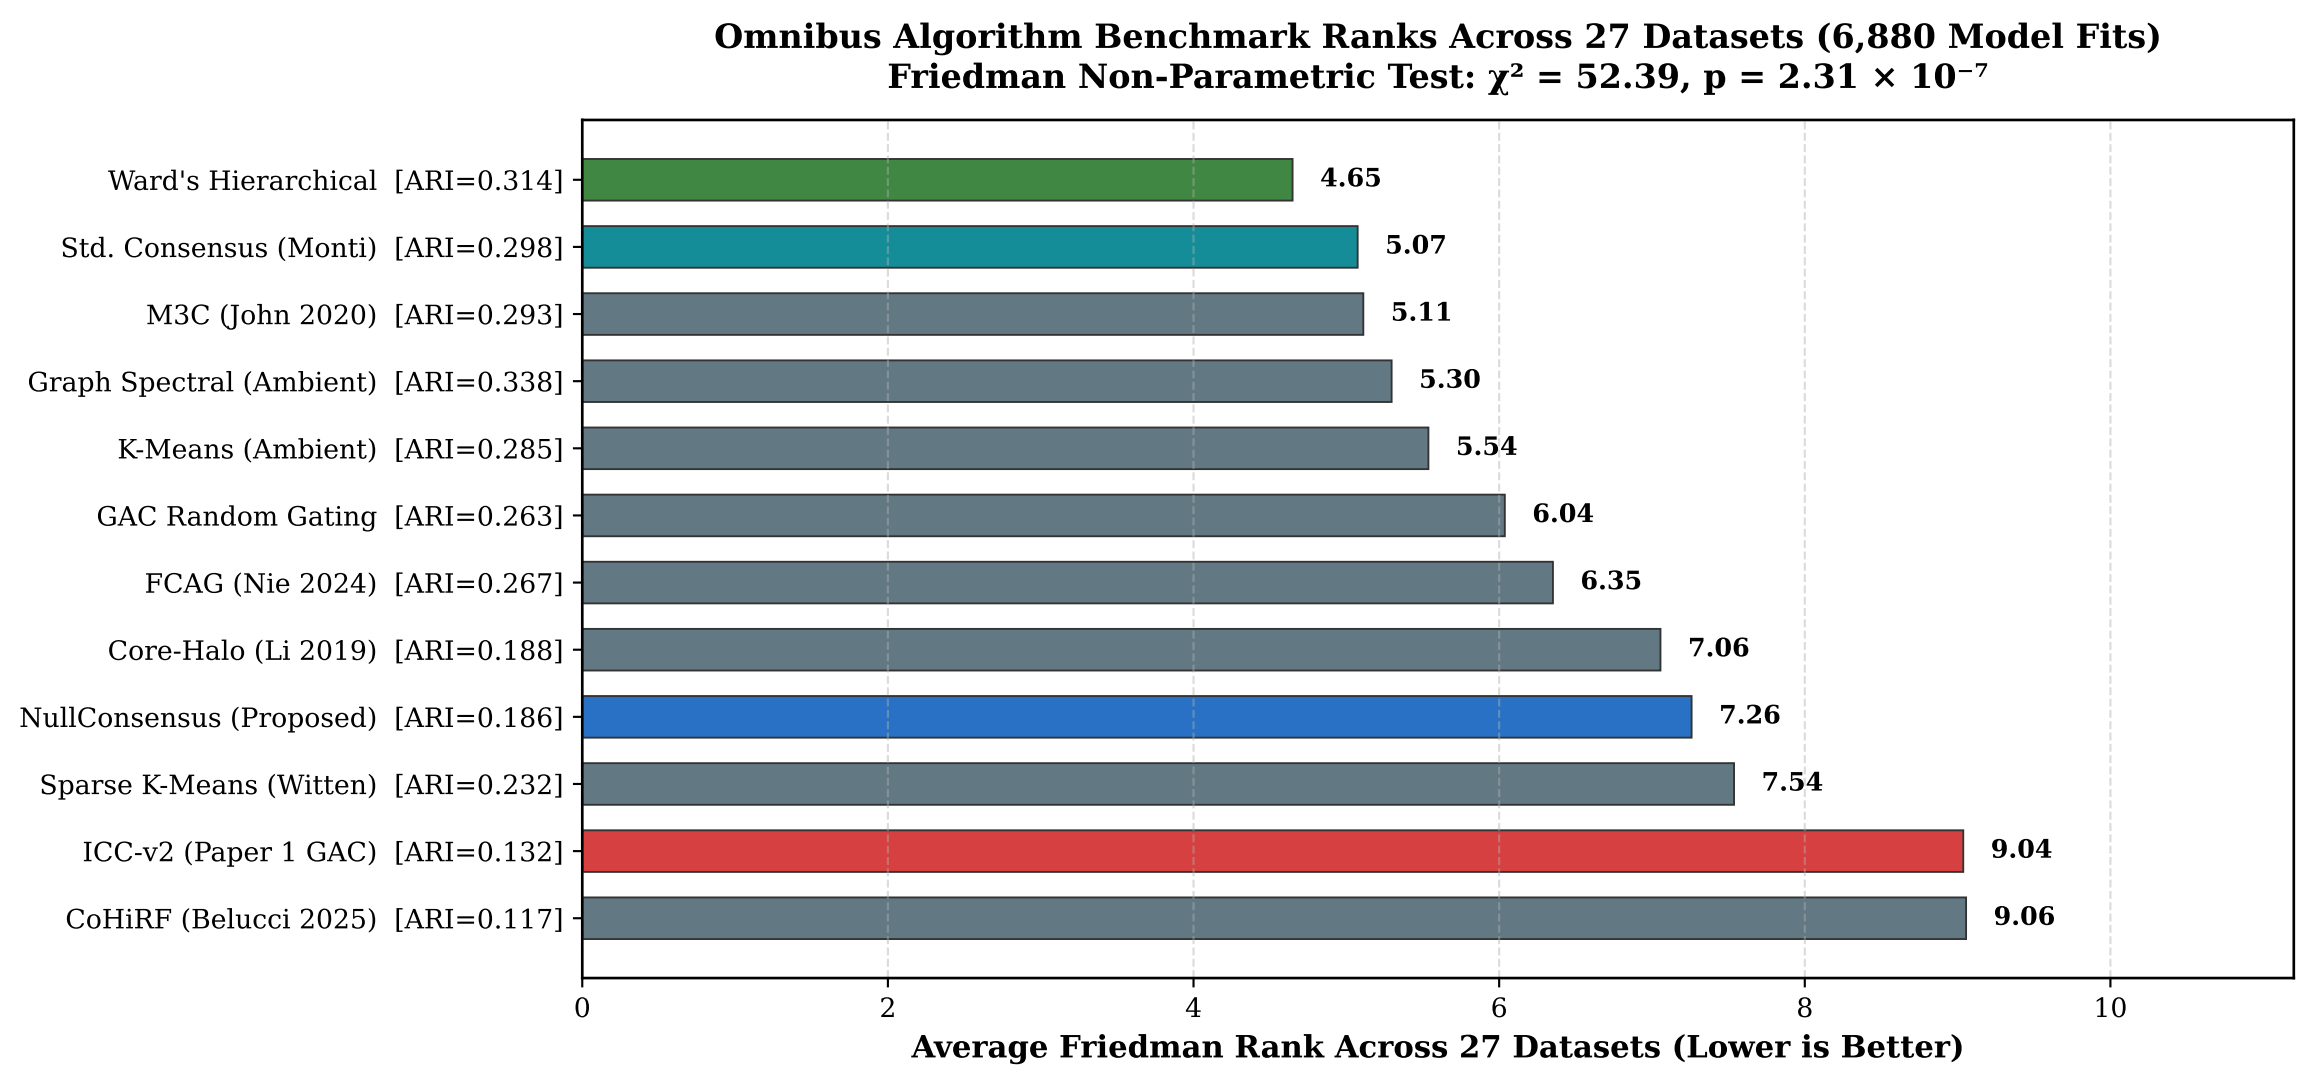
Omnibus Algorithm Benchmark Ranks Across 27 Datasets (6,880 Model Fits)
Friedman Non-Parametric Test: χ² = 52.39, p = 2.31 × 10⁻⁷
Ward's Hierarchical [ARI=0.314]
Std. Consensus (Monti) [ARI=0.298]
M3C (John 2020) [ARI=0.293]
Graph Spectral (Ambient) [ARI=0.338]
K-Means (Ambient) [ARI=0.285]
GAC Random Gating [ARI=0.263]
FCAG (Nie 2024) [ARI=0.267]
Core-Halo (Li 2019) [ARI=0.188]
NullConsensus (Proposed) [ARI=0.186]
Sparse K-Means (Witten) [ARI=0.232]
ICC-v2 (Paper 1 GAC) [ARI=0.132]
CoHiRF (Belucci 2025) [ARI=0.117]
4.65
5.07
5.11
5.30
5.54
6.04
6.35
7.06
7.26
7.54
9.04
9.06
0
2
4
6
8
10
Average Friedman Rank Across 27 Datasets (Lower is Better)