A DOSSIER FOR A BLIND PRODUCT LAUNCH


The stage, *dissected.*

Sixteen physical reveal concepts for three products — 2×2, 4×4 and 6×6 feet — drawn as mechanisms, not moods. Every phase is explained, every machine is visible, and every claim is tied to something a crew can build.

16	5	3	1
CONCEPTS	PHASES EACH	PRODUCT SIZES	18 × 9 M STAGE

Every plate carries an isometric anatomy with numbered parts, all five phases written out, the cue sheet, the three-size adaptation and a delivery tier. The house is drawn once and shared by all sixteen.

THE HOUSE, BEFORE THE CONCEPT FIG. 00

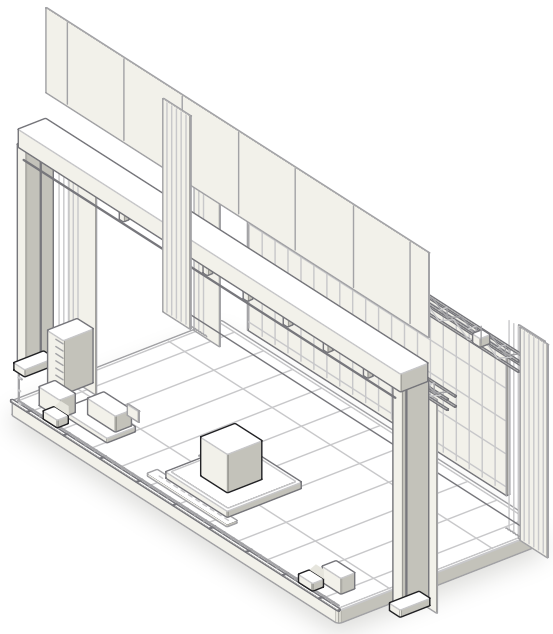

The mechanisms

01	THE UNSEEN	ENGINEERED	05
02	THE PULSE	ENGINEERED	07
03	THE CARGO VAULT	ENGINEERED	09
04	THE ASCENSION	PROVEN	11
05	THE DIGITAL VEIL	ENGINEERED	13
06	THE LIGHT SCULPTURE	ENGINEERED	15
07	THE DROP	ENGINEERED	17
08	THE PHANTOM	EXPERIMENTAL	19
09	THE STAGE IS THE PRODUCT	PROVEN	21
10	THE LASER DRAW	ENGINEERED	23
11	THE COLOUR RELEASE	PROVEN	25
12	THE IGNITION	ENGINEERED	27
13	THE KABUKI DROP	PROVEN	29
14	THE FLY BAR	PROVEN	31
15	THE TRAVELER	PROVEN	33
16	THE REVOLVE	ENGINEERED	35

Each concept occupies two plates: the anatomy and its parts on the left, the five phases, cue sheet and delivery reality on the right.

HOW TO READ THE DRAWINGS

Violet is the mechanism — the tracks, hinges, struts, cables, rams and drives that make the reveal happen.

Graphite is the house — deck, LED wall, masking, truss, fixtures and datum. Shared by every concept.

1 **Numbered pins** locate each part in the drawing. The list below the figure is the legend; nothing floats.

DELIVERY TIERS

PROVEN — standard theatre practice, stock or hireable, rehearses predictably.

ENGINEERED — custom scenic build with a known method and a real build window.

EXPERIMENTAL — depends on a technical answer we do not have yet.

THE FIXED ROOM

18 × 9 m deck, 20 m proscenium, two 20.4 m box-truss spans at 7.4–7.8 m, eight 1 t hoists, eight 750 W profiles, two booms, wool-serge masking and a 14.2 × 5.6 m LED wall. Every figure shares this room so the concepts can be compared.

Product identity, weight, height and centre of gravity are unknown. Nothing in this document assumes them; where a concept depends on those numbers, it says so.

FOUR CLASSICS, KEPT

13
THE KABUKI DROP
Eight clamps, one cue, under a second. The fastest and cheapest reveal to rehearse.

14
THE FLY BAR
A weighted hem lifts on a guided header. The sunrise reveal, done without a mistake.


15
THE TRAVELER
Two pleated panels part from the centre. Theatre's most legible reveal, unchanged.

16
THE REVOLVE
A sealed drum turns 180 degrees and brings its aperture to the room.

One room, *fully built.*

The room is fixed before a single reveal is designed. Every concept shares it, so it is drawn once, in full, and referenced by every plate that follows.

FIG. 00 / HOUSE — ISOMETRIC / LIGHT MODE

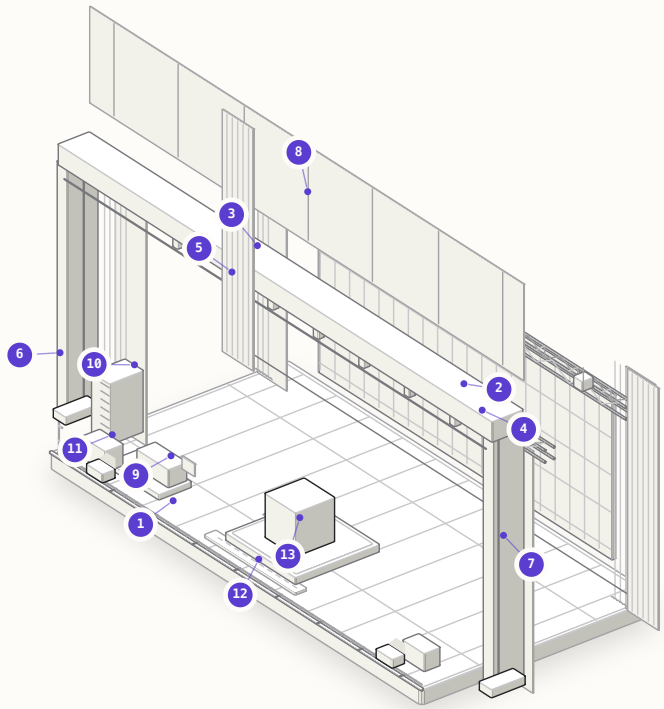

VIOLET = ANATOMY · GRAPHITE = HOUSE — NOT TO SCALE

PARTS

01 18 × 9 m deck
02 LED image surface
03 Wool-serge masking
04 Box truss + eight hoists
05 Profile fixtures
06 Height datum
07 20 m proscenium
08 Fly tower facade
09 Control position
10 Dimmer + show rack
11 Flight cases + wedges
12 Cable ramp
13 Hero product / 4 × 4 ft

THE FIXED ROOM

18 × 9 m deck	20 m proscenium
2 × 20.4 m truss spans	8 chain hoists
8 profile spots	14.2 × 5.6 m LED
Wool-serge masking	Dimmer rack + desk

The deck is 25 mm ply on steel legs with a 30 mm front edge and a recessed cable ramp. Truss is 400 mm box section on eight 1 t chain hoists, each with a secondary safety and a limit switch. Lighting is eight 750 W profiles on the front span, two boom specials and four practicals. Control is a two-universe desk with a printed show file and a redundant dimmer rack.

18 × 9 m	20 m	2 × 20.4 m	8 × 1 t	14.2 × 5.6 m	1 desk
MATTE-BLACK DECK	PROSCENIUM OPENING	BOX-TRUSS SPANS	CHAIN HOISTS	LED IMAGE SURFACE	TWO UNIVERSES, ONE FILE

Every element is standard Indian venue stock, chosen so the room can be rebuilt in a different city without redesigning the show. The house is the constant; the mechanism is the variable.

Five layers, *one baseline.*

01 **DECK**
An 18 × 9 m deck of 25 mm ply on steel legs sits inside a 20 m proscenium, dead flat and dead black. Every later lift, drop and reveal is measured from this plane.

02 **RIGGING**
Two 20.4 m box-truss spans fly at 6.6–7.0 m on eight 1 t chain hoists, each with a secondary safety and a limit switch. Eight profile spots, two boom specials and four practicals hang from them.

03 **LIGHT**
The lighting rig is deliberately limited: profiles for faces and product, booms for side shape, practicals for architecture. Haze is managed so beams read without fogging the room.

04 **MASKING**
Four wool-serge legs and two borders close the picture down to the deck. The audience sees only what the design intends, and every offstage movement stays hidden.

05 **CONTROL**
One two-universe desk, one printed show file and one operator run every cue in every concept. A redundant dimmer rack and a clear cue stack keep the evening repeatable.

CUE SHEET

0:00	**The room**	House lights at half, stage in a warm wash. The audience sees a working rig, not a set.
0:30	**The floor**	The deck reads dead flat and dead black, so every later lift, drop and reveal has a clean baseline.
1:30	**The rig**	Two truss spans carry the profiles, the booms and the practicals; eight hoists make the rig repeatable.
2:40	**The frame**	Masking legs and borders close the picture down to the deck, so nothing outside the design is visible.
3:30	**The wall**	The LED wall becomes the identity surface; all moving image lives there and nowhere else.
4:20	**The control**	One lighting desk, one show file, one operator; every cue in every concept is played from this position.

WHY IT IS FIXED

Every element is standard Indian venue stock: box truss, 1 t hoists, 750 W profiles, wool serge, a 2.5 mm LED wall and a two-universe desk.

A clear walk-up path from stage right, a 1 m clearance around the product plinth, and a boom spot that finds the guest without moving the show.

DELIVERY
BASE INFRASTRUCTURE
Stock truss, hoists, profiles and masking, assembled once and reused by every concept in the deck.

WHAT THE CONCEPT INHERITS

01
FIXED
The deck plane, the proscenium line, the LED wall and the masking. No concept may move these.


02
VARIABLE
Fixture focus, haze, rigging positions and the two truss heights. Set per concept, from the same stock.

03
PER CONCEPT
One mechanism, one cover, one guest action and one cue stack. Everything else is the house.

THE UNSEEN

The set withholds the product until the architecture decides to speak.

FIG. 01 — ISOMETRIC / LIGHT MODE

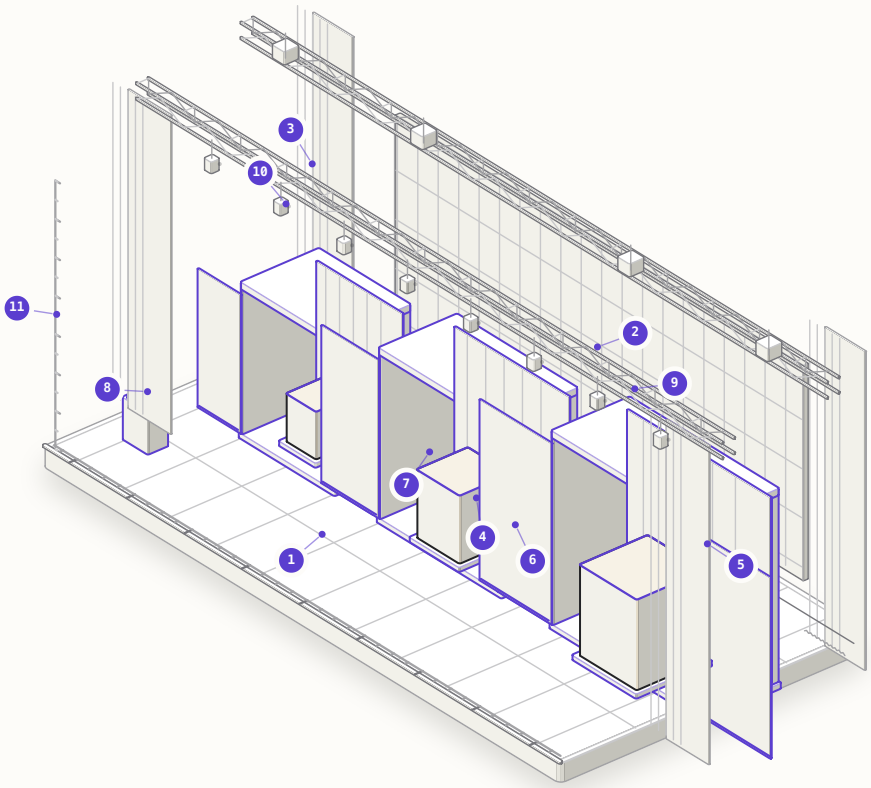


VIOLET = MECHANISM · GRAPHITE = HOUSE — ENGINEERED / 5–6 WK SCENIC

PARTS

01 18 × 9 m deck
02 LED image surface
03 Wool-serge masking
04 Product / 4 × 4 ft
05 Three scenic bays
06 Sliding face panels
07 LED skin + plinth
08 Architectural key
09 Box truss + eight hoists
10 Profile fixtures
11 Height datum

> *"The moment the first seam opens and the audience realises the wall was never a wall. It was a container for three separate worlds."*

DETAIL / MECHANISM
2.5×



THE SET

Three architectural bays span the rear stage, their widths increasing left to right. Each bay is a structural scenic frame with sliding face panels, an internal LED skin, a product plinth and a concealed access route. A low central lectern holds the architectural key. A wide LED wall sits behind the bays and only becomes visible when the bays open.

THE COVER

Each product sits inside a dedicated scenic bay. Face panels close flush with the surrounding architecture so the stage reads as a single sculptural wall rather than three obvious boxes.

THE HAND

The chief guest turns a machined brass architectural key at the lectern. The key does not drive the panels; it requests a supervised show cue. At the final launch, the guest holds the key until the third bay completes its opening, and all three bays resolve into the hero composition.

Three architectural bays that open in sequence, each wider and taller than the last. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

01 THE UNSEEN

A stage that rewrites itself, one reveal at a time.

ENGINEERED
5–6 WK SCENIC

01 **SEALED STAGE**
The house falls to black and three matte-black bays stand as one architectural wall. Only the seam lines and the brass key at the lectern are lit, so the room reads a finished set with nothing left to reveal.

02 **STORY**
A short approved narrative introduces the challenge behind the smallest product while abstract silhouettes move across the inner LED skin. The audience is told a story, not shown a catalogue, and the wall keeps its secret.

03 **KEY TURN**
The chief guest turns the machined key. It is an input device only: the scenic controller receives a request and a named operator confirms the cue. The seams of bay one brighten in sequence so the room sees cause before movement.

04 **BAY ONE**
Two face panels retract on low-friction guides and stop at encoded positions. The 2×2-ft product is already standing in a warm pool of light; the other bays stay dark, so the reveal feels like the first chapter rather than the whole show.

05 **TRILOGY**
Bays two and three open on separate cues, each wider and taller than the last, until the full LED wall is exposed behind an open composition. The three products, the guest and the presenter hold for the official photograph.

CUE SHEET

00:00–00:20	**A stage that keeps its secrets**
00:20–00:55	**The first story**
00:55–01:05	**The key turns**
01:05–01:20	**First reveal**
01:20–02:40	**The second chapter**
02:40–03:40	**The third chapter**
03:40–04:00	**The trilogy**

TECHNICAL

`Motorised scenic tracks` `Position sensors` `LED skins` `Media server` `Show control` `Independent bay safety`

Each bay is a steel scenic frame with two or four face panels on low-friction guides. Motorised chain drives move the panels; limit switches and position encoders stop travel at verified points. A dedicated scenic controller handles movement, while the media server and lighting console run the visual cue. The lectern key is an input device only. A show operator confirms every movement cue.

THE THREE SIZES

2×2 FT	A compact single-leaf bay. The 2×2-ft object is revealed with the shortest panel travel and the most intimate lighting.
4×4 FT	A wider two-leaf bay with a taller aperture and a longer visual prologue.
6×6 FT	A double-height four-leaf bay. The 6×6-ft product is framed by the full architectural wall, with the LED backdrop revealed behind it.

FEASIBILITY

The concept depends on stage width, bay depth, product access and enough clear travel for the panels. Each bay needs a service route so the object can be placed and checked without opening the face in view of the audience.

IF NOT

If motorised panels are not approved, the same architecture can use manually operated counterweighted panels or retractable drapes behind the seams. The visual language survives; only the mechanism changes.

DELIVERY — ENGINEERED
5–6 WK SCENIC
Three independent bay drives, each with its own safety circuit and service route. The bays are conventional; the sequencing is the work.

THE RUN OF SHOW, TO SCALE


00:00 — 04:00

20s	35s	10s	15s	1:20	1:00	20s
01 A stage th…	02 The first story	03	04 First re…	05 The second chapter	06 The third chapter	HOLD The trilogy

THE PULSE

The guest's hand starts a visible chain of light that ends at the product.

FIG. 02 ISOMETRIC / LIGHT MODE

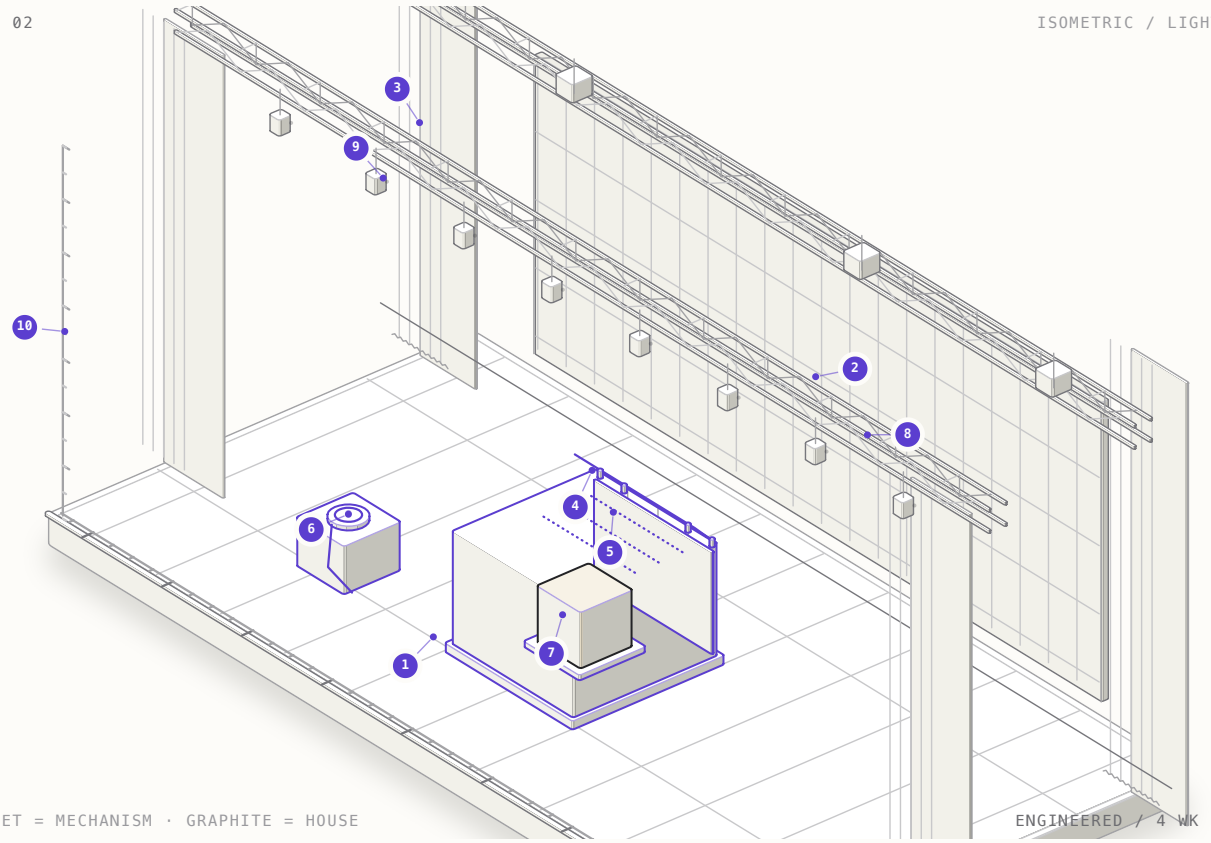


VIOLET = MECHANISM · GRAPHITE = HOUSE ENGINEERED / 4 WK SCENIC

PARTS

01	18 × 9 m deck	06	Palm reader
02	LED image surface	07	Product
03	Wool-serge masking	08	Box truss + eight hoists
04	Crate shell / 2.4 m	09	Profile fixtures
05	Hinged lid + gas struts	10	Height datum

> *"The three seconds when the pulse disappears into the screen and the audience waits to see where it will come out."*

DETAIL / MECHANISM 2.6×



THE SET

A low ceremonial console sits at stage left, connected to the main stage by a protected addressable LED channel. The LED path continues up a scenic fin and into the main screen. The product is concealed behind a theatrical drape on a centre-stage plinth.

THE COVER

A flame-retardant theatrical drape on a fast-release track. The drape is the only thing between the audience and the product, so its release is treated as a separate safety system.

THE HAND

The chief guest places a palm flat on a capacitive surface. The console responds immediately with light and a confirmation tone. The guest is not asked to press a button or perform a biometric scan; the gesture is simple, legible and dignified.

A palm on a console sends a visible line of light across the stage to the product. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

02 THE PULSE

One touch. A signal the whole room can follow.

ENGINEERED
4 WK SCENIC

01 **DARK**
The stage is black except for a low sculptural console at the front edge. A live camera finds the guest, and the room understands that the next action belongs to a person, not a timecode.

02 **TOUCH**
The guest rests a palm flat on the capacitive surface. A ring of light confirms contact and a low tone rises. Nothing is scanned and no data is read; the gesture is dignified and legible from the back row.

03 **PULSE**
Individually addressable pixels run from the console across the floor, up the scenic fin and into the screen. The audience follows one continuous line of light, which is the whole narrative held in a single moving object.

04 **SCREEN**
The LED wall wakes into an accelerated engineering sequence and the stage lighting begins to move with the content. The screen carries the product story while the floor path stays lit, so the guest remains physically connected to it.

05 **REVEAL**
A hard audio hit lands with the drape release. The flame-retardant cloth snaps up its track and the product is already lit behind it, while the pulse path remains on the floor as a line between the guest's hand and the object.

CUE SHEET

00:00–00:15	**The dark console**
00:15–00:30	**The palm**
00:30–00:45	**The signal**
00:45–01:00	**The screen wakes**
01:00–01:10	**The return**
01:10–01:25	**The reveal**
01:25–01:45	**Hero hold**

TECHNICAL

`Capacitive touch surface` `Pixel LED channel` `Media server` `Fast drape track` `Live camera` `Cue controller`

The console uses a capacitive sensor behind a translucent acrylic surface; its response is a programmed light animation, not a biometric read. The floor path uses individually addressable LED pixels in a protected channel. The drape runs on a theatrical track with a dedicated operator, mechanical stop and emergency release. A show-control cue links the touch, screen, lighting and drape, but the drape remains independently safety-controlled.

THE THREE SIZES

2×2 FT	One continuous light path and a compact drape reveal. The sequence is short and intimate.
4×4 FT	The path branches across two scenic edges before entering the screen. The drape reveal is joined by a wider lighting change.
6×6 FT	The pulse travels through the floor, scenic architecture and screen before the full stage transforms. The drape release is the final beat, not the only spectacle.

FEASIBILITY

The visible fast drape is the main risk. It must never be described as an explosive release, and the track must be engineered, tested and operated by a trained technician. The touch console must not imply biometric authentication.

IF NOT

If a fast drape is unsuitable, use a motorised roll-up fabric with a controlled acceleration curve, or a sliding scenic cover. The pulse-to-product story still works.

DELIVERY — ENGINEERED
4 WK SCENIC
Sensor and LED chase are straightforward. The crate skin, cable management and a repeatable palm read are the real build.

THE RUN OF SHOW, TO SCALE


00:00 — 01:45

15s	15s	15s	15s	10s	15s	20s
01 The dark console	02 The palm	03 The signal	04 The screen wakes	05 The return	06 The reveal	HOLD Hero hold

THE CARGO VAULT

A sealed vault opens with mechanical force, and the object inside becomes the hero.

FIG. 03 — ISOMETRIC / LIGHT MODE

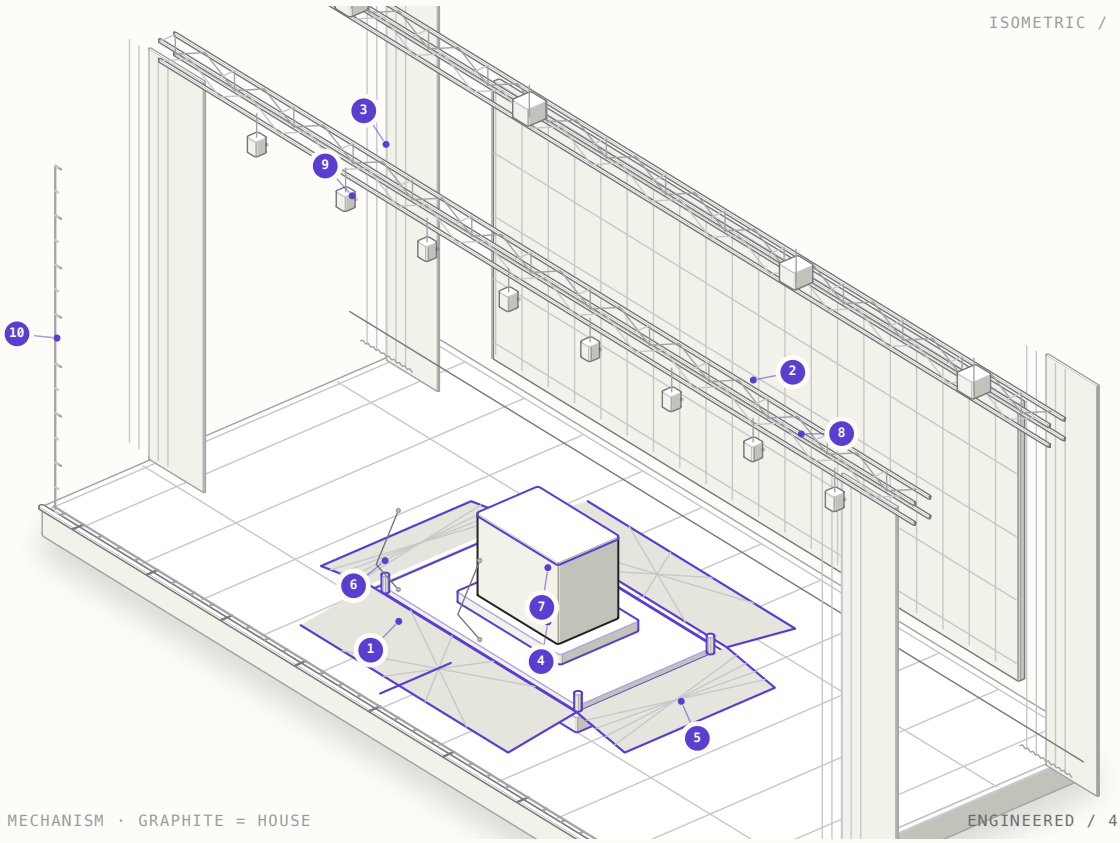


VIOLET = MECHANISM · GRAPHITE = HOUSE — ENGINEERED / 4 WK SCENIC

PARTS

01	18 × 9 m deck	06	Gas struts
02	LED image surface	07	Product / 6 × 6 ft
03	Wool-serge masking	08	Box truss + eight hoists
04	Vault base	09	Profile fixtures
05	Four shell leaves	10	Height datum

> *"The single beat when all four walls reach open and the fog rolls out under the product. The object appears to have been inside a sealed shipment all along."*

DETAIL / MECHANISM
2.5×



THE SET

A large scenic cargo vault sits on a low turntable or fixed plinth at centre stage. Its exterior is intentionally adaptable: rugged industrial, clean-tech containment, or a monumental black government vault. The interior is a finished display chamber with a top light, product plinth and removable service panels.

THE COVER

Four independent scenic walls close flush around the product. The roof is a separate light box. The audience sees a sealed volume, not a draped object.

THE HAND

The chief guest turns a heavy machined release handle on the vault's face. A second operator confirms the cue. The handle is a ceremonial input; the panels are moved by a supervised scenic controller.

A sealed cargo vault opens four walls on one cue and the object inside becomes the hero. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

03 THE CARGO VAULT

The shipment becomes the stage.

ENGINEERED
4 WK SCENIC

01 **SEALED**
A single overhead beam isolates a sealed scenic vault at centre stage. The screen shows abstract arrival data and the vault's lock lights sit amber, so the room reads a shipment that has not yet been cleared.

02 **ARRIVAL**
A short film frames the product as a significant arrival without inventing specifications. The vault stays closed and the audience is given time to accept the object as cargo before it is asked to accept it as a product.

03 **RELEASE**
The guest turns the heavy machined handle and a second operator confirms the cue. The lock lights step from amber to white, and a low mechanical tone builds under the room.

04 **BURST**
Four independent walls open through verified arcs within one beat, each on its own actuator and mechanical stop. Low water-based fog spills outward and the impact sound lands exactly as the walls reach open position.

05 **HERO**
The product is already lit inside the vault, so the opening structure becomes its display case. The guest stands beside it and the open vault frames the official photograph.

CUE SHEET

00:00–00:20	**The sealed shipment**
00:20–00:45	**The story of the cargo**
00:45–00:55	**Release**
00:55–01:05	**The burst**
01:05–01:20	**Inside the vault**
01:20–01:40	**The hero frame**

TECHNICAL

`Scenic vault structure` `Motorised or pneumatic panels` `Position sensors` `Low-lying fog` `Impact audio` `Show control`

The vault is a lightweight steel-and-plywood scenic shell with four independently hinged walls. Each wall is driven by a motor or pneumatic actuator with a mechanical stop, position feedback and a controlled acceleration profile. The panels do not fly; they open through a verified arc. Fog is low-lying and water-based. A dedicated vault operator controls movement, with emergency stop and manual release.

THE THREE SIZES

2×2 FT	A compact containment case with two or four opening faces. The object is revealed at close range.
4×4 FT	A larger vault with a mapped exterior. The outer skin appears to destabilise digitally before the panels move.
6×6 FT	The full cargo vault. Four walls open, fog spills, and the product may rise on an independent platform inside the vault after the walls are clear.

FEASIBILITY

The opening envelope is the critical constraint. Each wall needs clear space and the audience needs protection from any moving edge. The structure must be stable with all walls open, and the product must be serviceable from the rear.

IF NOT

If four moving walls are too complex, use two opposing doors and a fixed roof, or a static open frame with a fast retractable front cover. The cargo identity remains.

DELIVERY — ENGINEERED
4 WK SCENIC
Gas-strut and hinge geometry must be proven at full product weight before the finish is applied.

THE RUN OF SHOW, TO SCALE


00:00 — 01:40

20s	25s	10s	10s	15s	20s
01 The sealed shipment	02 The story of the cargo	03 Release	04 The burst	05 Inside the vault	HOLD The hero frame

THE ASCENSION

An empty stage, a circle of light, and an object coming up through the floor.

FIG. 04 ISOMETRIC / LIGHT MODE

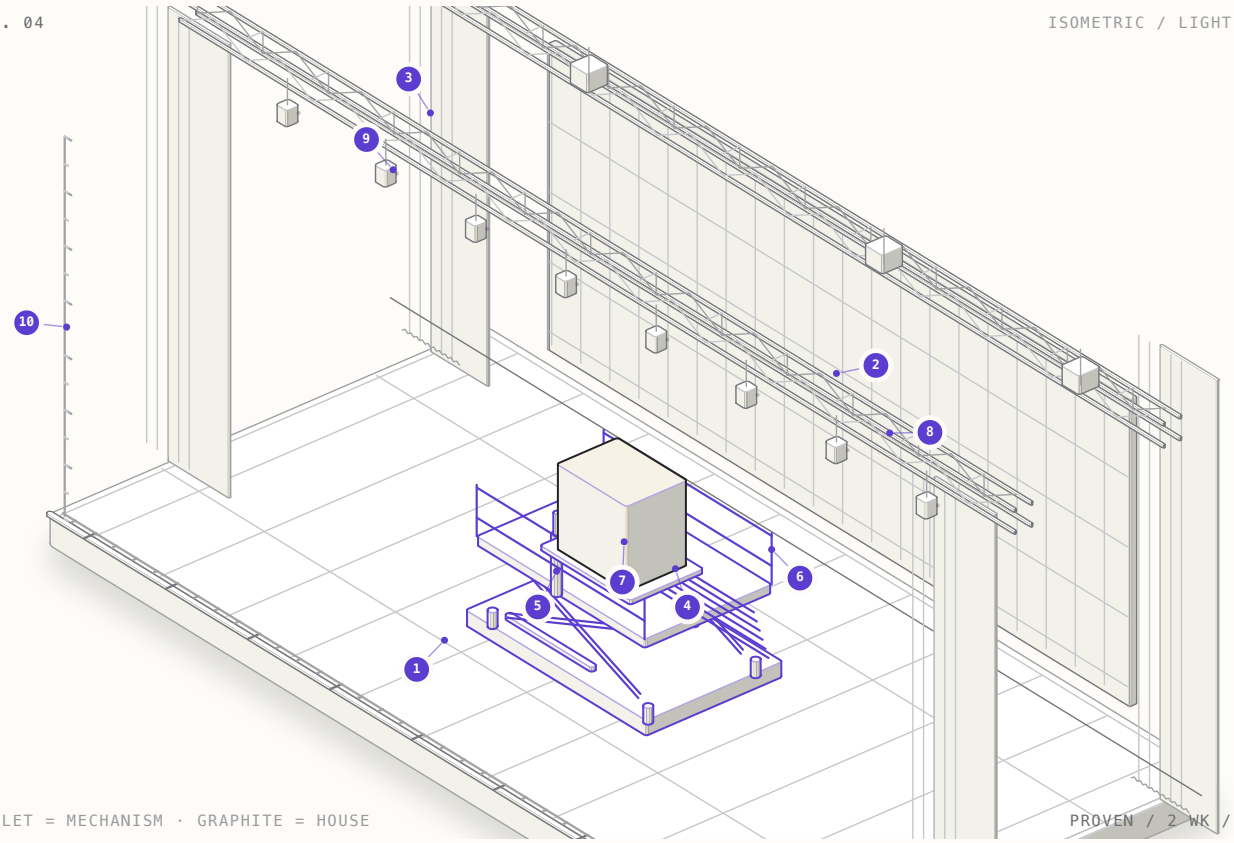


VIOLET = MECHANISM · GRAPHITE = HOUSE
PROVEN / 2 WK / HIRE

PARTS

01	18 × 9 m deck	06	Guardrail
02	LED image surface	07	Product platform
03	Wool-serge masking	08	Box truss + eight hoists
04	Scissor stack	09	Profile fixtures
05	Hydraulic ram	10	Height datum

> *"The product breaking through the fog into the beam. The audience sees it rise from a stage that was empty a moment ago."*

DETAIL / MECHANISM
2.9×



THE SET

A temporary raised stage with a certified lift pit at centre. A circular aperture with a lit perimeter ring sits flush with the stage floor. The lift platform carries a low display plinth. A vertical beam and a rear LED wall frame the ascent.

THE COVER

The product is pre-loaded on the lift below stage level, under a closed aperture cover. The audience sees a flat stage until the cover retracts.

THE HAND

The chief guest places a hand on a small illuminated plinth at the stage edge. This arms the cue. The lift itself is executed by a certified operator; the guest's action releases the moment, not the hydraulics.

The product rises through a lit aperture in the deck on a certified lift. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

04 THE ASCENSION

The product rises; the stage appears to exhale.

PROVEN
2 WK / HIRE

01 **EMPTY**
There is no product, no drape and no box. A single circular line appears on the deck, and the room is asked to look at an absence.

02 **BUILD**
Low-frequency audio grows while haze catches a vertical beam. The circle brightens, the stage appears to breathe, and the audience begins to expect the floor itself to move.

03 **ARM**
The guest places a hand on a small illuminated plinth at the stage edge. That gesture arms the cue; the certified lift operator receives the release and the hydraulics remain under dedicated control.

04 **RISE**
The aperture cover retracts, fog spills across the seam, and the platform climbs at a slow verified speed with the product already on board. The object arrives from below rather than from behind.

05 **LOCK**
The platform reaches its mechanical stop and the product is held inside the vertical beam. The screen resolves to the official identity and the guest is invited forward to a stage that is now only a floor, a circle and an object.

CUE SHEET

00:00–00:15	**The empty stage**
00:15–00:35	**The build**
00:35–00:45	**The guest arms the cue**
00:45–01:05	**The rise**
01:05–01:20	**The lock**
01:20–01:40	**The hero hold**

TECHNICAL

`Certified stage lift` `Structural platform` `Aperture cover` `Interlocks` `Edge protection` `Low fog`

The lift is a certified theatrical or industrial lift with a rated load, position feedback, mechanical stops, interlocks and an independent operator. The stage structure is engineered for the lift load and the audience load. The aperture cover is interlocked so the lift cannot move until the cover is clear. A rescue plan and manual lowering system are mandatory.

THE THREE SIZES

2×2 FT	A compact lift with a small aperture and a short travel. The product rises to stage level rather than above it.
4×4 FT	A larger platform with a taller reveal and a wider fog ring. The screen opens to a full product story.
6×6 FT	The full 6×6-ft lift, with a deep pit, a high travel and a complete stage transformation. This is the finale.

FEASIBILITY

This is the highest-risk concept in the deck. It requires exact product mass, centre of gravity, footprint, lifting height, stage load capacity, venue approval and a certified lift contractor. It cannot be priced or promised without those inputs.

IF NOT

If a lift is not feasible, the same audience experience can be created with a low scissor platform behind a retractable floor cover, or a stationary product revealed by a rising circular scenic ring and fog. The vertical reveal language survives.

DELIVERY — PROVEN
2 WK / HIRE
A standard scissor lift with a scenic skirt and a rated controller. The lowest-risk reveal in the deck.

THE RUN OF SHOW, TO SCALE

00:00 — 01:40


15s	20s	10s	20s	15s	20s
01 The empty stage	02 The build	03 The guest ar…	04 The rise	05 The lock	HOLD The hero hold

THE DIGITAL VEIL

The product is hidden inside a moving image that is physically removed.

FIG. 05

ISOMETRIC / LIGHT MODE

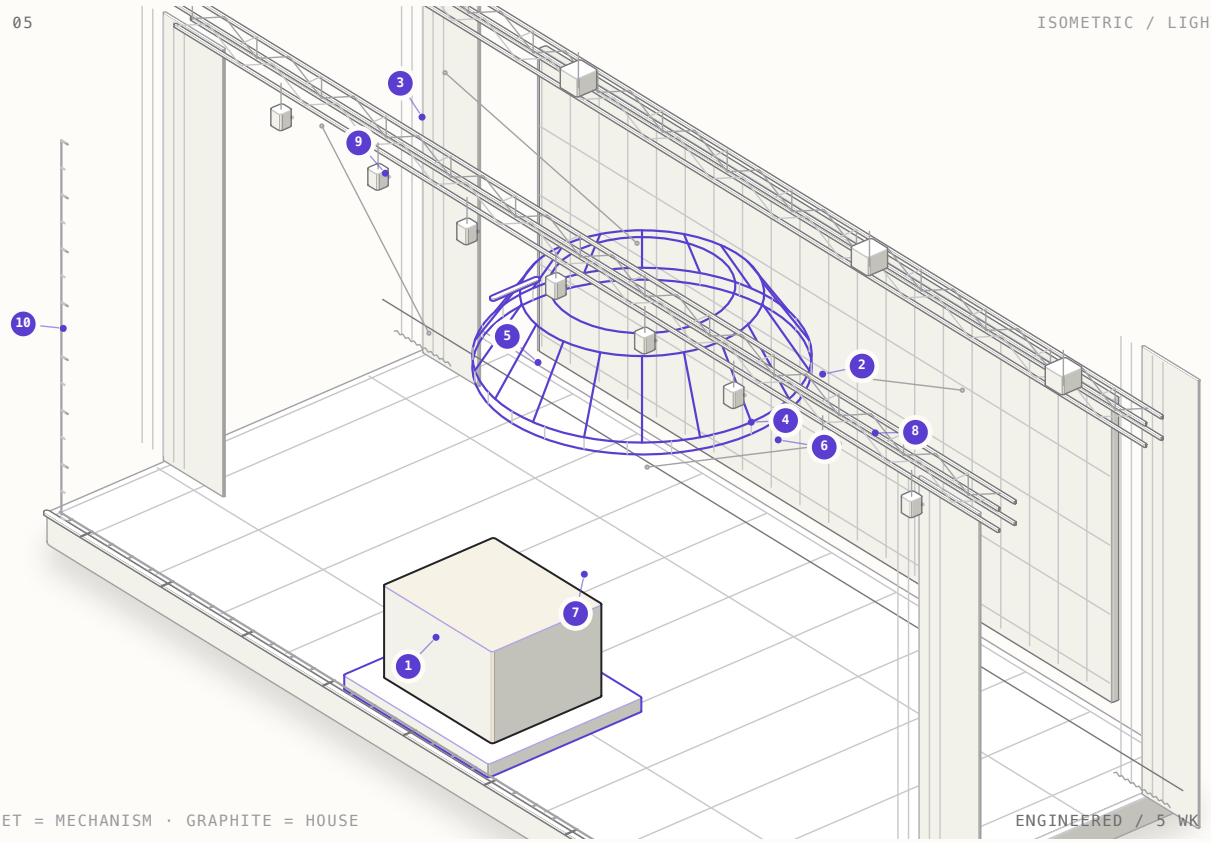

VIOLET = MECHANISM · GRAPHITE = HOUSE


ENGINEERED / 5 WK SCENIC

PARTS

01	18 × 9 m deck	06	Four-point bridle
02	LED image surface	07	Product / 4 × 4 ft
03	Wool-serge masking	08	Box truss + eight hoists
04	Flown hoop	09	Profile fixtures
05	Gathered veil	10	Height datum

> *"The projected world rising off the product in one continuous vertical move. The image does not fade; it physically leaves."*

DETAIL / MECHANISM
2.7×



THE SET

A cylindrical projection scrim surrounds the product on a low plinth. The scrim is a lightweight frame with a high-gain projection surface, suspended from a tracked or hoisted ring. Projectors are concealed upstage. The main LED wall sits behind the cylinder.

THE COVER

The cylinder is opaque enough under projection to hide the product. It is not a glass box; it is a controlled projection surface with a known seam and viewing angle.

THE HAND

The guest completes a circle on a luminous touch ring. The gesture is simple and symbolic: the last line of the circle closes, and the cylinder begins to rise.

A projected world wraps a cylinder that lifts away to expose the object. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

05 THE DIGITAL VEIL

A world made of light lifts away.

ENGINEERED
5 WK SCENIC

01 **DARK**
A tall cylindrical form stands in darkness, and the audience cannot tell whether it is a screen, a sculpture or a container. A thin seam and a low edge glow are the only clues.

02 **MAPPING**
Projected lines and contours wrap the surface and the cylinder appears to rotate while standing still. Two blended projectors are mapped to the curve, with the seam turned away from the main sightline.

03 **ACCELERATE**
The mapping becomes denser and faster, and the audio builds with it. The product story is told as abstract systems, never as claims the product has not made.

04 **CIRCLE**
The guest draws a full circle on a luminous touch ring. The projected world freezes for one beat, the last line closes, and the lift is released.

05 **LIFT**
The cylinder rises on its ring and carries the image upward, exposing the product from the base up through fog. It locks overhead as a luminous halo and the object stands in clean hero light.

CUE SHEET

00:00–00:15	**The dark cylinder**
00:15–00:45	**The world appears**
00:45–01:00	**The acceleration**
01:00–01:10	**The circle closes**
01:10–01:30	**The lift**
01:30–01:50	**The object**

TECHNICAL

`Projection mapping` `Cylindrical scrim` `Hoisted or tracked ring` `Brightness-matched projectors` `Touch ring` `Media server`

The cylinder is a purpose-built projection surface on an aluminium frame, with a seam positioned away from the main viewing axis. Two or more high-brightness projectors are blended and mapped to the curved surface. The lifting ring is operated by a certified hoist or counterweight track. The touch ring is a capacitive input, not a hologram.

THE THREE SIZES

2×2 FT	A low cocoon around a 2×2-ft object. The cylinder lifts only enough to expose the product.
4×4 FT	A full-height cylinder with a wider projected world and a more dramatic lift.
6×6 FT	A monumental 6×6-ft cocoon. The cylinder rises to become an overhead ring, and the full screen behind takes over the product story.

FEASIBILITY

Projector brightness, ambient light, surface gain, seam placement and sightlines from the sides must be tested. The lifting ring needs ceiling clearance and certified rigging. The product must be placed and serviced without disturbing the cylinder.

IF NOT

If projection on a cylinder is inconsistent, use a lightweight scenic cylinder with embedded LED strips and a matte surface. If the lift is not possible, split the cylinder into two retracting halves.

DELIVERY — ENGINEERED
5 WK SCENIC
Flown hoop, four-point bridle and a sewn sleeve that must gather cleanly on every take.

THE RUN OF SHOW, TO SCALE

00:00 — 01:50


15s	30s	15s	10s	20s	20s
01 The dark cylinder	02 The world appears	03 The acceleration	04 The circle c…	05 The lift	HOLD The object

THE LIGHT SCULPTURE

A luminous skeleton sketches an unknown form, then moves aside.

FIG. 06

ISOMETRIC / LIGHT MODE

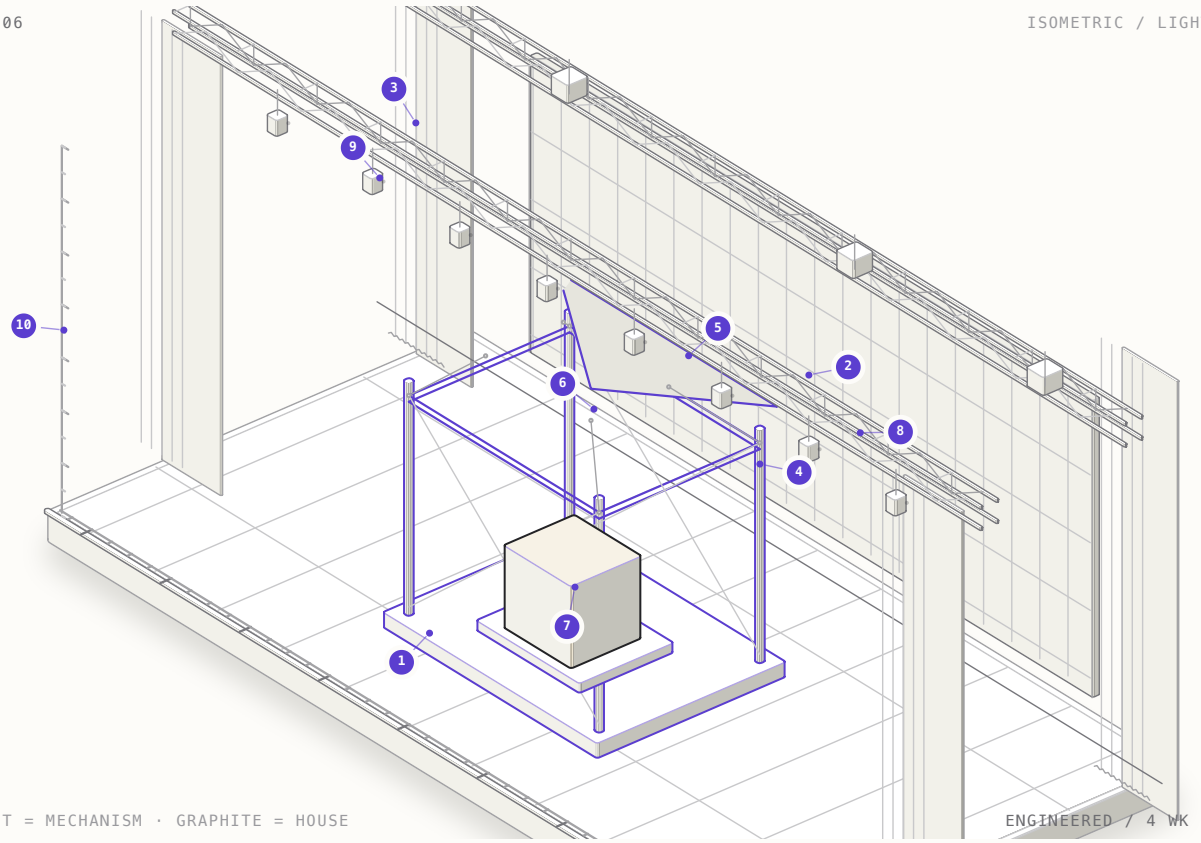

VIOLET = MECHANISM · GRAPHITE = HOUSE


ENGINEERED / 4 WK SCENIC

PARTS

01	18 × 9 m deck	06	Lift lines
02	LED image surface	07	Product / 6 × 6 ft
03	Wool-serge masking	08	Box truss + eight hoists
04	Tube frame	09	Profile fixtures
05	Hoisted cover	10	Height datum

> *"The last LED segment connecting and the sculpture holding for a beat before it moves. The audience realises the drawing has a body behind it."*

DETAIL / MECHANISM
2.8×



THE SET

A set of rigid aluminium frames carrying addressable LED neon-flex, arranged around the product position. The frames are mounted on pivots or short tracks so they can move clear. A separate matte cover conceals the product until the final beat.

THE COVER

A low matte scenic cover behind the light sculpture. The LED frames are the visual foreground; the cover is the physical barrier.

THE HAND

The chief guest sweeps a hand along a luminous control bar. The gesture completes the last line of the sculpture. It is intuitive, non-technical and visually connected to the drawing.

A skeleton of LED lines draws an unknown form, then moves aside. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

06 THE LIGHT SCULPTURE

First a drawing in light. Then the object.

ENGINEERED
4 WK SCENIC

01 **LINES**
A few LED segments hover in the dark without yet forming a shape. The room sees a drawing in progress rather than a finished object.

02 **DRAWING**
Segments illuminate in sequence and trace an abstract volume around the product position. The screen carries related engineering motifs, but the outline stays deliberately symbolic.

03 **HAND**
The guest sweeps a hand along a luminous control bar. The final segment connects and the sculpture holds complete for the first time.

04 **FRAMES**
The aluminium frames pivot outward and slide clear while the matte cover retracts. Cable management and counterweight keep the movement quiet and repeatable.

05 **OBJECT**
The product is revealed under clean light with the frames settled into a halo around it. The drawing in light becomes the frame for the photograph rather than the subject.

CUE SHEET

00:00–00:15	**A few lines**
00:15–00:45	**The drawing**
00:45–00:55	**The hand**
00:55–01:10	**The frames move**
01:10–01:25	**The object**
01:25–01:40	**The final composition**

TECHNICAL

`LED neon-flex` `Aluminium frames` `DMX / pixel control` `Pivots or short tracks` `Matte cover` `Show control`

The frames are lightweight aluminium profiles with LED neon-flex inset into the edges. Each frame is controlled as a pixel-mapped segment. Pivots or short tracks move the frames clear of the product. The cover is a separate motorised or manual scenic element. The system is comparatively simple, which makes it a strong mid-budget option.

THE THREE SIZES

2×2 FT	A compact single frame that traces a tight form around the 2×2-ft product.
4×4 FT	A multi-frame sculpture with more complex geometry and a wider halo.
6×6 FT	A large arch or cage of light around the 6×6-ft product, with frames that fold outward like petals.

FEASIBILITY

Do not claim the outline is the exact product geometry until the product is known. The sculpture should be abstract and symbolic. The frames must be stable, cable-managed and clear of the product during movement.

IF NOT

If moving frames are difficult, keep the frames static and retract the product cover behind them. The light drawing remains the signature.

DELIVERY — ENGINEERED
4 WK SCENIC
Tube frames are light and repeatable. The hoisted cover needs a clear path and a hard stop at trim.

THE RUN OF SHOW, TO SCALE


00:00 — 01:40

15s	30s	10s	15s	15s	15s
01 A few lines	02 The drawing	03 The hand	04 The frames move	05 The object	HOLD The final composition

THE DROP

A cargo module descends from above, lands, and opens.

FIG. 07 ISOMETRIC / LIGHT MODE

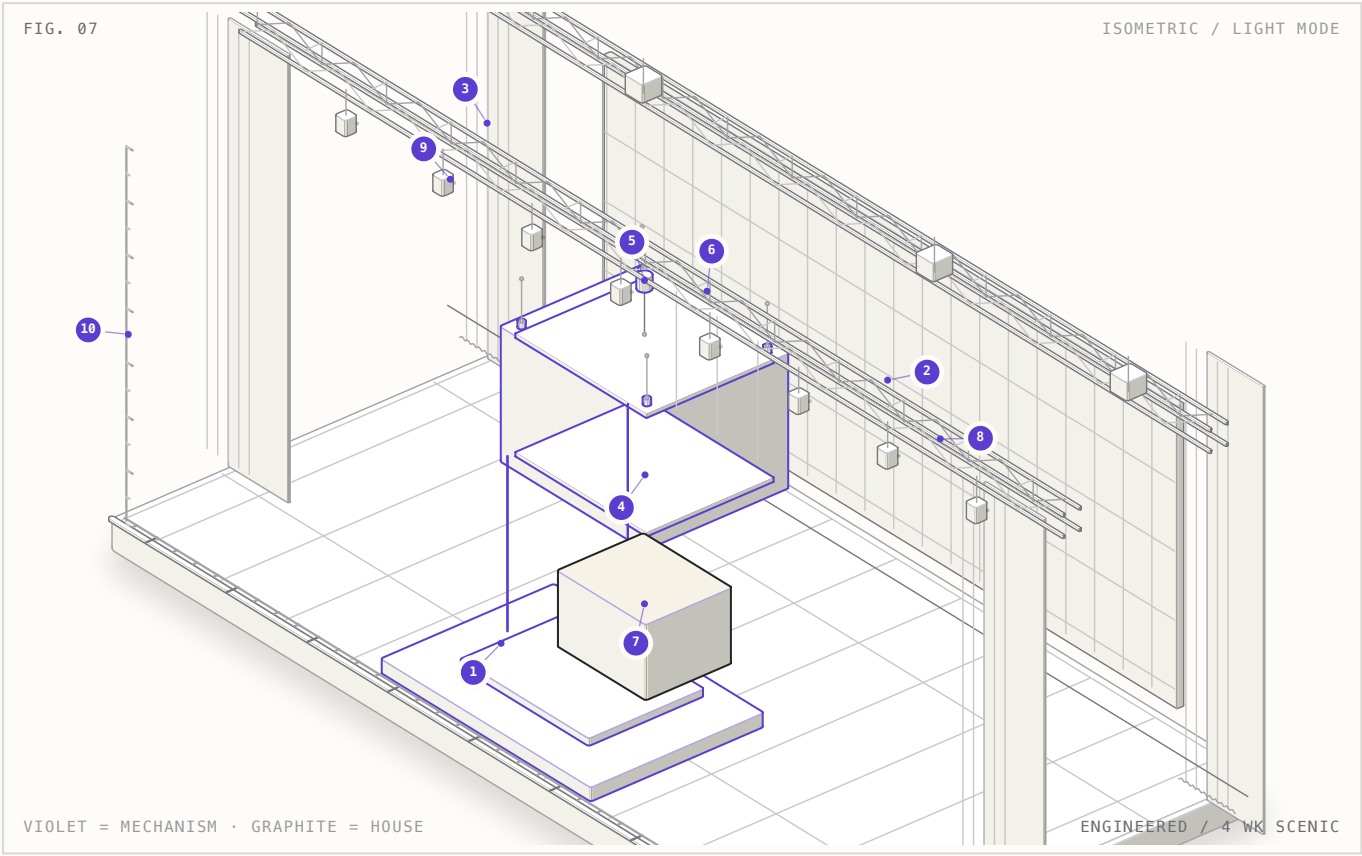


PARTS

01	18 × 9 m deck	06	Four-point sling
02	LED image surface	07	Product / 6 × 6 ft
03	Wool-serge masking	08	Box truss + eight hoists
04	Cargo shell	09	Profile fixtures
05	Single winch	10	Height datum

> *"The module hitting the stage and the impact rolling through the room. The audience feels the arrival."*

DETAIL / MECHANISM
2.5×



THE SET

A scenic cargo module suspended from certified rigging over a marked landing zone at centre stage, or a static module with a simulated descent. The module has opening doors and an internal product display. The screen carries the arrival film.

THE COVER

The module itself. The product is loaded inside before the event and serviced from the rear. The audience sees a sealed shipment.

THE HAND

The chief guest turns a release key on a small control pedestal. The descent begins only after the rigging operator confirms the cue. The guest's action starts the sequence; the rigging remains under dedicated control.

A cargo module descends on rigging, lands, and opens its doors. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

07 THE DROP

It arrives before it is revealed.

ENGINEERED
4 WK SCENIC

01 **APPROACH**
Low aircraft sound crosses the room and the screen shows an abstract delivery path. A single spotlight finds an empty landing zone at centre stage.

02 **DESCENT**
A scenic cargo module lowers through the beam on certified rigging, with a dedicated operator and a secondary safety line. The audience watches it arrive before it knows what is inside.

03 **LAND**
The module meets the deck on its marked landing zone. A deep impact sound, a lighting ripple and low fog from the base make the arrival physical.

04 **RELEASE**
The guest turns the release key on a small pedestal. The locks disengage in sequence, and the doors begin to move only after the module is confirmed down and stable.

05 **DOORS**
The doors open onto an internal top light and the product inside. The module stays in place as the photographic frame, with the guest beside the open cargo.

CUE SHEET

00:00–00:15	**Approach**
00:15–00:45	**Descent**
00:45–00:55	**Landing**
00:55–01:05	**Release**
01:05–01:20	**The doors**
01:20–01:40	**The hero**

TECHNICAL

`Certified theatrical hoist` `Scenic cargo module` `Opening doors` `Impact audio` `Fog` `Rigging control`

The module is a lightweight scenic shell flown on a certified theatrical hoist with a dedicated rigging operator, secondary safety line and controlled descent profile. The product should not be suspended with the module. The module is lowered empty to the landing zone, or the product is pre-loaded only if the combined load is fully certified. The doors are motorised or pneumatic with mechanical stops.

THE THREE SIZES

2×2 FT	A compact drop case with a short descent and a single front door.
4×4 FT	A larger crate with two doors and a stronger arrival film.
6×6 FT	The full cargo module. The descent is the opening spectacle; the opening doors are the second beat.

FEASIBILITY

Never suspend an unverified product over an audience. The default is a static module with a video-simulated descent. A flown module requires certified rigging points, load calculations, venue approval and a dedicated operator.

IF NOT

If rigging is not available, the module can be revealed behind a rising screen while the arrival film creates the illusion of descent. The cargo identity is preserved without aerial risk.

DELIVERY — ENGINEERED
4 WK SCENIC
A cargo shell on a single winch. Simple mechanism, but the shell is heavy and needs a controlled descent.

THE RUN OF SHOW, TO SCALE


00:00 — 01:40

15s	30s	10s	10s	15s	20s
01 Approach	02 Descent	03 Landing	04 Release	05 The doors	HOLD The hero

THE PHANTOM

A floating visual appears, then dissolves into the physical product.

FIG. 08 ISOMETRIC / LIGHT MODE

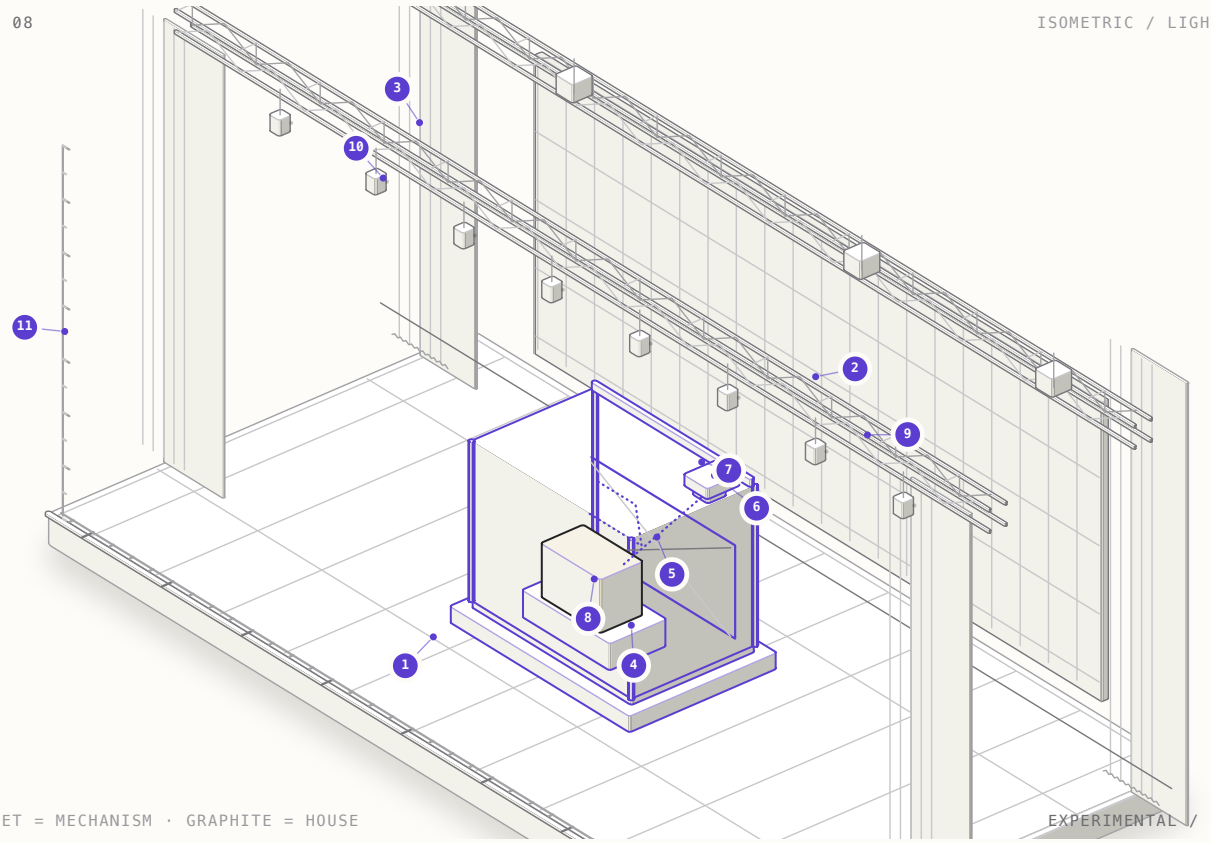


VIOLET = MECHANISM · GRAPHITE = HOUSE EXPERIMENTAL / 6–7 WK

PARTS

01 18 × 9 m deck
02 LED image surface
03 Wool-serge masking
04 Mirror cabinet
05 Pepper's ghost plate
06 Light trap hood
07 Projector
08 Product / 4 × 4 ft
09 Box truss + eight hoists
10 Profile fixtures
11 Height datum

> *"The floating object dissolving and the real product occupying the same visual space a moment later."*

DETAIL / MECHANISM
3.3×



THE SET

A darkened scenic chamber with a transparent reflective panel at approximately 45 degrees. A concealed source display sits below or behind the viewing plane. The product is in a separate chamber behind the illusion, revealed by a retracting panel. A camera captures the illusion for IMAG.

THE COVER

The product is behind the reflective chamber and a retracting scenic panel. The reflective surface is angled so the audience sees the floating image, not the product.

THE HAND

The chief guest presses a luminous seal on the chamber's frame. The floating emblem responds by assembling into a complete form. The gesture is simple and ceremonial.

A Pepper's Ghost image floats in a chamber, then dissolves into the real product. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

08 THE PHANTOM

A ghost introduces the real thing.

EXPERIMENTAL
6–7 WK

01 **CHAMBER**
A black architectural chamber stands at centre with a faint reflective surface catching the light. The product is hidden behind the illusion and a retracting scenic panel.

02 **APPARITION**
A luminous emblem appears to float inside the chamber, rotates, and breaks into particles. The effect is a Pepper's Ghost reflection, not a hologram, and the concealed source display is never seen.

03 **SEAL**
The guest presses a luminous seal on the frame. The particles reassemble into a complete symbol, and the room reads the gesture as the cause of the assembly.

04 **DISSOLVE**
The illusion fades, the reflective panel dims and the scenic panel behind it retracts. The audience is moved from a floating image to the promise of a physical object in the same sightline.

05 **OBJECT**
The product is revealed in that same central line, lit from above. A live camera pushes in and the screen carries the hero shot, so the whole auditorium shares the chamber's intimate view.

CUE SHEET

00:00–00:15	**The dark chamber**
00:15–00:40	**The apparition**
00:40–00:55	**The seal**
00:55–01:10	**The dissolve**
01:10–01:25	**The physical object**
01:25–01:45	**The camera**

TECHNICAL

`Reflective foil or glass` `Concealed source display` `Black masking` `Retracting scenic panel` `Live camera` `Light control`

The illusion uses a transparent reflective surface at roughly 45 degrees and a concealed high-brightness source display. The chamber is masked in matte black so only the reflected image is visible. The product sits in a separate plane behind the illusion. A camera captures the chamber for the main screen. This is a Pepper's Ghost optical effect, not a true hologram.

THE THREE SIZES

2×2 FT	A compact chamber for the 2×2-ft product, with a close camera feed.
4×4 FT	A larger chamber with a taller illusion and a wider product reveal.
6×6 FT	A large-format optical installation for the 6×6-ft product, or a smaller chamber with a cinematic IMAG feed for the audience.

FEASIBILITY

A small glass box will not read for 2,000 people across a wide auditorium. The illusion needs a large-format installation or a camera feed. Brightness, sightlines and ambient light are critical. The reflective surface must be clean and precisely aligned.

IF NOT

If a large installation is not possible, use a compact chamber with a live camera and accept that most of the audience experiences the illusion on screen. The physical reveal still happens onstage.

DELIVERY — EXPERIMENTAL

6–7 WK

Mirror face, light trap and live projection must be tested as one system. Highest technical uncertainty in the deck.

THE RUN OF SHOW, TO SCALE


00:00 — 01:45

15s	25s	15s	15s	15s	20s
01 The dark chamber	02 The apparition	03 The seal	04 The dissolve	05 The physical object	HOLD The camera

THE STAGE IS THE PRODUCT

The entire stage becomes an oversized abstraction of the object, and the object emerges from inside it.

FIG. 09 — ISOMETRIC / LIGHT MODE

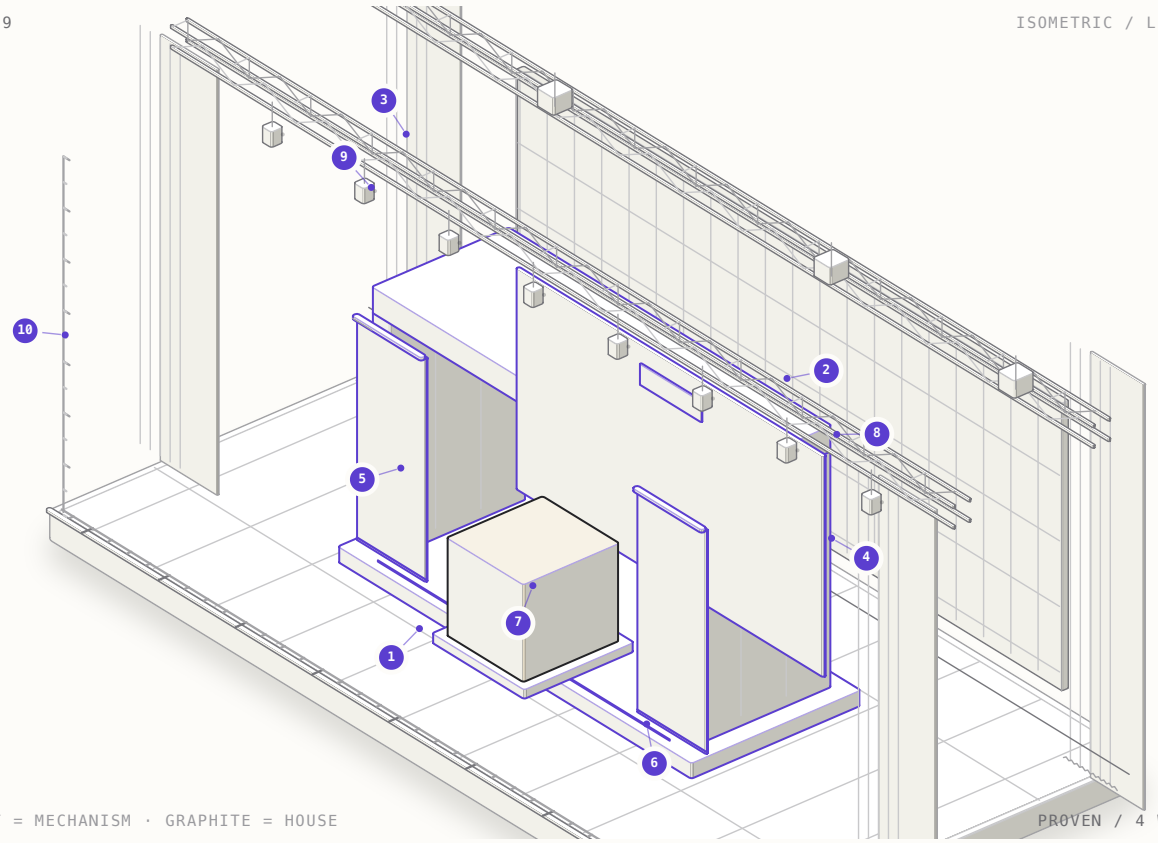


VIOLET = MECHANISM · GRAPHITE = HOUSE — PROVEN / 4 WK SCENIC

PARTS

01	18 × 9 m deck	06	Floor tracks
02	LED image surface	07	Product / 6 × 6 ft
03	Wool-serge masking	08	Box truss + eight hoists
04	Scenic arch	09	Profile fixtures
05	Two sliding faces	10	Height datum

> *"The camera pulling back to reveal that the tiny product and the entire stage share the same geometry."*

DETAIL / MECHANISM
2.5×



THE SET

A modular scenic environment built as an enlarged abstract motif derived from the product category or approved imagery. Large flats, illuminated channels and a central product bay. The design must work as a symbolic representation, not a literal claim.

THE COVER

The central product bay is integrated into the giant motif. The product is hidden inside the architecture and revealed when the central section opens.

THE HAND

The chief guest inserts a machined "core" module into a console at the centre of the stage. The final piece completes the motif, and the product bay opens.

The whole set becomes a monumental abstraction of the product, then opens. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

09 THE STAGE IS THE PRODUCT

The set is the product at monumental scale.

PROVEN
4 WK SCENIC

01 **SET**
The stage is a large geometric composition of modular flats, illuminated channels and a central bay. It reads as a designed environment, not yet as a product.

02 **CONNECTION**
The presenter explains that the set echoes the product's structure, and the screen labels abstract parts without inventing specifications. The audience is taught how to read the room.

03 **CORE**
The guest inserts a machined core module into a console at the centre. The channels illuminate in sequence, and the motif appears to complete itself around the gesture.

04 **BAY**
The central section opens and the product is revealed inside, lit at the scale of the room. The set stops being scenery and becomes the product's portrait.

05 **WIDE**
The camera pulls back to hold the product and the monumental set in one composition. The screen resolves to the official identity while the stage stays assembled as one image.

CUE SHEET

00:00–00:20	**An abstract set**
00:20–00:55	**The connection**
00:55–01:05	**The core**
01:05–01:20	**The bay**
01:20–01:35	**The wide shot**
01:35–01:55	**The hero**

TECHNICAL

`Modular scenic flats` `LED channels` `Mapped surfaces` `Central bay` `Show control` `Lighting`

The set is built from modular scenic flats with integrated LED channels and projection-ready surfaces. The central bay is a separate structural opening with a retracting cover. The design must be approved as a symbolic abstraction of the product. No literal technical claims are made by the set alone.

THE THREE SIZES

2×2 FT	A single oversized detail of the product form, with the 2×2-ft object at its centre.
4×4 FT	A larger sectional representation with more of the product's structure abstracted.
6×6 FT	The full stage becomes the product portrait. The 6×6-ft object emerges from the central axis.

FEASIBILITY

This concept depends on having enough product identity to create a meaningful abstraction. Without it, the set risks becoming generic. The central bay and the scenic structure must be integrated early.

IF NOT

If the product cannot be represented, use a symbolic "system" motif based on the product category, and make the connection explicit in the presenter's script rather than in literal imagery.

DELIVERY — PROVEN
4 WK SCENIC
A large scenic arch with two sliding faces on floor tracks. Big build, ordinary mechanism.

THE RUN OF SHOW, TO SCALE


00:00 — 01:55

20s	35s	10s	15s	15s	20s
01 An abstract set	02 The connection	03 The core	04 The bay	05 The wide shot	HOLD The hero

THE LASER DRAW

Controlled beams draw a portal in the haze, and the portal opens.

FIG. 10 ISOMETRIC / LIGHT MODE

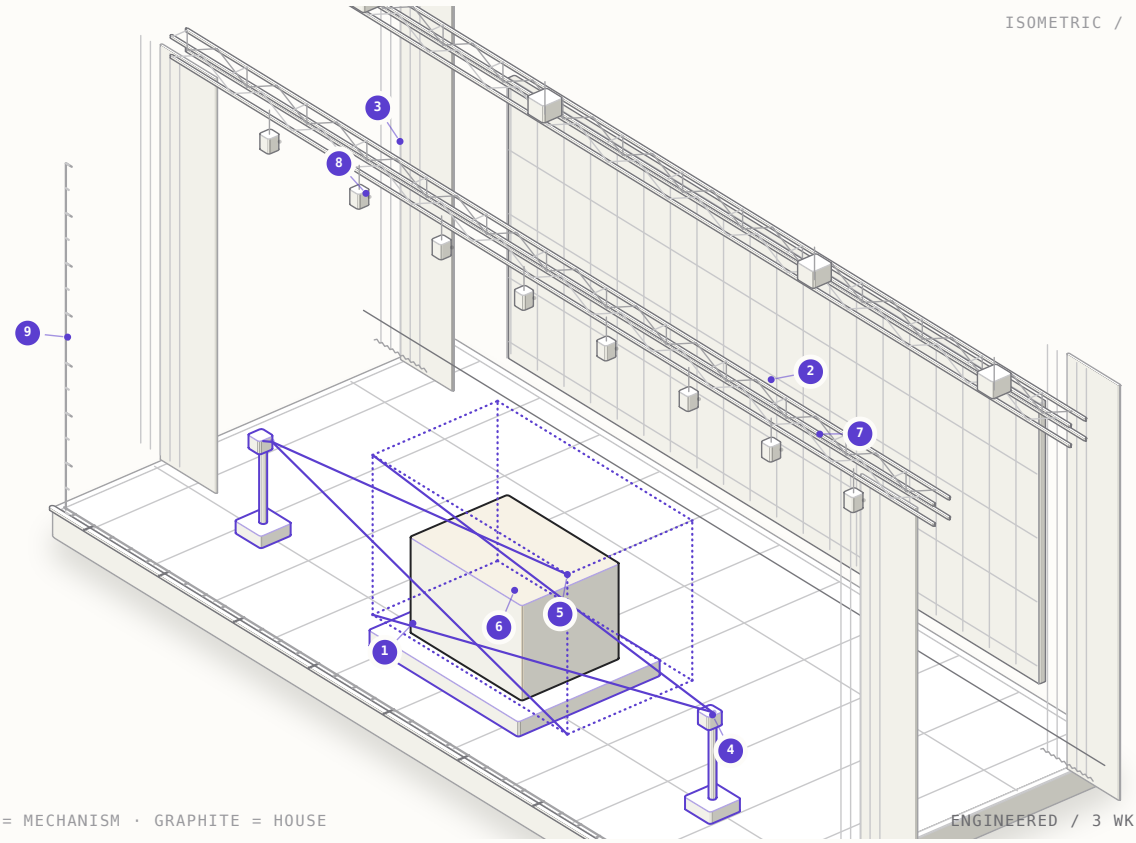


PARTS

01 18 × 9 m deck
02 LED image surface
03 Wool-serge masking
04 Laser heads
05 Beam cage
06 Product / 6 × 6 ft
07 Box truss + eight hoists
08 Profile fixtures
09 Height datum

> *"The final beam completing the portal, then the lasers cutting to black and the physical portal opening."*

DETAIL / MECHANISM
3×



THE SET

A haze-managed stage with professional laser projectors positioned to draw on the air and scenic surfaces. A physical scenic portal frames the concealed product. The portal opens on a controlled track. The main screen stays dark or minimal to preserve contrast.

THE COVER

The product is behind a physical scenic portal and a matte cover. The lasers draw the outline of the portal, not the product itself.

THE HAND

The chief guest breaks a low-power visible beam with a hand. The interruption triggers the final drawing sequence. The beam is eye-safe and part of the show, not a scanning effect.

Beams draw a portal in haze; the physical portal opens. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

10 THE LASER DRAW

The product is sketched in the air.

ENGINEERED
3 WK + PERMITS

01 **BEAM**
A single laser line appears in managed haze and the stage stays otherwise dark. The beam is terminated away from the audience and a certified operator is on the desk.

02 **DRAW**
More beams trace a geometric portal around the product position, building in layers. The lasers draw the architecture of the reveal, never the product itself.

03 **HAND**
The guest breaks a low-power visible beam with a hand. The interruption is an eye-safe sensor input, and the final lines snap into place.

04 **CUT**
The lasers cut out and the audience sees the completed portal for one beat. The drawing survives as an afterimage while the physical structure takes over.

05 **OPEN**
The scenic portal opens on its track and the product is revealed inside. A final low-power beam frame surrounds the object without ever striking the audience.

CUE SHEET

00:00–00:15	**First beam**
00:15–00:45	**The drawing**
00:45–00:55	**The hand**
00:55–01:05	**The cut**
01:05–01:20	**The opening**
01:20–01:40	**The hero**

TECHNICAL

`Professional laser projectors` `Haze` `Beam termination` `Scenic portal` `Interlocked show control` `Certified operator`

The laser system is a professional show system with a certified operator, controlled beam paths and beam termination away from the audience. The show uses no audience scanning. The physical portal is a scenic frame with a retracting cover. The guest's beam-break is a low-power, eye-safe sensor input.

THE THREE SIZES

2×2 FT	A compact beam frame around the 2×2-ft product.
4×4 FT	A larger portal with more complex line work and a longer reveal.
6×6 FT	A full-stage beam cage around the 6×6-ft product, with the physical portal opening inside it.

FEASIBILITY

Laser use requires venue approval, a certified operator, haze management and a beam path that never enters the audience. The physical portal must open cleanly without interrupting the beam path.

IF NOT

If lasers are restricted, use moving-head beams and projected line work. The drawn-portal language can be recreated with light without a laser.

DELIVERY — ENGINEERED
3 WK + PERMITS
The drawn frame is reliable. The work is laser safety, venue permission and a certified operator.

THE RUN OF SHOW, TO SCALE


00:00 — 01:40

15s	30s	10s	10s	15s	20s
01 First beam	02 The drawing	03 The hand	04 The cut	05 The opening	HOLD The hero

THE COLOUR RELEASE

A monochrome ceremony becomes a full-colour celebration in one beat.

FIG. 11 — ISOMETRIC / LIGHT MODE

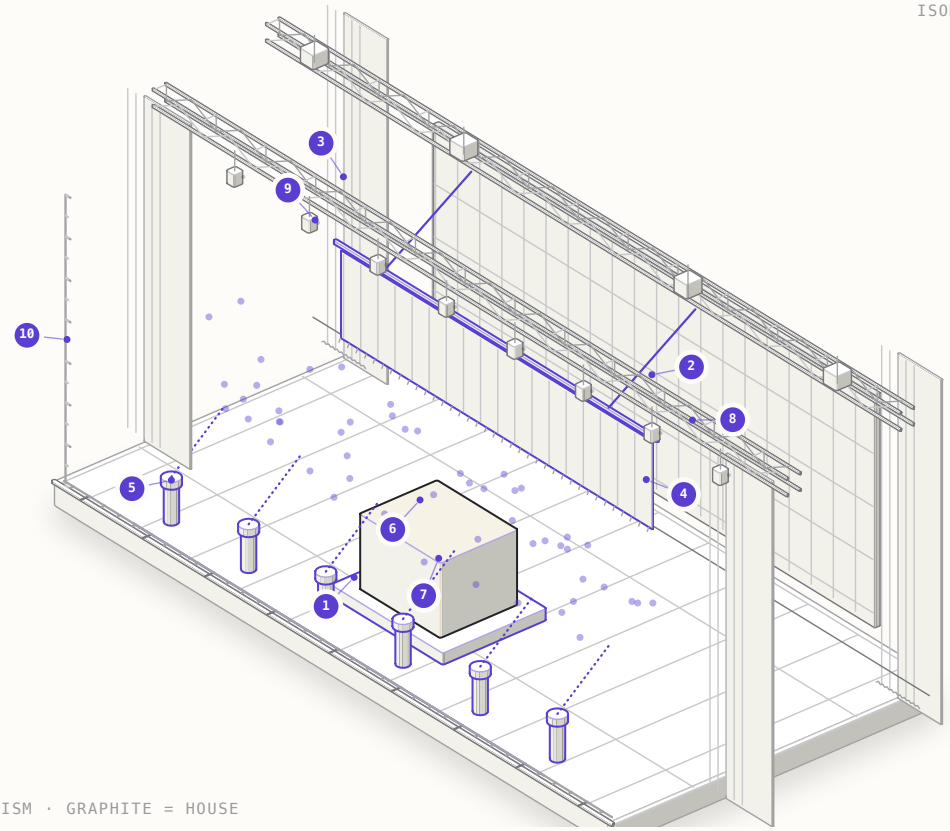


VIOLET = MECHANISM · GRAPHITE = HOUSE — PROVEN / 2 WK

PARTS

01	18 × 9 m deck	06	Confetti cloud
02	LED image surface	07	Product / 4 × 4 ft
03	Wool-serge masking	08	Box truss + eight hoists
04	Flown drape	09	Profile fixtures
05	Air cannons	10	Height datum

> *"The exact beat when the monochrome room becomes colour and the product appears. The contrast is the spectacle."*

DETAIL / MECHANISM
2.5×



THE SET

A neutral stage with a concealed product behind a theatrical drape. Confetti and streamer positions are rigged at the sides and front. The LED wall carries a monochrome visual system until the cue, then transitions to the approved palette. Lighting is programmed in two distinct states.

THE COVER

A simple theatrical drape. The mechanism is intentionally familiar; the transformation is in the room, not the box.

THE HAND

The chief guest presses a colour-coded pad on the lectern. The pad is the last monochrome object in the room; when it lights, the palette releases.

A monochrome room turns full colour at the reveal. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

11 THE COLOUR RELEASE

The room changes colour at the speed of the reveal.

PROVEN
2 WK

01 **MONO**
The room is white, black and grey, and the stage is deliberately restrained. A plain theatrical drape covers the product, and no colour is allowed anywhere in the frame.

02 **STORY**
The presenter tells the product story in a minimal monochrome language. The absence of colour is the setup, and the room becomes aware of it.

03 **PAD**
The guest presses a colour-coded pad on the lectern, the last monochrome object in the room. It illuminates in the first approved colour and the cue is live.

04 **RELEASE**
The drape retracts, the screen shifts to the full palette and the lighting changes across the auditorium in one coordinated beat. The transformation belongs to the room, not to the box.

05 **COLOUR**
Controlled confetti and streamers lift outside the product's fall zone, and the product stands under warm hero light. The room settles into the official identity with a cleanup plan already in place.

CUE SHEET

00:00–00:15	**Monochrome**
00:15–00:45	**The story**
00:45–00:55	**The pad**
00:55–01:05	**The release**
01:05–01:20	**The burst**
01:20–01:40	**The hero**

TECHNICAL

Theatrical drape | Confetti / streamers | LED wall | Colour lighting | Show control | Cleanup plan

The drape is a conventional theatrical track with a controlled retract. Confetti and streamers use compressed-air or electric cannons with a known fall zone. The LED content and lighting are programmed as two distinct looks: monochrome and full palette. A cleanup plan is required before the next segment.

THE THREE SIZES

2×2 FT	A compact drape and a tight confetti burst around the 2×2-ft product.
4×4 FT	A wider drape, a larger palette shift and a full-stage burst.
6×6 FT	The 6×6-ft product revealed inside a room-wide colour transformation, with the largest safe burst.

FEASIBILITY

Confetti and streamers can contaminate the product, block sightlines and create cleanup problems. The product should be protected or positioned outside the fall zone. The effect must be tested with the venue's fire and ventilation rules.

IF NOT

If confetti is not allowed, use lighting, projection and fabric colour changes only. The room still transforms; the celebration is cleaner.

DELIVERY — PROVEN

2 WK

Flown drape, six air cannons and a tested confetti load. The kind of effect a crew rehearses every season.

THE RUN OF SHOW, TO SCALE


00:00 — 01:40

15s	30s	10s	10s	15s	20s
01 Monochrome	02 The story	03 The pad	04 The release	05 The burst	HOLD The hero

THE IGNITION

A palm on a luminous cube sends a signal through the stage and brings the product up from below.

FIG. 12 — ISOMETRIC / LIGHT MODE

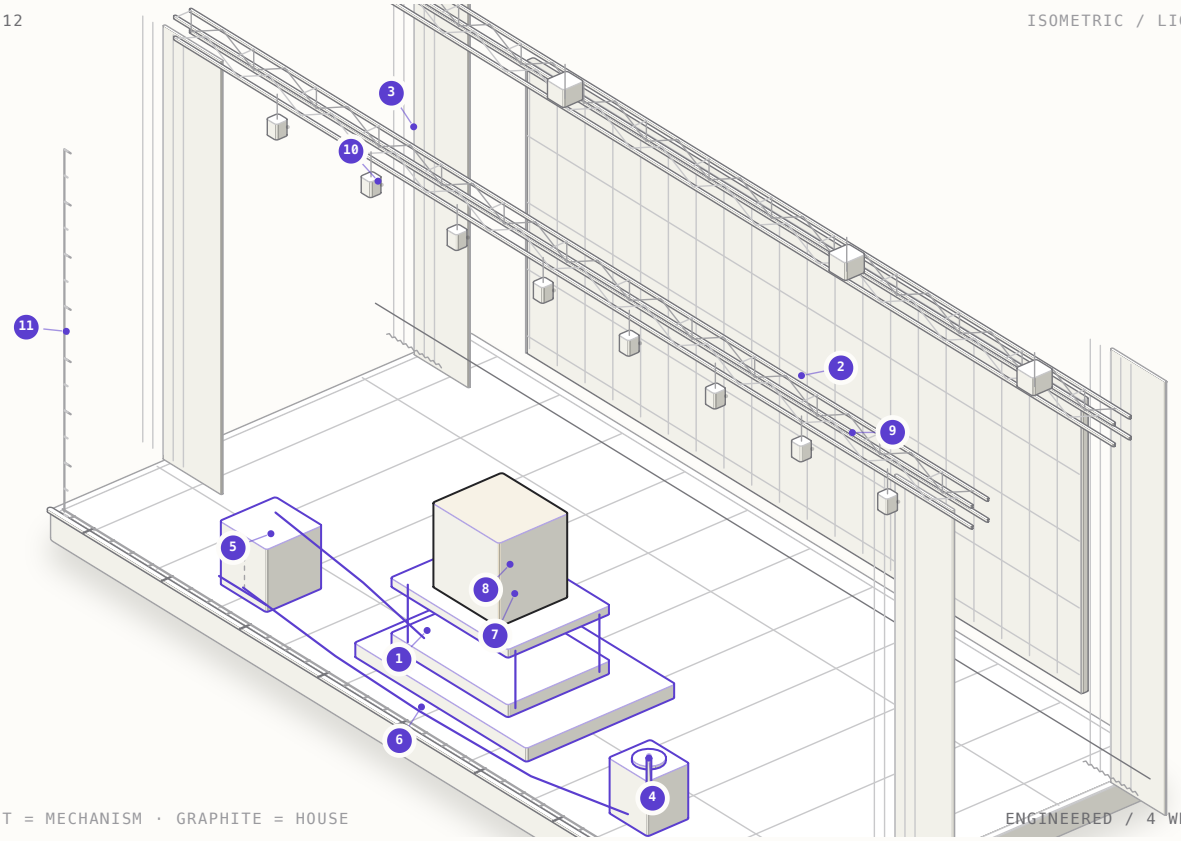


VIOLET = MECHANISM · GRAPHITE = HOUSE — ENGINEERED / 4 WK SCENIC

PARTS

01 18 × 9 m deck
02 LED image surface
03 Wool-serge masking
04 Palm pedestal
05 Charge cube
06 Conduit run
07 Hero lift
08 Product / 4 × 4 ft
09 Box truss + eight hoists
10 Profile fixtures
11 Height datum

> *"The product breaking through the fog at the end of the light path, as if the guest's touch had pulled it into the room."*

DETAIL / MECHANISM
2.5×



THE SET

A touch cube on a low plinth at stage left, connected to a protected addressable LED channel in the floor. The channel runs to the main screen and to the product lift position. A certified lift is concealed under a temporary raised stage. Fog units are positioned around the aperture.

THE COVER

The product is on a lift below stage level, covered by an aperture cover. The cube and the light path are the visible technology; the lift is hidden.

THE HAND

The chief guest places a palm flat on the cube. The cube responds with light. The touch requests a supervised show cue; it does not directly energise the hydraulic lift.

One touch wakes the stage and brings the product up from below. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

12 THE IGNITION

One touch. The entire stage wakes.

ENGINEERED
4 WK SCENIC

01 **STANDBY**
A translucent cube glows softly at stage left while the presenter introduces the product. Below the temporary raised stage, the product waits on a certified lift under a closed aperture cover.

02 **TOUCH**
The guest rests a palm flat on the cube. The capacitive sensor confirms contact, the internal light intensifies and a confirmation tone sounds. No biometric data is read or implied.

03 **PULSE**
A pixel-controlled pulse runs from the cube through a protected floor channel and into the screen. The audience sees one signal travel from a human hand to the stage machinery.

04 **AWAKEN**
The screen plays the launch film while lighting, audio and fog change together around the aperture. The stage looks awake; the lift is still waiting for its own authorisation.

05 **ASCEND**
The show operator authorises the certified lift and the product rises through the fog into a vertical beam. It stops at a verified position, the identity appears, and a live camera holds the hero shot.

CUE SHEET

00:00–00:15	**Standby**
00:15–00:30	**Palm detected**
00:30–00:45	**Pulse travels**
00:45–01:00	**World awakens**
01:00–01:20	**Product ascends**
01:20–01:35	**Hero moment**

TECHNICAL

`Capacitive touch cube` `Pixel LED path` `Media server` `Certified lift` `Fog` `Show control`

The cube is a translucent acrylic shell with internal LEDs and a capacitive touch sensor. The LED path uses addressable pixels in a protected floor channel. The lift is a certified stage lift with position feedback, interlocks and a dedicated operator. The touch fires a show cue; the lift has its own safety controller. A camera captures the palm for the screen.

THE THREE SIZES

2×2 FT	A single light path and a compact product lift. The sequence is short and precise.
4×4 FT	The path branches across scenic edges; the lift has a taller travel and a wider fog ring.
6×6 FT	The full stage wakes. Multiple paths converge, the screen takes over and the 6×6-ft product rises as the finale.

FEASIBILITY

The lift is the main constraint: mass, centre of gravity, travel, stage structure and rescue plan. The cube must not imply biometric authentication. The visible pulse and the actual lift must be synchronized by show control but governed by separate safety systems.

IF NOT

If the lift is unsuitable, keep the touch, pulse and screen sequence and reveal the stationary product with a retracting cover and a lighting snap. The activation story remains intact.

DELIVERY — ENGINEERED
4 WK SCENIC
Conduit, charge cube and hero lift are three separate cues that must read as one chain.

THE RUN OF SHOW, TO SCALE


00:00 — 01:35

15s	15s	15s	15s	20s	15s
01 Standby	02 Palm detected	03 Pulse travels	04 World awakens	05 Product ascends	HOLD Hero moment

THE KABUKI DROP

Eight solenoids let go and six metres of cloth is gone before the eye can follow it.

FIG. 13 — ISOMETRIC / LIGHT MODE

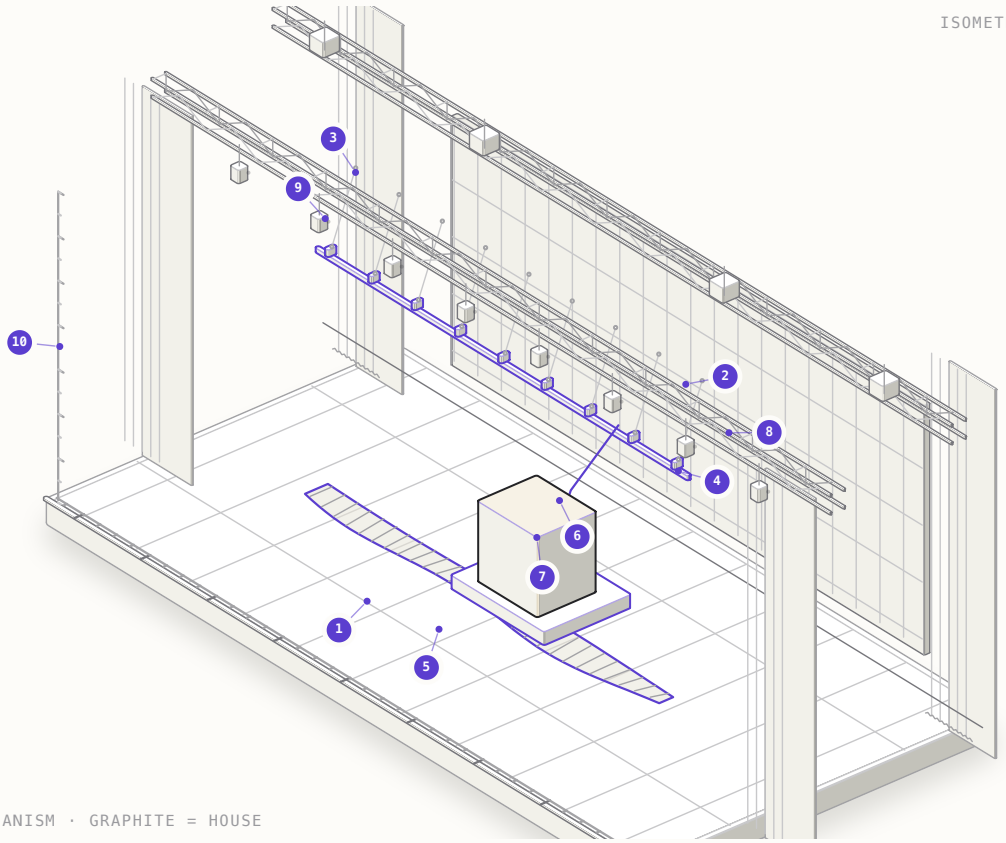


VIOLET = MECHANISM · GRAPHITE = HOUSE — PROVEN / 2 WK

PARTS

01	18 × 9 m deck	06	Release cable
02	LED image surface	07	Product / 6 × 6 ft
03	Wool-serge masking	08	Box truss + eight hoists
04	Header pipe + eight clamps	09	Profile fixtures
05	Quick-release cloth	10	Height datum

> *"The half-second where the stage is neither covered nor revealed, and the cloth is already on the floor."*

DETAIL / MECHANISM
2.7×



THE SET

A soft drop hangs from a steel header on eight quick-release clamps, dressing the full stage opening. Two side masts carry the header and are the only visible rigging. The product stands on a plinth directly behind the cloth, 250 mm clear of it. The floor in front of the drop is kept free of monitors, ramps and cable.

THE COVER

The drop is cover and backdrop at once. It is hem-weighted so it falls straight instead of billowing, and it hangs clear of the plinth so the cloth never touches the product on the way down.

THE HAND

The chief guest presses one illuminated button on the lectern. The button arms the release; a stage operator fires the cue from the desk. Nothing depends on the guest's timing, so a missed press cannot stall the show.

Eight solenoids drop six metres of cloth in under a second. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

13 THE KABUKI DROP

The fastest reveal in the room.

PROVEN
2 WK

01 **DRESSED**
A warm cloth wall fills the full stage opening, raked by side light so the folds read. The audience sees a finished backdrop, not a cover waiting to fall.

02 **STORY**
The presenter speaks in front of the drop with the screen hidden behind it. The stage stays quiet and physical, and the cloth becomes the whole visual world.

03 **ARMED**
The guest presses the illuminated button and the eight clamps arm. A cue light turns amber at the desk, and the operator—not the guest's timing—owns the release.

04 **RELEASE**
Eight solenoids fire on one cue and 12 kg of hem-weighted cloth leaves a 7.4 m header. It is on the floor in 0.7–0.9 seconds, falling straight instead of ballooning.

05 **HERO**
The product stands in hard hero light with the pooled cloth as a soft foreground hem. The guest steps to the pool line and holds for the photograph.

CUE SHEET

00:00–00:20	**Dressed**
00:20–00:50	**The story**
00:50–01:00	**Armed**
01:00–01:02	**Release**
01:02–01:20	**The product**
01:20–01:40	**The hold**

TECHNICAL

`Steel header` `8 quick-release clamps` `Soft drop, 7.4 × 5.6 m` `Hem weights` `Cue light` `Two-person dress team`

The drop hangs from a 7.4 m header on eight mechanical clamps, each released by a solenoid on a single cue. Release to floor takes 0.7–0.9 s. The cloth is roughly 12 kg, inherently flame-retardant and weighted at the hem so it collapses straight down instead of ballooning. The fall zone is kept clear for one metre in front of the plinth. Two stagehands dress and pin the cloth in about 40 seconds, so the effect can be reset for a rehearsal or a second show.

THE THREE SIZES

2×2 FT	A narrower drop around the 2×2-ft product with a short fall and an intimate reveal.
4×4 FT	A full-width drop with side light and a slower build before the cue.
6×6 FT	A double-height drop over the 6×6-ft product. The fall becomes the loudest single image of the evening and reads from the back row.

FEASIBILITY

The effect lives or dies on the fall zone: no monitors, no cable ramps and no presenter within one metre of the drop line. The header must be rated for the cloth weight plus shock, and the clamps need a secondary physical pin so an accidental cue cannot release the drop early. The cloth must be flame-retardant to venue standard.

IF NOT

If the venue will not allow a free-falling drop, the same cloth can fly upward on a counterweighted bar or part as a traveler. Reveal time rises from under a second to four or six seconds and nothing else in the design changes.

DELIVERY — PROVEN

2 WK

Eight clamps, one cue, under a second. The most reliable reveal in the deck and the cheapest to rehearse.

THE RUN OF SHOW, TO SCALE


00:00 — 01:40

20s	30s	10s	2s	18s	20s
01 Dressed	02 The story	03 Armed	04	05 The product	HOLD The hold

THE FLY BAR

The hem leaves the floor first, so the product arrives from below like a sunrise.

FIG. 14 — ISOMETRIC / LIGHT MODE

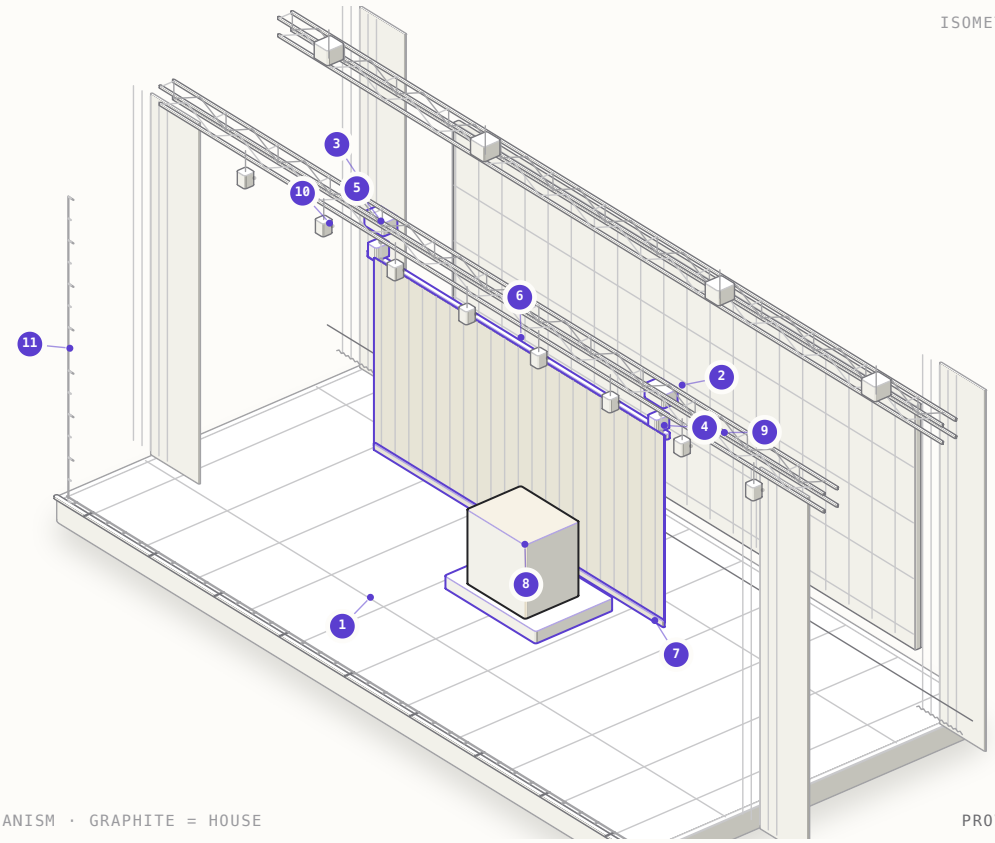


VIOLET = MECHANISM · GRAPHITE = HOUSE — PROVEN / 2 WK / HIRE

PARTS

01 18 × 9 m deck
02 LED image surface
03 Wool-serge masking
04 Flown bar
05 Two chain hoists
06 Guided header
07 Weighted hem
08 Product / 6 × 6 ft
09 Box truss + eight hoists
10 Profile fixtures
11 Height datum

> *"The hem leaving the deck: the product appears feet first, and the room fills in the reveal from the bottom of the frame."*

DETAIL / MECHANISM
2.5×



THE SET

A cloth drape hangs from a hoist-driven header that travels between two steel masts. The header is visible, the lift is visible and the travel is 2.6 m. The product sits on a plinth behind the cloth line, 300 mm clear of the fabric.

THE COVER

The drape is the cover while the header sits low, hem on the deck. When the header reaches trim, the hem clears the product by 250 mm so the fabric never grazes the top of the object.

THE HAND

The chief guest lifts a brass lever on the lectern. The lever releases a cue, not the load: the two chain hoists are operated by a named technician who has rehearsed the move. The guest's hand is the visible cause without becoming the safety risk.

A weighted drape lifts from the hem, revealing the product like a sunrise. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

14 THE FLY BAR

The oldest reveal, done without a single visible mistake.

PROVEN
2 WK / HIRE

01 **DRESSED**
The drape stands floor to header between two steel masts, hem weighted on the deck and lit from both sides. A single brass line ties the lectern to the rig.

02 **STORY**
The presenter works in front of the cloth while the audience reads a complete theatrical picture. Nothing moves, and the pause makes the later lift feel earned.

03 **LEVER**
The guest lifts the brass lever. The cue light goes green at the fly rail, and the two chain hoists remain in the hands of a named technician.

04 **LIFT**
The header climbs at 0.45 m per second and the hem leaves the deck first. The product is exposed from the bottom up, like a sunrise rather than a curtain call.

05 **HERO**
The header locks at 6 m with the hem 250 mm clear of the product, and the drape reads as a valance. The screen resolves and the valance frames the top of the photograph.

CUE SHEET

00:00–00:25	**Dressed to the floor**
00:25–00:55	**The story**
00:55–01:05	**The lever**
01:05–01:25	**The lift**
01:25–01:40	**The trim**
01:40–02:00	**The hold**

TECHNICAL

`Two steel masts` `Chain-hoist header` `Cloth drape, 7.8 × 3.4 m` `Hem weights` `Travel limit switches` `Named operator`

The header runs in guides on two masts and is driven by two chain hoists, each with a mechanical brake and a limit switch. A single technician flies it on a marked cue with limit switches at both ends and a hard stop at trim. The drape is 3.4 m deep and weighted at the hem. The full travel is 2.6 m at 0.45 m per second, which is slow enough to read and fast enough to hold a room.

THE THREE SIZES

2×2 FT	A lower header and a shorter travel around the 2×2-ft product.
4×4 FT	A full-width drape with a two-stage lift and a pause at half trim.
6×6 FT	A double-height drape over the 6×6-ft product. The long lift becomes a deliberate, ceremonial reveal rather than a quick one.

FEASIBILITY

The masts carry the whole load and must be tied to the deck and braced against side pull. The header needs limit switches and a physical hard stop, because a runaway fly is the one failure this effect cannot hide. The hem must clear the product by at least 150 mm at trim.

IF NOT

If the venue has a certified fly system, the drape can hang on a house bar instead of masts and the lift travel increases. If rigging is unavailable, the same drape can be dressed to one side and pulled clear by two operators, though the sunrise effect is lost.

DELIVERY — PROVEN
2 WK / HIRE
Two chain hoists, a guided header and a weighted hem. Standard theatrical practice with a visible mechanism.

THE RUN OF SHOW, TO SCALE


00:00 — 02:00

25s	30s	10s	20s	15s	20s
01 Dressed to the floor	02 The story	03 The lever	04 The lift	05 The trim	HOLD The hold

THE TRAVELER

The curtain parts from the centre and keeps gathering until the stage is twice as wide.

FIG. 15 — ISOMETRIC / LIGHT MODE

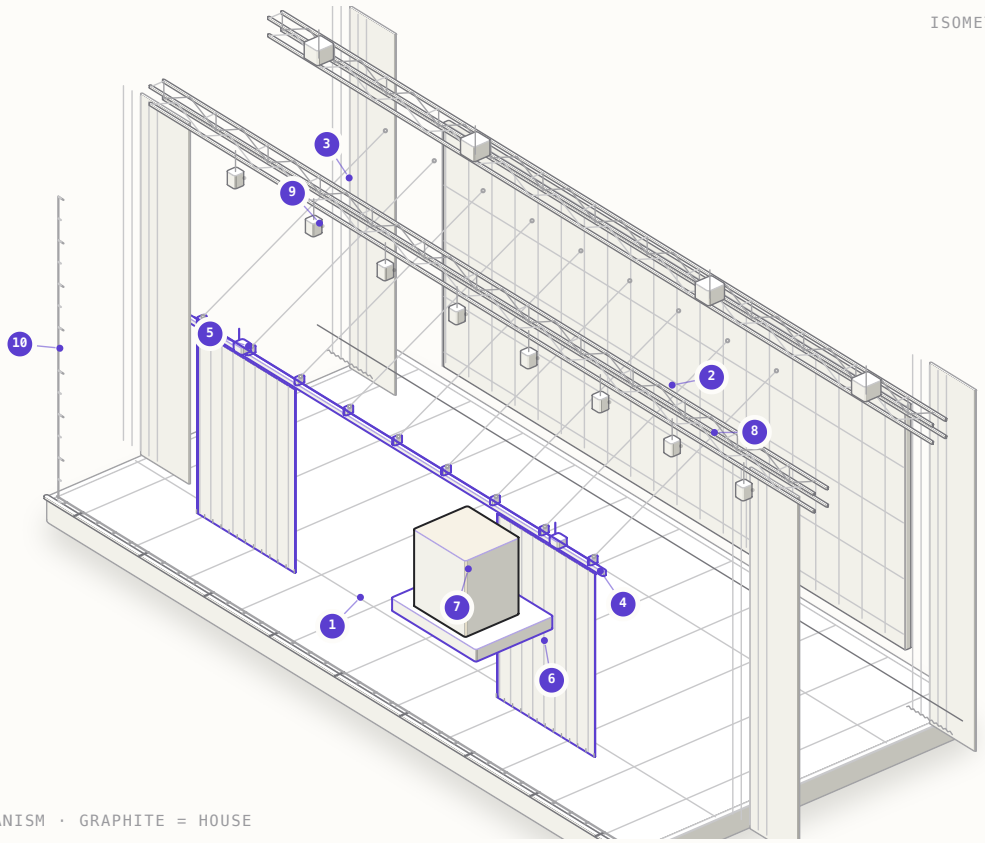


VIOLET = MECHANISM · GRAPHITE = HOUSE — PROVEN / 1–2 WK

PARTS

01	18 × 9 m deck	06	Two panels + overlaps
02	LED image surface	07	Product / 4 × 4 ft
03	Wool-serge masking	08	Box truss + eight hoists
04	Track	09	Profile fixtures
05	Carriers	10	Height datum

> *"The first 200 mm of the part, when a vertical line of light appears where the audience had read a solid wall."*

DETAIL / MECHANISM
2.5×



THE SET

A pipe track spans the proscenium with two carriers. Two pleated panels hang from the carriers with a 300 mm centre overlap. The product sits on a plinth at centre, behind the curtain line, with a clear 1.2 m gap so the fabric never catches the object as it gathers.

THE COVER

The overlap is the whole trick. The two panels close with no gap, no light leak and no visible mechanism, so the audience reads a solid wall of cloth rather than a pair of doors.

THE HAND

The chief guest draws a short brass baton across a sensor on the lectern. The gesture reads as pulling the curtain, while the track motors run from the show controller with an operator holding a dead-man switch.

Two pleated panels part from the centre and gather into the wings. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

15 THE TRAVELER

Two panels, one line of light, no ambiguity.

PROVEN
1–2 WK

01 **CLOSED**
Two heavy pleated panels meet at centre with a 300 mm overlap. Only fold highlights show, and the audience reads a solid wall of cloth rather than a pair of doors.

02 **STORY**
The presenter works in front of the curtain and the stage reads as a theatre. The overlap is never questioned because nothing about it looks mechanical.

03 **BATON**
The guest draws a short brass baton across a sensor. The carriers release and the motors take up the load while an operator holds a dead-man switch.

04 **PART**
The panels separate from the centre and gather as they travel, exposing the product from the middle outward. Each carrier moves at 0.5 m per second and stacks into the wings.

05 **HERO**
The stage is open to its full width for the first time, with the gathered panels framing the shot. The screen resolves and the product holds the centre line.

CUE SHEET

00:00–00:20	**Closed house**
00:20–00:50	**The story**
00:50–01:00	**The baton**
01:00–01:25	**The part**
01:25–01:40	**The width**
01:40–02:00	**The hold**

TECHNICAL

Pipe track · Two carriers · Motorised drive · Pleated panels · Centre overlap · Dead-man control

A pipe track spans the opening with two motorised carriers. The panels are pleated, lined and weighted at the hem so they hang dead straight. The carriers travel at 0.5 m per second and gather the panels to roughly 38 percent of their closed width. The overlap is 300 mm and is maintained by a guide pin until the panels are fully closed. An operator holds a dead-man switch, so releasing it stops the travel.

THE THREE SIZES

2×2 FT	A narrow proscenium pair around the 2×2-ft product, with a short travel and a tight reveal.
4×4 FT	A full-width pair with a slower part and a deliberate pause at half open.
6×6 FT	A double-height pair over the 6×6-ft product. The travel and gather become the event's main stage move.

FEASIBILITY

The track must be level, the carriers rated for the panel weight and the overlap maintained at the closed position. The gathering stack needs 1.1 m of wing space on each side. The panels must be flame-retardant and the track must have a manual release so the stage can be cleared if power drops.

IF NOT

If motorised carriers are unavailable, the same pair runs on a manual walk-along track with two operators, or on a single centre-pull line. The part is slower and less even but visually intact.

DELIVERY — PROVEN
1–2 WK
A track, two carriers and two panels. Nothing on this page can fail in an interesting way.

THE RUN OF SHOW, TO SCALE


00:00 — 02:00

20s	30s	10s	25s	15s	20s
01 Closed house	02 The story	03 The baton	04 The part	05 The width	HOLD The hold

THE REVOLVE

A sealed black drum rotates on its own axis and the aperture comes round.

FIG. 16 ISOMETRIC / LIGHT MODE

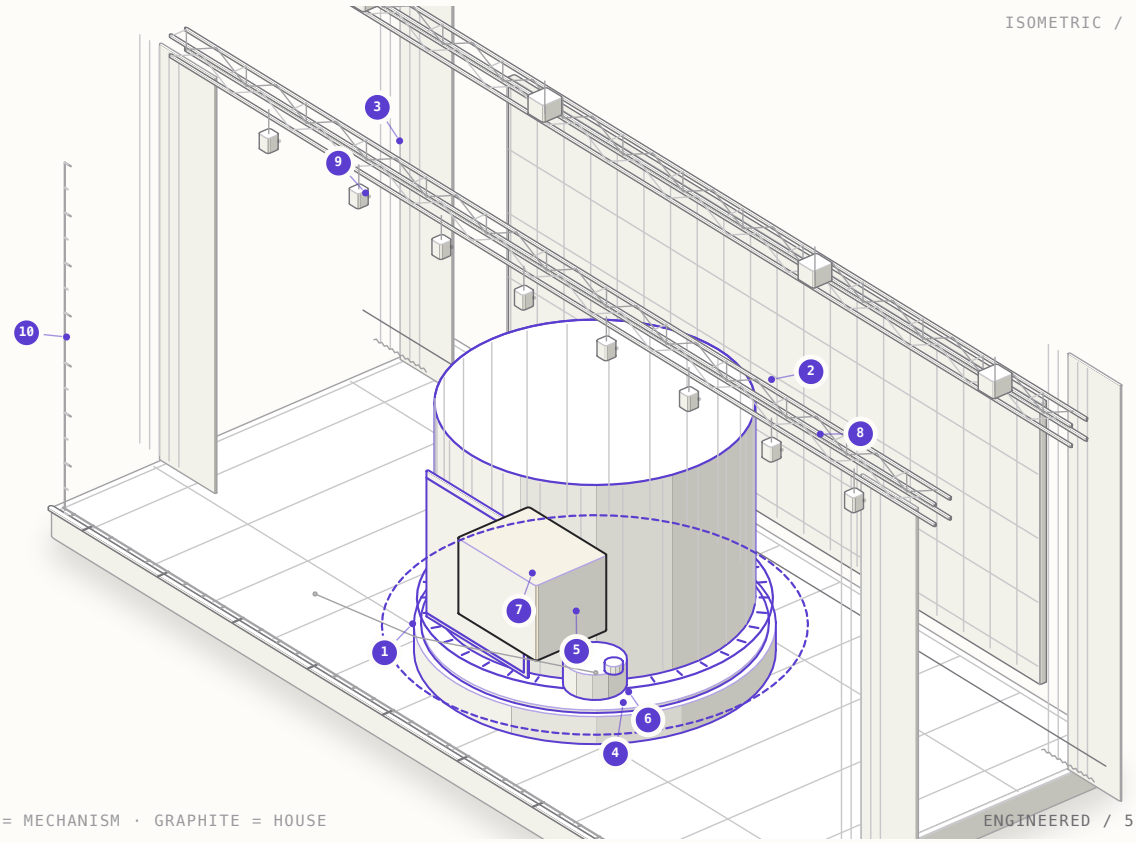


PARTS

01	18 × 9 m deck	06	Drive motor
02	LED image surface	07	Product / 6 × 6 ft
03	Wool-serge masking	08	Box truss + eight hoists
04	Turntable disc	09	Profile fixtures
05	Shell + aperture	10	Height datum

> *"The aperture crossing the centre line: the interior light spills out a slit before the product is fully visible."*

DETAIL / MECHANISM
3.3×



THE SET

A matte-black cylindrical shell 4.6 m tall and 6.2 m across sits on a recessed turntable. The shell has one aperture and a continuous edge light. The product stands on the turntable inside, offset 500 mm so it lands on the centre line when the aperture faces front. The turntable is driven by a friction wheel with a mechanical index at both ends.

THE COVER

The shell is opaque, sealed and seamless except for the aperture, which starts facing upstage. The audience sees a closed black drum for the whole first act, with only a thin seam of light betraying that it is not solid.

THE HAND

The chief guest turns a brass handle through a quarter turn on the lectern. The handle releases the turntable brake; the drive is controlled by the show operator and indexed to a physical stop at 180 degrees.

A sealed drum turns 180 degrees and brings its aperture round to the room. Drawn in the fixed house; product shown as a massing block because its identity is unknown.

16 THE REVOLVE

The room turns to face the product.

ENGINEERED
5 WK SCENIC

01 **SEALED**
A sealed matte-black drum stands at centre with one aperture facing upstage and a single seam of light. It reads as architecture with a secret rather than a product box.

02 **STORY**
The presenter walks the edge of the drum while the seam glows and the stage stays completely still. The audience is given time to accept the object as a room.

03 **HANDLE**
The guest turns a brass handle through a quarter turn. The turntable brake releases with a mechanical click, and the drive waits for the show operator.

04 **TURN**
The drum rotates 180 degrees and the aperture sweeps around, with interior light escaping before the product is visible. The turn is indexed to a physical stop.

05 **HERO**
The drum lands on its stop with the aperture facing the room. The product stands inside a circular frame, the identity resolves on screen, and the geometry becomes the photograph.

CUE SHEET

00:00–00:20	**The drum**
00:20–00:50	**The story**
00:50–01:00	**The handle**
01:00–01:25	**The turn**
01:25–01:40	**The aperture**
01:40–02:00	**The hold**

TECHNICAL

`Revolved scenic shell` `Recessed turntable` `Friction-wheel drive` `Physical index stops` `Edge lighting` `Operator dead-man`

The shell is a revolved scenic flat built on a steel ring, skinned and finished matte black. It sits on a recessed turntable driven by a friction wheel, with a mechanical index at 0 and 180 degrees and a dead-man control at the desk. The full turn takes 20 seconds at constant speed. The aperture edges carry a continuous LED strip so the seam reads from the back of the room. The interior is lit independently and can be serviced through a hatch upstage.

THE THREE SIZES

2×2 FT	A smaller drum around the 2×2-ft product, with a quarter turn instead of a half.
4×4 FT	A full drum with a 180-degree turn and a slower, more ceremonial speed.
6×6 FT	A monumental drum around the 6×6-ft product. The turn becomes the signature image and the aperture frames the hero shot.

FEASIBILITY

The turntable must be recessed or ramped so the audience never sees a mechanism under the shell. The shell needs a clear swept radius of 3.4 m, which sets the minimum stage depth. The index stops must be physical, not encoder-only, and the drive must fail safe in the closed position.

IF NOT

If a recessed turntable is impossible, the shell can run on a visible circular track disguised as a scenic ring. If rotation is refused altogether, the same shell can travel laterally on a wagon and present the aperture by sliding rather than turning.

DELIVERY — ENGINEERED
5 WK SCENIC
A revolved shell on a recessed turntable. The build is the cost; the rotation is a solved problem.

THE RUN OF SHOW, TO SCALE

00:00 — 02:00

20s	30s	10s	25s	15s	20s
01 The drum	02 The story	03 The handle	04 The turn	05 The aperture	HOLD The hold

What ships, *and what must be answered.*

Three tiers, sixteen mechanisms. 6 are standard practice, 9 are custom scenic builds with a known method, and 1 depends on a technical answer that does not exist yet. Nothing here is priced until the product mass, footprint and venue rigging are confirmed.

#	CONCEPT	MECHANISM	TIER	BUILD	COMPLEXITY	FOOTPRINT
01	THE UNSEEN	Transforming architectural stage	ENGINEERED	5–6 WK SCENIC	Medium–high	2×2 / 4×4 / 6×6 FT
02	THE PULSE	Palm-to-product activation	ENGINEERED	4 WK SCENIC	Medium	2×2 / 4×4 / 6×6 FT
03	THE CARGO VAULT	Controlled mechanical burst	ENGINEERED	4 WK SCENIC	Medium–high	2×2 / 4×4 / 6×6 FT
04	THE ASCENSION	Hydraulic rise through atmosphere	PROVEN	2 WK / HIRE	High	6×6 FT FOCUS
05	THE DIGITAL VEIL	Projection cocoon	ENGINEERED	5 WK SCENIC	Medium–high	4×4 FT FOCUS
06	THE LIGHT SCULPTURE	Programmable LED outline	ENGINEERED	4 WK SCENIC	Low–medium	2×2 / 4×4 FT
07	THE DROP	Theatrical cargo arrival	ENGINEERED	4 WK SCENIC	High	4×4 FT FOCUS
08	THE PHANTOM	Pepper's Ghost theatre	EXPERIMENTAL	6–7 WK	High	2×2 FT FOCUS
09	THE STAGE IS THE PRODUCT	Whole-stage product mockup	PROVEN	4 WK SCENIC	High	6×6 FT FOCUS
10	THE LASER DRAW	Light draws the launch	ENGINEERED	3 WK + PERMITS	Medium–high	4×4 FT FOCUS
11	THE COLOUR RELEASE	Instant colour transformation	PROVEN	2 WK	Low–medium	4×4 FT FOCUS
12	THE IGNITION	Touch-to-stage activation	ENGINEERED	4 WK SCENIC	Medium–high	4×4 FT FOCUS
13	THE KABUKI DROP	Quick-release fabric drop	PROVEN	2 WK	Low–medium	6×6 FT FOCUS
14	THE FLY BAR	Guided drape lift	PROVEN	2 WK / HIRE	Low–medium	6×6 FT FOCUS
15	THE TRAVELER	Parting curtain on a track	PROVEN	1–2 WK	Low	2×2 / 4×4 / 6×6 FT
16	THE REVOLVE	Rotating drum turntable	ENGINEERED	5 WK SCENIC	Medium	6×6 FT FOCUS

THE ONE THING TO HOLD

Every concept is a machine first and an image second. The five-phase anatomy, the cue sheet and the delivery tier are the same information for the stage manager, the fabricator and the client — so a decision made on paper survives contact with the room.

WHAT WE STILL NEED

Product height, weight and centre of gravity; product form and handling restrictions; actual sector and approved claims; venue rigging points, stage load and ceiling height; lift travel, sightlines and crossovers; fog, laser, confetti and fire-alarm permissions.

NEXT

Choose one concept per product footprint, confirm the venue's rigging and power, and commission a full technical drawing and load sheet for the shortlisted mechanisms.