AkashPrakash1111 /
19CS416-CS-Ex-3-Linux-Commands

Code Pull requests Actions Projects Wiki Security Insights

19CS416-CS-Ex-3-Linux-Commands / README.md

AkashPrakash1111 Update README.md ead5418 · now

376 lines (246 loc) · 8.54 KB

19CS416-CS-Ex-3-Linux-Commands

Linux is an open-source operating system, and its kernel is the heart of the OS, facilitating communication between hardware and software. One of the key advantages of Linux is its customizability; developers can modify the Linux kernel to create their own tailored operating systems.

Linux Commands

Linux commands are executed in the terminal, which is case-sensitive. This guide covers some basic and advanced commands used in Linux.


1. `ls` Command

The `ls` command is used to display a list of contents in a directory.

Syntax:

```
ls
```

Output:



2. `pwd` Command

The `pwd` command displays the location of the current working directory.

Syntax:

```
pwd
```

Output:



3. `mkdir` Command

The `mkdir` command is used to create a new directory.

Syntax:

```
mkdir <directory_name>
```

Output:



4. `rmdir` Command

The `rmdir` command is used to delete a directory.

Syntax:

```
rmdir <directory_name>
```

Output:



5. `cd` Command

The `cd` command is used to change the current directory.

Syntax:

```
cd <directory_name>
```

Output:



6. `cat` Command

The `cat` command is used to create, display, and concatenate files.

Syntax:

```
cat [OPTION]... [FILE]...
```

Output:



7. `cp` Command

The `cp` command is used to copy files or directories.

Syntax:

```
cp <source_file> <destination_file>
```

Output:



8. `gedit` Command

`gedit` is a general-purpose text editor used to create and edit text files.

Syntax:

```
gedit <file_name>
```

Output:



9. `su` Command

The `su` command provides administrative access to another user.

Syntax:

```
su <username>
```

Output:



10. `mv` Command

The `mv` command is used to move a file or directory from one location to another.

Syntax:

```
mv <file_name> <directory_path>
```

Output:



11. `rename` Command

The `rename` command is used to rename files.

Syntax:

```
rename 's/old-name/new-name/' <files>
```

Output:



12. `head` Command

The `head` command displays the first 10 lines of a file.

Syntax:

```
head <file_name>
```

Output:



13. `tail` Command

The `tail` command displays the last 10 lines of a file.

Syntax:

```
tail <file_name>
```

Output:




14. `id` Command

The `id` command displays the user ID (UID) and group ID (GID).

Syntax:

```
id
```

Output:



15. `grep` Command

The `grep` command is used to search for a pattern within files.

Syntax:

```
command | grep <search_word>
```

Output:



16. `tr` Command

The `tr` command is used to translate or delete characters.

Syntax:

```
command | tr <old> <new>
```

Output:




17. `chmod` Command

The `chmod` command is used to change the access mode (permissions) of a file.

Syntax:

```
chmod <options> <permissions> <file_name>
```

Output:

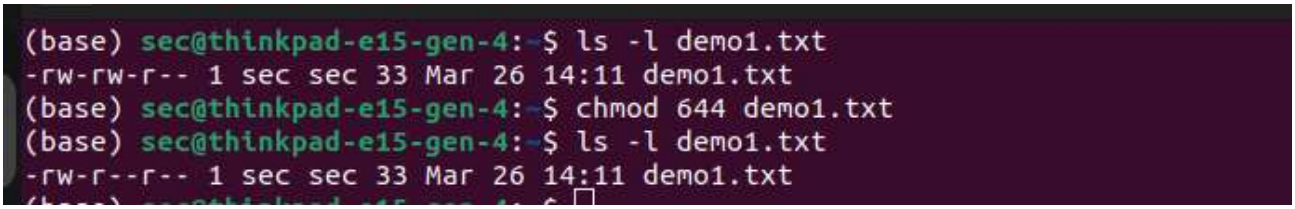


18. `tar` Command

The `tar` command is used to create or extract archive files.

Syntax:

```
tar [options] [archive-file] [files_to_archive]
```

Output:

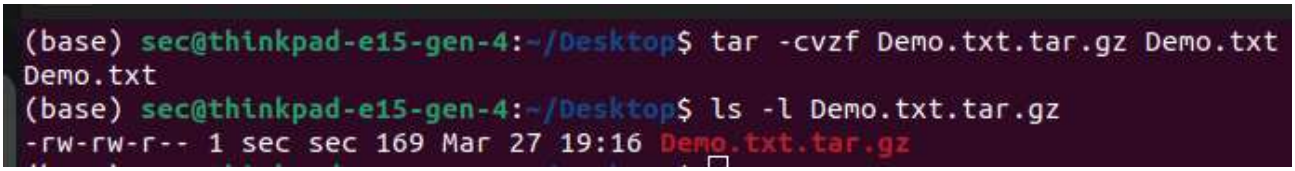


19. `chown` Command

The `chown` command is used to change the ownership of a file.

Syntax:

```
chown <owner_name> <file_name>
```

Output:

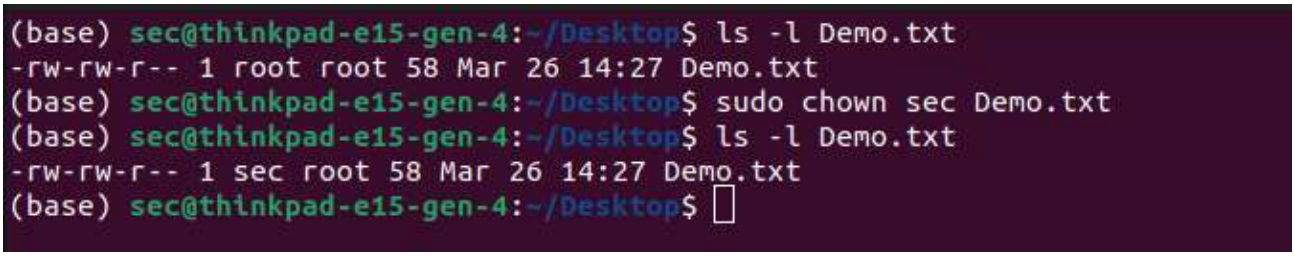


20. `make` Command

The `make` command is used to build and maintain groups of programs.

Syntax:

```
make [-f makefile] [options] [targets]
```

Output:

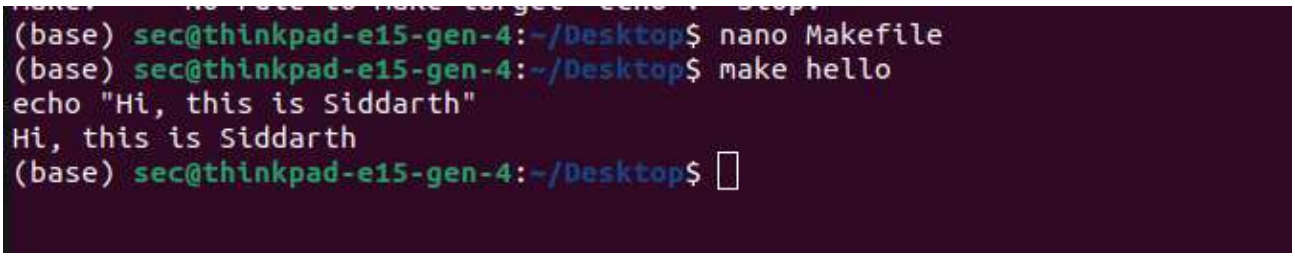

21. `ifconfig` Command

The `ifconfig` command is used to configure network interfaces.

Syntax:

```
ifconfig [options] [interface]
```

Output:




22. `chmod 777` Command

The `chmod 777` command gives read, write, and execute permissions to the owner, group, and others.

Syntax:

```
chmod 777 <file_name>
chmod -R 777 /path/to/file/or/folder
```

Output:

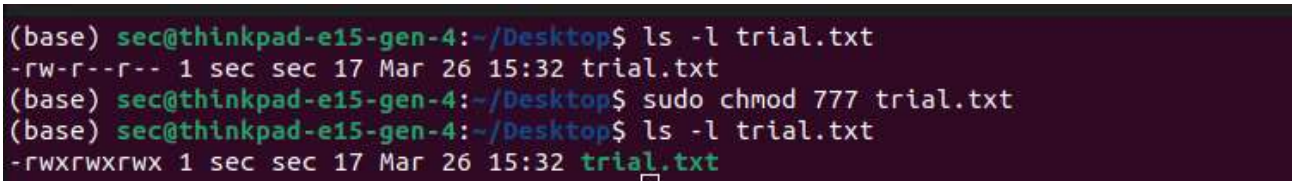


23. `host` Command

The `host` command is used to display the IP address for a given domain name.

Syntax:

```
host <domain_name> or <ip_address>
```

Output:




24. `gzip` Command

The `gzip` command is used to compress files, replacing the original file with a compressed one with a `.gz` extension.

Syntax:

```
gzip <file1> <file2> <file3>...
```

Output:



25. `sort` Command

The `sort` command is used to sort the contents of a file alphabetically.

Syntax:

```
sort <file_name>
```

Output:




26. `cal` Command

The `cal` command displays the current month's calendar with the current date highlighted.

Syntax:

```
cal
```

Output:

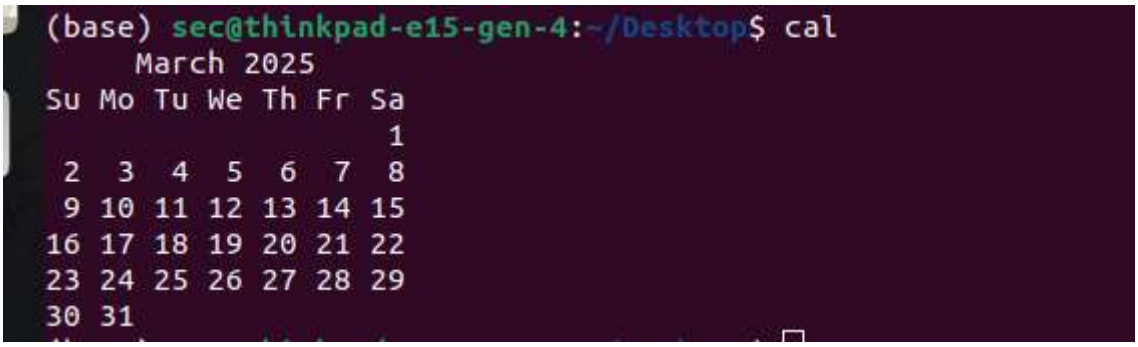


27. `clear` Command

The `clear` command clears the terminal screen.

Syntax:

```
clear
```

Output:

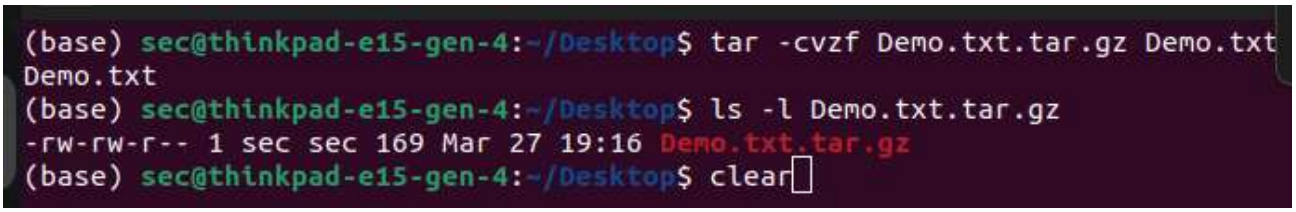

28. `mail` Command

The `mail` command is used to send emails from the command line.

Syntax:

```
mail
```

Output:

```
(base) sec@thinkpad-e15-gen-4:~$ mail -s "Greetings" sonnu2004@gmail.com
Cc:
Hello,
Hope you are enjoying Life.

(base) sec@thinkpad-e15-gen-4:~$
```

29. `df` Command

The `df` command displays the disk space usage of file systems.

Syntax:

```
df
```

Output:

```
(base) sec@thinkpad-e15-gen-4:~$ df
Filesystem     1K-blocks      Used Available Use% Mounted on
tmpfs            1602552      2584   1599968   1% /run
/dev/nvme0n1p8  65745376  10233728  52126152  17% /
tmpfs            8012760         0   8012760   0% /dev/shm
tmpfs               5120         4      5116   1% /run/lock
/dev/nvme0n1p5  29352956  12981608  14854960  47% /home
/dev/nvme0n1p7    531084    188480    303612  39% /boot
/dev/nvme0n1p1    262144     37160    224984  15% /boot/efi
tmpfs            1602552        96   1602456   1% /run/user/1000
```

30. `find` Command

The `find` command is used to search for files in a directory hierarchy.

Syntax:

```
find <directory> -name <file_name>
```

Output:

```
(base) sec@thinkpad-e15-gen-4:~$ find . -type f -name "Demo.txt"
./Documents/Demo.txt
(base) sec@thinkpad-e15-gen-4:~$
```

Result