

**School of Computer Science and Artificial Intelligence**

---

**Lab Assignment # 9.2**

---

<b>Program</b>	<b>: B. Tech (CSE)</b>
<b>Specialization</b>	<b>: -</b>
<b>Course Title</b>	<b>: AI Assisted Coding</b>
<b>Course Code</b>	<b>: 23CS002PC304</b>
<b>Semester</b>	<b>II</b>
<b>Academic Session</b>	<b>: 2025-2026</b>
<b>Name of Student</b>	<b>: R.AKASH REDY</b>
<b>Enrollment No.</b>	<b>: 2403A51L30</b>
<b>Batch No.</b>	<b>51</b>
<b>Date</b>	<b>: 06/02/26</b>

---

**Submission Starts here**

**Screenshots:**

**Task Description -1 (Documentation – Function Summary Generation)**


**Code used:**

```
def factorial(n):  
    if n == 0:  
        return  
    1 else:  
        return  
n*factorial(n-1)  
factorial(5)
```

**Prompt:**

Add a short summary describing the purpose of the function in the code

**Output:**

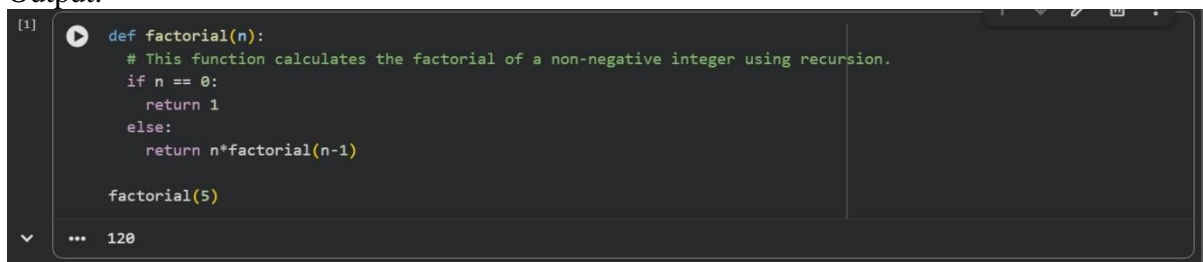

```
[1] def factorial(n):  
    # This function calculates the factorial of a non-negative integer using recursion.  
    if n == 0:  
        return 1  
    else:  
        return n*factorial(n-1)  
  
    factorial(5)  
... 120
```


**Task Description -2 (Documentation – Logical Explanation for Conditions and Loops)**

**Code Used:**

```
def
    numbers(n
): if n > 0:
    result = "Positive"
elif n < 0:
    result =
"Negative" else:
    result = "Zero"
return result
numbers(3)
```

**Prompt:**

explain only decision-making logic and loop behavior inside the code

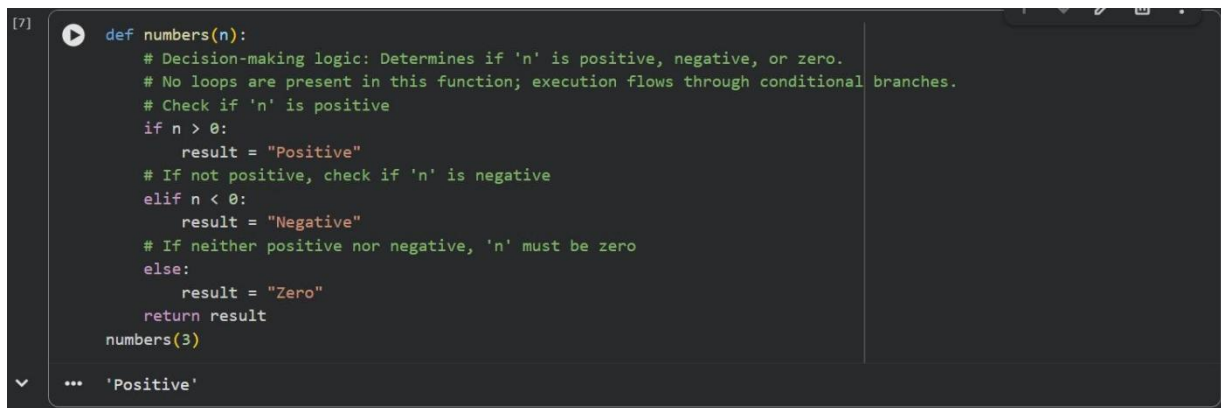**Output:**

```
[7] def numbers(n):
    # Decision-making logic: Determines if 'n' is positive, negative, or zero.
    # No loops are present in this function; execution flows through conditional branches.
    # Check if 'n' is positive
    if n > 0:
        result = "Positive"
    # If not positive, check if 'n' is negative
    elif n < 0:
        result = "Negative"
    # If neither positive nor negative, 'n' must be zero
    else:
        result = "Zero"
    return result
numbers(3)
```

... 'Positive'

**Task Description -3 (Documentation – File-Level Overview)****Code Used:**

```
def
    factorial(n
): result = 1
    for i in range(1, n + 1):
        result *= i
    return result

def square_list(numbers):
    return [n * n for n in numbers]

def main():
    print(factorial(5))
    print(square_list([1, 2, 3, 4]))
```

**Prompt:**

Generate a high-level overview summarizing the overall purpose and functionality of the Code. add the summary at the beginning

**Output:**

```
[8]
✓ 0s # This code defines two utility functions: `factorial` to calculate the factorial of a number,
# and `square_list` to square each element in a list. It then demonstrates their usage in a `main` function.

def factorial(n):
    result = 1
    for i in range(1, n + 1):
        result *= i
    return result

def square_list(numbers):
    return [n * n for n in numbers]

def main():
    print(factorial(5))
    print(square_list([1, 2, 3, 4]))

main()

... 120
[1, 4, 9, 16]
```

**Task Description -4 (Documentation – Refine Existing Documentation)**

**Code Used:**

```
def calculate_discount(price,
    discount): # calculate
    if price > 0:
        # apply discount
        final_price = price - (price * discount /
            100) return final_price
    else:
        # wrong price
        return 0
```

**Prompt:**

Rewrite the documentation to improve clarity and consistency.

**Output:**

```
[10]
✓ 0s def calculate_discount(price, discount):
    """
    Calculates the final price after applying a discount.

    Args:
        price (float or int): The original price of the item.
        discount (float or int): The discount percentage to apply (e.g., 10 for 10%).

    Returns:
        float: The final price after applying the discount. Returns 0 if the original price is not positive.
    """
    if price > 0:
        # Apply the discount percentage to the original price
        final_price = price - (price * discount / 100)
        return final_price
    else:
        # Return 0 if the price is invalid (non-positive)
        return 0
```

## Task Description -5 (Documentation – Prompt Detail Impact Study)

### Code Used:

```
def  
    reverse_string(tex  
t): return text[::-1]
```

### Prompt - 1:

Write a short documentation comment explaining what this Python function does.

### Output - 1:




```
[12]  
✓ Os def reverse_string(text):  
    """  
    Reverses a given string.  
  
    Args:  
        text (str): The input string to be reversed.  
  
    Returns:  
        str: The reversed string.  
    """  
    return text[::-1]
```

### Prompt - 2:

Write a clear and detailed documentation comment for the given Python function.

### Output - 2:

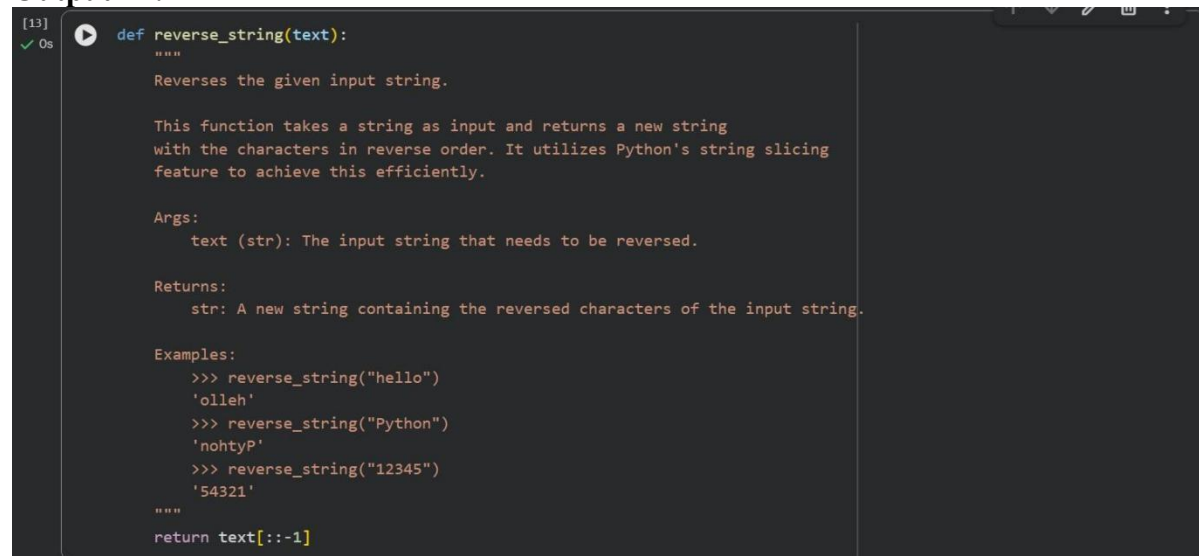

```
[13]  
✓ Os def reverse_string(text):  
    """  
    Reverses the given input string.  
  
    This function takes a string as input and returns a new string  
    with the characters in reverse order. It utilizes Python's string slicing  
    feature to achieve this efficiently.  
  
    Args:  
        text (str): The input string that needs to be reversed.  
  
    Returns:  
        str: A new string containing the reversed characters of the input string.  
  
    Examples:  
        >>> reverse_string("hello")  
        'olleh'  
        >>> reverse_string("Python")  
        'nohtyP'  
        >>> reverse_string("12345")  
        '54321'  
    """  
    return text[::-1]
```