

Assignment -4

SmartFarmer - IoT Enabled Smart Farming Application

Question-1:

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events. Upload document with wokwi share link and images of IBM cloud

CODE 1 :


```
#include <WiFi.h>
#include <PubSubClient.h> void callback(char* subscribetopic, byte* payload,
unsigned int payloadLength);
#define ORG "rf1z1n"
#define DEVICE_TYPE "esp32"
#define DEVICE_ID "12345"
#define TOKEN "12345678" String data3; char server[] = ORG
".messaging.internetofthings.ibmcloud.com"; char publishTopic[]
= "iot-2/evt/Data/fmt/json"; char subscribetopic[] = "iot-
2/cmd/test/fmt/String"; char authMethod[] = "use-token-auth";
char token[] = TOKEN; char clientId[] = "d:" ORG ":"
DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5; const int echoPin = 18; #define
SOUND_SPEED 0.034 long duration; float distance; void
setup() { Serial.begin(115200); pinMode(trigPin,
OUTPUT); pinMode(echoPin, INPUT); wificonnect();
mqttconnect();
} void
loop()
{
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW); duration
= pulseIn(echoPin, HIGH); distance =
duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance); if(distance<100)
{
Serial.println("ALERT!!"); delay(1000);
PublishData(distance);
delay(1000); if
(!client.loop()) {
mqttconnect();
} }
delay(1000);
}
void PublishData(float dist) { mqttconnect();
String payload = "{\"Distance\":\""; payload += dist;
payload += "\",\"ALERT!!\":\"\"Distance less than 100cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
```

```

Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
} }
void mqttconnect() { if
(!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(500); }
initManagedDevice();
Serial.println();
} }
void wificonnect()
{
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6); while
(WiFi.status() != WL_CONNECTED) {
delay(500); Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() {
if (client.subscribe(subscribetopic)) { Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
} }
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic); for (int i =
0; i < payloadLength; i++)
{
data3 += (char)payload[i];
}
Serial.println("data: "+ data3); data3="";
}

```

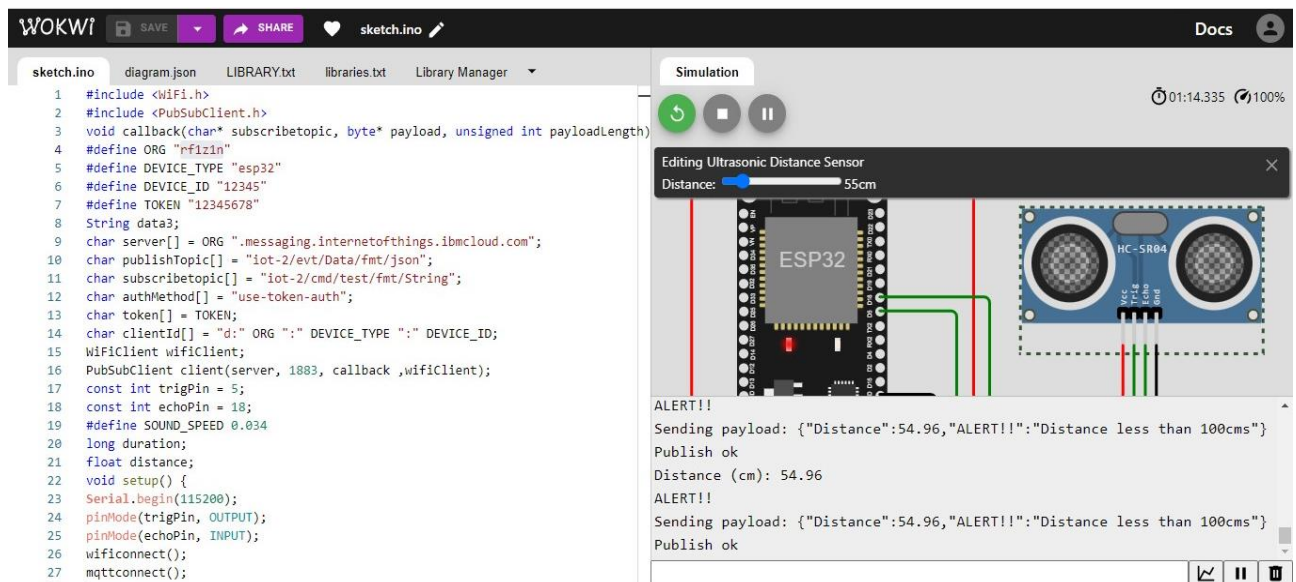

Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events.

Browse
Action
Device Types
Interfaces

Add Device +

Identity
Device Information
Recent Events
State
Logs
X

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
Data	{"Distance":54.96,"ALERT!!":"Distance less than ...	json	a few seconds ago
Data	{"Distance":54.96,"ALERT!!":"Distance less than ...	json	a few seconds ago
Data	{"Distance":54.96,"ALERT!!":"Distance less than ...	json	a few seconds ago
Data	{"Distance":54.96,"ALERT!!":"Distance less than ...	json	a few seconds ago
Data	{"Distance":54.96,"ALERT!!":"Distance less than ...	json	a few seconds ago