Capstone Project-2

Mobile Price Range Prediction

Akash Shankar Jadhav

Content :

Problem Statement

The problem statement is to predict the price range of mobile phones based on the features available (price range indicating how high the price is). Here is the description of target classes:

- 0 - Low cost Phones
- 1 - Medium cost phones
- 2 - High cost phones
- 3 - Very High cost phones

This will basically help companies to estimate price of mobiles to give tough competition to other mobile manufacturer.

Also, it will be useful for consumers to verify that they are paying best price for a mobile.

Data Summary :

- **Independent variables :**
- **Battery_power** - Total energy a battery can store in one time measured in mAh
- **Blue** - Has bluetooth or not
- **Clock_speed** - speed at which microprocessor executes instructions
- **Dual_sim** - Has dual sim support or not
- **Fc** - Front Camera mega pixels
- **Four_g** - Has 4G or not
- **Int_memory** - Internal Memory in Gigabytes
- **M_dep** - Mobile Depth in cm

Data Summary contd..

- **Mobile_wt** - Weight of mobile phone
- **N_cores** - Number of cores of processor
- **Pc** - Primary Camera mega pixels
- **Px_height** - Pixel Resolution Height
- **Px_width** - Pixel Resolution Width
- **Ram** - Random Access Memory in Mega Bytes
- **Sc_h** - Screen Height of mobile in cm
- **Sc_w** - Screen Width of mobile in cm
- **Talk_time** - longest time that a single battery charge will last when you are

Data Summary contd..

Three_g - Has 3G or not

Touch_screen - Has touch screen or not

Wifi - Has wifi or not

Dependent variables :

Price_range - This is the target variable with value of
0(low cost),
1(medium cost),
2(high cost)
and 3(very high cost).

EDA and Feature engineering
Relation Between Price Range & Ram

- This is a positive relationship, with increase in RAM, price too increases. There are 4 types of price range

- Type 1(low cost): RAM ranges between 216 to 1974 megabytes

- Type 2(medium cost): RAM ranges between 387 to 2811 megabytes

- Type 3(high cost): RAM ranges between 1185 to 3916 megabytes

- Type 4(very high cost): RAM ranges between 2255 to 4000 megabytes


Price Range Vs Ram
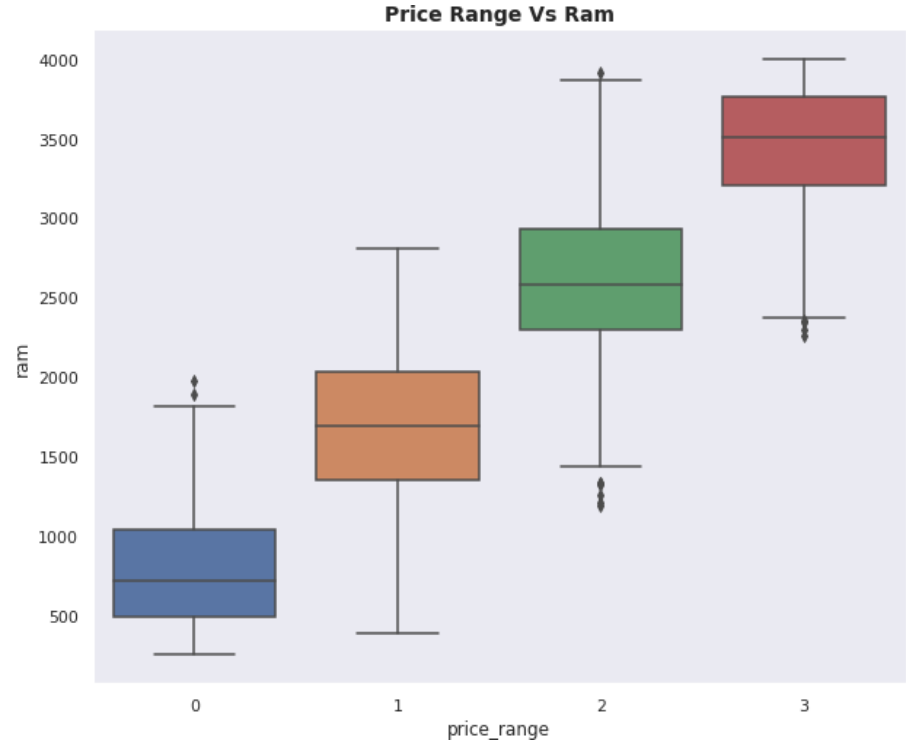
Relationship between the Price Range and Pixel Height/ Width

- From the above bar plot, we can see that the average pixel height and width are highest for the price range 3(very high cost).
- Low-cost phones have smaller average pixel width and pixel height.
- We can observe from this Bar plot that pixel height and pixel width are roughly equal in relevance when it comes to model development for prediction.
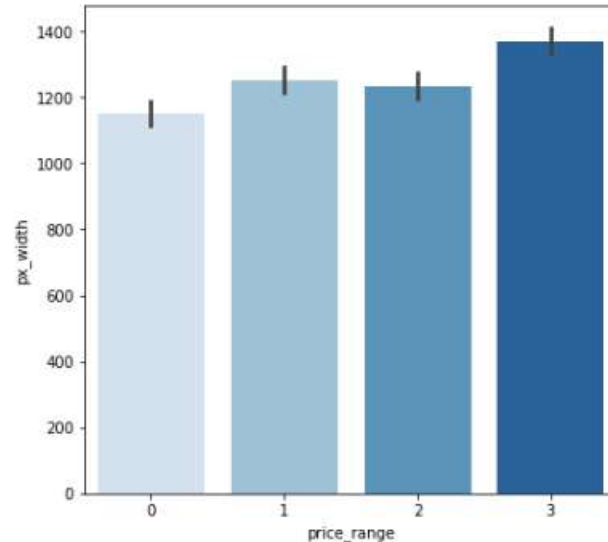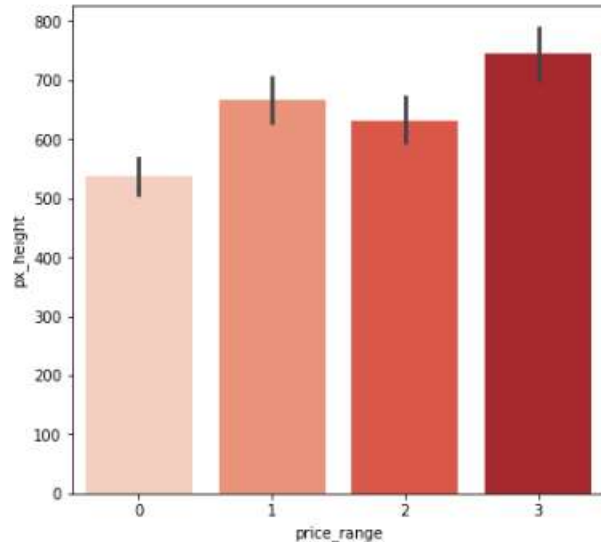
E D A contd..

- **3G-4G supported and Non-supported**
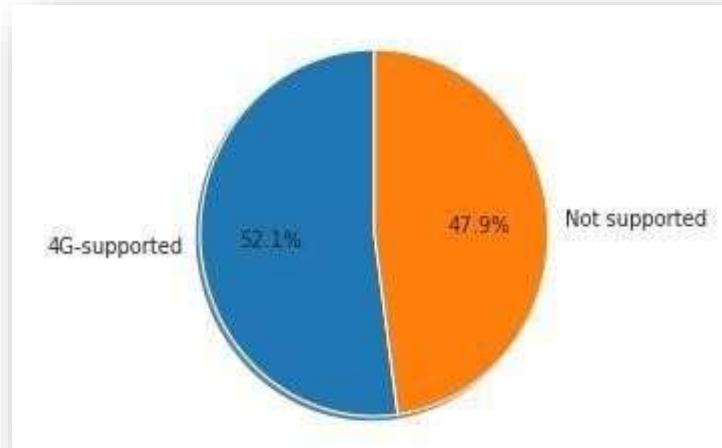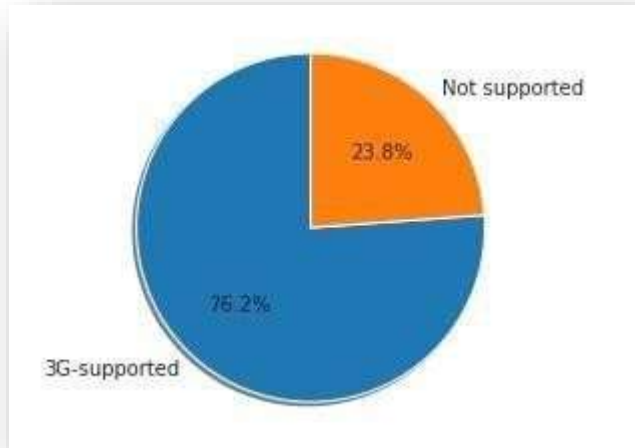
Multivariate analysis - int_memory, mobile_wt
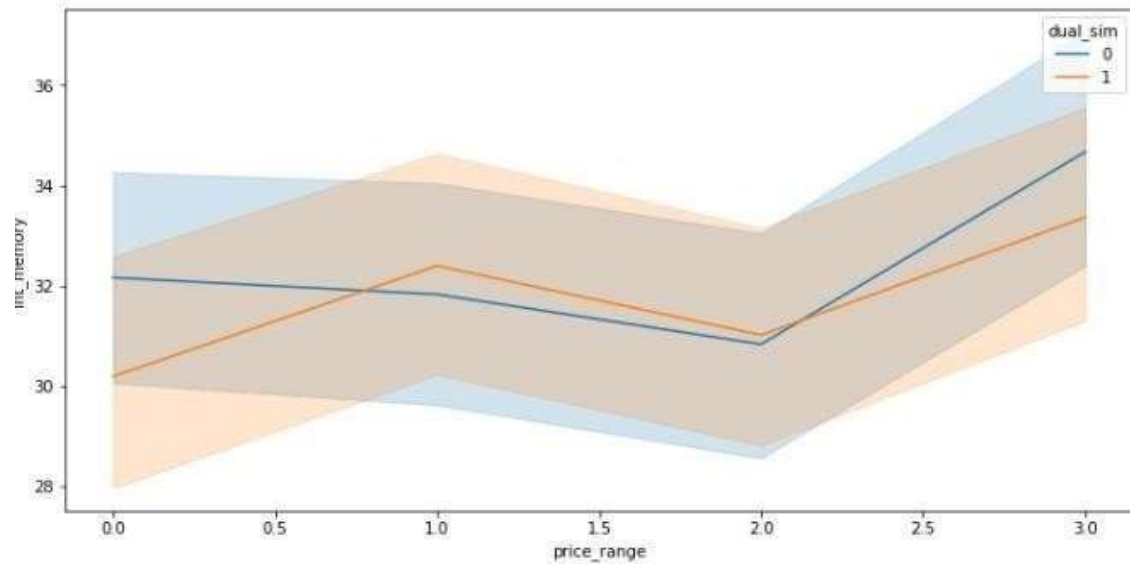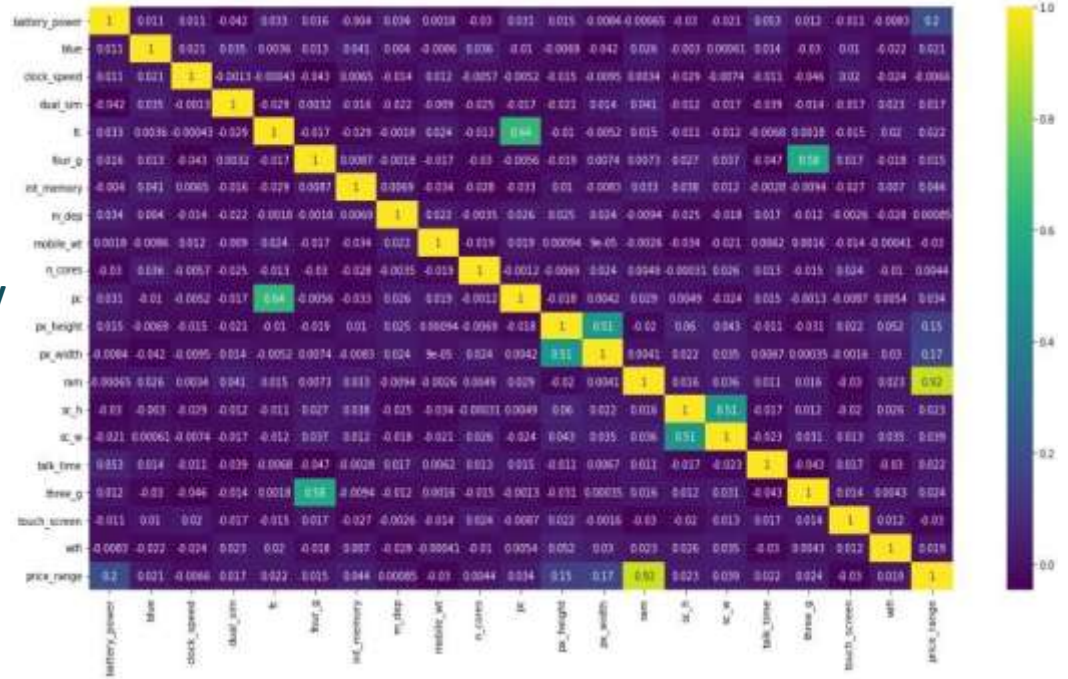

- There is drastic increase in internal memory for vey high prices.
- Also there is drastic Decrease in mobile weight for very high price.

Multivariate analysis

- **Pc is correlated with Fc.**

- **px_height and px_width are moderately correlated.**

- **Sc_h and sc_w are moderately correlated.**

- **Ram is highly correlated with price_range.**

Preparing dataset for modeling

Task : multiclass classification

Train set : (1340 , 20)

Test set : (660 , 20)

Response : 0-1-2-3

battery_power	blue	clock_speed	dual_sim	fc	four_g	int_memory	m_dep	mobile_wt	n_cores	pc	px_height
842	0	2.2	0	1	0	7	0.6	188	2	2	20
1021	1	0.5	1	0	1	53	0.7	136	3	6	905
563	1	0.5	1	2	1	41	0.9	145	5	6	1263
615	1	2.5	0	0	0	10	0.8	131	6	9	1216
1821	1	1.2	0	13	1	44	0.6	141	2	14	1208
1859	0	0.5	1	3	0	22	0.7	164	1	7	1004
1821	0	1.7	0	4	1	10	0.8	139	8	10	381
1954	0	0.5	1	0	0	24	0.8	187	4	0	512
1445	1	0.5	0	0	0	53	0.7	174	7	14	386
509	1	0.6	1	2	1	9	0.1	93	5	15	1137
769	1	2.9	1	0	0	9	0.1	182	5	1	248
1520	1	2.2	0	5	1	33	0.5	177	8	18	151
1815	0	2.8	0	2	0	33	0.6	159	4	17	607

Applying Model

Implementing KNeighbours Classifier

TPR(True Positive rate)
**= TP/(TP+FN)**

FPR(False Positive rate)
= FP/(FP+TN)

Knn Multiclass ROC curve
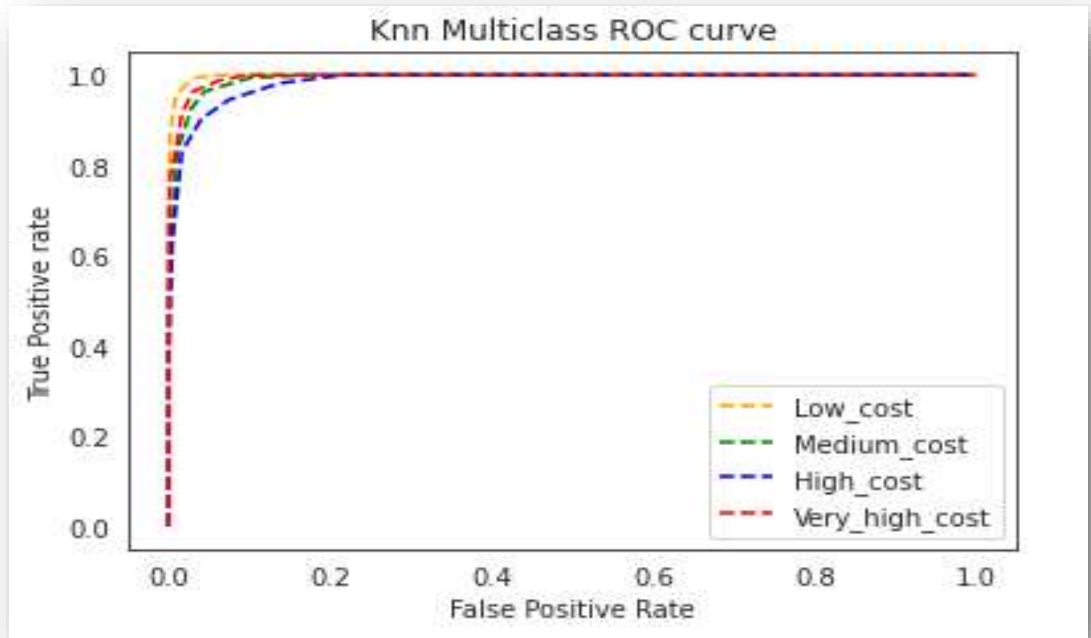
Implementing KNeighbours Classifier contd.

Train metrics

	precision	recall	f1-score	support
0	0.98	0.96	0.97	228
1	0.93	0.96	0.94	212
2	0.93	0.93	0.93	229
3	0.96	0.95	0.96	228
accuracy			0.95	897
macro avg	0.95	0.95	0.95	897
weighted avg	0.95	0.95	0.95	897

Test metrics

	precision	recall	f1-score	support
0	0.96	0.96	0.96	165
1	0.92	0.93	0.92	165
2	0.88	0.90	0.89	165
3	0.95	0.92	0.93	165
accuracy			0.93	660
macro avg	0.93	0.93	0.93	660
weighted avg	0.93	0.93	0.93	660

Confusion Matrix

Confusion Matrix
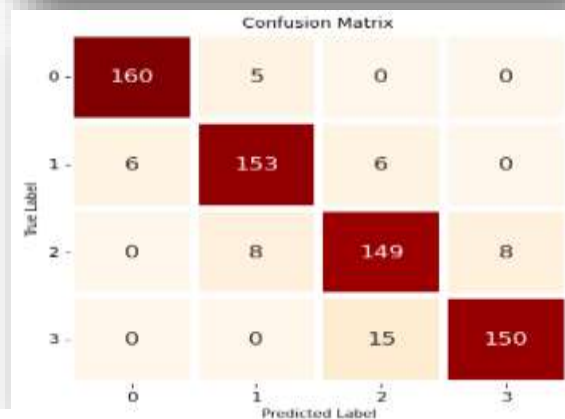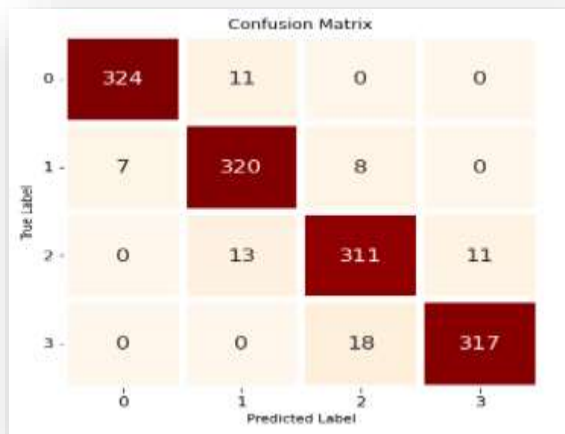
Implementing Random Forest Classifier

Train metrics

	precision	recall	f1-score	support
0	0.90	0.95	0.93	335
1	0.77	0.78	0.77	335
2	0.82	0.72	0.77	335
3	0.91	0.96	0.93	335
accuracy			0.85	1340
macro avg	0.85	0.85	0.85	1340
weighted avg	0.85	0.85	0.85	1340

Test metrics

	precision	recall	f1-score	support
0	0.92	0.93	0.92	165
1	0.71	0.76	0.74	165
2	0.74	0.59	0.66	165
3	0.85	0.95	0.89	165
accuracy			0.81	660
macro avg	0.80	0.81	0.80	660
weighted avg	0.80	0.81	0.80	660

Confusion Matrix

Confusion Matrix
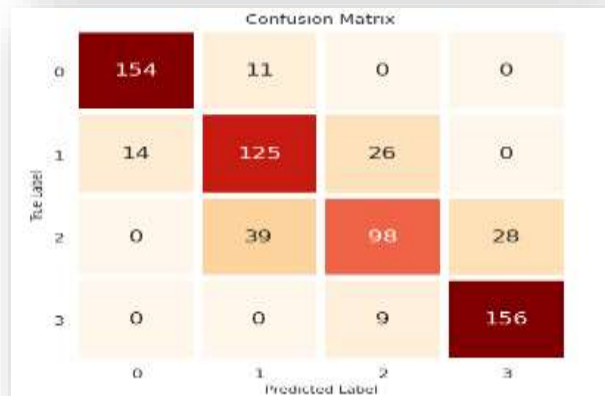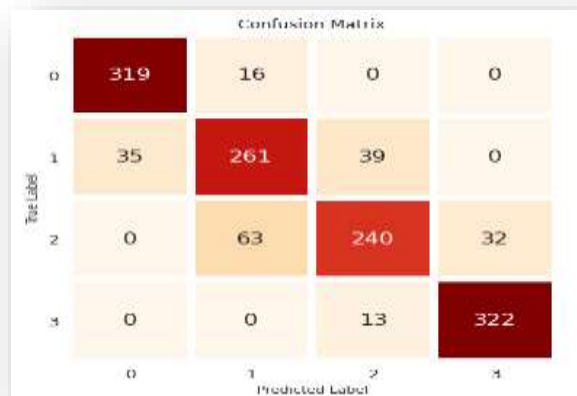
Implementing Gradient Boosting Classifier

Train metrics

```
Classification Report
              precision    recall  f1-score   support

           0       0.91      0.94      0.93       107
           1       0.85      0.86      0.86       123
           2       0.86      0.83      0.85       106
           3       0.94      0.93      0.94       107

    accuracy                           0.89       443
   macro avg       0.89      0.89      0.89       443
weighted avg       0.89      0.89      0.89       443
```
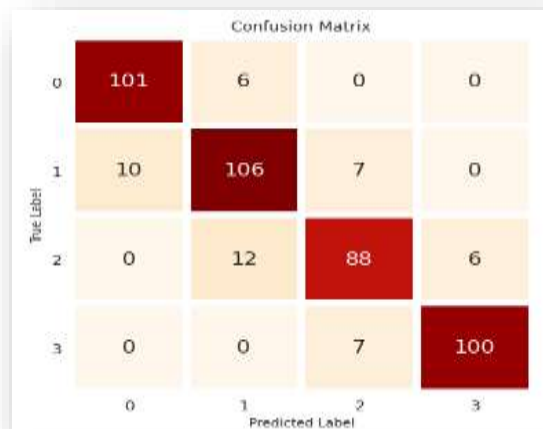
Test metrics

```
Classification Report
              precision    recall  f1-score   support

           0       0.92      0.96      0.94       107
           1       0.88      0.85      0.86       123
           2       0.80      0.76      0.78       106
           3       0.88      0.92      0.89       107

    accuracy                           0.87       443
   macro avg       0.87      0.87      0.87       443
weighted avg       0.87      0.87      0.87       443
```


Confusion Matrix

Confusion Matrix

Implementing XGBClassifier

Train metrics

```
Classification Report
              precision    recall  f1-score   support

           0       0.92      0.97      0.95       107
           1       0.92      0.88      0.90       123
           2       0.87      0.85      0.86       106
           3       0.92      0.93      0.93       107

    accuracy                           0.91       443
   macro avg       0.91      0.91      0.91       443
weighted avg       0.91      0.91      0.91       443
```
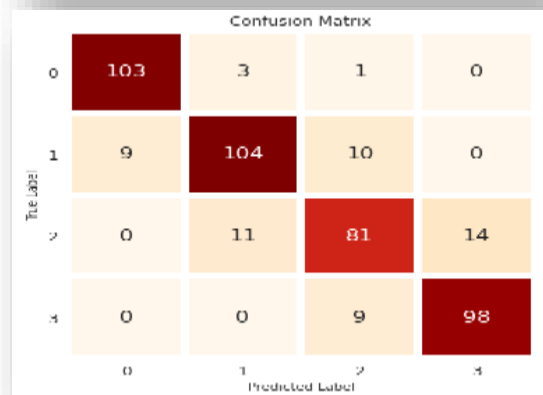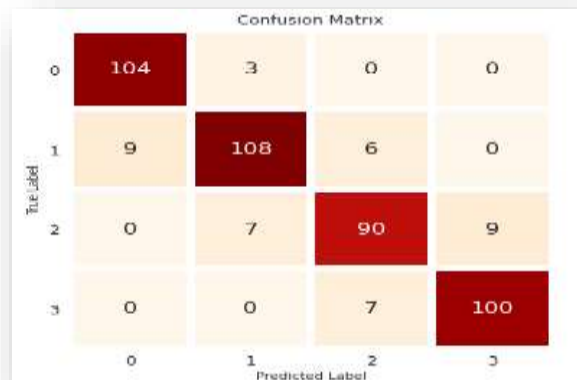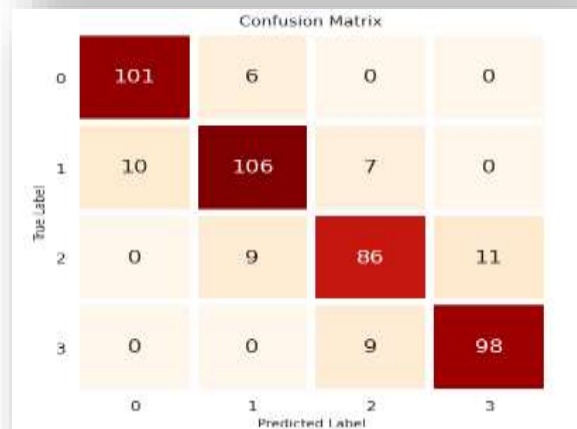
Test metrics

```
Classification Report
              precision    recall  f1-score   support

           0       0.91      0.94      0.93       107
           1       0.88      0.86      0.87       123
           2       0.84      0.81      0.83       106
           3       0.90      0.92      0.91       107

    accuracy                           0.88       443
   macro avg       0.88      0.88      0.88       443
weighted avg       0.88      0.88      0.88       443
```


Confusion Matrix

Confusion Matrix

Implementing Logistic regression

Train metrics

	precision	recall	f1-score	support
0	0.90	0.88	0.89	228
1	0.70	0.71	0.70	212
2	0.72	0.67	0.70	229
3	0.85	0.90	0.87	228
accuracy			0.79	897
macro avg	0.79	0.79	0.79	897
weighted avg	0.79	0.79	0.79	897

Test metrics

	precision	recall	f1-score	support
0	0.88	0.82	0.85	165
1	0.60	0.57	0.59	165
2	0.58	0.63	0.60	165
3	0.83	0.85	0.84	165
accuracy			0.72	660
macro avg	0.72	0.72	0.72	660
weighted avg	0.72	0.72	0.72	660

Confusion Matrix

Confusion Matrix
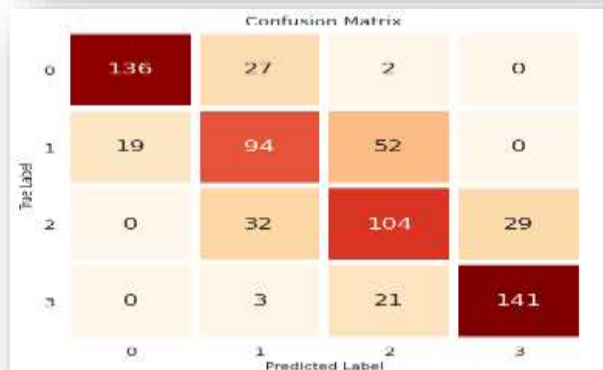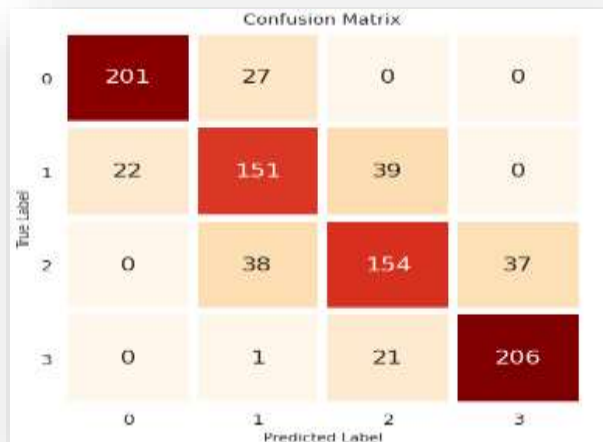
Model Validation & Selection contd…

Observations :

1. As seen in the above slides Random forest classifier is not giving great results , GradientBoostingClassifier is bit better than Random forest in recall and precision

2. XGboost classifier is giving the better results than GB but the recall of random forest classifier is somewhat similar

3. KNeighbors is giving the best results among all of the algorithms

4. Logistic regression is giving low results among all of them

Model Validation & Selection contd…

So we had chosen Kneighbors classifier for the prediction and the best hyperparameters obtained are as below

Best hyperparameters :
Train : (algorithm='auto', leaf_size=30, metric='Euclidean', metric_params=None, n_jobs=None, n_neighbors=11, p=2, weights='distance')

Test : (algorithm='auto', leaf_size=30, metric='euclidean', metric_params=None, n_jobs=None, n_neighbors=17, p=2, weights='distance')
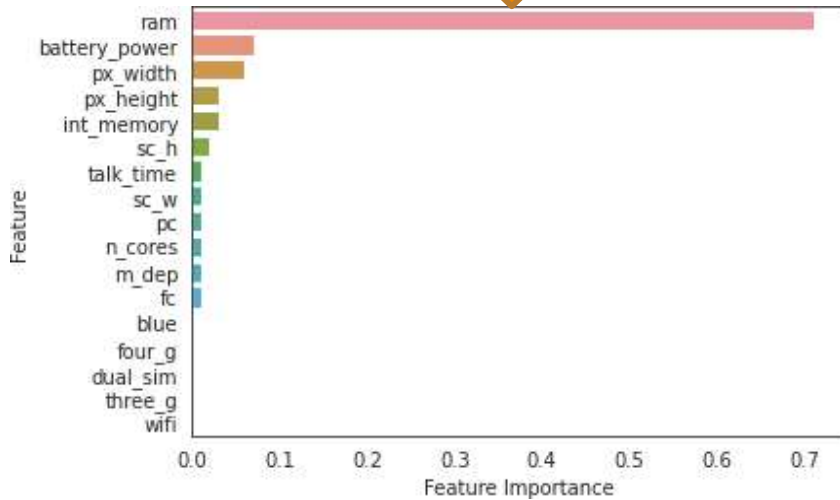
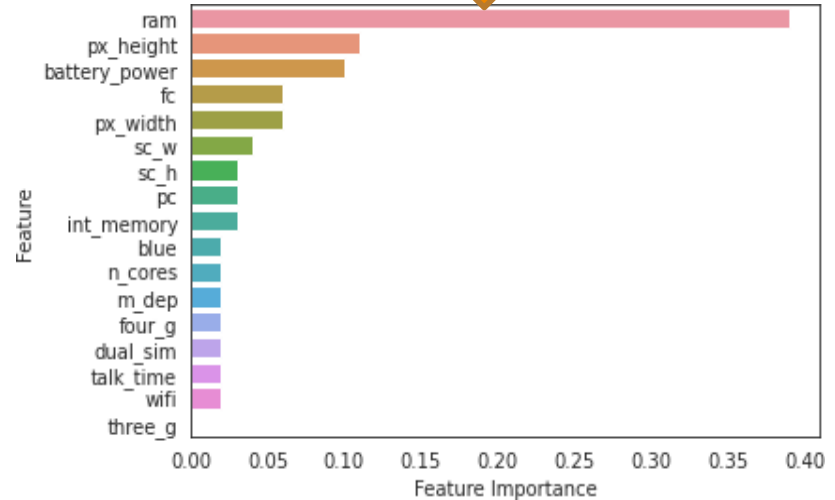# Model Validation & Selection(Hyperparamter tuned)
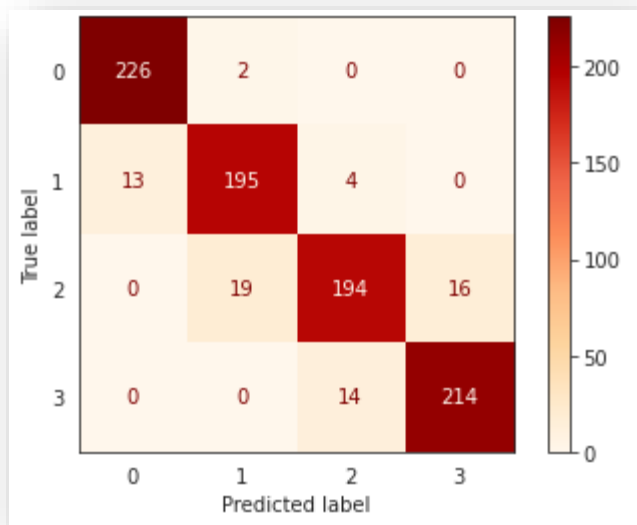
	precision	recall	f1-score	support
0	0.95	0.99	0.97	228
1	0.90	0.92	0.91	212
2	0.92	0.85	0.88	229
3	0.93	0.94	0.93	228
accuracy			0.92	897
macro avg	0.92	0.92	0.92	897
weighted avg	0.92	0.92	0.92	897

Feature Importance

Random Forest Classifier

XGBoost Classifier

Conclusion

➢ Ram , Battery_power features were found to be the most relevant features for predicting price range of mobiles and dropping negative correlation features which are clock speed , mobile_wt , touch_screen

➢ Kneighbors and Xgboost are given best accuracy score 95% test ,93% train and 91% train , 88% test respectively and roc_auc score for kneighbors is 99%

➢ Tuning the hyperparameters by GridSearchCV on kneighbors but not getting much difference in results but the best parameters n_neighbors for train and test are 11and 17

➢ So we conclude that kneighbors classifier is giving the best results for these dataset

➢ So we can say that in the price range prediction as the ram and battery_power increases the price range will increase for sure