

# SENDING DATA FROM RASPBERRY-PI TO IBM WATSON

<b>Date</b>	3 NOVEMBER 2022
<b>Team ID</b>	PNT2022TMID42496
<b>Project Name</b>	GAS LEAKAGE MONITORING AND ALERTING SYSTEM FOR INDUSTRIES

## AIM:

To send sensor data (or any dummy data) from Raspberry –Pi to IBM Watson .In our case it is DHT sensors Data.

## REQUIREMENTS:

### HARDWARE:

- RASPBERRY-PI (3B)(WITH ETHERNET CABLE OR WIFI CONNECTED)
- USB MOUSE
- USB KEYBOARD
- VGA TO HDMI CABLE
- A MONITOR
- RASPBERRY’S POWER SUPPLY
- DHT-11 Sensor ○ Connecting Wires


### SOFTWARE:

- IBM BLUEMIX ACCOUNT

## STEPS TO BE FOLLOWED

### Step-1: Create a device in IBM Watson:

- Firstly, login into your IBM-Bluemix account with your e-mail ID and Password.

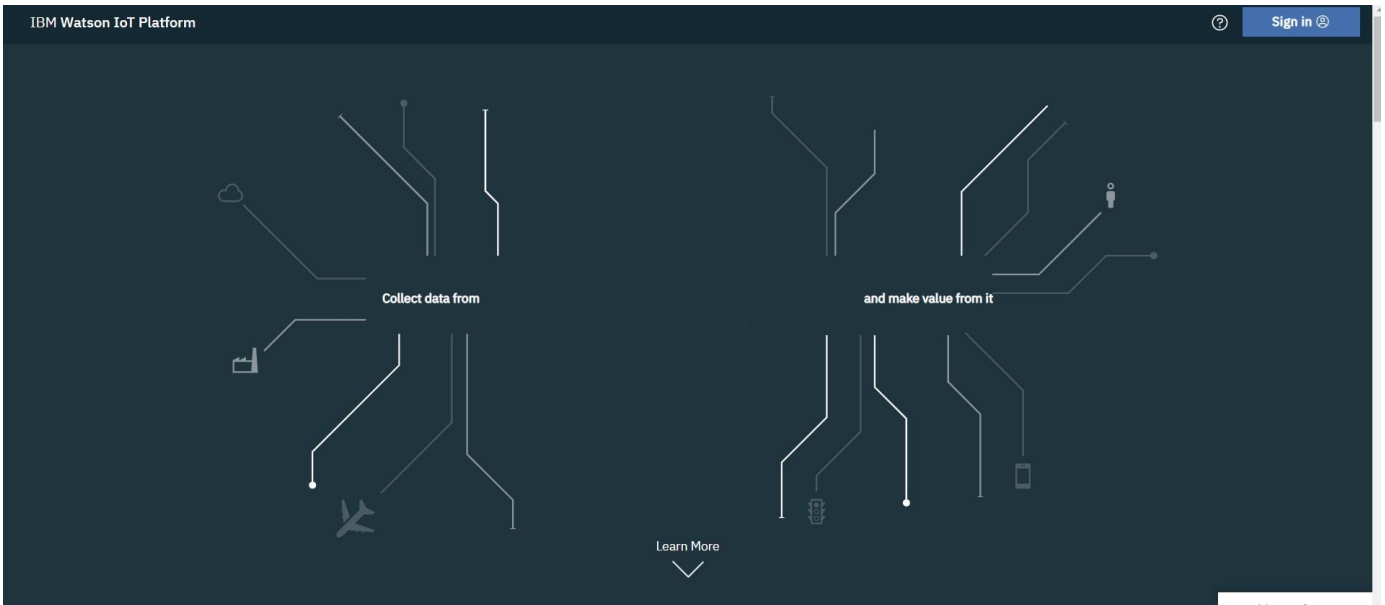

IBM

## Log in to IBM

IBMid


[Forgot IBMid?](#)

☒ Remember me ⓘ


Continue →

Don't have an account? [Create an IBMid](#)

Need help? [Contact the IBMid help desk](#)

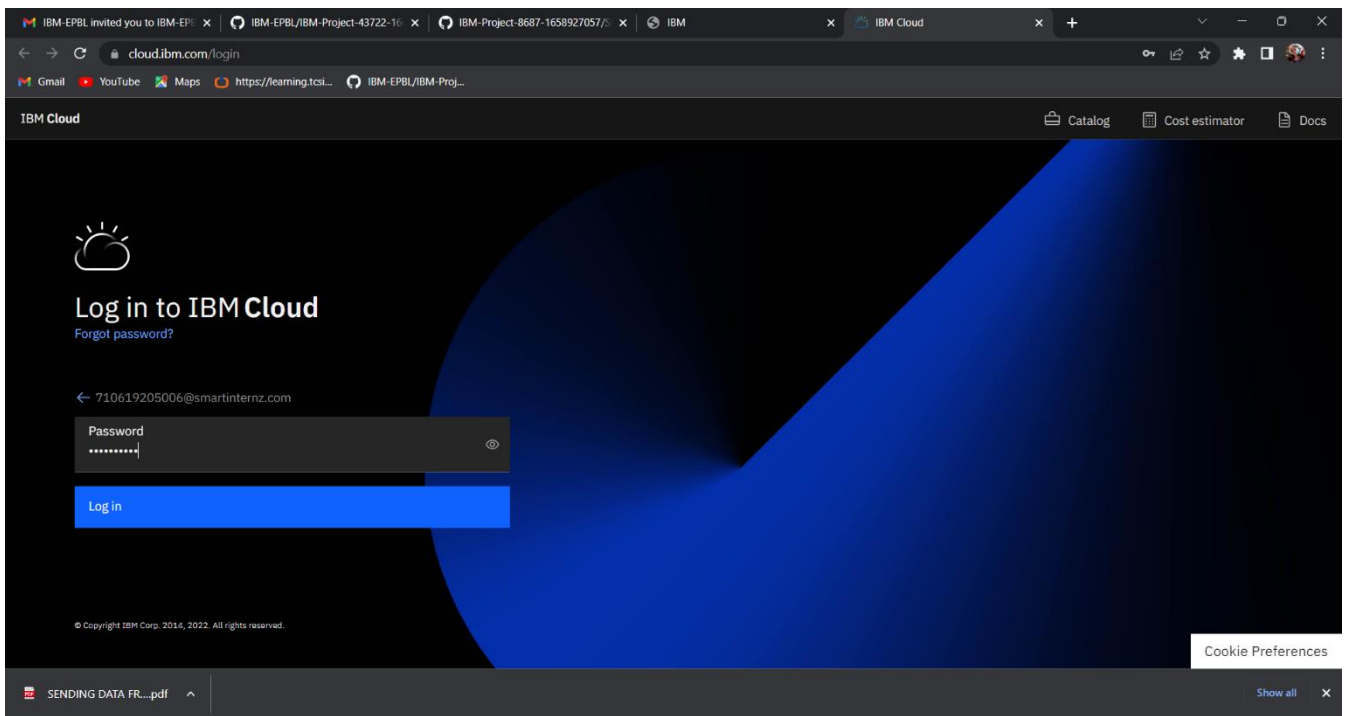

- Click on catalog on your dashboard screen, then under platform go IoT.

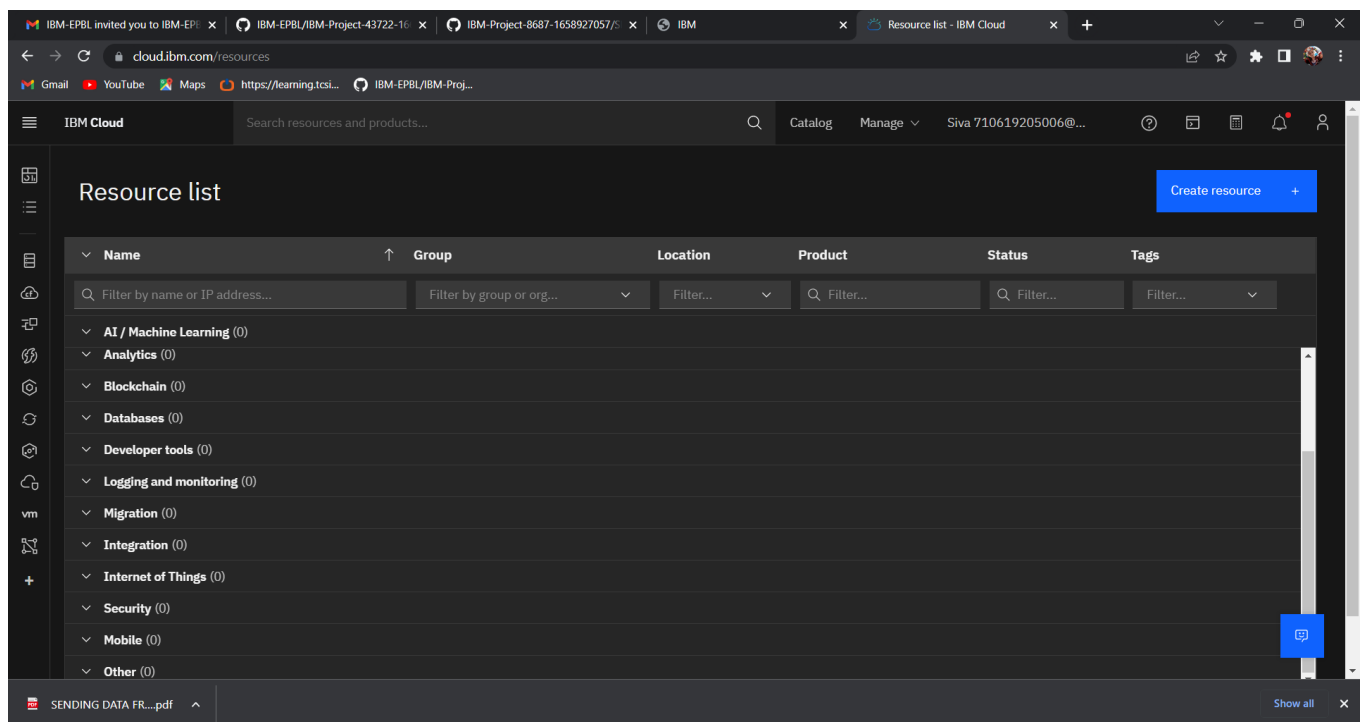

○ Check all details and click on create.

The screenshot shows the 'Internet of Things Platform' creation page in the IBM Cloud console. On the left, a sidebar lists service details: Type (Service), Provider (IBM), Last updated (08/15/2022), Category (Internet of Things), Compliance (IAM-enabled), and Location (Frankfurt). The main content area has two tabs: 'Create' (active) and 'About'. Under 'Create', there's a 'Select a location' dropdown set to 'Frankfurt (eu-de)' and a 'Select a pricing plan' section. A table lists two plans: 'Lite' (Free, includes up to 500 devices and 200 MB data) and 'Standard' (not fully visible). A 'Create' button is prominent. On the right, a 'Summary' panel shows the plan details and a checkbox for license agreements, with an 'Add to estimate' button below.

Catalog /

## Internet of Things Platform

This service is the hub of all things IBM IoT, it is where you can set up and manage your connected devices so that your apps can access their live and historical data.

**Create** About

Type Service

Provider IBM

Last updated 08/15/2022

Category Internet of Things

Compliance IAM-enabled

Location Frankfurt

Select a location

Frankfurt (eu-de)

Select a pricing plan

Displayed prices do not include tax. Monthly prices shown are for country or location: [United States](#)

Plan	Features	Pricing
Lite	Includes up to 500 registered devices, and a maximum of 200 MB of each data metric Maximum of 500 registered devices	Free

**Summary**

**Internet of Things Platform** Free

Location: Frankfurt

Plan: Lite

Service name: Internet of Things Platform-0g

Resource group: Default

☒ I have read and agree to the following license agreements: [Terms](#)

Create

Add to estimate

○ click on Launch

The screenshot shows the 'Internet of Things Platform-0g' dashboard. The top bar includes 'Resource list /', the resource name, status (Active), and tags. A left sidebar has 'Manage' (selected), 'Plan', and 'Connections'. The main area features a large IoT icon and a 'Let's get started with IBM Watson IoT Platform' section with 'Launch' and 'Docs' buttons. Below this, a 'Ready for the next level?' section shows the 'IBM Watson IoT Platform Journey' with 'Lite' (selected) and 'Non-Production' options. A chat icon is in the bottom right corner.

Resource list /

## Internet of Things Platform-0g

Active Add tags

Details Actions...

**Manage**

Plan

Connections

Let's get started with IBM Watson IoT Platform

Securely connect, control, and manage devices. Quickly build IoT applications that analyze data from the physical world.

Launch Docs


Ready for the next level?

IBM Watson IoT Platform Journey


☒ Lite ☐ Non-Production

Dashboard of IBM Watson IoT platform,

○ Click on Add device

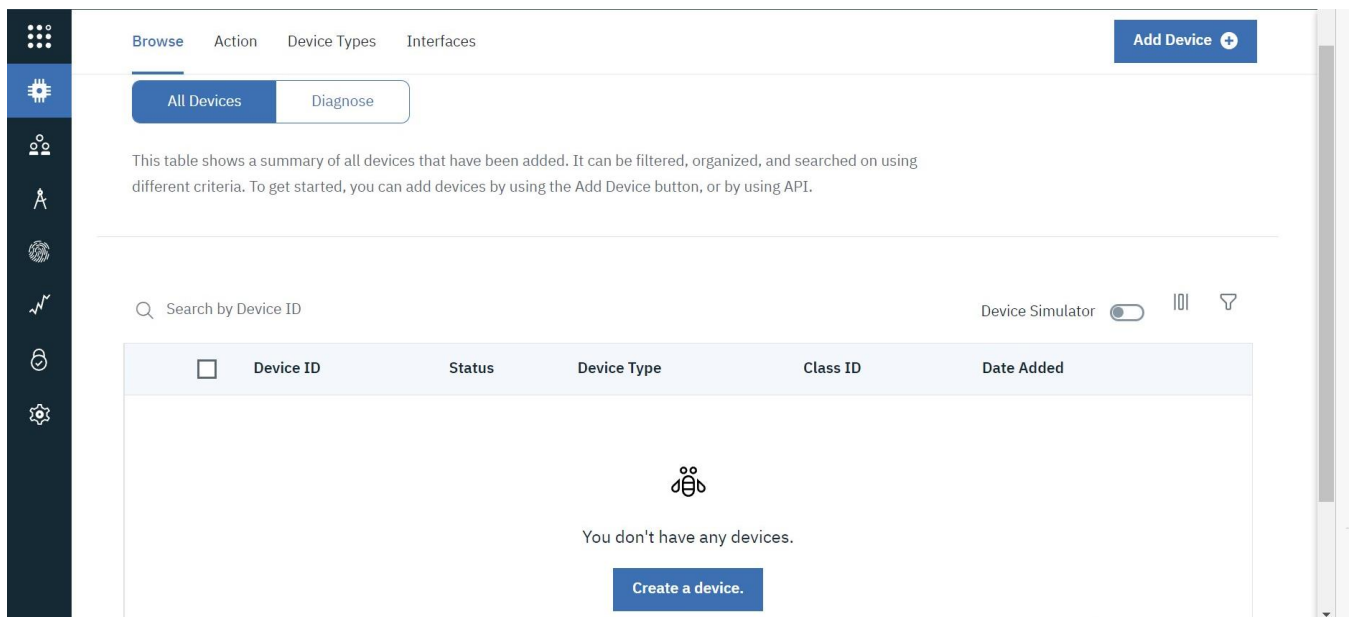

- After click on Add device this page will open

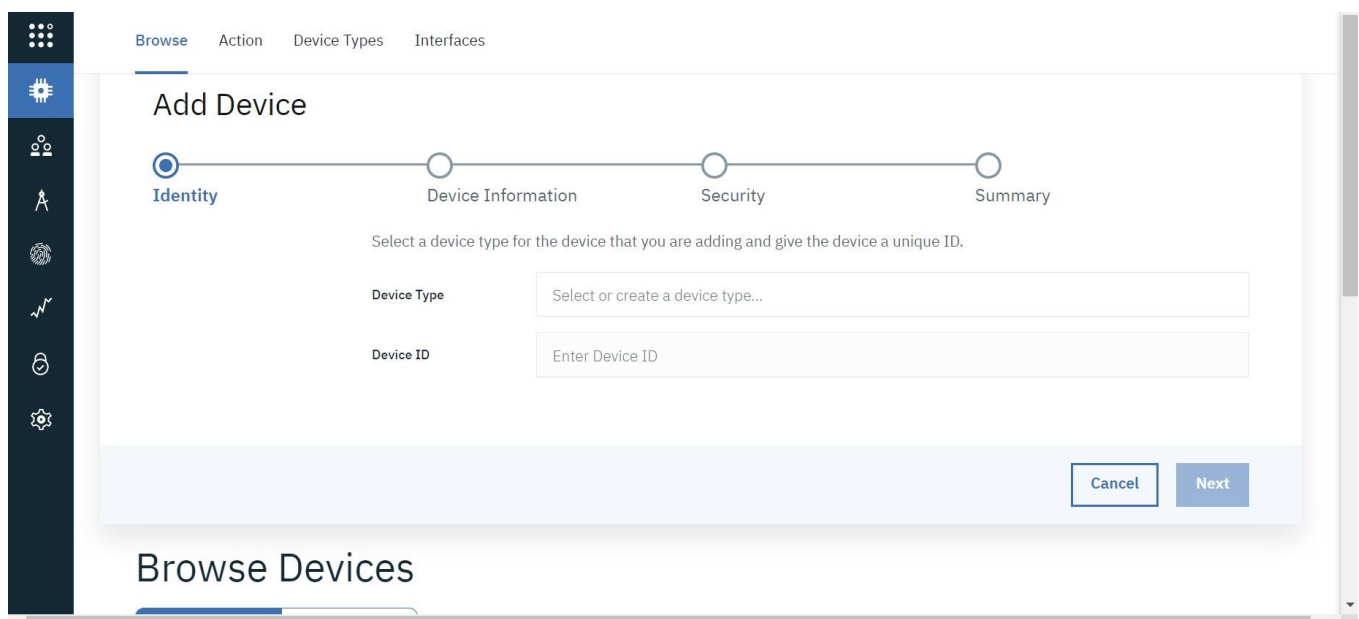

- Go to device type and fill the details.



## Register Device.


Browse Action **Device Types** Interfaces

Optional

### Register Devices, Define Interfaces

Now that you added a device type, you can register and connect devices for this type.

Register Devices



Cancel Next

- Choose the device and give device ID and then click on next.

Browse Action Device Types Interfaces

### Add Device

Identity Device Information Security Summary

Select a device type for the device that you are adding and give the device a unique ID.

Device Type Nagarajan

Device ID 12345

Cancel Next

### Browse Devices

All Devices Diagnose

## Click on Next

The screenshot shows the 'Add Device' form with the 'Device Information' step selected. The form includes a progress bar with four steps: Identity, Device Information, Security, and Summary. Below the progress bar, a message states: 'You can modify the default device information and enter more information about the device for identification purposes.' The form contains several input fields: 'Serial Number', 'Model', 'Description', 'Hardware Version', 'Manufacturer', 'Device Class', 'Firmware Version', and 'Descriptive Location'. Each field has a placeholder text 'Enter [field name]'. At the bottom left, there is a button labeled 'Add Metadata' with a plus icon.

**Add Device**

Identity Device Information Security Summary

You can modify the default device information and enter more information about the device for identification purposes.

Serial Number Enter Serial Number

Model Enter Model

Description Enter Description

Hardware Version Enter Hardware Version

Manufacturer Enter Manufacturer

Device Class Enter Device Class

Firmware Version Enter Firmware Version

Descriptive Location Enter Descriptive Location

Add Metadata +

## Click on Next

The screenshot shows the 'Add Device' form with the 'Security' step selected. The form includes a progress bar with four steps: Identity, Device Information, Security, and Summary. Below the progress bar, a message states: 'There are two options for selecting a device authentication token.' The form is divided into two columns. The left column is titled 'Auto-generated authentication token (default)' and contains text explaining that the service will generate an 18-character token. The right column is titled 'Self-provided authentication token' and contains text explaining that the user must provide their own token. At the bottom, there is an input field labeled 'Authentication Token' with a placeholder 'Enter an optional token' and an information icon. Below the input field, a message states: 'Make a note of the generated token. Lost authentication tokens cannot be recovered. Tokens are encrypted before being stored.' and 'Authentication token are encrypted before we store them.'

**Add Device**

Identity Device Information Security Summary

There are two options for selecting a device authentication token.

**Auto-generated authentication token (default)**

Allow the service to generate an authentication token for you. Tokens are 18 characters and contain a mix of alphanumeric characters and symbols. The token is returned to you at the end of the device registration process.

**Self-provided authentication token**

Provide your own authentication token for this device. The token must be between 8 and 36 characters and contain a mix lowercase and uppercase letters, numbers, and symbols, which can include hyphens, underscores, and periods. Do not use repeated characters, dictionary words, user names, or other predefined sequences.

Authentication Token Enter an optional token ⓘ

Make a note of the generated token. Lost authentication tokens cannot be recovered. Tokens are encrypted before being stored.

Authentication token are encrypted before we store them.

Finish



Browse

Action

Device Types

Interfaces

Add Device

✓

Identity

✓

Device Information

✓

Security

○

Summary

Verify that the following information is correct then select Finish

Device Type

Nagarajan

Device ID

12345

View Metadata

Security Token

To be generated

Back

Finish

○ Device is created

Browse

Action

Device Types

Interfaces

Add Device

Browse Devices

All Devices

Diagnose

This table shows a summary of all devices that have been added. It can be filtered, organized, and searched on using different criteria. To get started, you can add devices by using the Add Device button, or by using API.

Search by Device ID

Device Simulator

<input type="checkbox"/>	Device ID	Status	Device Type	Class ID	Date Added	Descriptive Location
>	<input type="checkbox"/> 12345	Disconnected	Nagarajan	Device	Oct 31, 2022 11:38 AM	

Items per page 50

1 of 1 page

<

1

>

1 Simulation running

Activate Windows  
Go to Settings to activate Windows.

## STEP-2: INSTALLING NECESSARY PACKAGES ON YOUR PI:

- Now we are going to install necessary packages on your pi.
- Open your terminal in your pi and type the following commands
- `curl -LO https://github.com/ibm-messaging/iot-raspberrypi/releases/download/1.0.2.1/iot_1.0-2_armhf.deb`
- `sudo dpkg -i iot_1.0-2_armhf.deb`
- `service iot status`

Following are the images as to what appears on your pi's terminal when u type these commands

```
File Edit Tabs Help
--2017-10-23 06:55:22-- http://ftp.nl.debian.org/debian/pool/main/o/openssl/libssl1.0.0_1.0.1t-1-deb8u6_armhf.deb
Resolving ftp.nl.debian.org (ftp.nl.debian.org)... 130.89.149.21, 2001:67c:2564:a120::21
Connecting to ftp.nl.debian.org (ftp.nl.debian.org)[130.89.149.21]:80... connect
ed.
HTTP request sent, awaiting response... 200 OK
Length: 867950 (848K) [application/x-debian-package]
Saving to: 'libssl1.0.0_1.0.1t-1-deb8u6_armhf.deb'

libssl1.0.0_1.0.1t-100%[=====] 847.61K  358KB/s   in 2.4s

2017-10-23 06:55:25 (358 KB/s) - 'libssl1.0.0_1.0.1t-1-deb8u6_armhf.deb' saved [
867950/867950]

pi@raspberrypi:~$ sudo dpkg -i libssl1.0.0_1.0.1t-1-deb8u6_armhf.deb
Selecting previously unselected package libssl1.0.0:armhf.
(Reading database ... 115606 files and directories currently installed.)
Preparing to unpack libssl1.0.0_1.0.1t-1-deb8u6_armhf.deb ...
Unpacking libssl1.0.0:armhf (1.0.1t-1-deb8u6) ...
Setting up libssl1.0.0:armhf (1.0.1t-1-deb8u6) ...
pi@raspberrypi:~$ curl -LO https://github.com/ibm-messaging/iot-raspberrypi/rele
ases/download/1.0.2.1/iot_1.0-2_armhf.deb
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left   Speed
100 164    0 164    0  157    0 --:--:--  0:00:01 --:--:--  157
100 609    0 609    0  457    0 --:--:--  0:00:01 --:--:--  457
100 110k 100 110k  0  29117  0  0:00:03  0:00:03 --:--:-- 48190
pi@raspberrypi:~$ sudo dpkg -i iot_1.0-2_armhf.deb
(Reading database ... 115626 files and directories currently installed.)
Preparing to unpack iot_1.0-2_armhf.deb ...
Unpacking iot (1.0-1) over (1.0-1) ...
Setting up iot (1.0-1) ...
Processing triggers for systemd (232-25+deb9u1) ...
pi@raspberrypi:~$ service iot status
* iot.service: LSB: IoT service
   Loaded: loaded (/etc/init.d/iot; generated; vendor preset: enabled)
   Active: active (running) since Mon 2017-10-23 06:56:25 UTC; 17s ago
     Docs: man:systemd-sysv-generator(8)
    Group: /system.slice/iot.service
    CGroup: /-2562/opt/iot/iot /dev/null

Oct 23 06:56:24 raspberrypi systemd[1]: Starting LSB: IoT service...
Oct 23 06:56:24 raspberrypi iot[2567]: Starting the iot program
Oct 23 06:56:25 raspberrypi iot[2562]: **** IoT Raspberry Pi Sample has started ****
Oct 23 06:56:25 raspberrypi iot[2562]: Config file not found. Going to Quickstart mode
Oct 23 06:56:25 raspberrypi iot[2562]: Running in Quickstart mode
Oct 23 06:56:25 raspberrypi systemd[1]: Started LSB: IoT service
```

- Then open your terminal and type `pip install ibmiotf`


```
File Edit Tabs Help
pi@raspberrypi:~$ pip install ibmiotf
Collecting ibmiotf
  Downloading ibmiotf-0.3.0.tar.gz (58kB)
    100% |#####| 61kB 510KB/s
Collecting dicttoxml>=1.7.4 (from ibmiotf)
  Downloading dicttoxml-1.7.4.tar.gz
Collecting iso8601>=0.1.10 (from ibmiotf)
  Downloading iso8601-0.1.12-py2.py3-none-any.whl
Collecting paho-mqtt>=1.2 (from ibmiotf)
  Downloading paho-mqtt-1.3.1.tar.gz (80kB)
    100% |#####| 81kB 916KB/s
Collecting pytz>=2014.7 (from ibmiotf)
Using cached pytz-2017.2-py2.py3-none-any.whl
Collecting requests>=2.5.0 (from ibmiotf)
  Downloading requests-2.18.4-py2.py3-none-any.whl (88kB)
    100% |#####| 92kB 1.0MB/s
Collecting requests-toolbelt>=0.7.0 (from ibmiotf)
  Downloading requests-toolbelt-0.8.0-py2.py3-none-any.whl (54kB)
    100% |#####| 61kB 1.0MB/s
Collecting xmldict>=0.10.2 (from ibmiotf)
  Downloading xmldict-0.11.0-py2.py3-none-any.whl
Collecting urllib3<1.23,>=1.21.1 (from requests>=2.5.0->ibmiotf)
  Downloading urllib3-1.22-py2.py3-none-any.whl (122kB)
    100% |#####| 13kB 1.4MB/s
Collecting idna<2.7,>=2.5 (from requests>=2.5.0->ibmiotf)
  Downloading idna-2.6-py2.py3-none-any.whl (56kB)
    100% |#####| 61kB 1.7MB/s
Collecting chardet<3.1.0,>=3.0.2 (from requests>=2.5.0->ibmiotf)
  Downloading chardet-3.0.4-py2.py3-none-any.whl (133kB)
    100% |#####| 14kB 1.0MB/s
Collecting certifi>=2017.4.17 (from requests>=2.5.0->ibmiotf)
Using cached certifi-2017.7.27.1-py2.py3-none-any.whl
Building wheels for collected packages: ibmiotf, dicttoxml, paho-mqtt
Running setup.py bdist_wheel for ibmiotf ... done
Stored in directory: /home/pi/.cache/pip/wheels/f9/45/bbc33ad957e2f7b71ba80e316d65a839d735a0d12e0c0418
Running setup.py bdist_wheel for dicttoxml ... done
Stored in directory: /home/pi/.cache/pip/wheels/45/62/59/96910b33ec6a7b2ae66a13765401b50def5468024078e12cce
Running setup.py bdist_wheel for paho-mqtt ... done
Stored in directory: /home/pi/.cache/pip/wheels/20/08/0d/acdc8f289011b7be7de71deebef0642f083be0313dff0493
Successfully built ibmiotf dicttoxml paho-mqtt
Installing collected packages: dicttoxml, iso8601, paho-mqtt, pytz, urllib3, idna, chardet, certifi, requests, requests-toolbelt, xmldict, ibmiotf
Successfully installed certifi-2017.7.27.1 chardet-3.0.4 dicttoxml-1.7.4 ibmiotf-0.3.0 idna-2.6 iso8601-0.1.12 paho-mqtt-1.3.1 pytz-2017.2 requests-2.18.4 requests-toolbelt-0.8.0 urllib3-1.22 xmldict-0.11.0
pi@raspberrypi:~$
```

- I have sent DHT-11 Sensors data to ibm bluemix .To get the code u need to login into IOT GYAN. ○ Then I get the image as follows in my pi's shell:


```
File Edit Shell Debug Options Window Help
Python 2.7.13 (default, Jan 19 2017, 14:48:08)
[GCC 6.3.0 20170124] on linux2
Type "copyright", "credits" or "license()" for more information.
>>>
===== RESTART: /home/pi/Downloads/dht11toibmiot.py =====
2017-10-23 07:10:37,768 ibmiotf.device.Client INFO Connected successfully: d:geg14:mydevice:mydevice
Published Temperature = 28 C Humidity = 50 % to IBM Watson
SensorData Invalid
Published Temperature = 28 C Humidity = 50 % to IBM Watson
SensorData Invalid
Published Temperature = 28 C Humidity = 50 % to IBM Watson
SensorData Invalid
Published Temperature = 28 C Humidity = 50 % to IBM Watson
Published Temperature = 28 C Humidity = 50 % to IBM Watson
Published Temperature = 28 C Humidity = 50 % to IBM Watson
```

### Step-3: checking your data sent on IBM Bluemix:

- After you have sent your sensors data you can check whether it is received at your iot platform Just look at the image below and if u see the same wifi kind of symbol on your created device then your data is being received.

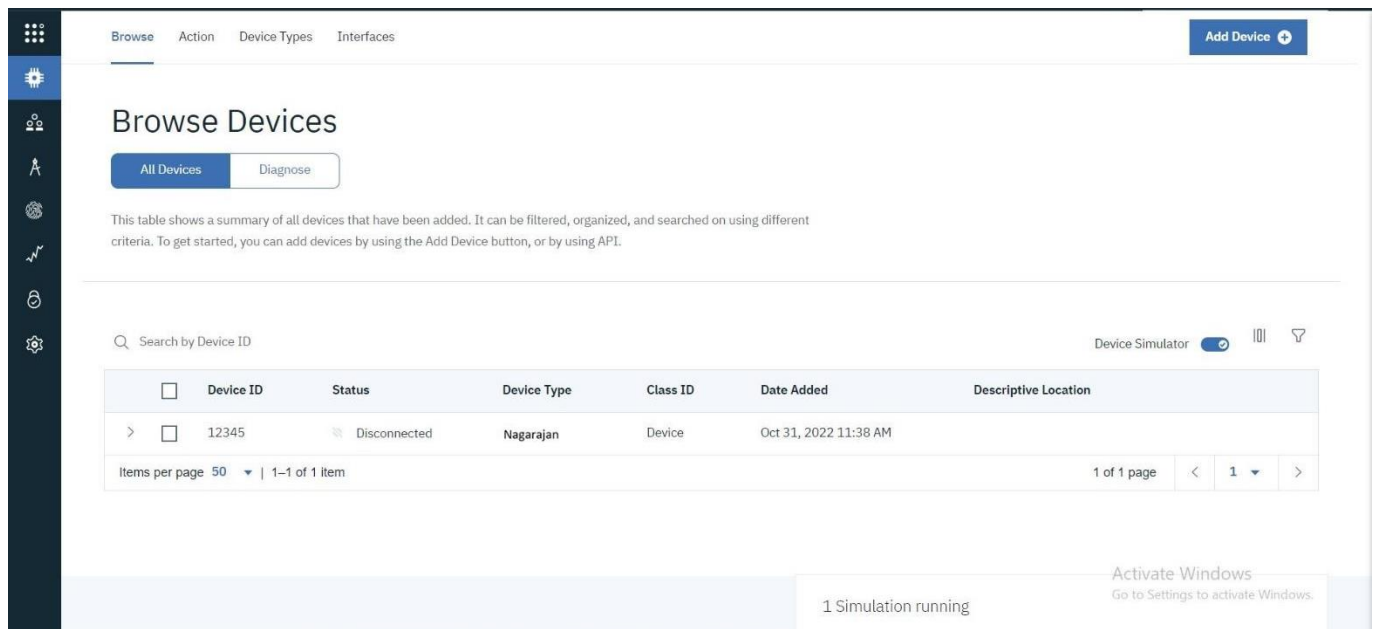


- After double clicking on your created device you can see the received data as shown in image

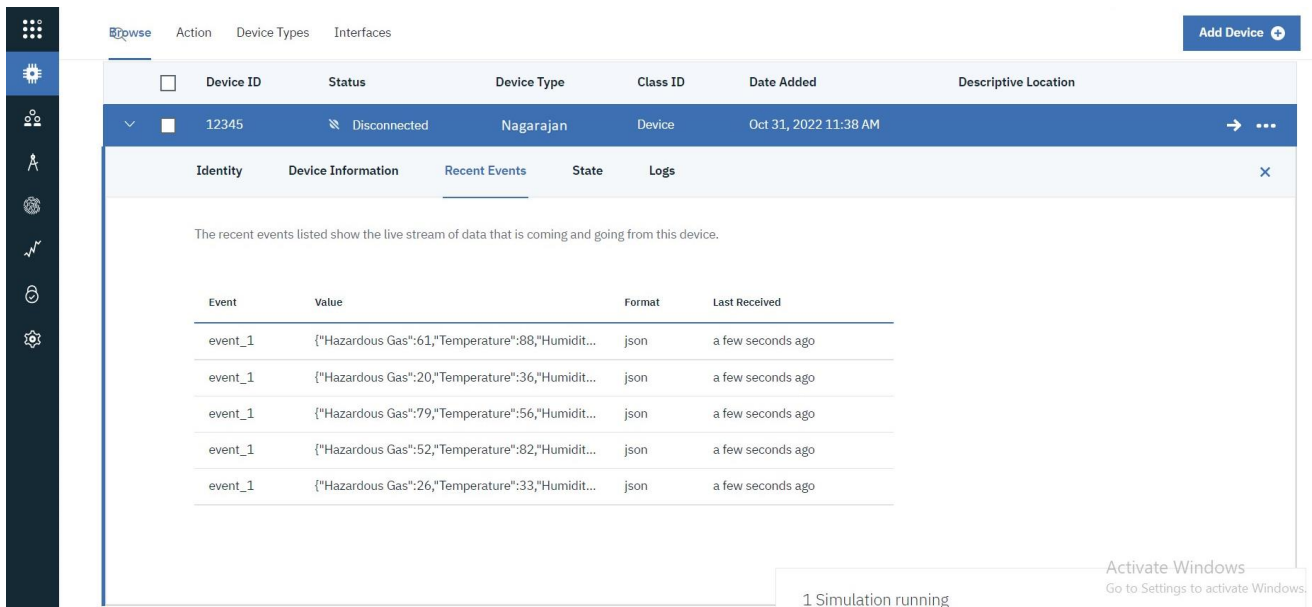


#### Step-4: Creating boards and cards for visualization of data:

- In your Watson platform you have an option called board .Click on it and you get the following window on your screen

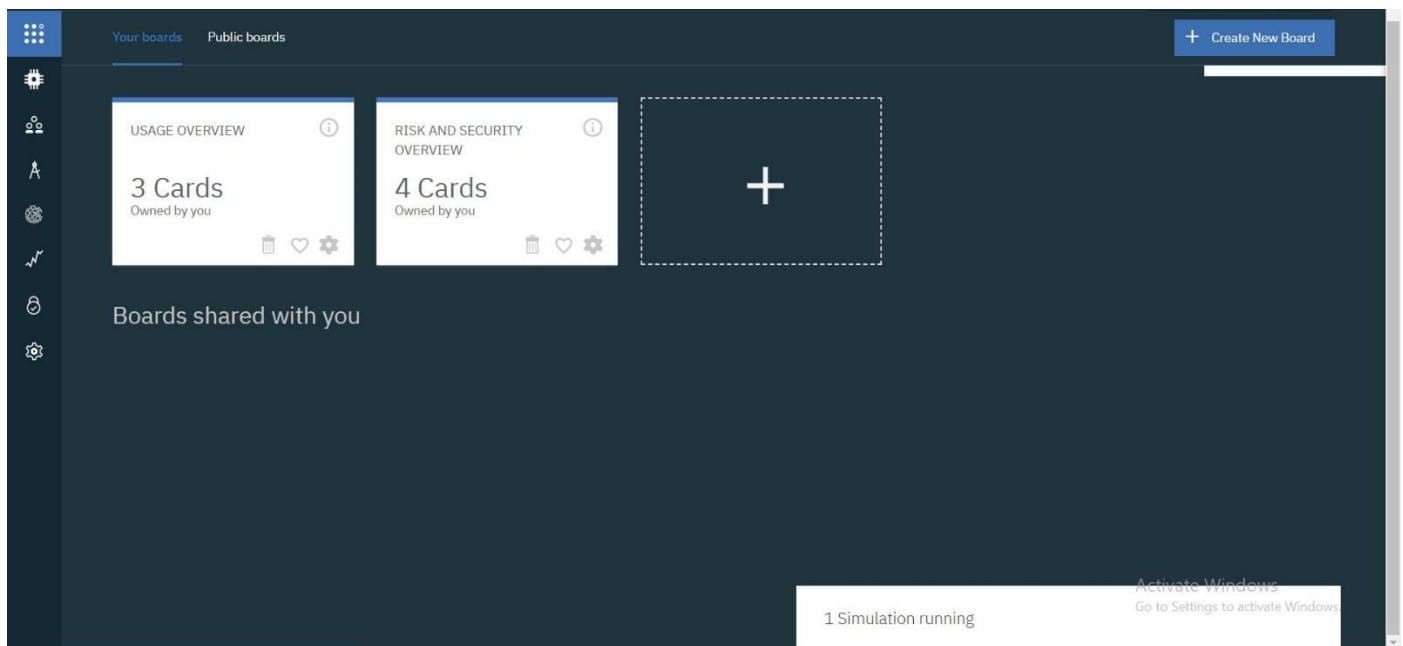


- Click on Create a new board to create a board .


The given below window appears give a name and description to your board as shown in the window below.

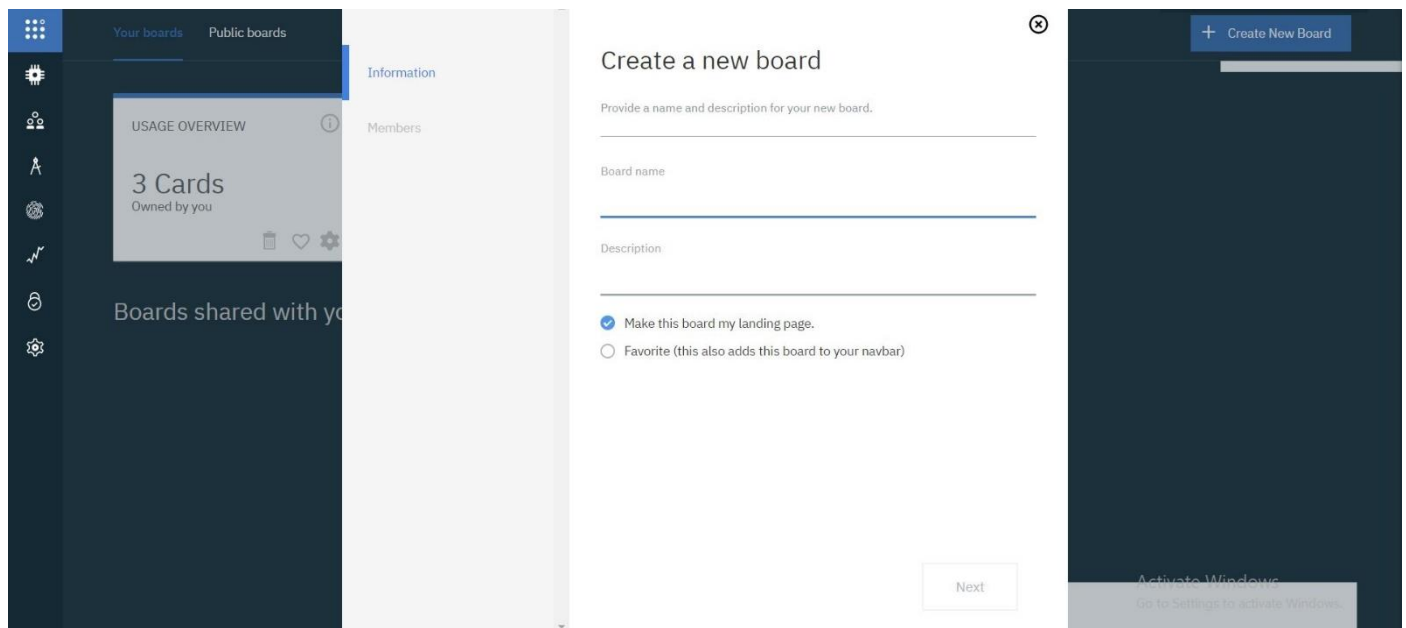


- Then click on Next you get the below window then again click on Submit

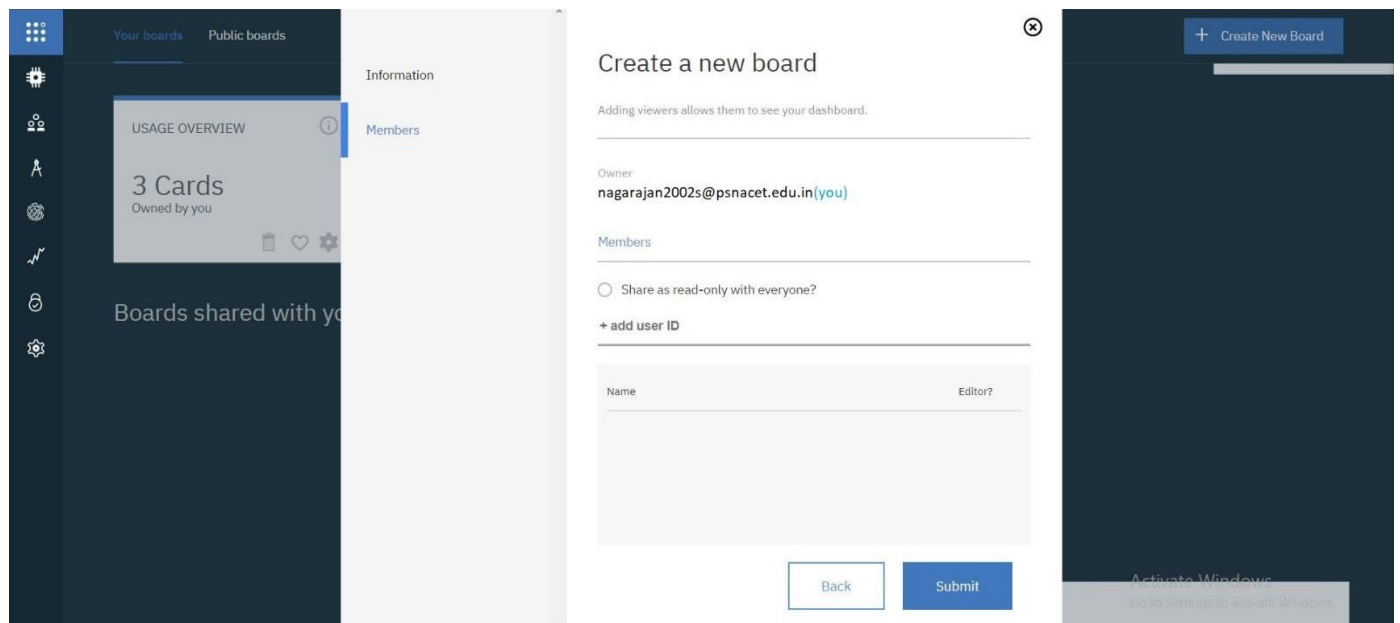


- Then double click on your boards name which you have created.

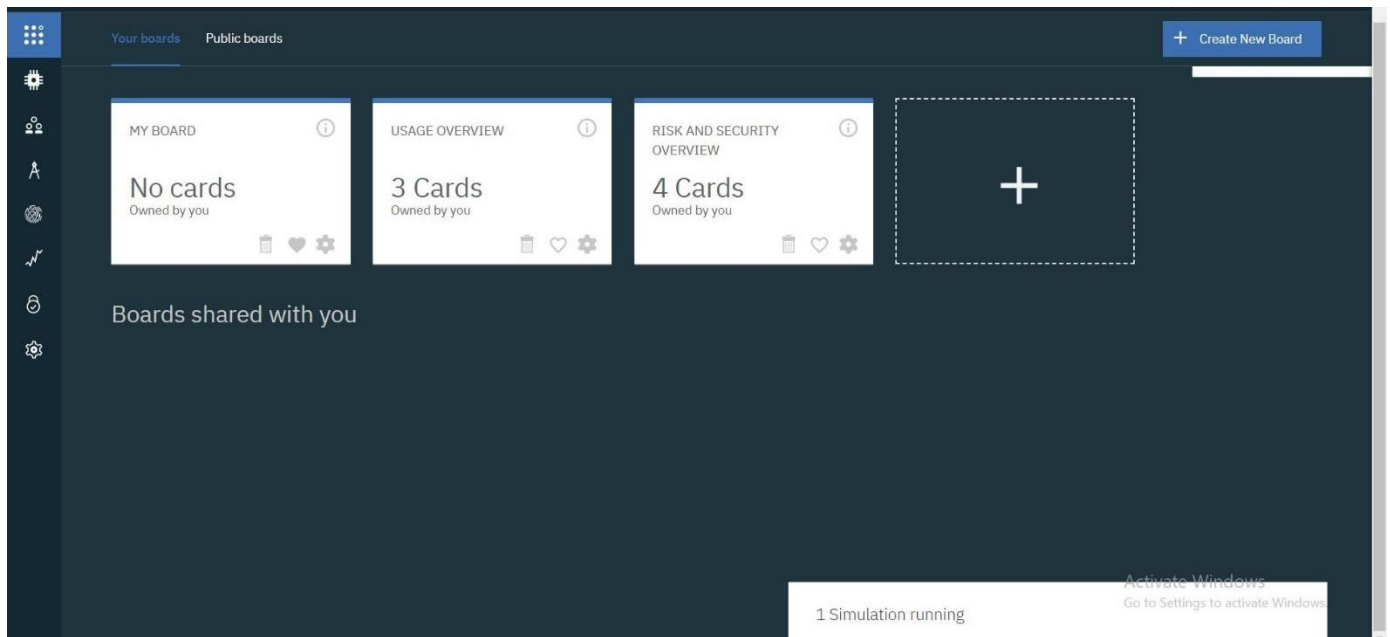


- Click on Add New Card

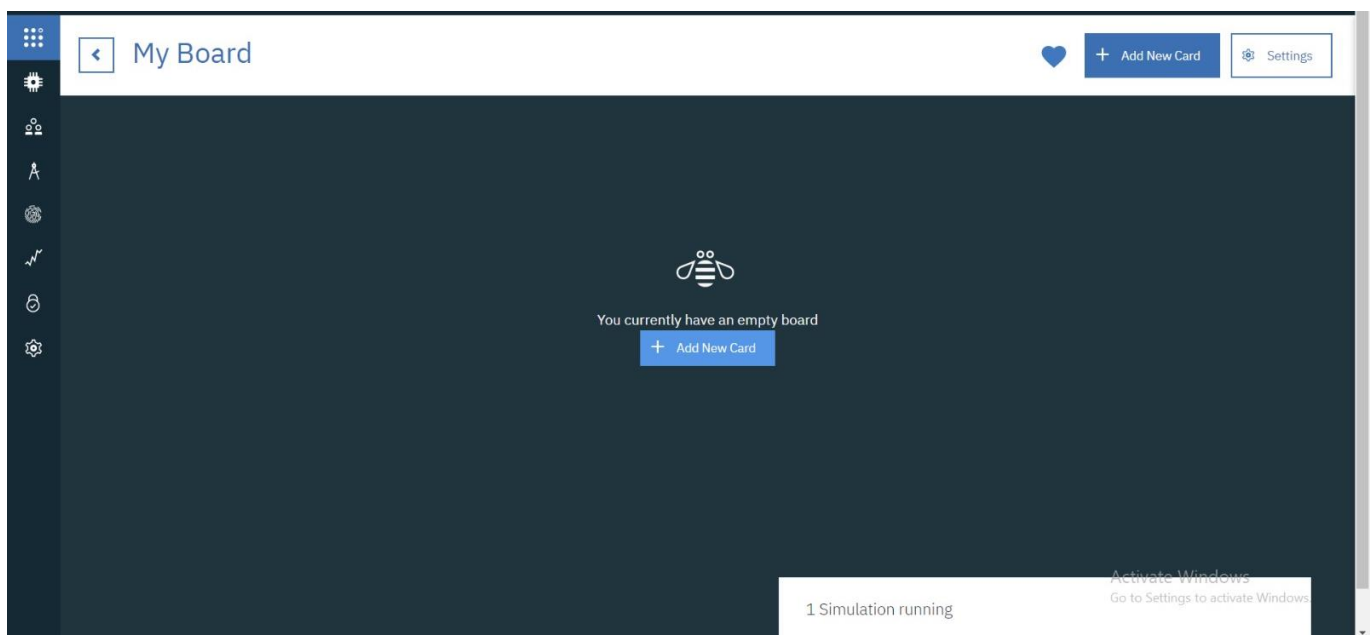


- Select the type of Graph u want accordingly and click next

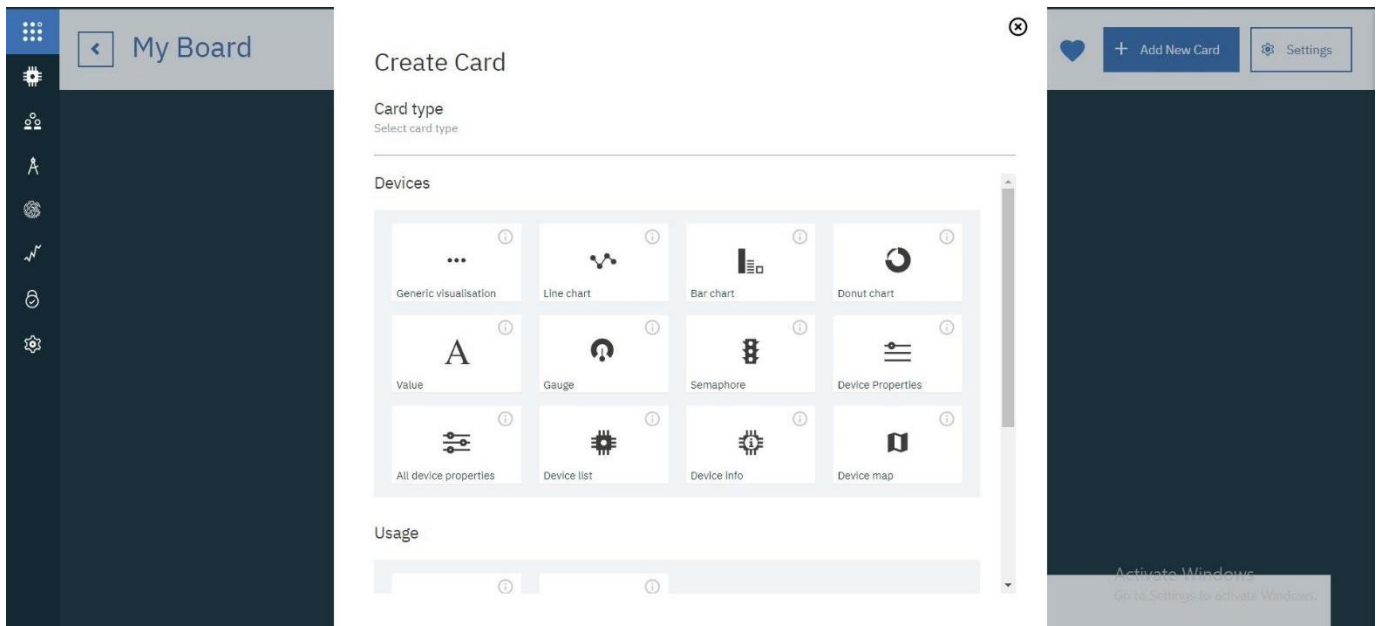


- You get the below window, choose the Device and click on Next.

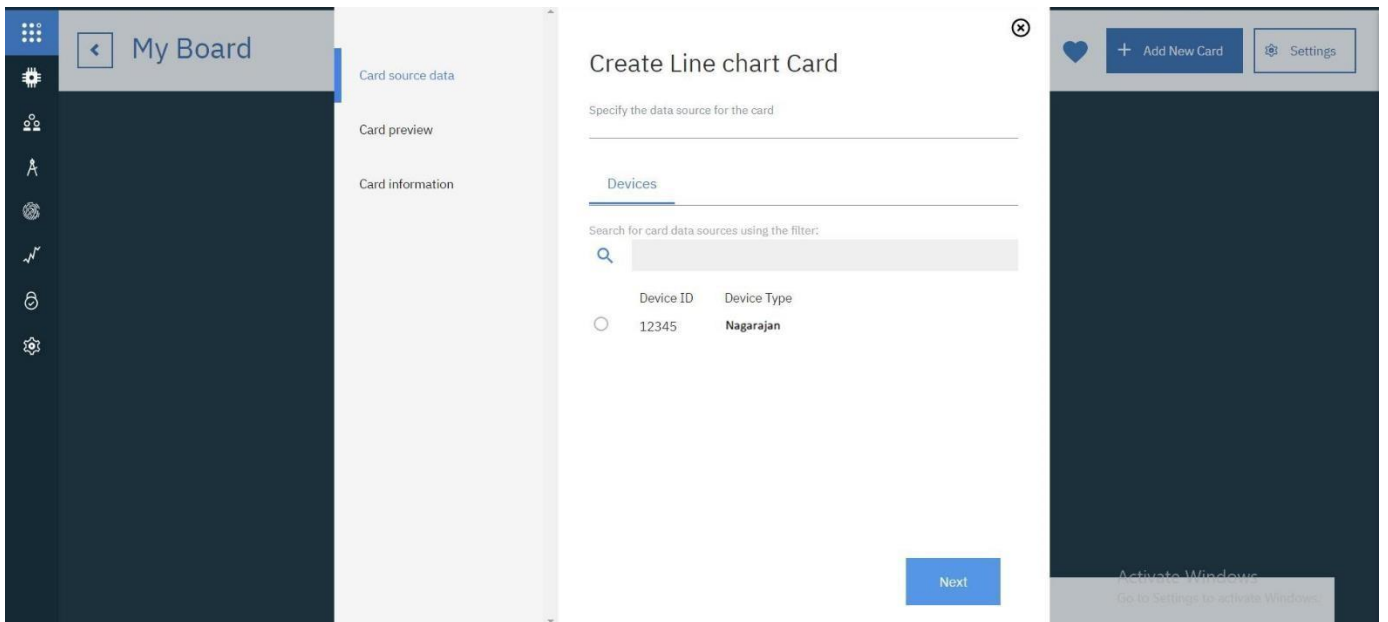

- Select the event, properly to be visualized on your graph and click next. In my case it is humidity

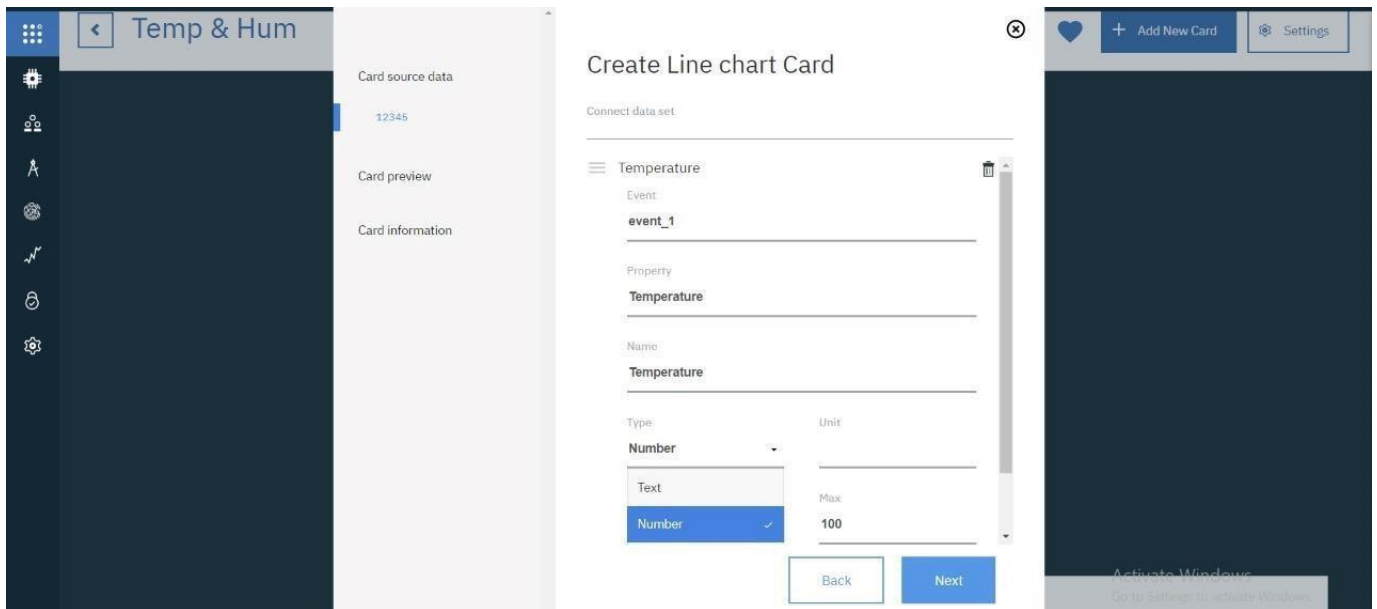


- Then select the size of the graph and color of the graph board you want and click next

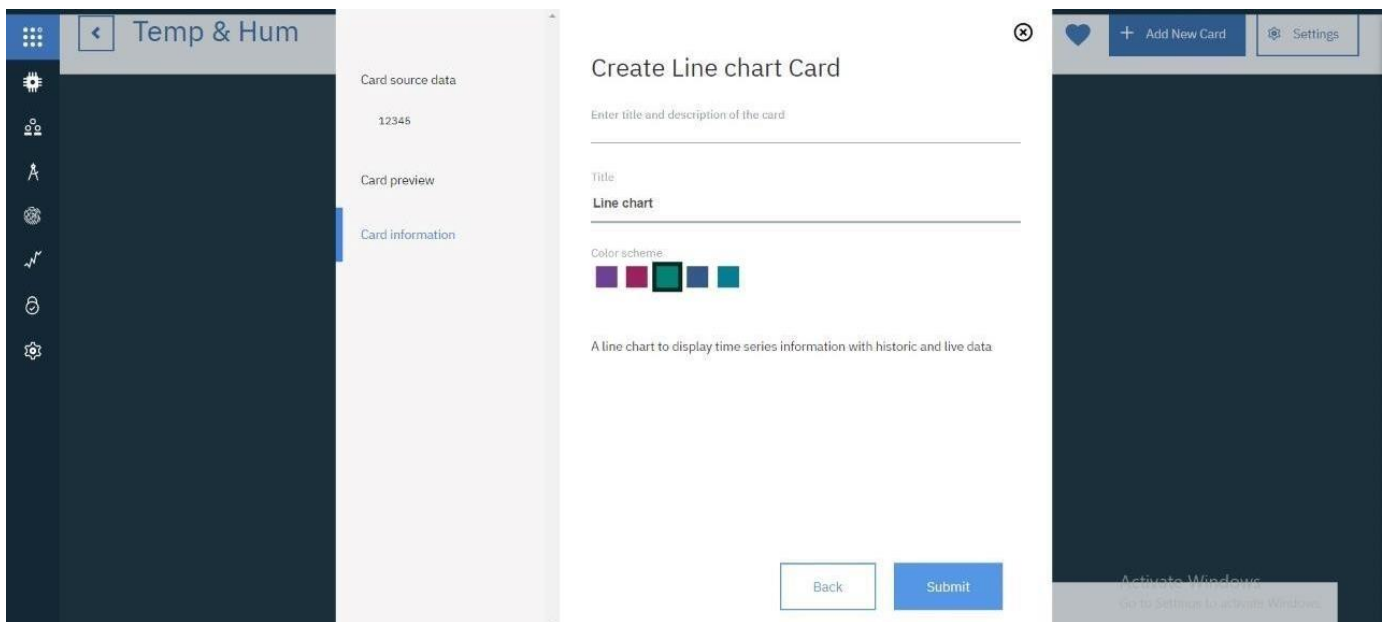



- Here is the graph



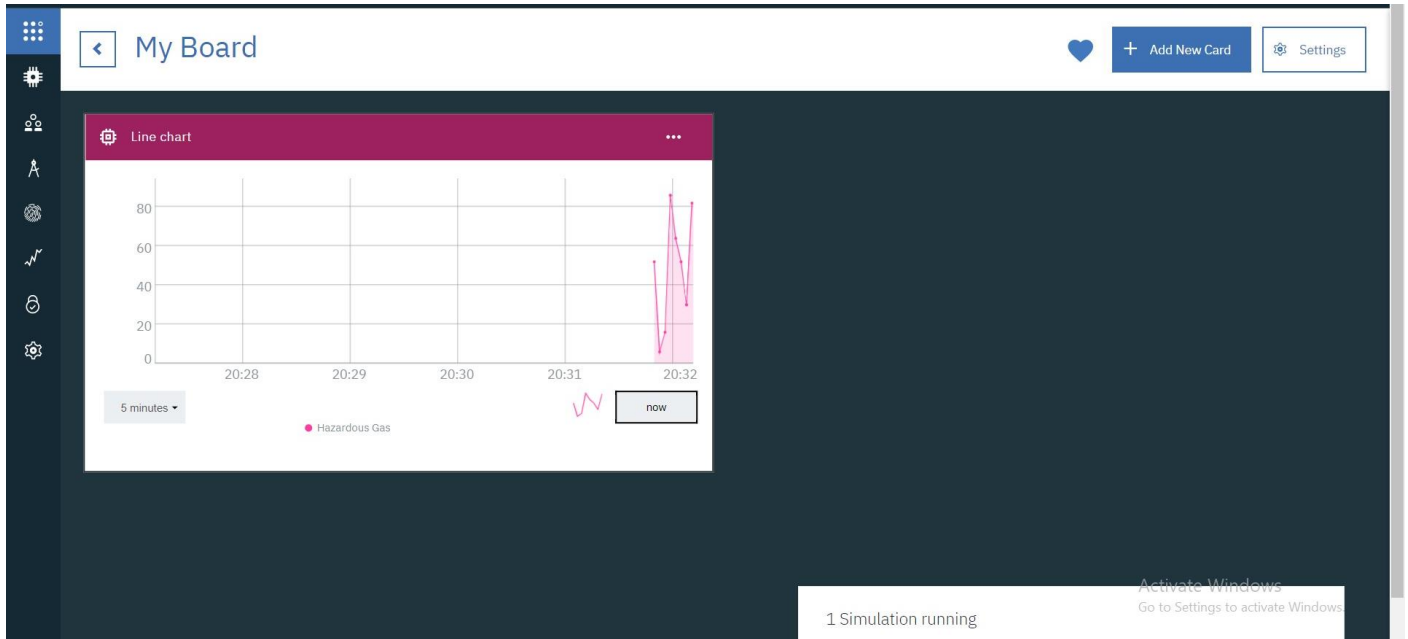

○ Repeat the process to get different graphs.

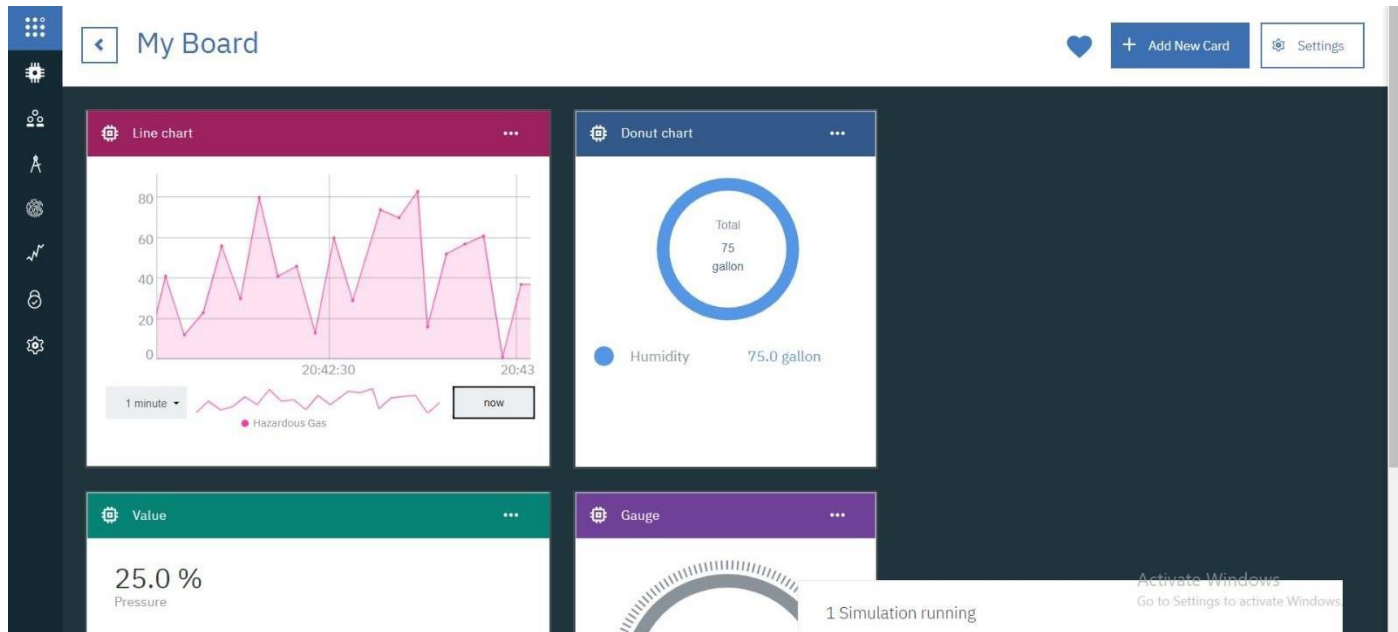

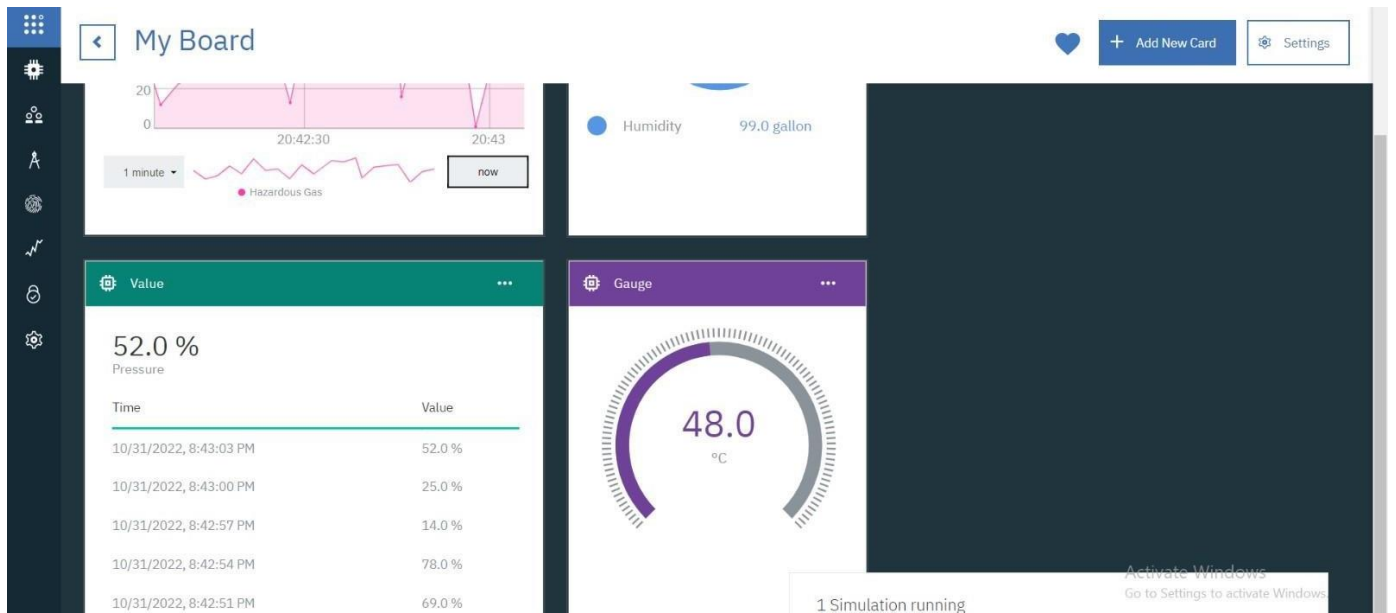

## RESULT:

Hence, we were able to send data from our pi to IBM Watson and visualize it on a graph.