

Ruijie Cloud API Reference Manual

V2.0.3

update time : 2026-03-30

1. Overview

1.1 Purpose

This document describes the modes, processes, methods, and parameters used to quickly connect third-party platforms to the RUIJIE CLOUD.

Request message example:

This document only provides definitions instead of implementation details of the APIs used for connection between third-party platforms and the RUIJIE CLOUD.

1.2 Glossary

This document describes Ruijie RUIJIE CLOUD platform.

1.3 Technical Scheme

The RUIJIE CLOUD provides a northbound interface through representational state transfer (REST), allowing you to use RESTful APIs to develop application programs based on your specific needs.


REST is an architectural style used for designing and developing network applications. Compared with Simple Object Access Protocol (SOAP), REST has the following advantages in Web service implementation:

- REST is a lightweight solution without the need to build a standard SOAP XML as required by SOAP.
- REST enables browsers to function as clients to simplify software requirements.
- REST supports caching to improve response speeds.
- REST allows different servers to process different requests in a series of requests based on stateless communication, improving service scalability.
- REST has reduced software dependencies compared with SOAP.
- REST has enhanced long-term compatibility as software technologies evolve.

The RUIJIE CLOUD supports invocation of RESTful APIs to realize platform openness and scalable secondary development. Based on HTTP, REST is simple, lightweight, and highly effective. You can use a browser to invoke REST.

1.4 API Implementation Process

Figure 1-1 API Implementation Process

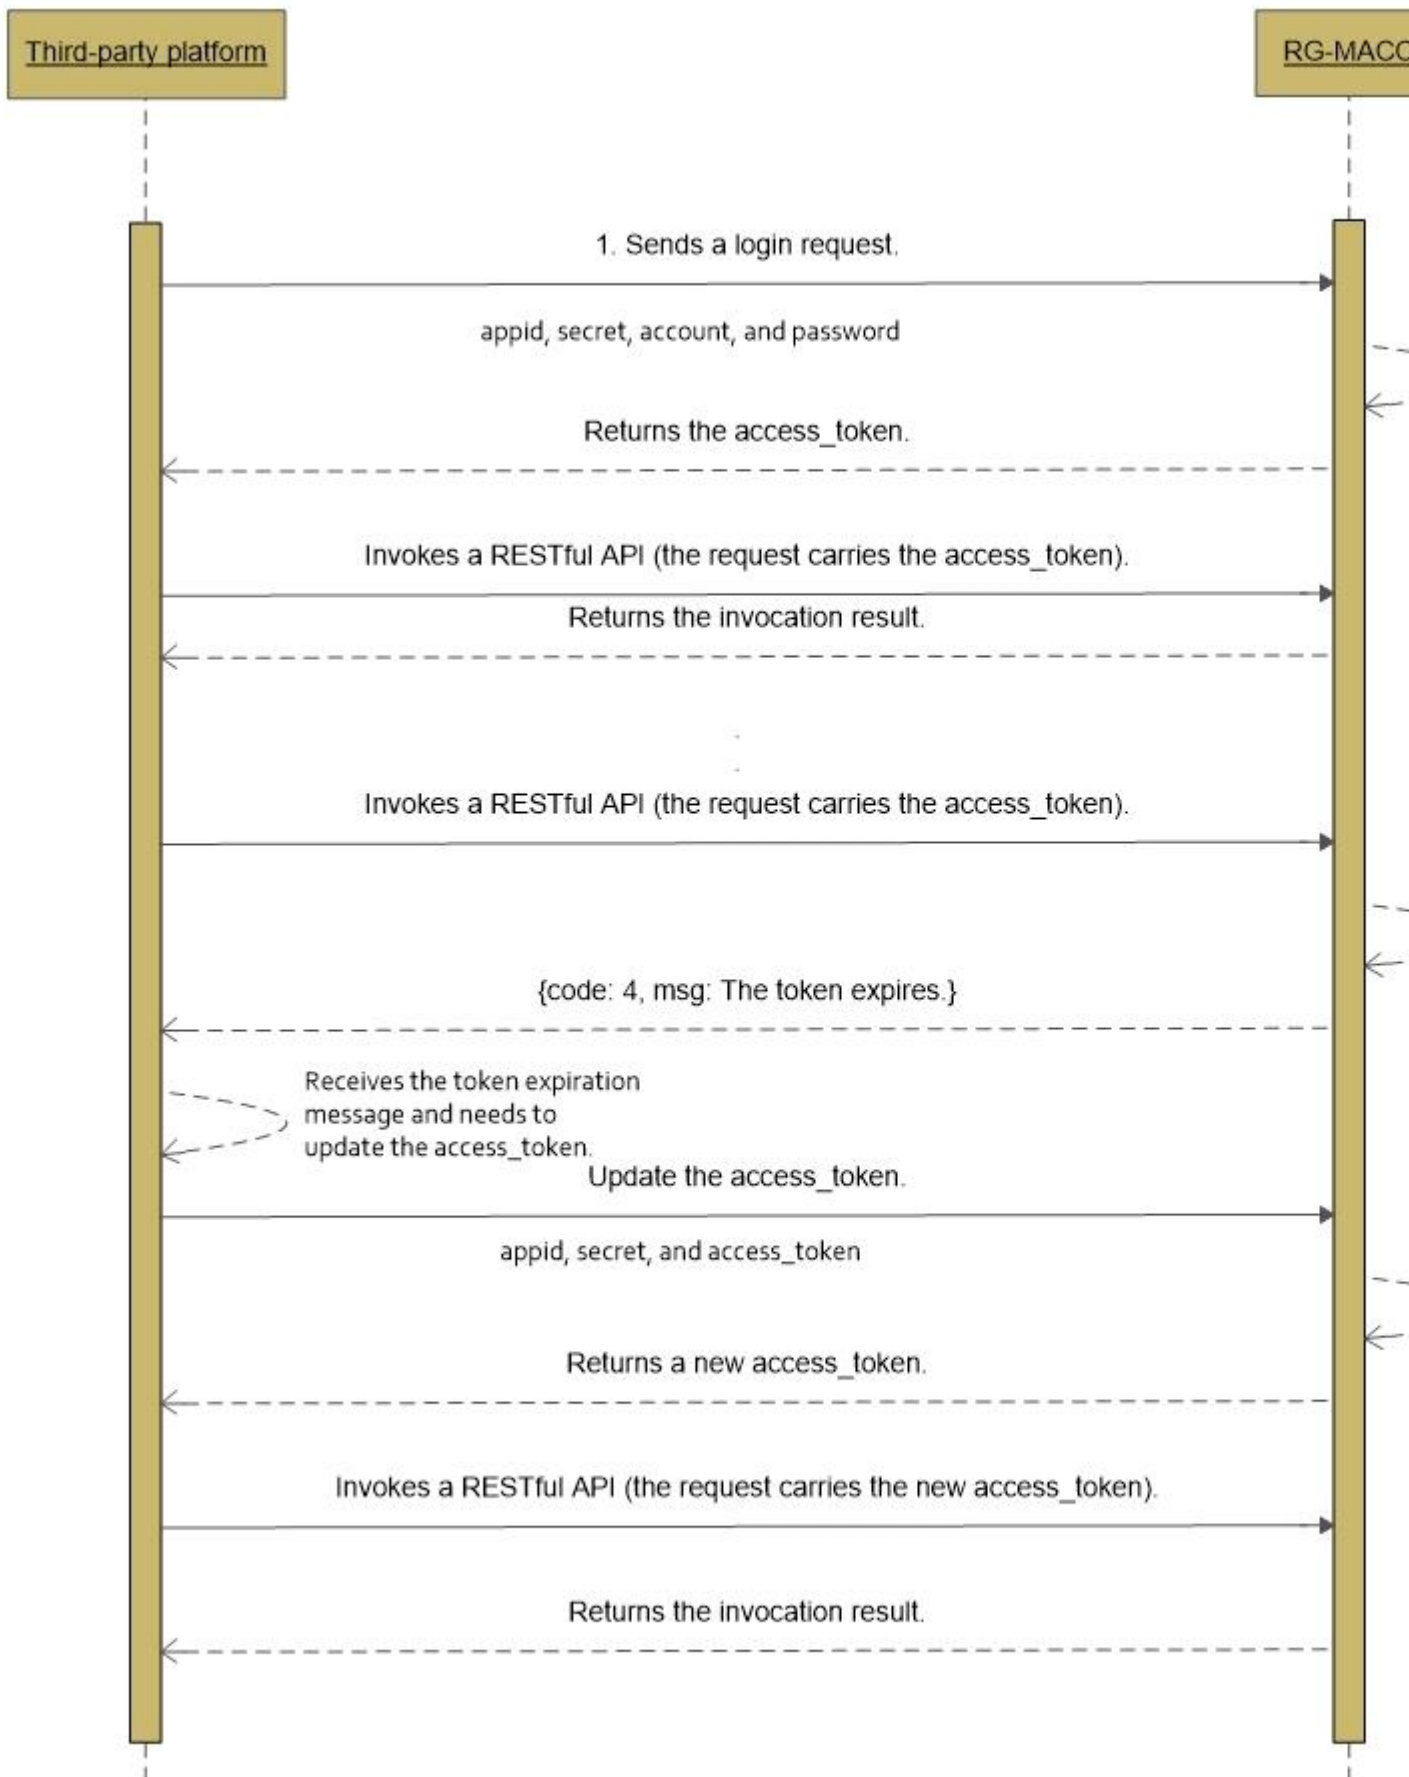

The API implementation process consists of user login, token acquisition, RESTful API invocation, token re-application, and RESTful API re-invocation.

- A user logs in to the RUIJIE CLOUD and performs authentication in order to use a third-party application. If the user identity is valid, the RUIJIE CLOUD returns an access_token to the third-party application. Note: All users are managed on the RUIJIE CLOUD, which authenticates users who want to use third-party applications. The access_token is the credential for RESTful API invocation and must be carried in every RESTful API invocation request. For details, see the section about how to use the access_token to apply for RESTful APIs.
- The access_token allows the third-party application to invoke RESTful APIs to complete service processing.
- The expiration time of the access_token is 30 days, after which the access_token will expire and a new one must be applied for again.
- The third-party application needs to check the code value returned by each RESTful API. If the code value is 4 , the access_token has expired.
- In this case, the third-party application needs to apply for a new access_token in order to resume RESTful API invocation.
- **The default expiration time for the token is 30 days. The token expires if it is neither used for access within 30 minutes. The expired token cannot be used for access but it can be updated. The expiration time (30 minutes) starts from the last access or update.**

1.5 Uniform Specifications

1.5.1 Message Encapsulation Specifications

- A uniform character set is used. All packets transferred during RESTful API invocation are encoded using ****UTF-8****.
- All external RESTful APIs provided by the RUIJIE CLOUD adopt the uniform URI prefix <http://ip:port/service/api/> for the moment. If the domain name format is used, the content of *ip* corresponds to the domain name. The uniform URI prefix is represented by **[ApiUrlPrefix]** in the following.
- API requests can be committed using the GET, POST, DELETE, and PUT methods.
- Parameter formats: Request parameters are classified into **JsonParam** , **PathParam** , and ****QueryParam****.
- **JsonParam** is carried in the message body of an HTTP request. The packet content is in the JSON format.

That is, the **Content-Type** field of the HTTP header is set to ****application/json****.

The following shows an example of the JSON format:

```
{“A”:value_a,“B”:value_b}
```

The names of the elements (**A** and **B**) indicate the parameter names and the values (**value_a** and **value_b**) of the elements indicate the parameter values.

- **PathParam** is located in the path of a URI and separated by slashes (/). For example, a URI path is defined as follows:

<http://172.18.34.136/service/api/group/{groupId}>

In the request URL <http://172.18.34.136/service/macc/api/group/2>, the value of **groupId** is ****2****.

- **QueryParam** is located after the absolute path of a URI. It starts with a question mark (?) and adopts the format of `_parameter name=_parameter value_`. Parameters are separated by the “&” symbol but are not ordered. The following is a URI that contains the **QueryParam** parameter in the `_parameter name=_parameter value_` format:

<http://172.18.34.136/service/api/login?appid=0001&account=admin&password=admin>

The values of the **account** and **password** parameters are both ****admin****.

- For RESTful APIs, the HTTP message body is in the format of application/json. That is, the **Content-Type** field of the HTTP header is set to ****application/json****.
- Return codes:
- If the 200 status code is returned, the requested operation is successful.
- If any other status code is returned, a network exception or other unknown exceptions occur.

1.5.2 RESTful API QueryParam Specifications

The following table lists the requirements for the **QueryParam** parameter carried in all RESTful APIs.

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.

For example:

http://Serverip/service/api/maint/devices?access_token=A002B4E1E91747E0A1E569E2CB8EE07C


1.5.3 RESTful API Response Parameter Specifications

The following table lists the response parameters applicable to all RESTful APIs.

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is null or is not carried.

1.6 Request Flow Demo

The below image is the request flow demo of creating NEW Voucher, help you understand API request.

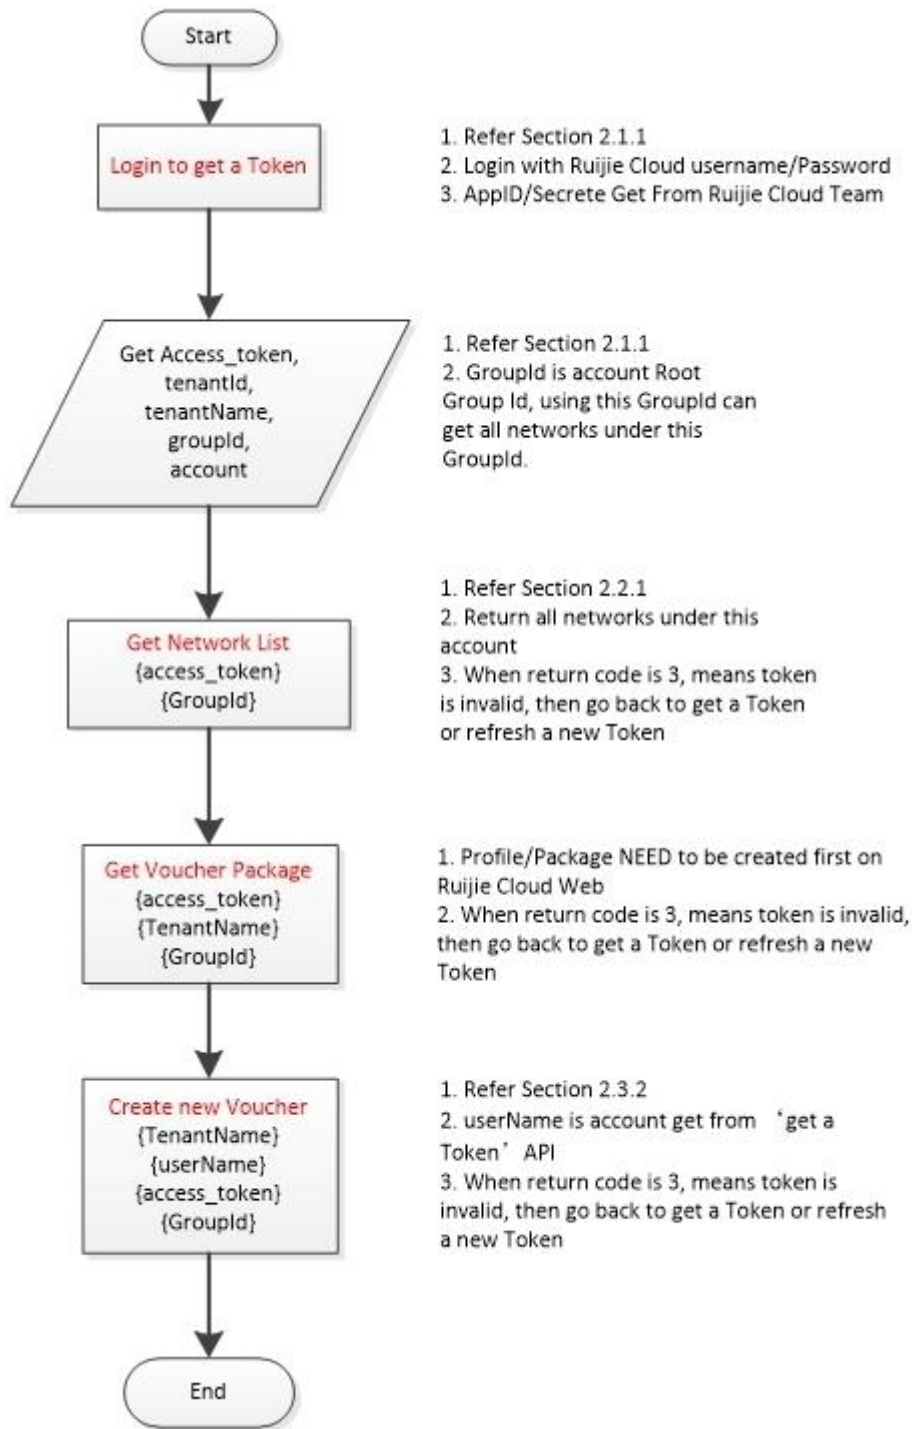

2 RUIJIE CLOUD APIs

2.1 Authorization Management APIs

The URI prefix [CloudUriPrefix] is cloud accessing address, such as <https://cloud-as.ruijienetworks.com>.

2.1.1 Get an Access Token

Description		Get an Access Token
Implementer	RUIJIE CLOUD	
URL	[CloudUriPrefix]/service/api/oauth20/client/access_token?token=d63dss0a81e4415a889ac5b78fsc904a	
Request Method	POST	

QueryParam request parameters:

Parameter Name	Type	Mandatory	Description
token	String	M	This value is d63dss0a81e4415a889ac5b78fsc904a, no need change this value.

Body JsonParam request parameters:

Parameter Name	Type	Mandatory	Description
appid	String	M	Application ID, Get from Ruijie Cloud Backend
secret	String	M	Application Secret, Get from Ruijie Cloud Backend

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	General return value. 0: operation succeeded Non-0: operation failed
msg	String	O	Code description.
accessToken	String	M	Token assigned by the RUIJIE CLOUD. Use this accessToken to call API. By default, the token expiration time is 30 days.

Request example:

Plain Text


```
curl -X POST
'http://{cloudserver}}/service/api/oauth20/client/access_token?token=d63dss0a81e4415a8
89ac5b78fsc904a'
-H 'Content-Type: application/json'
-d '{
  "appid": "Tartestxxxxx",
  "secret": "Dartestxxxxx"
}'
```

Response message example:

```
JSON
{
  "code": 0,
  "msg": "OK.",
  "accessToken": "jJVmxTfIVok7D0ol5z9Q6oCMkHJPEERl"
}
```

2.1.2 Refreshing a Token

Description	Refreshes a token.
Implementer	RUIJIE CLOUD
URL	[CloudUrlPrefix]/service/api/token/refresh?appid={}&secret={}&access_token={}
Request Method	GET

QueryParam request parameters:

Parameter Name	Type	Mandatory	Description
appid	String	M	Application corresponding to the specified app ID, which is assigned by the server.
secret	String	M	Key corresponding to the specified app ID, which is assigned by the server.
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	General return value. 0: operation succeeded Non-0: operation failed
msg	String	O	Code description.
accessToken	String	O	New Token assigned by the RUIJIE CLOUD.

Request example:

Plain Text

curl -X GET

https://{cloudserver}}/service/api/token/refresh?appid=xxx2&secret=11xxxxx1&access_token=C1EF2AE38BD04A5CB83D4D8CB5DF374E

Response message example:

JSON

```
{  
  "code": 0,  
  "msg": "OK.",  
  "accessToken": "C1EF2AE38BD04A5CB83D4D8CB5DF374E"  
}
```

2.1.3 Get Account Detail

Description	Get Account Tenant Info
Implementer	RUIJIE CLOUD
URL	[CloudUrlPrefix]/service/api/org/account/info?access_token={}
Request Method	GET

QueryParam Request Parameters

Parameter	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.

Returned parameters:

Parameter	Type	Mandatory	Description
code	int	M	General return value.0: operation succeededNon-0: operation failed
msg	String	O	Code description.
accountId	Integer	O	Account
Email	String	O	Tenant Name
Account	String	O	User name
defaultTenant	Integer	O	Tenant ID

Request example:

JSON

curl -X GET

https://cloudServer.ruijienetworks.com/service/api/org/account/info?access_token=C1EF2AE38BD04A5CB83D4D8CB5DF374E

Response message example:

Plain Text

```
{
  "code": 0,
  "msg": "OK.",
  "accountId": 32114,
  "account": "ren-testas-001@yopmail.com",
  "userName": "rr mm",
  "phone": "",
  "phoneState": "UNBIND",
  "email": "ren-testas-001@yopmail.com",
  "emailState": "BIND",
  "address": "Vietnam",
  "company": "",
  "title": "",
  "language": "en",
  "scene": "COMMON",
  "wechatState": "UNBIND",
  "appleState": "UNBIND",
  "appleUserId": "",
  "permitModifyAccount": false,
  "role": "rootManager",
  "tenantRole": "TENANT_MANAGER",
  "userType": "ROOT",
  "rootManager": true,
  "theme": "RUIYI_V2",
  "themeChange": false,
  "timeZone": "Africa/Abidjan",
```

```

“defaultTenant”: 27337,
“supportDemo”: false,
“twoFactorCheck”: {
“enable”: false
},
“createTime”: 1614855739000,
“image”: “”,
“defaultPassword”: false,
“defaultAccount”: false,
“hasOpenId”: false
}

```

2.2 Network Groups API

2.2.1 Get Network Group List

Description Get Network Group List, if your network group tree has Location, Building and Sub-group, these group tree hierarchical structure will be responded

Implementer RUIJIE CLOUD

URL [CloudUrlPrefix]/service/api/group/single/tree?depth=BUILDING&access_token=JveZb3FJvRLiLZDog7B0oC5x9n6opWTr

Request Method GET

PathParam request parameters:

Parameter Name Type Mandatory Description

QueryParam request parameters:

Parameter Name	Type	Mandatory	Description
access_token	String	M	The token to call Ruijie Cloud API. An access_token is gotten from 2.1.1.
depth	String	M	LOCATIONIN, BUILDING, DEVICE. LOCATION: return only logical location type of groups. BUILDING: return including project type of groups. DEVICE: return including subgroups of project

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.
groups	List Price	M	Network groups list
name	String	M	network-group name
timezone	String	M	Network timezon
groupId	int	M	Network Group ID, Create Voucher based on this GroupID, each customers can be seen as one network (Group)
type	String	M	LOCATION, BUILDING, DEVICE
subGroups	List Price	O	Subgroups of current group

Request message example:

Plain Text

```
curl --request GET
```

```
"https://{cloudserver}}/service/api/group/single/tree?depth=BUILDING&access_token=JveZb3FJvRLiLZDog7B0oC5x9n6opWTr"
-header "Content-Type: application/json" \
-data "{
}"
```

Response message example:

JSON

```
{
  "code": 0,
  "msg": "OK.",
  "groups": {
    "name": "dummy",
    "timezone": "Asia/Shanghai",
    "groupId": 0,
    "subGroups": [
      {
        "name": "ProjectSDDD",
        "description": "",
        "timezone": "Asia/Shanghai",
        "groupId": 12480,
        "createTime": "2017-12-26 14:21:26",
        "type": "LOCATION",
```

```
    "businessType": "MARKET",
    "subGroups": [
      {
        "name": "HomeDDA",
        "description": "",
        "timezone": "PRC",
        "groupId": 12482,
        "createTime": "2017-12-26 14:21:55",
        "type": "BUILDING",
        "businessType": "UNCERTAIN",
        "sceneEnum": "UNCERTAIN"
      }
    ],
    "sceneEnum": "COMMON"
  },
  {
    "name": "Hotel225",
    "description": "",
    "timezone": "Asia/Shanghai",
    "groupId": 12479,
    "createTime": "2017-12-26 14:21:11",
    "type": "LOCATION",
    "businessType": "MARKET",
    "subGroups": [
      {
        "name": "BeijingRoad001",
        "description": "",
        "timezone": "Asia/Shanghai",
        "groupId": 12484,
        "createTime": "2017-12-26 14:22:17",
        "type": "LOCATION",
        "businessType": "MARKET",
        "subGroups": [],
        "sceneEnum": "COMMON"
      }
    ],
    {
      "name": "ZhongShan330",
      "description": "",
      "timezone": "Asia/Shanghai",
      "groupId": 12485,
      "createTime": "2017-12-26 14:22:28",
      "type": "LOCATION",
      "businessType": "MARKET",
      "subGroups": [],
      "sceneEnum": "COMMON"
    }
  ],
```

```

“sceneEnum”: “COMMON”
}
],
“rootGroupName”: “dummy”,
“rootGroupId”: 0
}

```

2.2.2 Add Network

Type: group/create

URL: {CloudUrlPrefix}/service/api/open/v1/group
Method: POST

QueryParam request

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token assigned by the server to the client. When the client invokes a RESTful API, it must return the access_token as-is to the server. The access_token expires after a set period, and the client must request a new one to resume API invocation.

JSON Parameter Request:

Parameter Name	Type	Mandatory	Description
pGroupId	Integer	M	Parent group ID
name	String	M	Group name (max 32 characters; can only include Chinese characters, English letters, numbers, and underscores)
type	String	M	Group type: LOCATION - Management group; BUILDING - Project type; DEVICE - Device group type
description	String	O	Group description (max 64 characters; can only include Chinese characters, English letters, numbers, and underscores)
longitude	Double	O	Group's longitude
latitude	Double	O	Group's latitude
businessType	String	O	Business type: MARKET - Cloud AP; TRAFFIC - Traffic; AC - Thin AP; UNCERTAIN - General network

Parameter Name	Type	Mandatory	Description
timezone	String	O	Timezone ID set for the group

Returned Parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. This parameter is not returned if the operation is successful.
group	Object	O	-
groupId	Integer	M	Group ID
name	String	M	Group name
type	String	M	Group type: LOCATION - Management group; BUILDING - Project type; DEVICE - Device group type
createTime	String	M	Creation time
description	String	M	Group description

Example:

Request Message Example:

```
curl --location --request POST '/service/api/open/v1/group?access_token=' \
--header 'Content-Type: application/json' \
--data-raw '{
  "pGroupId": 9391895,
  "name": "test_group",
  "type": "BUILDING",
  "timezone": "Asia/Shanghai",
  "description": "This is a test group",
  "latitude": 26.056812,
  "businessType": "ENET",
  "longitude": 119.198453
}'
```

Response Message Example:

```
{
  "code": 0,
  "msg": "OK.",
  "group": {
    "groupId": 9391998,
    "name": "test_group",
```



```

        "type": "BUILDING",
        "createTime": "2025-05-18 14:44:42",
        "description": "This is a test group"
    }
}

```

2.3 Voucher Management APIs

2.3.1 Generate Voucher

Type: voucher/create

Shell

url: {CloudUrlPrefix}/service/api/open/auth/voucher/create/{groupId}

method: POST

PathParam request parameters:

Parameter Name	Type	Mandatory	Description
groupId	Integer	M	Group ID

QueryParam parameters:

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.

JsonParam parameters:

Parameter Name	Type	Mandatory	Description
quantity	Int	M	Voucher created number, Must <= 500.
profile	String	M	Profile package UUID, get from API “2.7.1 Get User Group List” of authprofileid field
userGroupId	int	M	User Group Id, get from API “2.7.1 Get User Group List” of id field
firstName	String	Optional.	User first name
lastName	String	Optional.	User last name
Email	String	Optional.	User email address

Parameter Name	Type	Mandatory	Description
phone	String	Optional.	User phone number
comment	String	Optional.	This is user/voucher alias

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.
count	Int	M	Voucher total number
List Price			
uuid	String	M	Voucher
codeNo	String	M	Voucher Code
status	String	M	Voucher status 1: unused 2: in-use status 3: expired
profileId:	String	M	Voucher Profile package id
expiryTime	String	M	Voucher expiry date, timestamp (from 1970-1-1 timestamp milliseconds), expiry date is counted begin from activated time.
limitClients	Int	M	The number of concurrent clients to use voucher code

Request message example:

Plain Text

```
curl --request POST
https://{server}/service/api/open/auth/voucher/create/{groupId}
--header "Content-Type: application/json" --data "{
  "quantity": 2,
  "profile": "30113648274480073538014045592098",
  "userGroupId": 18067,
  "firstName": "test1",
  "lastName": "william",
  "email": "test@gmail.com",
  "phone": "21025522",
  "comment": "alias1"
}"
```

Response message example:

JSON

```
{
```

```
“code”: 0,
“msg”: “Success.”,
“voucherData”: {
“code”: 0,
“msg”: “OK.”,
“count”: 2,
“list”: [
{
“uuid”: “78eb665b70d44658937db776905676c9”,
“codeNo”: “4zr45r”,
“status”: “1”,
“tenantId”: “nSgKPhYFDQPfdECFLckTUIBoJVpqFvII”,
“secuserId”: “”,
“totle”: 0,
“sign”: “”,
“profileId”: “30113648274480073538014045592098”,
“expiryTime”: “2121-09-01 22:48:10”,
“limitClients”: 3,
“qrcodeUrl”: “www.ruijienetworks.com”,
“groupId”: “1be31cf89904484d8b90fe1784261c06”,
“firstName”: “test1”,
“lastName”: “william”,
“email”: “test@gmail.com”,
“phone”: “21025522”,
“comment”: “alias1”
},
{
“uuid”: “5e80c4cc86684a509005c90007dfdd02”,
“codeNo”: “gfkhrw”,
“status”: “1”,
“tenantId”: “nSgKPhYFDQPfdECFLckTUIBoJVpqFvII”,
“secuserId”: “”,
“totle”: 0,
“sign”: “”,
“profileId”: “30113648274480073538014045592098”,
“expiryTime”: “2121-09-01 22:48:10”,
“limitClients”: 3,
“qrcodeUrl”: “www.ruijienetworks.com”,
“groupId”: “1be31cf89904484d8b90fe1784261c06”,
“firstName”: “test1”,
“lastName”: “william”,
“email”: “test@gmail.com”,
“phone”: “21025522”,
“comment”: “alias1”
}
]
}
```

```
}  
}
```

2.3.2 Receive Customized Voucher

Type: voucher/customerCreate

Shell

url: {CloudUrlPrefix}/service/api/open/auth/voucher/customerCreate/{groupId}/{code}

method: POST

PathParam request parameters:

Parameter Name	Type	Mandatory	Description
groupId	Integer	M	Group ID
code	String	M	Customize Voucher Code, format: xxxx-xxxx, xxxx-xxxx-xxxx.

QueryParam parameters:

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.

JsonParam request parameters:

Parameter Name	Type	Mandatory	Description
groupId	String	M	Network Group ID, get from API “2.2.1 Get Network Group List”
profile	String	M	Profile package UUID, get from API “2.7.1 Get User Group List”
userGroupId	int	M	User Group Id, get from API “2.7.1 Get User Group List” of id field

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.

Request message example:

```
SQL
curl --request POST
https://Server.ruijienetworks.com/service/api/open/auth/voucher/customerCreate/{groupId}
/{code}?access_token=access_token=C0116BF86B66497C9B5733B15240EDA3&tenantId
=209
--header "Content-Type: application/json"
--data "{
"groupId": "1789",
"profile": "66693400473348729256354243919059",
"userGroupId": "3862"
}"
```

Response message example:

Plain Text

```
Response
{
"code": 0,
"msg": "OK.",
}
```

2.3.3 Query Voucher List

Type: voucher/getList

Shell

```
url: {CloudUrlPrefix}/service/api/open/auth/voucher/getList/{groupId}
method: GET
```

PathParam request parameters:

Parameter Name	Type	Mandatory	Description
groupId	Integer	M	Group ID

QueryParam request parameters:

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.
start	Int	M	Begin index of the record, start with 0. For example, PageSize=10, to get Second page, the start is (2-1)*PageSize =10
pageSize	int	M	Page Size for paging return

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.
count	Int	M	Voucher total number
List Price			
uuid	String	M	Voucher
codeNo	String	M	Voucher Code
status	String	M	Voucher status 1: unused 2: in-use status 3: expired
profileId:	String	M	Voucher Profile package id
expiryTime	String	M	Voucher expiry date, timestamp (from 1970-1-1 timestamp milliseconds)
limitClients	Int	M	The number of concurrent clients to use voucher code

Request message example:

```
Shell
curl --request GET
https://CloudIP/service/api/open/auth/voucher/getList/{groupId}?access_tokenaccess_token=3ABBEE24339F49AE9A819D955216EECA&start=11&pageSize=10&tenantId=184
```

Response message example:

```
Bash
{
  "code": 0,
```

```
“msg”: “OK.”,  
“voucherData”: {  
  “code”: 0,  
  “msg”: “OK.”,  
  “count”: 13,  
  “list”: [  
    {  
      “uuid”: “3c36bc35f3444394bc0fda39a3a62225”,  
      “tenantId”: “KeIHfvZpxsOBpLUdyBrBJZRTlQzhVYFT”,  
      “voucherCode”: “pgnazc”,  
      “nameRef”: “”,  
      “timePeriod”: 10080,  
      “usedTime”: 0,  
      “createTime”: 1531122413000,  
      “maxClients”: 2,  
      “currentClients”: 0,  
      “quota”: 200,  
      “usedQuota”: 0,  
      “status”: “1”,  
      “qrcodeUrl”: “www.ruijienetworks.com”,  
      “downloadRateLimit”: 0,  
      “uploadRateLimit”: 0,  
      “bindMac”: 0,  
      “packageName”: “7DayWiFi”  
    },  
    {  
      “uuid”: “93a88786c5d44d8689fd634bf550ea11”,  
      “tenantId”: “KeIHfvZpxsOBpLUdyBrBJZRTlQzhVYFT”,  
      “voucherCode”: “h3mtkr”,  
      “nameRef”: “Room403 Chan Tai Man”,  
      “timePeriod”: 1440,  
      “usedTime”: 0,  
      “createTime”: 1531122313000,  
      “maxClients”: 3,  
      “currentClients”: 0,  
      “quota”: 100,  
      “usedQuota”: 0,  
      “status”: “1”,  
      “qrcodeUrl”: “www.ruijienetworks.com”,  
      “downloadRateLimit”: 0,  
      “uploadRateLimit”: 0,  
      “bindMac”: 0,  
      “packageName”: “1DayWiFi”  
    }  
  ]  
}  
}
```

2.4 Auth Account Management APIs

2.4.1 Add Account

Type: account/create

Shell

url: {CloudUrlPrefix}/service/api/open/auth/account/create/{groupId}

method: POST

PathParam request

Parameter Name	Type	Mandatory	Description
----------------	------	-----------	-------------

groupId	Integer	M	Group ID
---------	---------	---	----------

QueryParam request

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.

jsonParam request :

Parameter Name	Type	Mandatory	Description
username	String	M	Account name
password	String	M	Account password
profileId:	String	M	Package
userGroupId	String	M	User Group ID, get from 2.7.1 section
vpnEnable	Boolean	M	True or false
comment	Double	O	Alias name

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.

Parameter Name	Type	Mandatory	Description
msg	String	O	Code message. If the operation is successful, this parameter is not carried.

Request message example:

```

Bash
Request
curl --request POST
https://Server.ruijienetworks.com/service/api/samTransfer/account/create/testdemo/testdemo/927?access\_token=F8BF266ED6D84B119D98D21EC83E8AD6&ishttps=false&tenantId=2756
--header "Content-Type: application/json" \
--data "{
  "username": "test_account_name",
  "password": "123456",
  "profileId": "87984554683924718561245367586213",
  "userGroupId":20990,
  "vpnEnable":false,
  "comment": "alias name"
}"

```

Response message example:

```

Shell
{
  "code": 0,
  "msg": "OK."
}

```

2.4.2 Delete Account

Type: account/delete

```

Shell
url: {CloudUrlPrefix}/service/api/open/auth/account/delete/{groupId}
method: DELETE

```

PathParam request

Parameter Name	Type	Mandatory	Description
groupId	Int	M	Project ID, get from 2.2.1
ishttps	String	O	If use https valid: true, false

QueryParam parameters: :

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.

****jsonParam request parameters: ****

Parameter Name	Type	Mandatory	Description
names	String	M	Account names Array

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.

Request message example:

```
Shell
curl --request POST
http://Server.ruijienetworks.com/service/api/samTransfer/account/delete/5678?access_token=F8BF266ED6D84B119D98D21EC83E8AD6&ishttps=false&tenantId=2756
--header "Content-Type: application/json"
--data "[
"name1",
"name2",
"name3"
]"
```

Response message example:

```
Shell
{
"code": 0,
"msg": "OK."
}
```

2.4.3 Query Account List

Type: account/getList

Shell

url: {CloudUrlPrefix}/service/api/open/auth/account/getList/{groupId}

method: GET

PathParam request parameters:

Parameter Name	Type	Mandatory	Description
----------------	------	-----------	-------------

groupId	Integer	M	Group ID
---------	---------	---	----------

QueryParam request parameters:

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.
start	String	O	Start page
pageSize	String	O	Per page size
createEnd	String	O	
createBegin	String	O	
status	String	O	1: not Activated; 2: Activated; 3: Expired;
name	String	O	Account name for searching

Request message example:

Shell

curl --request GET

http://Server.ruijienetworks.com/service/api/open/auth/account/getList/{groupId}?access_token=access_token=F8BF266ED6D84B119D98D21EC83E8AD6&ishttps=false&tenantId=2756 &start=0&pageSize=10&name=aaa&createBegin=15235422&createEnd=4851325

Response message example:

Bash

```
{
  "code": 0,
  "msg": "OK.",
}
```

```
“count”: 2,
“list”: [
{
“uuid”: “912e12380275461b9757ce9dd0ddd053”,
“refName”: “alias name”,
“username”: “test_account_name_02”,
“password”: “123456”,
“createTime”: 1604307006000,
“expiryTime”: null,
“logintime”: null,
“groupId”: “84ea43d8230042ea8855344e5c0a3f9f”,
“tenantId”: “ZxOKzqQmNrgNbCeHSHPIIUDqCoHSECZ”,
“profileId”: “14251152229359204590000804102161”,
“profileName”: “4233423”,
“status”: “1”,
“quotalimit”: 100,
“usedQuota”: 0,
“maxUplink”: 0,
“maxDownlink”: 0,
“timePeriod”: 30,
“currentClients”: 0,
“maxClients”: 3,
“usedTime”: null
},
{
“uuid”: “85e5270efca840e8bc9551cd9230650d”,
“refName”: “alias name”,
“username”: “test_account_name”,
“password”: “123456”,
“createTime”: 1604307001000,
“expiryTime”: null,
“logintime”: null,
“groupId”: “84ea43d8230042ea8855344e5c0a3f9f”,
“tenantId”: “ZxOKzqQmNrgNbCeHSHPIIUDqCoHSECZ”,
“profileId”: “14251152229359204590000804102161”,
“profileName”: “4233423”,
“status”: “1”,
“quotalimit”: 100,
“usedQuota”: 0,
“maxUplink”: 0,
“maxDownlink”: 0,
“timePeriod”: 30,
“currentClients”: 0,
“maxClients”: 3,
“usedTime”: null
}
}
```

```
]
}
```

2.4.4 Update Account Information

Type: account/update

Shell

url: {CloudUrlPrefix}/service/api/open/auth/account/update/{groupId}

method: POST

PathParam request

Parameter Name	Type	Mandatory	Description
----------------	------	-----------	-------------

groupId	Integer	M	Group ID
---------	---------	---	----------

QueryParam request parameters:

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.

jsonParam request parameters:

Parameter Name	Type	Mandatory	Description
uuid	String	M	Account uuid
password	String	M	Account password
userGroupId	int	M	User Group Id, get from API “2.7.1 Get User Group List” of id field

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.

Request message example:

```
SQL
curl --request POST
http://Server.ruijienetworks.com/service/api/open/auth/account/update/{groupId}?access_tokenaccess_token=F8BF266ED6D84B119D98D21EC83E8AD6&ishttps=false&tenantId=2756
--header "Content-Type: application/json"
--data "{
  \"uuid\": \"5c9c6d7560db4132adbd1888641d0239\",
  \"userGroupId\": 11,
  \"password\": \"123456\"
}"
```

Response message example:

```
Shell
Response
{
  \"code\": 0,
  \"msg\": \"OK.\"
}
```

2.4.5 Reset Account Information

Type: account/reset

```
Shell
url: {CloudUrlPrefix}/service/api/open/auth/account/reset/{groupId}
method: POST
```

PathParam request

Parameter Name	Type	Mandatory	Description
----------------	------	-----------	-------------

groupId	Integer	M	Group ID
---------	---------	---	----------

QueryParam request parameters:

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the

Parameter Name	Type	Mandatory	Description
			client needs to apply for a new one in order to resume API invocation.

jsonParam request parameters:

Parameter Name	Type	Mandatory	Description
names	String	M	Account names

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.

Request message example:

```
SQL
curl --request POST
http://Server.ruijienetworks.com/service/api/open/auth/account/reset/{groupId}?access_token=F8BF266ED6D84B119D98D21EC83E8AD6&ishttps=false&tenantId=2756
--header "Content-Type: application/json"
--data "[
  "name1",
  "name2"
]
```

Response message example:

```
Bash
{
  "code": 0,
  "msg": "OK."
}
```

2.4.6 Get All Account Information

Type: account/getStatusSummary

Shell

url: {CloudUrlPrefix}/service/api/open/auth/account/getStatusSummary/{groupId}

method: GET

PathParam request

Parameter Name	Type	Mandatory	Description
----------------	------	-----------	-------------

groupId	Integer	M	Group ID
---------	---------	---	----------

QueryParam request parameters:

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.
groupId	String	M	groupId

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.
total	String		Account total number
used	String		User Account number
expired	String		Expired Account number

Request message example:

Shell

curl --request GET

http://Server.ruijienetworks.com/service/api/open/auth/account/getStatusSummary/{groupId}

Response message example:

Bash

{


```

“code”: 0,
“msg”: “OK.”,
“total”: 2,
“used”: 0,
“expired”: 0
}

```

2.5 Client Record APIs

2.5.1 Client Online/ Offline history

Description		Get Online or offline history client record list
Implementer	RUIJIE CLOUD	
URL	[CloudUrlPrefix]/logbizagent/logbiz/api/sta/sta_users?access_token={}	
Request Method	POST	

QueryParam request parameters:

Parameter	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.

JsonParam request parameters:

Parameter	Type	Mandatory	Description
groupId	int	M	Network Group ID, get from API “2.2.1 Get Network Group List”
pageSize	int	M	Page Size for paging return
pageIndex	int	M	Begin index of the record, start with 0. For example, PageSize=10, to get Second page, the start is (2-1)*PageSize=10
staType	String	M	“currentUser”: Current online data;“onofflineUserHistory”: History data
mac	String	O	Matching client mac address
ssid	String	O	Matching client link wireless ssid
sn	String	O	Matching client link serial_number

Returned parameters:

code int M **Response code. For details, see the section about response code description.**
msg String O Code message. If the operation is successful, this parameter is not carried.

Response message example:

```
{  
  "code": 0,  
  "msg": "OK.",  
  "list": [  
    {  
      "activeTime": 5353000,  
      "band": "2.4G",  
      "buildingId": 9391115,  
      "buildingName": "GeneralDemo2",  
      "channel": "1",  
      "deviceAliasName": "Ruijie",  
      "downlinkRate": 8222548.0,  
      "floorNoise": -74,  
      "mac": "ff61.f313.0101",  
      "onlineTime": 1716804247000,  
      "pktLoseRate": 0,  
      "rssi": "-67",  
      "rssiInt": -67,  
      "score": 27,  
      "scoreReason": "heavy interference",  
      "sn": "NAHK0046H0008",
```

```

“ssid”: “NAHK0046H0008”,
“timeDelay”: 64,
“updateTime”: 1716809600376,
“uplinkRate”: 1538630.0,
“userIp”: “192.168.110.11”,
“utilization”: 28,
“wifiDown”: 990833347,
“wifiUp”: 998323450,
“wifiUpDown”: 1989156797
}
],
“count”: 1
}

```

2.6 Device Management APIs

2.6.1 Device List

2.6.1.1 AP / Switch List

Description		Get AP / Switch list
Implementer	RUIJIE CLOUD	
URL	[CloudUrlPrefix]/service/api/maint/devices?access_token={}	
Request Method	GET	

QueryParam request parameters:

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the

Parameter Name	Type	Mandatory	Description
			client needs to apply for a new one in order to resume API invocation.
product_type	String	O	Product series type, e.g. “EAP, RAP, AP, EGW”, but this type is backend series type, not the same as product model name shown. Recommend to use below*common_type* to call this API.
common_type	String	M	Product type, e.g. AP, Switch, Gateway
group_id	int	M	Group ID
key	String	O	Search key, e.g. AP SN or Alias
page	int	M	Begin index of the record, start with 0. For example, PageSize=10, to get Second page, the start is (2-1)*PageSize =10
per_page	int	M	Page Size for paging return

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.

Request message example:

```
Shell
curl -X GET Get
'https://Server.ruijienetworks.com/service/api/maint/devices?page=1&per__page=10&group__id=57805&product__type=AP&access_tokenaccess_token=x9oI0oP1E8b8r9J2oawukhdbU2iGzqGk'
```

Response message example:

```
Plain Text
{
  "code": 0,
  "msg": "OK.",
  "deviceList": [
    {
      "serialNumber": "G1LQ68P016011",
      "productClass": "AP720-I",
      "productType": "AP",
```

```
    "hardwareVersion": "1.00",
    "softwareVersion": "AP_RGOS 11.1(9)B1P19, Release(06200910)",
    "onlineStatus": "ON",
    "offlineReason": "INFORM",
    "name": "",
    "aliasName": "",
    "groupId": 154845,
    "groupName": "Binnykuoll",
    "timezone": "Etc/GMT-8",
    "parentGroupName": "1653454930@qq.com",
    "remark": "",
    "localIp": "192.168.110.60",
    "cpeIp": "220.250.41.86",
    "lastOnline": 1626838447000,
    "createTime": 1623312353000,
    "mac": "5869.6ce9.100e",
    "confSyncType": "UP_TO_DATE",
    "confSyncTypeDesc": "UP_TO_DATE",
    "apModeChange": "IDLE",
    "apMode": "FAT",
    "devMode": "",
    "commonType": "AP"
  }, {
    "serialNumber": "G1MQAWQ00077C",
    "productClass": "RG-AP840-I",
    "productType": "AP",
    "hardwareVersion": "1.00",
    "softwareVersion": "AP_RGOS 11.9(6)B1, Release(07201411)",
    "onlineStatus": "OFF",
    "offlineReason": "INFORM",
    "name": "Ruijie1618281901637",
    "aliasName": "Ruijie1618281901637",
    "groupId": 126115,
    "groupName": "tests",
    "timezone": "Asia/Shanghai",
    "parentGroupName": "1653454930@qq.com",
    "remark": "Ruijie_Auto1618281901637",
    "localIp": "192.168.110.195",
    "cpeIp": "192.168.110.195",
    "lastOnline": 1618295587000,
    "createTime": 1617243656000,
    "mac": "0074.9cbd.ac9e",
    "confSyncType": "NOT_SYNC",
    "confSyncTypeDesc": "NOT_SYNC",
    "apModeChange": "IDLE",
    "apMode": "FAT",
    "devMode": ""
```

```

“commonType”: “AP”
}
],
“totalCount”: 2
}

```

2.6.2 Get Device Flow Trend For Last 24 Hours

Description		Query Reyee EG Flow Trend List For Last 24 Hours
Implementer		RUIJIE CLOUD
URL		[CloudUrlPrefix]/logbizagent/logbiz/api/flow/show/hour?access_token={}
Request Method		POST

QueryParam request parameters:

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.

jsonParam request parameters:

Parameter Name	Type	Mandatory	Description
sn	String	M	The device serial number
startDate	Date	M	Query start time, timestamp format
endDate	Date	M	Query end time, timestamp format

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.
List Price			
intfType	String	M	Interface Type
sn	String	M	The device serial number

Parameter Name	Type	Mandatory	Description
buildingId	int	M	Project group id at the Cloud
rxBytes	Long	M	Downlink flow, received Bytes
rxPkts	Long	M	Number of received packets
txBytes	Long	M	Uplink flow, transmitted Bytes
txPkts	Long	M	Number of packets transmitted
timeStamp	Date	M	Timestamp (milliseconds from 1970 -1-1) of the flow value, based on this value transfer to local TimeZone, such as: 1632339000000, UTC+8 time is 2021-09-23 03:30:00.

Request message example:

Plain Text

```
curl --request POST
```

```
https://cloudLogBizIP/logbizagent/logbiz/api/flow/show/hour?access\_token=access\_token=C0116BF86B66497C9B5733B15240EDA3
```

```
-header "Content-Type: application/json" \
```

```
-data "{
```

```
  "sn": "H1NA1WA000705",
```

```
  "startDate": 1632313892000,
```

```
  "endDate": 1632468666882
```

```
}"
```

Response message example:

JSON

```
{
```

```
  "code": 0,
```

```
  "msg": "OK.",
```

```
  "count": 2,
```

```
  "list": [
```

```
    {
```

```
      "buildingId": 58959,
```

```
      "rxBytes": 297421,
```

```
      "rxPkts": 1592,
```

```
      "txBytes": 297964,
```

```
      "txPkts": 1498,
```

```
      "timeString": "2021-09-23 03:30:00",
```

```
      "timeStamp": 1632339000000
```

```
    },
```

```
    {
```

```
      "buildingId": 58959,
```

```
      "rxBytes": 167569,
```

```

“rxPkts”: 1307,
“txBytes”: 202703,
“txPkts”: 1166,
“timeString”: “2021-09-23 03:40:00”,
“timeStamp”: 1632339600000,
“egRxBytes”: 0,
“rxRate”: 0.002,
“txRate”: 0.003
} ]
}
}

```

2.6.3 Get Device ON/OFF status

Description	Get Device On/Off status
Implementer	RUIJIE CLOUD
URL	[CloudUrlPrefix]/service/api/device/ {sn}?access_token={}
Request Method	GET

QueryParam request parameters:

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.

PathParam request parameters:

Parameter Name	Type	Mandatory	Description
sn	String	M	The device serial number

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.

Parameter Name	Type	Mandatory	Description
groupId	Int	M	Network Group Id
productClass	String	M	The device product class
onlineStatus	String	M	The device online status, including ON, OFF, NEVER_ONLINE
mac	String	M	The device mac address
serialNumber	String	M	The device serial number
name	String	M	User defined alias

Request message example:

Plain Text

```
curl --request GET
```

```
https://CloudIP/service/api/device/MACC942570020?access_token=3hCeDNEVVbcz4gog0ou4J7A7W3z0ok2S
```

Response message example:

JSON

```
{
  "code": 0,
  "msg": "OK.",
  "groupId": 189279,
  "localIp": "192.168.200.4",
  "productClass": "EG205G-V2",
  "productType": "EGW",
  "softwareVersion": "ReyeeOS 1.53.1621;EG_3.0(1)B11P53,Release(08162123)",
  "onlineStatus": "ON",
  "cpeUrl": "",
  "hardwareVersion": "1.00",
  "osType": "openwrt_1.0",
  "remark": "",
  "mac": "00d0.f815.0843",
  "serialNumber": "MACC942570020",
  "name": "Gateway"
}
```

2.6.4 Get Gateway Port status

Description	Query Gateway Device ON/OFF status
Implementer	RUIJIE CLOUD
URL	[CloudUrlPrefix]/service/api/gateway/intf/info/{sn}?access_token={}
Request Method	GET

PathParam request parameters:

Parameter Name	Type	Mandatory	Description
sn	String	M	The device serial number

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.
List Price			
linestatus	Boolean	M	True / false, true means cable inserted and port ON status.
adminstatus	Boolean	M	True / false, true means enable administration of port.
alias	String	M	Alias name
type	String	M	Port Type. E.g. LAN
sn	String	M	The device serial number
speed	String	M	Speed rate
pppoe	String	M	Is pppoe port
RG-layer2Name	String	O	Layer 2 interface name
port	int	M	Port number

Request message example:

Plain Text

```
curl --request GET
```

```
https://CloudIP/service/api/service/api/gateway/intf/info/H1PT4F2044471?access_token=3  
ABBEE24339F49AE9A819D955216EECA
```

Response message example:

JSON

```
{  
  "code": 0,  
  "msg": "OK.",  
  "data": [  
    {  
      "alias": "Gi0/0",
```

```
    "sn": "H1NA1WA000705",
    "port": 0,
    "intfType": "Gi",
    "hwName": "",
    "adminstatus": "true",
    "protostatus": "true",
    "linestatus": "true",
    "description": "",
    "ipAddr": "42.200.231.215",
    "ipMask": "255.255.255.0",
    "type": "WAN",
    "nextHop": "42.200.231.254",
    "mtu": 1500,
    "bandwidth": 1000000,
    "downband": 1000000,
    "upband": 1000000,
    "pppoe": "false",
    "speed": "100M",
    "mediumType": "copper",
    "duplexMode": "Full",
    "isSubintf": "false",
    "updateTime": 1632468585000,
    "ipType": "dhcp",
    "province": "Fujian",
    "city": "-",
    "isp": "xxx",
    "poeStatus": "Off",
    "enableReversePath": true
  },
  {
    "alias": "Gi0/2",
    "sn": "H1NA1WA000705",
    "port": 1,
    "intfType": "Gi",
    "hwName": "",
    "adminstatus": "true",
    "protostatus": "true",
    "linestatus": "false",
    "description": "",
    "ipAddr": "192.168.110.1",
    "iMask": "255.255.254.0",
    "type": "LAN",
    "mtu": 1500,
    "pppoe": "false",
    "isSubintf": "false",
    "updateTime": 1632468585000,
    "ipType": "none",
```

```
    "layer2LineStatus": "false",
    "layer2Name": "LAN 1",
    "poeStatus": "Off",
    "enableReversePath": false,
    "dhcpInfo": {
      "id": 44027,
      "sn": "H1NA1WA000705",
      "name": "ap_dhcp_pool",
      "ipAddr": "192.168.110.0",
      "startIp": "192.168.110.1",
      "endIp": "192.168.111.254",
      "subnetMask": "255.255.254.0",
      "lease": "0 20 0",
      "dnsServers": "8.8.8.8 8.8.4.4",
      "defaultRouter": "192.168.110.1",
      "status": "ENABLE",
      "updateTime": 1619091269000,
      "ipHelper": "",
      "vlanId": "",
      "excludedIps": "",
      "option43": "3.3.33.3",
      "option138": "3.3.33.3",
      "ipNum": 510,
      "maskLength": 23
    }
  },
  {
    "alias": "Gi0/2",
    "sn": "H1NA1WA000705",
    "port": 2,
    "intfType": "Gi",
    "hwName": "",
    "adminstatus": "true",
    "protostatus": "true",
    "linestatus": "true",
    "description": "",
    "ipAddr": "192.168.110.1",
    "ipMask": "255.255.254.0",
    "type": "LAN",
    "mtu": 1500,
    "pppoe": "false",
    "speed": "1000M",
    "mediumType": "Copper",
    "duplexMode": "Full",
    "isSubintf": "false",
    "updateTime": 1632468585000,
    "ipType": "none",
```

```
    "layer2DuplexMode": "Full",
    "layer2LineStatus": "true",
    "layer2MediumType": "Copper",
    "layer2Name": "LAN 2",
    "layer2Speed": "1000M",
    "poeStatus": "On",
    "enableReversePath": false,
    "dhcpInfo": {
      "id": 44027,
      "sn": "H1NA1WA000705",
      "name": "ap_dhcp_pool",
      "ipAddr": "192.168.110.0",
      "startIp": "192.168.110.1",
      "endIp": "192.168.111.254",
      "subnetMask": "255.255.254.0",
      "lease": "0 20 0",
      "dnsServers": "8.8.8.8 8.8.4.4",
      "defaultRouter": "192.168.110.1",
      "status": "ENABLE",
      "updateTime": 1619091269000,
      "ipHelper": "",
      "vlanId": "",
      "excludedIps": "",
      "option43": "3.3.33.3",
      "option138": "3.3.33.3",
      "ipNum": 510,
      "maskLength": 23
    }
  },
  {
    "alias": "Gi0/2",
    "sn": "H1NA1WA000705",
    "port": 3,
    "intfType": "Gi",
    "hwName": "",
    "adminstatus": "true",
    "protostatus": "true",
    "lnestatus": "true",
    "description": "",
    "ipAddr": "192.168.110.1",
    "ipMask": "255.255.254.0",
    "type": "LAN",
    "mtu": 1500,
    "pppoe": "false",
    "speed": "1000M",
    "mediumType": "Copper",
    "duplexMode": "Full",
```

```
    "isSubintf": "false",
    "updateTime": 1632468585000,
    "ipType": "none",
    "layer2DuplexMode": "Full",
    "layer2LineStatus": "true",
    "layer2MediumType": "Copper",
    "layer2Name": "LAN 3",
    "layer2Speed": "1000M",
    "poeStatus": "On",
    "enableReversePath": false,
    "dhcpInfo": {
      "id": 44027,
      "sn": "H1NA1WA000705",
      "name": "ap_dhcp_pool",
      "ipAddr": "192.168.110.0",
      "startIp": "192.168.110.1",
      "endIp": "192.168.111.254",
      "subnetMask": "255.255.254.0",
      "lease": "0 20 0",
      "dnsServers": "8.8.8.8 8.8.4.4",
      "defaultRouter": "192.168.110.1",
      "status": "ENABLE",
      "updateTime": 1619091269000,
      "ipHelper": "",
      "vlanId": "",
      "excludedIps": "",
      "option43": "3.3.33.3",
      "option138": "3.3.33.3",
      "ipNum": 510,
      "maskLength": 23
    }
  },
  {
    "alias": "Gi0/2",
    "sn": "H1NA1WA000705",
    "port": 4,
    "intfType": "Gi",
    "hwName": "",
    "adminstatus": "true",
    "protostatus": "true",
    "linestatus": "true",
    "description": "",
    "ipAddr": "192.168.110.1",
    "ipMask": "255.255.254.0",
    "type": "LAN",
    "mtu": 1500,
    "pppoe": "false",
```

```
    "speed": "1000M",
    "mediumType": "Copper",
    "duplexMode": "Full",
    "isSubintf": "false",
    "updateTime": 1632468585000,
    "ipType": "none",
    "layer2DuplexMode": "Full",
    "layer2LineStatus": "true",
    "layer2MediumType": "Copper",
    "layer2Name": "LAN 4",
    "layer2Speed": "1000M",
    "poeStatus": "On",
    "enableReversePath": false,
    "dhcpInfo": {
      "id": 44027,
      "sn": "H1NA1WA000705",
      "name": "ap_dhcp_pool",
      "ipAddr": "192.168.110.0",
      "startIp": "192.168.110.1",
      "endIp": "192.168.111.254",
      "subnetMask": "255.255.254.0",
      "lease": "0 20 0",
      "dnsServers": "8.8.8.8 8.8.4.4",
      "defaultRouter": "192.168.110.1",
      "status": "ENABLE",
      "updateTime": 1619091269000,
      "ipHelper": "",
      "vlanId": "",
      "excludedIps": "",
      "option43": "3.3.33.3",
      "option138": "3.3.33.3",
      "ipNum": 510,
      "maskLength": 23
    }
  },
  {
    "alias": "Gi0/2",
    "sn": "H1NA1WA000705",
    "port": 5,
    "intfType": "Gi",
    "hwName": "",
    "adminstatus": "true",
    "protostatus": "true",
    "linestatus": "true",
    "description": "",
    "ipAddr": "192.168.110.1",
    "ipMask": "255.255.254.0",
```

```
    "type": "LAN",
    "mtu": 1500,
    "pppoe": "false",
    "speed": "1000M",
    "mediumType": "Copper",
    "duplexMode": "Full",
    "isSubintf": "false",
    "updateTime": 1632468585000,
    "ipType": "none",
    "layer2DuplexMode": "Full",
    "layer2LineStatus": "true",
    "layer2MediumType": "Copper",
    "layer2Name": "LAN 5",
    "layer2Speed": "1000M",
    "poeStatus": "On",
    "enableReversePath": false,
    "dhcpInfo": {
      "id": 44027,
      "sn": "H1NA1WA000705",
      "name": "ap_dhcp_pool",
      "ipAddr": "192.168.110.0",
      "startIp": "192.168.110.1",
      "endIp": "192.168.111.254",
      "subnetMask": "255.255.254.0",
      "lease": "0 20 0",
      "dnsServers": "8.8.8.8 8.8.4.4",
      "defaultRouter": "192.168.110.1",
      "status": "ENABLE",
      "updateTime": 1619091269000,
      "ipHelper": "",
      "vlanId": "",
      "excludedIps": "",
      "option43": "3.3.33.3",
      "option138": "3.3.33.3",
      "ipNum": 510,
      "maskLength": 23
    },
    {
      "alias": "Gi0/2",
      "sn": "H1NA1WA000705",
      "port": 6,
      "intfType": "Gi",
      "hwName": "",
      "adminstatus": "true",
      "protostatus": "true",
      "linestatus": "false",
```



```
    "description": "",
    "ipAddr": "192.168.110.1",
    "ipMask": "255.255.254.0",
    "type": "LAN",
    "mtu": 1500,
    "pppoe": "false",
    "isSubintf": "false",
    "updateTime": 1632468585000,
    "ipType": "none",
    "layer2LineStatus": "false",
    "layer2Name": "LAN 6",
    "poeStatus": "Off",
    "enableReversePath": false,
    "dhcpInfo": {
      "id": 44027,
      "sn": "H1NA1WA000705",
      "name": "ap_dhcp_pool",
      "ipAddr": "192.168.110.0",
      "startIp": "192.168.110.1",
      "endIp": "192.168.111.254",
      "subnetMask": "255.255.254.0",
      "lease": "0 20 0",
      "dnsServers": "8.8.8.8 8.8.4.4",
      "defaultRouter": "192.168.110.1",
      "status": "ENABLE",
      "updateTime": 1619091269000,
      "ipHelper": "",
      "vlanId": "",
      "excludedIps": "",
      "option43": "3.3.33.3",
      "option138": "3.3.33.3",
      "ipNum": 510,
      "maskLength": 23
    }
  },
  {
    "alias": "Gi0/2",
    "sn": "H1NA1WA000705",
    "port": 7,
    "intfType": "Gi",
    "hwName": "",
    "adminstatus": "true",
    "protostatus": "true",
    "linestatus": "false",
    "description": "",
    "ipAddr": "192.168.110.1",
    "ipMask": "255.255.254.0",
```

```

"type": "LAN",
"mtu": 1500,
"pppoe": "false",
"isSubintf": "false",
"updateTime": 1632468585000,
"ipType": "none",
"layer2LineStatus": "false",
"layer2Name": "LAN 7",
"poeStatus": "Off",
"enableReversePath": false,
"dhcpInfo": {
  "id": 44027,
  "sn": "H1NA1WA000705",
  "name": "ap_dhcp_pool",
  "ipAddr": "192.168.110.0",
  "startIp": "192.168.110.1",
  "endIp": "192.168.111.254",
  "subnetMask": "255.255.254.0",
  "lease": "0 20 0",
  "dnsServers": "8.8.8.8 8.8.4.4",
  "defaultRouter": "192.168.110.1",
  "status": "ENABLE",
  "updateTime": 1619091269000,
  "ipHelper": "",
  "vlanId": "",
  "excludedIps": "",
  "option43": "3.3.33.3",
  "option138": "3.3.33.3",
  "ipNum": 510,
  "maskLength": 23
}
}
]
}

```

2.6.5 Get Device Event Log

Description	Query Device Event Log by Serial Number
Implementer	RUIJIE CLOUD
URL	[CloudUrlPrefix] /service/api/apmgt/apinfo/{sn}/devicemgtlogs?access_token={}
Request Method	GET

PathParam request parameters:

Parameter Name	Type	Mandatory	Description
sn	String	M	The device serial number

QueryParam request parameters:

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.
group_id	int	M	Product details type, e.g. "EAP,.RAP"
days	int	O	Of the last N days
page	Int	M	Page number, if records have many, this API supports query by paging
per_page	Int	M	Page Size (return count) by each page

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.
data			
List Price			
sn	String	M	The device serial number
logtype	String	M	The device log type, such as ONLINE, OFFLINE, RESTART, etc
logdetail	String	M	The device log details
operateTime	Long	M	Timestamp of operation time
tenantId	int	M	Tenant ID
groupId	int	M	Group ID
accountId	int	M	Fixed to 0, please ignore

Request message example:

Plain Text
curl --request GET

https://CloudIP/service/api/apmgt/apinfo/
MACC942570020/devicemgtlogs?access_token=3hCeDNEVVbcz4gog0ou4J7A7W3z0ok
2S

Response message example:

JSON

```
{
  "code": 0,
  "msg": "OK.",
  "data": {
    "count": 17,
    "list": [
      {
        "id": 9,
        "sn": "123494257001C",
        "tenantId": 6128,
        "groupId": 67769,
        "logType": "reboot",
        "logDetail": "Device restart",
        "operateTime": 1647829099000,
        "accountId": 0
      },
      {
        "id": 10,
        "sn": "123494257001C",
        "tenantId": 6128,
        "groupId": 67769,
        "logType": "onoffline",
        "logDetail": "Device online",
        "operateTime": 1647829099000,
        "accountId": 0
      },
      {
        "id": 373,
        "sn": "123494257001C",
        "tenantId": 6128,
        "groupId": 67769,
        "logType": "onoffline",
        "logDetail": "Device offline. The final time when it sends packets to Cloud is: 2022-03-19  
05:00:07(It is an estimated value. The deviation is 1 minute.)",
        "operateTime": 1647644947000,
        "accountId": 0
      },
      {
        "id": 198,
        "sn": "123494257001C",
```

```
    "tenantId": 6128,
    "groupId": 67770,
    "logType": "reboot",
    "logDetail": "Device restart",
    "operateTime": 1647327541000,
    "accountId": 0
  },
  {
    "id": 197,
    "sn": "123494257001C",
    "tenantId": 6128,
    "groupId": 67770,
    "logType": "onoffline",
    "logDetail": "Device online",
    "operateTime": 1647327541000,
    "accountId": 0
  },
  {
    "id": 193,
    "sn": "123494257001C",
    "tenantId": 6128,
    "groupId": 67770,
    "logType": "onoffline",
    "logDetail": "Device offline. The final time when it sends packets to Cloud is: 2022-03-15 12:35:07(It is an estimated value. The deviation is 1 minute.)",
    "operateTime": 1647326647000,
    "accountId": 0
  },
  {
    "id": 183,
    "sn": "123494257001C",
    "tenantId": 6128,
    "groupId": 67770,
    "logType": "onoffline",
    "logDetail": "Device online",
    "operateTime": 1647325085000,
    "accountId": 0
  },
  {
    "id": 175,
    "sn": "123494257001C",
    "tenantId": 6128,
    "groupId": 67770,
    "logType": "onoffline",
    "logDetail": "Device offline. The final time when it sends packets to Cloud is: 2022-03-15 12:04:07(It is an estimated value. The deviation is 1 minute.)",
    "operateTime": 1647324787000,
```

```

“accountId”: 0
},
{
“id”: 148,
“sn”: “123494257001C”,
“tenantId”: 6128,
“groupId”: 67770,
“logType”: “reboot”,
“logDetail”: “Device restart”,
“operateTime”: 1647247226000,
“accountId”: 0
},
{
“id”: 122,
“sn”: “123494257001C”,
“tenantId”: 6128,
“groupId”: 67770,
“logType”: “reboot”,
“logDetail”: “Device restart”,
“operateTime”: 1647238109000,
“accountId”: 0
}
]
}
}

```

2.6.6 Get Device CPU and Memory

Description	Query Device current CPU and Memory information
Implementer	RUIJIE CLOUD
URL	[CloudUrlPrefix] /logbizagent/logbiz/api/sys/current_performance?access_token={ }
Request Method	GET

QueryParam request parameters:

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.

Parameter Name	Type	Mandatory	Description
sn	String	M	The device serial number

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.
data			
cpuTemp	Float	M	Fixed to 0, please ignore
cpuRate	Float	M	Current CPU usage, unit is %
processNum	int	M	Number of processors
memoryRate	Float	M	Memory usage, unit is %
memoryFree	Long	M	Free memory
flashRate	Float	M	Flash usage
flashFree	Long	M	Free flash
diskRate	Float	M	Fixed to 0, please ignore
diskFree	Long	M	Fixed to 0, please ignore

Request message example:

Plain Text

```
curl --request GET
https://CloudIP/
logbizagent/logbiz/api/sys/current_performance?access_token=nb7vWdZ2NrbC1doi0oA6
Y7e6k7omlKMw&sn=123494257001C
```

Response message example:

JSON

```
{
  "code": 0,
  "msg": "OK.",
  "data": {
    "cpuTemp": 0.0,
    "cpuRate": 30.0,
    "processNum": 179,
    "memoryRate": 63.0,
    "memoryFree": 114336,
```

```

“flashRate”: 67.0,
“flashFree”: 84892,
“diskRate”: 0.0,
“diskFree”: 0
}
}

```

2.6.7 Get Switch Port status

Descript ion	Query Switch Device Port status
Impleme nter	RUIJIE CLOUD
URL	[CloudUrlPrefix]/service/api/conf/switch/device/{sn}/ports?page_size=100&page_index=0&access_token={}
Request Method	GET

PathParam request parameters:

Parameter Name	Type	Mandatory	Description
sn	String	M	The device serial number
Page_index	int	M	Begin index of the record, start with 0. For example, PageSize=10, to get Second page, the start is (2-1)*PageSize =10
Page_size	int	M	Page Size for paging return

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is null or is not carried.
List Price			
port	int	M	port
order	int	M	The port Id in the panel, such as Gi 1/0/2, order is 2.
slotOrder	int	M	The slot Id in the panel, such as Gi 1/0/2, the slotOrder is 0.

Parameter Name	Type	Mandatory	Description
devOrder	int	M	The device ID in the panel, such as Gi 1/0/2, the devOrder is 1.
name	String	O	The port name
description	String	M	The port alias
description	String	M	The port enable status, true/false
type	String	M	Access / Trunk type
vlan	int	M	If type is access, then vlan is access vlan, If type is trunk, the vlan is native vlan
vlanlist	String	M	If type is trunk, this value is allowed vlan list
status	String	M	Up/Down/Unknown/Dormant status
Description	String	M	Port Speed
mediumType	String	M	Copper / Fiber of medium
mediumType	String	M	Whether support Combo (use either RJ45 or the SFP port) port, if support then true, others is false
Mtu	int	M	mtu
duplexMode	String	M	Half or Full
isUplink	String	M	True or false, if work as uplink port, then it is true.
poeStatus	String	M	Port poe status, On, Off, Errorneous, Unsupport
loopState	String	M	True or False, whether under loop status.
loopState	String	M	True or False
switchPortEnable	String	M	True or False
enableConfig	Boolean	M	True is can be configured, False is not configurable.
message	String	O	The message of why can't be configurable

Request message example:

Plain Text

```
curl --request GET
```

```
https://{maccserver}/service/api/conf/switch/device/NAEK322EH0002/ports?page_size=2&page_index=0&access_token=Nb9Sr1qKWoS0oS5g9L6ojv1xb8svvWqP
```

Response message example:

JSON

```
{
  "code": 0,
  "msg": "OK.",
  "portList": [
    {
```

```
    "sn": "NAEK322EH0002",
    "port": 0,
    "name": "Gi1",
    "alias": "Gi1",
    "isUplink": "true",
    "description": "",
    "enable": "true",
    "type": "Access",
    "vlan": 1,
    "vlanList": "",
    "untagVlan": "",
    "status": "Up",
    "speedConf": "Auto",
    "speed": "1000M",
    "mediumType": "Copper",
    "supportMedium": "false",
    "portGroupId": 8,
    "duplexMode": "Auto",
    "duplexModeCurrent": "Full",
    "loopState": "false",
    "updateTime": 1675604059000,
    "switchPortEnable": "true",
    "priIpAddrType": "NONE",
    "order": 1,
    "vsuOrder": 100000,
    "devOrder": 1,
    "slotOrder": 0,
    "poeStatus": "Unsupport",
    "productType": "MSW",
    "productClass": "NBS3200-48GT4XS",
    "enableConfig": true,
    "uplink": true,
    "aggregatePort": true
  },
  {
    "sn": "NAEK322EH0002",
    "port": 1,
    "name": "Gi2",
    "alias": "Gi2",
    "description": "",
    "enable": "true",
    "type": "Access",
    "vlan": 1,
    "vlanList": "",
    "untagVlan": "",
    "status": "Up",
    "speedConf": "Auto",
```

```

“speed”: “1000M”,
“mediumType”: “Copper”,
“supportMedium”: “false”,
“portGroupId”: 8,
“duplexMode”: “Auto”,
“duplexModeCurrent”: “Full”,
“loopState”: “false”,
“updateTime”: 1675604059000,
“switchPortEnable”: “true”,
“priIpAddrType”: “NONE”,
“order”: 2,
“vsuOrder”: 100000,
“devOrder”: 1,
“slotOrder”: 0,
“poeStatus”: “Unsupport”,
“productType”: “MSW”,
“productClass”: “NBS3200-48GT4XS”,
“enableConfig”: true,
“uplink”: false,
“aggregatePort”: true
}
],
“totalCount”: 52
}

```

2.6.8 Get Switch PoE Port Info

Description	Query Switch Port Info
Implementer	RUIJIE CLOUD
URL	[CloudUrlPrefix]/service/api/conf/switch/device/{sn}/poe/info
Request Method	GET

PathParam request parameters:

Parameter Name	Type	Mandatory	Description
sn	String	M	The device serial number

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.

Parameter Name	Type	Mandatory	Description
msg	String	O	Code message. If the operation is successful, this parameter is null or is not carried.
data	Object[]		
port	int	M	port
sn	String	M	The device serial number
poeAdminStatus	String	M	Poe Switch, On:enable, Off:disable
poeStatus	String	M	Poe Status, On:open, Off:shutdown
powerUsed	String	M	Device Poe Power Used

Request message example:

Plain Text

```
curl --request GET
```

```
https://{macserver}}/service/api/conf/switch/device/{sn}/poe/info?access_token=Nb9Sr1qKWoS0oS5g9L6ojvLxb8svvWqP
```

Response message example:

JSON

```
{
  "code": 0,
  "msg": "OK.",
  "data": [
    {
      "port": 0,
      "sn": "NAEK29DFH0005",
      "poeAdminStatus": "On",
      "poeStatus": "On",
      "powerUsed": "5.42 W"
    },
    {
      "port": 1,
      "sn": "NAEK29DFH0005",
      "poeAdminStatus": "On",
      "poeStatus": "On",
      "powerUsed": "3.32 W"
    }
  ],
  "count": 2
}
```

2.6.9 Get Switch PoE Power Usage Info

Description		Query Switch PoE Power Info
Implementer		RUIJIE CLOUD
URL		[CloudUrlPrefix]/service/api/conf/switch/device/{sn}/poe/pwr
Request Method		GET

PathParam request parameters:

Parameter Name	Type	Mandatory	Description
sn	String	M	The device serial number

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is null or is not carried.
data	Object		
maxPower	String	M	Support Max Poe Power
curPower	String	M	Current Device Poe Power Consumption

Request message example:

Plain Text

```
curl --request GET
```

```
https://{maccserver}}/service/api/conf/switch/device/{sn}/poe/pwr?access_token=Nb9Sr1qKWoS0oS5g9L6ojvLxb8svvWqP
```

Response message example:

JSON

```
{
  "code": 0,
  "msg": "OK.",
  "data": {
    "sn": "NAEK29DFH0005",
    "tenantId": 118458,
    "groupId": 5805213,
    "maxPower": "370.00 W",
    "curPower": "16.20 W"
  }
}
```

2.6.10 Get Application Traffic Statistics

Description		QueryGateway Application Traffic Statistics
Implementer	RUIJIE CLOUD	
URL	[CloudUrlPrefix]/logbizagent/logbiz/api/eg/appflow/statistic/data-minute/appname	
Request Method	POST	

PathParam request parameters:

Parameter Type Mandatory Description

QueryParam request parameters:

Parameter	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.

JsonParam request parameters:

Parameter	Type	Mandatory	Description
groupId	Int	M	Account Root Group ID, all the network Groups under this Root Group ID. Create voucher API not use this GroupId, Groups will be crated at Ruijie Cloud UI, each group seen as each network location. Network groups get from API “2.2.1 Get Network Group List”
sn	String	M	Matching client link serial_number
startTime	timestamp	O	Start time for statistic, can be null. timestamp value format(from 1970-1-1 timestamp milliseconds)
endTime		M	End time for statistic. If startTime is null, endTime value is current time, then return the latest real-time data. If both startTime and endTime are not null, will return the aggregate value of application at this period. timestamp value format(from 1970-1-1 timestamp milliseconds)
pageIndex		M	Begin index of the record, start with 0. For example, PageSize=10, to get Second page, the start is (2-1)*PageSize =10

Parameter	Type	Mandatory	Description
pageSize		M	Page Size for paging record items return, if u want to get all profiles, u can set start=0, pageSize=1000 (if profiles num <1000).

Returned parameters:

Parameter	Type	Mandatory	Description
code	Int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.
totalCount	Int	M	Application total number
List Price			
appGroupName	String	M	Application Group Type
appName	String	M	Application Name
downFlow	Int	M	Downlink traffic statistics
upFlow	Int	M	Uplink traffic statistics
upDownFlow	Int	M	Uplink and downlink traffic statistics

Request message example:

Plain Text

```
curl --request POST \
-url 'https://[CloudUrlPrefix]/logbizagent/logbiz/api/eg/appflow/statistic/data-minute/appname?access_token=3JVlpDZBkjBov1oj7w0T7M0oKPw5TqrW' \
-header "Content-Type: application/json" \
-data '{
  "groupId": 89876,
  "sn": "MACCEG2206021",
  "endTime": 1702971807000,
  "pageIndex": 1,
  "pageSize": 10
}'
```

Response message example:

JSON

```
{
  "code": 0,
  "list": [
    {
      "appGroupName": "Other",
      "appName": "TikTok",
```

```

“downFlow”: 35970,
“upDownFlow”: 99741,
“upFlow”: 63771
},
{
“appGroupName”: “Other”,
“appName”: “Other UDP”,
“downFlow”: 25130,
“upDownFlow”: 83981,
“upFlow”: 58851
}
],
“msg”: “ok.”,
“totalCount”: 27
}

```

2.7 User Group Management APIs

2.7.1 Get User Group List

Descrip tion	Get User Group List
Implem enter	RUIJIE CLOUD
URL	[CloudUrlPrefix]/service/api/intl/usergroup/list/{group_Id}?pageIndex={start}&pageSize={pageSize}&access_token={}
Request Method	GET

PathParam request parameters:

Parameter Name	Type	Mandatory	Description
groupId	Integer	M	Group ID, network group Id, get from API “Get Network Group List”

QueryParam request parameters:

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the

Parameter Name	Type	Mandatory	Description
			client needs to apply for a new one in order to resume API invocation.
pageIndex	Int	M	Begin index of the record, start with 0. For example, PageSize=10, to get Second page, the start is (2-1)*PageSize =10
pageSize	Int	M	Page Size for paging record items return, if u want to get all profiles, u can set start=0, pageSize=1000 (if profiles num <1000).

Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.
count	int		Package Number
data			
id	Int	M	UserGroup ID
userGroupName	String	M	User group name
authProfileId	Int	M	Group policy profile id
createTime	Int	M	Timestamp of create time
quota	Int	M	Each Voucher Traffic Volume Limit (MB), 0 means no limited.
downloadRateLimit	Int	M	Client Download Speed Limit, 0 means no limited.
uploadRateLimit	Int	M	Client Upload Speed Limit, 0 means no limited.
description	String	M	description of the package
bindMac	Int	M	Whether enable bind MAC for online login Voucher code, 1 means Bound, 0 means no Bound.
noOfDevice	Int	M	Current user number

Request message example:

GET

https://{server}/service/api/intl/usergroup/list/449441?pageIndex=0&pageSize=20&access_token=tGdm3muWyoT0oM5S9B6oTaKTOISnJV9p

Plain Text

****Response message example:****

```
```json
{
 "code": 0,
 "msg": "OK.",
 "data": [
 {
 "id": 18067,
 "userGroupName": "StaffGroup",
 "authProfileId": "30113648274480073538014045592098",
 "createTime": 1662042491000,
 "updateTime": 1662042491000,
 "name": "StaffGroup",
 "noOfDevice": 3,
 "bindMac": 0,
 "timePeriod": 30,
 "quota": 100.0,
 "downloadRateLimit": 0,
 "uploadRateLimit": 0,
 "packageType": "COMMON"
 },
 {
 "id": 18066,
 "userGroupName": "BossGroup",
 "authProfileId": "23999504999216992345230097272894",
 "createTime": 1662042483000,
 "updateTime": 1662042506000,
 "name": "BossGroup",
 "noOfDevice": 3,
 "bindMac": 0,
 "timePeriod": 30,
 "quota": 0.0,
 "downloadRateLimit": 5120,
 "uploadRateLimit": 5120,
 "packageType": "COMMON"
 }
],
 "count": 2,
 "maxAllowNum": 20
}
```

## 2.8 WiFi Management APIs

### 2.8.1 Insert/Update WiFi Without TemplateId

**Description:**

Insert or update WiFi settings without using a templateId.

**Implementer:**

RUIJIE CLOUD

**URL:**

[CloudUrlPrefix]/service/api/open/v1/wifi

**Request Method:**

POST

---

**Path Parameter Request Parameters:**

Parameter Name	Type	Mandatory	Description
groupId	Integer	M	Group ID (network group ID, obtained from the API “Get Network Group List”)
wifiGrpSsid	Boolean	M	Whether it is a single WiFi network for the entire network (default is <code>false</code> )
ssidId	Integer	O	Primary key ID for the entire network WiFi. If exists, it indicates editing; if not, it means adding a new one
wirelessConfEntity	Object	M	WiFi configuration object
ssidName	String	M	WiFi name
ssidEncode	String	M	WiFi encoding
relatedRadio	String	M	Radio frequency: 1 for 2.4G, 2 for 5G, 3.5 for second 5G radio, 3.6 for 6G. Example: “1,2”
enable	String	M	WiFi switch (on/off)
ishidden	String	M	Whether WiFi is hidden
fowardType	String	M	Forwarding mode (bridge/nat)
vlanId	String	M	VLAN ID
encryptionMode	String	M	Encryption mode (e.g., open, wpa-psk; refer to the list below)
password	String	O	Required if encryption mode is set. WiFi password
authEnable	String	M	Whether authentication is enabled (set to true if authentication is required)

Parameter Name	Type	Mandatory	Description
authEntity	Object	O	Authentication object
bandSelectEnable	String	M	5G priority
ppskEnable	String	M	PPSK switch
xpressEnable	String	M	Racing mode switch
ftEnable	String	M	11R roaming switch
okcEnable	String	M	11R roaming switch
axMode	String	M	Wireless mode (refer to the table below for values)
beMode	String	M	Wireless mode (refer to the table below for values)
wm	String	M	Wireless mode (refer to the table below for values)
vAuth	String	M	1X dynamic VLAN authorization
mlo	String	M	MLO switch
isGuest	String	M	Whether it is a guest WiFi
l2iso	String	M	Network isolation switch for the entire network
preset	String	M	Preset scenario (1: Guest, 2: Smart furniture)

## Encryption Mode Types

```
{
SUPPORT_OPEN(1, "open", "OPEN (open) ", "open"),
SUPPORT_WPA_PSK(2, "wpa-psk", "WPA-PSK", "wpa-psk"),
SUPPORT_WPAWPA2_PSK(3, "wpa_wpa2-psk", "WPA/WPA2-PSK", "wpa_wpa2-psk"),
SUPPORT_WPA2_PSK(4, "wpa2-psk", "WPA2-PSK", "wpa2-psk"),
SUPPORT_WPA2_PSK_WPA3_SAE(5, "wpa2-psk_wpa3-sae", "WPA2-PSK/WPA3-SAE",
"wpa2-psk"),
SUPPORT_WPAWPA2_PSK_WPA3_SAE(6, "wpa_wpa2-psk_wpa3-sae", "WPA/WPA2-
PSK_WPA3_SAE", "wpa_wpa2-psk"),
SUPPORT_WPA3_SAE(7, "wpa3-sae", "WPA3-SAE", "wpa2-psk"),
SUPPORT_OWE(20, "owe", "OWE (Enhanced Open) ", "open"),
SUPPORT_WPA_1X(21, "wpa_Dot1x", "WPA-802.1X", "wpa2-psk"),
SUPPORT_WPA_WPA2_1X(22, "wpa_wpa2_Dot1x", "WPA/WPA2-802.1X", "wpa2-psk"),
SUPPORT_WPA2_1X(23, "Dot1x", "WPA2-802.1X", "wpa2-psk"),

// RGOS Device PPSK Encryption Mode Types
WPA_PPSK(0, "wpa-ppsk", "WPA-PPSK", "wpa2-psk"),
WPA2_PPSK(0, "wpa2-ppsk", "WPA2-PPSK", "wpa2-psk"),
WPA_WPA2_PPSK(0, "wpa_wpa2-ppsk", "WPA-WPA2-PPSK", "wpa2-psk"),

}
```

## Encryption Mode Types:

Encryption Description	Encryption Parameter
OPEN (no encryption)	open
WPA-PSK	wpa-psk
WPA/WPA2-PSK	wpa_wpa2-psk
WPA2-PSK	wpa2-psk
WPA2-PSK/WPA3-SAE	wpa2-psk_wpa3-sae
WPA/WPA2-PSK/WPA3-SAE	wpa_wpa2-psk_wpa3-sae
WPA3-SAE	wpa3-sae
OWE (Enhanced Open)	owe
WPA-802.1X (Enterprise)	wpa_Dot1x
WPA/WPA2-802.1X (Enterprise)	wpa_wpa2_Dot1x
WPA2-802.1X (Enterprise)	Dot1x
WPA-WPA2-PPSK (Enterprise)	wpa_wpa2-ppsk
WPA2-PPSK (Enterprise)	wpa2-ppsk

---

#### Wireless Mode Parameter Combinations:

Wi-Fi Mode	wm	axMode	beMode	Device Activation
Auto	0	true	true	Device operates at the maximum capability of all radio frequencies
Wi-Fi 7	10	true	true	Wi-Fi 7; if not supported, falls back to the maximum available mode
Wi-Fi 6	7	true	false	Wi-Fi 6; if not supported, falls back to the maximum available mode
Wi-Fi 4/5	6	false	false	Wi-Fi 5 (5G) for Wi-Fi 5 and Wi-Fi 4 (2.4G) for Wi-Fi 4

```
POST -
https://{server}/service/api/open/v1/wifi?access_token=access_token=tGdm3muWyoT0oM5S9B6oTaKTOISnJV9p
{
 "groupId": 2563157,
 "wifiGrpSsid": false,
 "wirelessConfEntity": {
 "ssidName": "2313123123123",
 "ssidEncode": "utf-8",
 "relatedRadio": "1,2",
 "enable": "true",
 "ishidden": "false",
 "fowardType": "bridge",
 "vlanId": 1,
 "encryptionMode": "wpa_wpa2-psk",
 "encryptionModeDesc": "WPA/WPA2-PSK",
 "password": "Ruijie123!222",
```

```

 "upRate": 0,
 "downRate": 0,
 "wlanUpRate": 0,
 "wlanDownRate": 0,
 "qosEnable": "false",
 "wlanQosEnable": "false",
 "authEnable": "false",
 "bandSelectEnable": "true",
 "ppskEnable": "false",
 "usersLimit": 0,
 "xpressEnable": "false",
 "ftEnable": 0,
 "okcEnable": 0,
 "axMode": "true",
 "beMode": "true",
 "wm": "0",
 "vAuth": "0",
 "mlo": "0",
 "radiusServerAll": [],
 "isApartment": "false",
 "isGuest": "false",
 "l2iso": "false",
 "wirelessModeType": "wifi7",
 "preset": "0",
 "supportTmngt": false
 }
}

```

#### Response message example:

```

{
 "code": 0,
 "msg": "OK."
}

```

## 2.9 Reyee Gateway – Traffic Statistics

### 2.9.1 Application Traffic — Query Daily Data Based on the Application Group

GET /service/api/open/v1/dev/eg/appflow/data-minute/appgroup

#### Request parameters

Parameter Name	Location	Type	Mandatory	Description
group_id	query	integer	M	Project ID, which is expressed as “buildingId” on Ruijie Cloud.
sn	query	string	M	none

Parameter Name	Location	Type	Mandatory	Description
intfName	query	string	M	WAN port name, such as “wan.” Pass in “all” to query all WAN ports.
start_time	query	number	M	Start time
end_time	query	number	M	End time
size	query	integer	M	Maximum quantity (up to 1000) to be queried
access_token	query	string	O	none

### Detailed description

JSON

```
{
 "code": 0,
 "list": [
 {
 "appGroupName": "Others",
 "downFlow": 214012,
 "upDownFlow": 234824,
 "upFlow": 20812
 },
 {
 "appGroupName": "Social Software",
 "downFlow": 3040,
 "upDownFlow": 5032,
 "upFlow": 1992
 }
],
 "msg": "ok."
}
```

### Returned result

Status Code	Status Code	Meaning	Description	Data Model
200	<a href="#"><u>OK</u></a>	none	Inline	

### Returned parameters

Parameter Name	Type	Mandatory	Restraint	Description
» code	integer	M	none	none
» list	[object]	M	none	none
»» appGroupName	string	M	none	Application category name

Parameter Name	Type	Mandatory	Restraint	Description
»» downFlow	integer	M	none	Downstream traffic
»» upDownFlow	integer	M	none	Upstream and downstream traffic
»» upFlow	integer	M	none	Upstream traffic
» msg	string	M	none	none

## 2.9.2 Application Traffic — Query Data on a Specified Date Based on the Application Group

GET /service/api/open/v1/dev/eg/appflow/data-day/appgroup

### Request parameters

Parameter Name	Location	Type	Mandatory	Description
group_id	query	integer	M	none
sn	query	string	M	none
intfName	query	string	M	WAN port name, such as “br-wan.”
start_time	query	integer	M	Start time, such as 20240522
end_time	query	integer	M	End time, such as 20240523
size	query	integer	M	Maximum quantity (up to 1000) to be queried
access_token	query	string	O	none

### Detailed description

JSON

```
{
 "code": 0,
 "list": [
 {
 "appGroupName": "Others",
 "downFlow": 93499445,
 "upDownFlow": 116898235,
 "upFlow": 23398790
 }
],
 "msg": "ok."
}
```

### Returned result



Status Code	Status Code Meaning	Description	Data Model
200	<a href="#"><u>OK</u></a>	none	Inline

### Returned parameters

Parameter Name	Type	Mandatory	Restraint	Description
» code	integer	M	none	none
» list	[object]	M	none	none
»» appGroupName	string	O	none	none
»» downFlow	integer	O	none	none
»» upDownFlow	integer	O	none	none
»» upFlow	integer	O	none	none
» msg	string	M	none	none

### 2.9.3 Application Traffic — Query Daily Data Based on the Application Name

POST /service/api/open/v1/dev/eg/appflow/data-minute/appname

JSON

```
{
 "groupId": 1,
 "sn": "H1SU3CD0020071",
 "intfName": "wan1",
 "startTime": 1718726737000,
 "endTime": 1718787937000,
 "pageIndex": 1,
 "pageSize": 10
}
```

### Request parameters

Parameter Name	Location	Type	Mandatory	Description
access_token	query	string	O	none
body	body	object	O	none
» sn	body	string	M	none
» intfName	body	string	M	WAN port name, such as, br-wan. Pass in "all" to query all WAN ports.
» groupId	body	integer	M	none
» startTime	body	integer	M	Start time
» endTime	body	integer	M	End time

Parameter Name	Location	Type	Mandatory	Description
» pageIndex	body	integer	M	Page number
» pageSize	body	integer	M	Quantity on a page

### Response message example

JSON

```
{
 "code": 0,
 "list": [
 {
 "appGroupName": "Others",
 "appName": "SSH",
 "downFlow": 203400,
 "upDownFlow": 217964,
 "upFlow": 14564
 },
 {
 "appGroupName": "Others",
 "appName": "Other UDP",
 "downFlow": 7160,
 "upDownFlow": 10564,
 "upFlow": 3404
 },
 {
 "appGroupName": "Others",
 "appName": "Windows-Remote Desktop",
 "downFlow": 3452,
 "upDownFlow": 6296,
 "upFlow": 2844
 },
 {
 "appGroupName": "Social Software",
 "appName": "Lark",
 "downFlow": 3040,
 "upDownFlow": 5032,
 "upFlow": 1992
 }
],
 "msg": "ok.",
 "totalCount": 0
}
```

### Returned result

Status Code	Status Code Meaning	Description	Data Model
200	<a href="#"><u>OK</u></a>	none	Inline

#### Returned parameters

Parameter Name	Type	Mandatory	Restraint	Description
» code	integer	M	none	none
» list	[object]	M	none	none
»» appGroupName	string	M	none	none
»» appName	string	M	none	none
»» downFlow	integer	M	none	none
»» upDownFlow	integer	M	none	none
»» upFlow	integer	M	none	none
» msg	string	M	none	none
» totalCount	integer	M	none	none

### 2.9.4 Application Traffic — Query Data on a Specified Date Based on the Application Name

POST /service/api/open/v1/dev/eg/appflow/data-day/appname

Application Traffic — Query Data on a Specified Date Based on the Application Name

JSON

```
{
 "groupId": 100200,
 "sn": "MACCWSFEG2001",
 "intfName": "br-wan",
 "startTime": 20250629,
 "endTime": 20250629,
 "pageIndex": 1,
 "pageSize": 10
}
```

#### Request parameters

Parameter Name	Location	Type	Mandatory	Description
access_token	query	string	O	none
body	body	object	O	none
» sn	body	string	M	none

Parameter Name	Location	Type	Mandatory	Description
» intfName	body	string	M	WAN port name, such as, br-wan Pass in “all” to query all WAN ports.
» groupId	body	integer	M	none
» startTime	body	integer	M	Start time, such as 20240522
» endTime	body	integer	M	End time, such as 20240522
» pageIndex	body	integer	M	Page number
» pageSize	body	integer	M	Quantity on a page

### Response message example

JSON

```
{
 "code": 0,
 "list": [
 {
 "appGroupName": "Others",
 "appName": "Common Web Browsing",
 "downFlow": 84885437,
 "upDownFlow": 100178775,
 "upFlow": 15293338
 },
 {
 "appGroupName": "Others",
 "appName": "DNS",
 "downFlow": 1046130,
 "upDownFlow": 8513933,
 "upFlow": 7467803
 },
 {
 "appGroupName": "Others",
 "appName": "Other UDP",
 "downFlow": 7238327,
 "upDownFlow": 7537195,
 "upFlow": 298868
 },
 {
 "appGroupName": "Others",
 "appName": "SYN_ACK",
 "downFlow": 207533,
 "upDownFlow": 477734,
 "upFlow": 270201
 },
 {

```

```

“appGroupName”: “Others”,
“appName”: “Application Being Identified”,
“downFlow”: 122018,
“upDownFlow”: 190598,
“upFlow”: 68580
}
],
“msg”: “ok.”,
“totalCount”: 5
}

```

### Returned result

Status Code	Status Code Meaning	Description	Data Model
200	<a href="#"><u>OK</u></a>	none	Inline

### Returned parameters

Parameter Name	Type	Mandatory	Restraint	Description
» code	integer	M	none	none
» list	[object]	M	none	none
»» appGroupName	string	M	none	none
»» appName	string	M	none	none
»» downFlow	integer	M	none	none
»» upDownFlow	integer	M	none	none
»» upFlow	integer	M	none	none
» msg	string	M	none	none
» totalCount	integer	M	none	none

## 2.9.5 Query the Peak Rate Trend of a Specified Port

GET /service/api/open/v1/dev/peekflow/intf/trend

### Request parameters

Parameter Name	Location	Type	Mandatory	Description
intf_name	query	string	M	Interface abbreviation. Pass in “global” when the overall device traffic is involved.
sn	query	string	M	sn
start_time	query	number	M	Start time
end_time	query	number	M	End time

Parameter Name	Location	Type	Mandatory	Description
access_token	query	string	O	none

### Special description

The data granularity is automatically selected based on the duration.

- < 2 days Return 5-min data.
- 2–10 days Return 30-minute data.
- > 10 days Return 2-hour data.

Query the peak rate trend of a specified port on an RG-EG, RG-EGW, or firewall.

### Response message example

```
JSON
{
 "code": 0,
 "list": [
 {
 "gatherTime": 1625157029000,
 "inputRate": 629853,
 "outputRate": 33972
 },
 {
 "gatherTime": 1625157330000,
 "inputRate": 668979,
 "outputRate": 35595
 }
],
 "msg": "OK."
}
```

### Returned result

Status Code	Status Code Meaning	Description	Data Model
200	<a href="#">OK</a>	none	Inline

### Returned parameters

Parameter Name	Type	Mandatory	Restraint	Description
» code	integer	M	none	none
» list	[object]	M	none	none

Parameter Name	Type	Mandatory	Restraint	Description
»» gatherTime	integer	M	none	none
»» inputRate	integer	M	none	none
»» outputRate	integer	M	none	none
» msg	string	M	none	none

## 3.0 Client Information

GET /service/api/open/v1/dev/user/current-user

### Request Parameters

Parameter Name	Location	Type	Mandatory	Description
group_id	query	array[string]	No	Network ID
page_index	query	array[string]	No	Page number
page_size	query	number	No	Maximum number of records on a page
access_token	query	string	No	Authentication token

### Response message example

JSON

```
{
 "code": 0,
 "msg": "OK.",
 "list": [
 {
 "mac": "1e2a.f53e.251e",
 "ip": "192.168.110.60",
 "onlineTime": 1758775549000,
 "userName": "REDMI-K80",
 "linkedDevice": "G1RU70T000814",
 "deviceName": "AP2",
 "groupName": "office",
 "flowUp": 217634581,
 "flowDown": 15810832,
 "flowUpDown": 233445413,
 "upRate": 4292,
 "downRate": 4033,
 "activeSec": 3193,
 "band": "5G",
 "rssi": -31,
 "pktLoseRate": 0,
 }
]
}
```

```

“channel”: “36”,
“updateTime”: 1758778743000,
“connectType”: “wireless”,
“clientSource”: “AP”,
“ssid”: “@WYL-LVL-1-5G”,
“manufacturerId”: “REDMI”,
“manufacturer”: “REDMI”,
“staCategory”: “mobileDevices”,
“staCategoryName”: “mobileDevices”,
“staLabel”: “PHONE”,
“staLabelName”: “PHONE”,
“staOs”: “android 15”,
“staModel”: “REDMI-K80”
}
],
“totalCount”: 9
}

```

## Returned Result

### Status Code Status Code Meaning Description Data Model

200      [OK](#)      none      Inline

## Returned Parameters

Status code **200**

Parameter Name	Type	Mandatory	Restraint	English Name	Description
» code	integer	M	none		none
» msg	string	M	none		none
» list	[object]	M	none	Client list	none
»» mac	string	M	none	Client MAC address	none
»» ip	string	M	none	Client IP address	none
»» onlineTime	integer	M	none	Connection time	none
»» userName	string	M	none	Username	none
»» linkedDevice	string	M	none	Associated device	none
»» deviceName	string	M	none	Associated device name	none
»» groupName	string	M	none	Group name	none
»» flowUp	integer	M	none	Downlink traffic (wireless)	none
»» flowDown	integer	M	none	Uplink traffic (wireless)	none
»» flowUpDown	integer	M	none	Traffic (wireless)	none
»» upRate	integer	M	none	Uplink rate	none



Parameter Name	Type	Mandatory	Restraint	English Name	Description
»» downRate	integer	M	none	Downlink rate	none
»» activeSec	integer	M	none		none
»» band	string	M	none	Frequency band	none
»» rssi	integer	M	none	RSSI	none
»» pktLoseRate	integer	M	none		none
»» channel	string	M	none	Radio channel	none
»» updateTime	integer	M	none		none
»» connectType	string	M	none	Connection type	none
»» clientSource	string	M	none		none
»» ssid	string	M	none	SSID	none
»» manufacturerId	string	M	none	Vendor ID	none
»» manufacturer	string	M	none	Vendor ID description	none
»» staCategory	string	M	none	Client category	none
»» staCategoryName	string	M	none	Client category description	none
»» staLabel	string	M	none	Client subcategory	none
»» staLabelName	string	M	none	Client subcategory description	none
»» staOs	string	M	none	System type	none
»» staModel	string	M	none	Client type	none
» totalCount	integer	M	none	Number of clients	none

### 3.1 Obtain Device History Log

GET /service/api/open/v1/dev/{sn}/devicemgtlogs

#### Request Parameters

Parameter Name	Location	Type	Mandatory	Description
sn	path	string	M	none
log_type	query	string	M	Log type
startTime	query	integer	M	Start timestamp
endTime	query	integer	M	End timestamp
page	query	integer	O	Page index. The default value is 1.
per_page	query	integer	O	Number of entries per page. The default value is 10.
access_token	query	string	M	none

## Response message example

200 Response

JSON

```
{
 "code": 0,
 "msg": "OK",
 "data": {
 "count": 2,
 "list": [
 {
 "id": 3,
 "sn": "1234567654321",
 "tenantId": 1,
 "groupId": 100,
 "account": "wyl",
 "logType": "onoffline",
 "logDetail": "from1to6",
 "operateTime": 1459847898000
 },
 {
 "id": 4,
 "sn": "1234567654321",
 "tenantId": 1,
 "groupId": 100,
 "account": "wyl",
 "logType": "onoffline",
 "logDetail": "from1to8",
 "operateTime": 1459685877000
 }
]
 }
}
```

## Returned Result

Status Code	Status Code	Meaning	Description	Data Model
200	<a href="#">OK</a>		none	Inline

## Returned Parameters

Status code **200**

Parameter Name	Type	Mandatory	Restraint	Other	Description
» code	integer	M	none		code
» msg	string	M	none		msg
» data	object	M	none		none
»» count	integer	M	none		Total number of data records, used for pagination
»» list	[object]	M	none		none
»»» sn	string	M	none		Device SN
»»» tenantId	integer	M	none		Tenant ID (not displayed)
»»» groupId	integer	M	none		Group ID (not displayed)
»»» account	string	M	none		ISP account name
»»» logType	string	M	none		Log type
»»» logSubType	string	M	none		Log subtype
»»» logDetail	string	M	none		Log content
»»» param	string	M	none		Log details
»»» operateTime	integer	M	none		Operation time, timestamp

## 3.2 Register Authentication Account Management API

### 3.2.1 Account List Query

**Type:** register/getlist

**URL:** {CloudUrlPrefix}/service/api/open/auth/register/getList/{groupId}

**Method:** GET

---

Path Parameter Request:

Parameter Name	Type	Mandatory	Description
groupId	Integer	M	Group ID

---

Query Parameter Request:

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by the server to the client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.
account	String	O	Account (optional)
page	Integer	M	Start page for pagination
size	Integer	M	Number of records per page

---

## Example:

### Request Message Example:

```
Request
curl --request GET
http://Server.ruijienetworks.com/service/api/open/auth/register/getList/{
groupId}?access_tokenaccess_token=F8BF266ED6D84B119D98D21EC83E8AD6&tenan
tId=2756&page=1&size=10&account=aaa
```

### Response Message Example:

```
{
 "code": 0,
 "msg": "OK.",
 "data": {
 "success": true,
 "timestamp": 1761812486980,
 "result": {
 "total": 2,
 "list": [
 {
 "uuid": "8c769de67f3349c593e4d04a7e3f342a",
 "account": "456@456.com",
 "email": "456@456.com",
 "username": "123123232",
 "tel": "123213123",
 "mac": "7085.c45b.ace0",
 "userIp": "192.168.110.4",
 "param1": null,
 "param2": null,
 "param3": null,
 "param4": null,
 "param5": null,
 "status": "2",
 "quota": 0.0,
 "usedQuota": 11.0,
 "currentClients": 0,
```

```

"downloadRateLimit": 0,
"uploadRateLimit": 0,
"timePeriod": 5,
"bindMac": 1,
"disableStatus": 0,
"userGroupId": "4233",
"profileId": "99909125696260776761655661622618",
"accountType": 1,
"packageName": "12",
"loginDate": "2025-08-28 15:49:17",
"expireDate": null,
"createDate": "2025-08-28 15:49:17",
"createTime": 1756367357000,
"expiryTime": null,
"loginTime": 1756367357000,
"termStatus": 1,
"maxClients": 3,
"usedTime": 5,
"dailyLoginTotal": 0,
"dailyLoginLimit": 2,
"osTypeStr": "windows"
},
{
"uuid": "d4a1b1cee72248bfbca8ab8e025b6497",
"account": "123@123.com",
"email": "123@123.com",
"username": "1111111111",
"tel": "1111111111",
"mac": "7085.c45b.ace0",
"userIp": "192.168.110.4",
"param1": null,
"param2": null,
"param3": null,
"param4": null,
"param5": null,
"status": "2",
"quota": 0.0,
"usedQuota": 38.0,
"currentClients": 0,
"downloadRateLimit": 0,
"uploadRateLimit": 0,
"timePeriod": 5,
"bindMac": 1,
"disableStatus": 0,
"userGroupId": "4233",
"profileId": "99909125696260776761655661622618",
"accountType": 1,
"packageName": "12",
"loginDate": "2025-08-28 15:41:51",
"expireDate": null,
"createDate": "2025-08-28 15:41:51",
"createTime": 1756366911000,
"expiryTime": null,
"loginTime": 1756366911000,
"termStatus": 1,
"maxClients": 3,
"usedTime": 5,

```

```

 "dailyLoginTotal": 0,
 "dailyLoginLimit": 2,
 "osTypeStr": "windows"
 },
],
 "pageNum": 1,
 "pageSize": 10,
 "size": 2,
 "startRow": 1,
 "endRow": 2,
 "pages": 1,
 "prePage": 0,
 "nextPage": 0,
 "isFirstPage": true,
 "isLastPage": true,
 "hasPreviousPage": false,
 "hasNextPage": false,
 "navigatePages": 8,
 "navigatepageNums": [
 1
],
 "navigateFirstPage": 1,
 "navigateLastPage": 1,
 "firstPage": 1,
 "lastPage": 1
}
}
}

```

# Appendix

## Appendix Response Code List

code = 0: Operation results are returned correctly.

code > 0: The service logic is not completed properly during API invocation. The developer must handle the problem.

$-50 \leq \text{code} \leq -1$ : API invocation does not pass authorization or verification and a service exception occurs. The developer must handle the problem.

code < -50: An internal error occurs. Contact the RUIJIE CLOUD platform management personnel.

Response Code	Error Message	Description
0	N/A	The operation is successful.
1	Appid is invalid.	The appid is invalid.

Response Code	Error Message	Description
2	Parameter value\ is invalid.	Request parameters are invalid.
3	Token is invalid.	The token is invalid.
4	Token is overdued.	The token expires.
5/16.4	Unauthorized API access.	The API-based access is not authorized.
7	API execute timeout.	API execution times out.
25	running	API execution is in progress.
-1002	service internal error	An internal service error occurs. Contact the development personnel.
1009	Login failed, cause: {}	Login fails. The cause is provided inside {}, which is not included in the message. For example:Login failed, cause: incorrect password

#### Example:

Bash

Request

```
curl --request POST
```

```
https://{server}}/service/api/open/auth/voucher/create/{groupId}
```

```
-header "Content-Type: application/json" \
```

```
-data "{
```

```
 "quantity": 2,
```

```
 "profile": "30113648274480073538014045592098",
```

```
 "userGroupId": 18067,
```

```
 "firstName": "test1",
```

```
 "lastName": "william",
```

```
 "email": "test@gmail.com",
```

```
 "phone": "21025522",
```

```
 "comment": "alias1"
```

```
}"
```

Response

```
{
```

```
 "code": 0,
```

```
 "msg": "Success.",
```

```
 "voucherData": {
```

```
 "code": 0,
```

```
 "msg": "OK.",
```

```
 "count": 2,
```

```
 "list": [
```

```

{
 "uuid": "78eb665b70d44658937db776905676c9",
 "codeNo": "4zr45r",
 "status": "1",
 "tenantId": "nSgKPhYFDQPfdECFLckTUIBoJVpqFvII",
 "secuserId": "",
 "totle": 0,
 "sign": "",
 "profileId": "30113648274480073538014045592098",
 "expiryTime": "2121-09-01 22:48:10",
 "limitClients": 3,
 "qrcodeUrl": "www.ruijienetworks.com",
 "groupId": "1be31cf89904484d8b90fe1784261c06",
 "firstName": "test1",
 "lastName": "william",
 "email": "test@gmail.com",
 "phone": "21025522",
 "comment": "alias1"
},
{
 "uuid": "5e80c4cc86684a509005c90007dfdd02",
 "codeNo": "gfkhrw",
 "status": "1",
 "tenantId": "nSgKPhYFDQPfdECFLckTUIBoJVpqFvII",
 "secuserId": "",
 "totle": 0,
 "sign": "",
 "profileId": "30113648274480073538014045592098",
 "expiryTime": "2121-09-01 22:48:10",
 "limitClients": 3,
 "qrcodeUrl": "www.ruijienetworks.com",
 "groupId": "1be31cf89904484d8b90fe1784261c06",
 "firstName": "test1",
 "lastName": "william",
 "email": "test@gmail.com",
 "phone": "21025522",
 "comment": "alias1"
}
]
}
}

```

**PathParam request parameters:**

Parameter Name	Type	Mandatory	Description
groupId	Integer	M	Group ID



### QueryParam request parameters:

Parameter Name	Type	Mandatory	Description
access_token	String	M	An access_token is assigned by server to client. When the client invokes a RESTful API, it needs to return the access_token as it is to the server. The access_token expires after its expiration time has elapsed, and the client needs to apply for a new one in order to resume API invocation.
start	Int	M	Begin index of the record, start with 0. For example, PageSize=10, to get Second page, the start is (2-1)*PageSize =10
pageSize	int	M	Page Size for paging return

### Returned parameters:

Parameter Name	Type	Mandatory	Description
code	int	M	Response code. For details, see the section about response code description.
msg	String	O	Code message. If the operation is successful, this parameter is not carried.
count	Int	M	Voucher total number
List Price			
uuid	String	M	Voucher
codeNo	String	M	Voucher Code
status	String	M	Voucher status 1: unused 2: in-use status 3: expired
profileId:	String	M	Voucher Profile package id
expiryTime	String	M	Voucher expiry date, timestamp (from 1970-1-1 timestamp milliseconds)
limitClients	Int	M	The number of concurrent clients to use voucher code