任务 2 基于 IKE 的 IPSEC VPN 的规划与配置

【任务描述】

在企业数字化转型进程中，跨区域业务协同日益频繁，总部与异地业务部门间的内网数据交互需求激增。然而，传统公网传输存在数据泄露、篡改、拦截等安全风险，且无法保障内网资源的专属访问权限。为解决这一核心痛点，某公司计划部署基于 IKE（Internet Key Exchange，互联网密钥交换协议）的 IPSEC VPN（IP Security Virtual Private Network，IP 安全虚拟专用网络），构建安全、稳定、高效的跨区域内网互通通道。

网络拓扑。

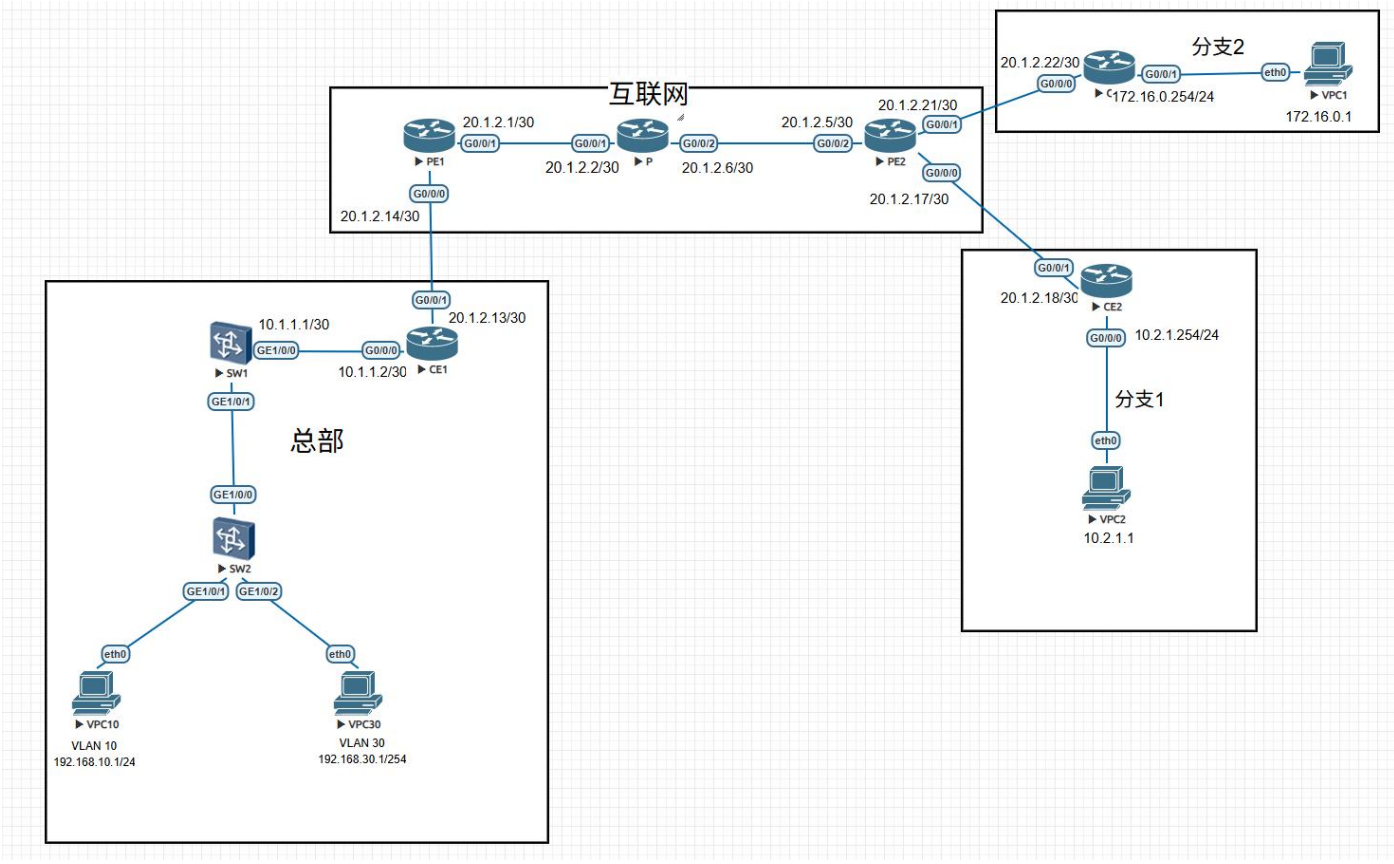

【VPN 规划】

总部设交换机 SW1、SW2，路由器 CE1、PE1 及 VPC10（192.168.10.0/24）、VPC30（192.168.30.0/24）；异地有路由器 CE2、CE3 及 VPC2（10.2.1.0/24）、VPC1（172.16.0.0/24），核心路由器 P 连接 PE1、PE2 构 ISP 骨干。

设备配置按表设定 IP，如 CE1 的 G0/0/0 为 10.1.1.2/30 等。先基础配置改设备名、设 IP、划 VLAN；再配静态路由实现内网通，OSPF 让 ISP 网络互通；接着建 ACL、IPSEC 提议、IKE 提议与对等体，配 IPSEC 安全策略并应用于出接口；最后验证连通性与 SA 状态，确保 VPN 安全通信。

设备	端口号	IP 地址	网关
CE1	G0/0/0	10.1.1.2/30	
	G0/0/1	20.1.2.13/30	
	Tunnel0	10.3.1.1/30	

	Tunnel1	10.3.1.5/30	
CE2	G0/0/0	10.2.1.254/24	
	G0/0/1	20.1.2.18/30	
	Tunnel0	10.3.1.2/30	
CE3	G0/0/0	20.1.2.22/30	
	G0/0/1	172.16.0.254/24	
	Tunne1	10.3.1.6/30	
PE1	G0/0/0	20.1.2.14/30	
	G0/0/1	20.1.2.1/30	
PE2	G0/0/0	20.1.2.17/30	
	G0/0/2	20.1.2.5/30	
	G0/0/1	20.1.2.21/30	
P	G0/0/1	20.1.2.2/30	
	G0/0/2	20.1.2.6/30	
SW1	Vlanif10	192.168.10.254/24	
	Vlanif1000	10.1.1.1/30	
	Vlanif30	192.168.30.254/24	
VPC10	Eth0	192.168.10.1/24	192.168.10.254
VPC30	Eth0	192.168.30.1/24	192.168.30.254
VPC2	Eth0	10.2.1.1/24	10.2.1.254
VPC1	Eth0	172.16.0.1/24	172.16.0.254

【任务实施】

一. 基础配置

1.根据规划表和拓扑图修改设备名称，配置网络设备与主机接口 IP 地址

（1）输入 system-view immediately 进入系统视图。

```
<HUAWEI>system-view  immediately
Enter system view, return user view with return command.
[HUAWEI]
[HUAWEI]
```

（2）修改设备名称，明确设备角色。

```
[HUAWEI]
[HUAWEI]sysname CE1
[CE1]
```

（3）配置 ip 地址。

```
[CE1]
[CE1]int g 0/0/0
[CE1-GigabitEthernet0/0/0]ip add 10.1.1.2 30
[CE1-GigabitEthernet0/0/0]
```

（4）VPCS 设备配置地址及对应网关。

```
VPCS>
VPCS> ip 192.168.10.1 24 192.168.10.254
Checking for duplicate address...
VPCS : 192.168.10.1 255.255.255.0 gateway 192.168.10.254

VPCS>
VPCS>
```

```
PCS>
PCS> ip 10.2.1.1 24 10.2.1.254
hecking for duplicate address...
PCS : 10.2.1.1 255.255.255.0 gateway 10.2.1.254
```

2. 交换机 SW1 和 SW2 划分端口 vlan 并配置 vlanif 端口地址。

SW1：

```
[SW1]vlan batch 10 30 1000
[SW1]
[SW1]int vlan 10
[SW1-Vlanif10]
[SW1-Vlanif10]ip add 192.168.10.254 24
[SW1-Vlanif10]
[SW1-Vlanif10]quit
[SW1]
[SW1]int vlan 30
[SW1-Vlanif30]
[SW1-Vlanif30]ip add 192.168.30.254 24
[SW1-Vlanif30]
[SW1-Vlanif30]quit
[SW1]
[SW1]int vlan 1000
[SW1-Vlanif1000]
[SW1-Vlanif1000]ip add 10.1.1.1 30
[SW1-Vlanif1000]
[SW1-Vlanif1000]quit
[SW1]
```

```
[SW1]int g1/0/0
[SW1-GE1/0/0]
[SW1-GE1/0/0]port default vlan 1000
[SW1-GE1/0/0]
[SW1-GE1/0/0]quit
[SW1]
[SW1]int g1/0/1
[SW1-GE1/0/1]
[SW1-GE1/0/1]port link-type trunk
[SW1-GE1/0/1]
[SW1-GE1/0/1]port trunk allow-pass vlan 10 30
[SW1-GE1/0/1]
[SW1-GE1/0/1]quit
```

SW2:

```
[SW2]
[SW2]vlan batch 10 30
[SW2]
[SW2]int g 1/0/0
[SW2-GE1/0/0]
[SW2-GE1/0/0]port link-type trunk
[SW2-GE1/0/0]
[SW2-GE1/0/0]port trunk  allow-pass vlan 10 30
[SW2-GE1/0/0]
[SW2-GE1/0/0]quit
[SW2]
[SW2]int g 1/0/1
[SW2-GE1/0/1]
[SW2-GE1/0/1]port default vlan 10
[SW2-GE1/0/1]
[SW2-GE1/0/1]int g 1/0/2
[SW2-GE1/0/2]
[SW2-GE1/0/2]port default vlan 30
[SW2-GE1/0/2]
[SW2-GE1/0/2]quit
[SW2]
```

二.配置内网互通

1.CE1 与 SW1 配置静态路由实现内网通信。

```
[CE1]
[CE1]ip route-static 192.168.10.0 24 10.1.1.1
[CE1]
[CE1]ip route-static 192.168.30.0 24 10.1.1.1
[CE1]
```

```
[SW1]
[SW1]ip route-static 0.0.0.0 0.0.0.0 10.1.1.2
[SW1]
```

2. CE1 配置访问互联网的默认路由。

```
[CE1]
[CE1]ip route-static 0.0.0.0 0.0.0.0 20.1.2.1
[CE1]
```

3. CE2 配置访问互联网的默认路由。

```
[CE2]
[CE2]ip route-static 0.0.0.0 0.0.0.0 20.1.2.17
```

4. CE3 配置访问互联网的默认路由。

```
[CE3]ip route-static 0.0.0.0 0.0.0.0 20.1.2.21
[CE3]
```

三. 配置 ISP 网络互通

1. CE1 配置 OSPF 宣告公网接口 IP 地址。

```
[CE1]ospf 1
[CE1-ospf-1]
[CE1-ospf-1]area 0
[CE1-ospf-1-area-0.0.0.0]
[CE1-ospf-1-area-0.0.0.0]network 20.1.2.13 0.0.0.3
```

2. CE2 配置 OSPF 宣告公网接口 IP 地址。

```
[CE2]
[CE2]ospf 1
[CE2-ospf-1]
[CE2-ospf-1]area 0
[CE2-ospf-1-area-0.0.0.0]
[CE2-ospf-1-area-0.0.0.0]network 20.1.2.18 0.0.0.3
```

3. CE3 配置 OSPF 宣告公网接口 IP 地址。

```
[CE3]
[CE3]ospf 1
[CE3-ospf-1]
[CE3-ospf-1]area 0
[CE3-ospf-1-area-0.0.0.0]network 20.1.2.22 0.0.0.3
```

3. 在 PE1、P、PE2 三台网络设备上配置 OSPF 协议，通过 network 宣告网段，实现 ISP 网络互通。

```
[PE1]
[PE1]ospf 1
[PE1-ospf-1]
[PE1-ospf-1]area 0
[PE1-ospf-1-area-0.0.0.0]network 20.1.2.14 0.0.0.3
[PE1-ospf-1-area-0.0.0.0]
[PE1-ospf-1-area-0.0.0.0]network 20.1.2.1 0.0.0.3
[PE1-ospf-1-area-0.0.0.0]
```

```
[P]
[P]ospf 1
[P-ospf-1]
[P-ospf-1]area 0
[P-ospf-1-area-0.0.0.0]
[P-ospf-1-area-0.0.0.0]network 20.1.2.2 0.0.0.3
[P-ospf-1-area-0.0.0.0]
[P-ospf-1-area-0.0.0.0]network 20.1.2.6 0.0.0.3
[P-ospf-1-area-0.0.0.0]
[P-ospf-1-area-0.0.0.0]quit
[P-ospf-1]
```

```
[PE2]
[PE2]ospf 1
[PE2-ospf-1]
[PE2-ospf-1]area 0
[PE2-ospf-1-area-0.0.0.0]
[PE2-ospf-1-area-0.0.0.0]network 20.1.2.17 0.0.0.3
[PE2-ospf-1-area-0.0.0.0]
[PE2-ospf-1-area-0.0.0.0]network 20.1.2.5 0.0.0.3
[PE2-ospf-1-area-0.0.0.0]
[PE2-ospf-1-area-0.0.0.0]network 20.1.2.21 0.0.0.3
[PE2-ospf-1-area-0.0.0.0]
```

四. 配置 ipsec

1.创建 ACL 流，匹配感兴趣的流量,定义总部业务到分支 1 的数据流。

```
[CE1]
[CE1]acl number 3001
[CE1-acl-adv-3001]
[CE1-acl-adv-3001]rule permit ip source 192.168.10.0 0.0.0.255 destination 10.2.1.0 0.0.0.255
[CE1-acl-adv-3001]
```

2.配置高级 ACL 3001，匹配总部到分支 2 的数据流。

```
[CE1]
[CE1]acl number 3002
[CE1-acl-adv-3002]
[CE1-acl-adv-3002]rule 10 permit ip source 192.168.10.0 0.0.0.255 destination 172.16.0.0 0.0.0.255
[CE1-acl-adv-3002]
```

3.创建 ipsec 提议，配置 ipsec 模式和加密模式。

```
[CE1]
[CE1]ipsec proposal tran1   # 定义名称为tran1的ipsec安全提议
[CE1-ipsec-proposal-tran1]
[CE1-ipsec-proposal-tran1]esp authentication-algorithm md5    # 设置身份验证算法是md5
Warning: The security level of md5/sha1 is low.
[CE1-ipsec-proposal-tran1]
[CE1-ipsec-proposal-tran1]esp encryption-algorithm des        # 设置加密算法为des
Warning: The security level of des/3des this algorithm is low.
[CE1-ipsec-proposal-tran1]
[CE1-ipsec-proposal-tran1]quit
```

4. 创建 ike 提议，配置 ipsec 如何产生密钥。

```
[CE1]
[CE1]ike proposal 5          #定义IKE名为5的安全提议
[CE1-ike-proposal-5]
[CE1-ike-proposal-5] dh group2      # 将 Diffie-Hellman（DH）组设置为组 2
Warning: The security level of group1/group2/group5 is low.
[CE1-ike-proposal-5]
[CE1-ike-proposal-5]authentication-method pre-share  # 将IKE的认证方法设置为预共享密钥
[CE1-ike-proposal-5]
[CE1-ike-proposal-5]authentication-algorithm md5    # 将 IKE 的身份验证算法设置为md5
Warning: The security level of md5/sha1 is low.
[CE1-ike-proposal-5]
[CE1-ike-proposal-5] encryption-algorithm des
 Warning: The security level of des/3des is low.    #将 IKE 数据的加密算法设置为des
[CE1-ike-proposal-5]
[CE1-ike-proposal-5]
[CE1-ike-proposal-5]quit
```

5. 创建 ike 对等体，分别指定分支 1 和分支 2 远端 ip，配置与共享密钥，关联 ike 提议。

```
[CE1]
[CE1]ike peer spub      # 创建名为“spub”的 IPSec VPN对等连接
[CE1-ike-peer-spub]
[CE1-ike-peer-spub]ike-proposal 5   # 引用之前配置的名为“5”的 IKE安全提议
[CE1-ike-peer-spub]
[CE1-ike-peer-spub]pre-shared-key cipher gzqk@123  # 将用于身份验证的预共享密钥设置为'gzqk@123'
[CE1-ike-peer-spub]
[CE1-ike-peer-spub]local-address 20.1.2.13    # 指定本地IP地址
[CE1-ike-peer-spub]
[CE1-ike-peer-spub]remote-address 20.1.2.18
[CE1-ike-peer-spub]                          # 指定远端对等体的IP地址 (分支1)
[CE1-ike-peer-spub]
```

6. 创建 ike 对等体，指定远端对等体分支 2。

```
[CE1]
[CE1]ike peer spub1
[CE1-ike-peer-spub1]ike-proposal 5
[CE1-ike-peer-spub1]
[CE1-ike-peer-spub1]local-address 20.1.2.13
[CE1-ike-peer-spub1]
[CE1-ike-peer-spub1]remote-address 20.1.2.22
[CE1-ike-peer-spub1]
[CE1-ike-peer-spub1]pre-shared-key cipher gzqk@123
[CE1-ike-peer-spub1]
```

5. 配置 ipsec 安全策略 map1，序号为 1，用于与分支 1 的 GRE 连接，关联 ipsec 提议，关联 ike 对等体，关联 ACL3001。

```
[CE1]
[CE1]ipsec policy map1 1 isakmp          # 定义名为“mapl”的IPSec策略
Info: The ISAKMP policy sequence number should be smaller than the template policy sequence
[CE1-ipsec-policy-isakmp-map1-1]
[CE1-ipsec-policy-isakmp-map1-1]ike-peer spub   # 引用以前定义的名为“spub”的 IKE 对等连接
[CE1-ipsec-policy-isakmp-map1-1]
[CE1-ipsec-policy-isakmp-map1-1]proposal tran1  # 引用之前配置的名为“tran1”的IPSec提案
[CE1-ipsec-policy-isakmp-map1-1]
[CE1-ipsec-policy-isakmp-map1-1]security acl 3001   # 将acl 3001与此IPSec策略相关联
[CE1-ipsec-policy-isakmp-map1-1]
[CE1-ipsec-policy-isakmp-map1-1]quit
[CE1]
```

配置序号为 2 的 ipsec 安全策略，关联 ipsec 提议，关联对应的 IKE 对等体和 ACL3002。

```
[CE1]
[CE1]ipsec policy map1 2 isakmp
Info: The ISAKMP policy sequence number should be smaller than
ISAKMP policy does not take effect.
[CE1-ipsec-policy-isakmp-map1-2]
[CE1-ipsec-policy-isakmp-map1-2]ike-peer spub1
[CE1-ipsec-policy-isakmp-map1-2]
[CE1-ipsec-policy-isakmp-map1-2]proposal tran1
[CE1-ipsec-policy-isakmp-map1-2]
[CE1-ipsec-policy-isakmp-map1-2]security acl 3002
[CE1-ipsec-policy-isakmp-map1-2]
```

6. 在出接口应用 ipsec 安全策略。

```
[CE1]
[CE1]interface GigabitEthernet 0/0/1
[CE1-GigabitEthernet0/0/1]                  # 将名为“mapl”的IPSec策略应用于此接口
[CE1-GigabitEthernet0/0/1]ipsec policy map1
[CE1-GigabitEthernet0/0/1]
Aug 20 2025 07:45:27+00:00 CE1 IPSEC/4/IPSECPOLICYATTACH:OID 1.3.6.1.4.1.
GigabitEthernet0/0/1)
```

7. CE2 侧配置

（1）创建 acl，匹配内网流量。

```
[CE2]
[CE2]acl number 3001
[CE2-acl-adv-3001]
[CE2-acl-adv-3001]rule 5 permit ip source 10.2.1.0 0.0.0.255 destination 192.168.10.0 0.0.0.255
```

（2）创建 IPSEC 提议。

```
[CE2]ipsec proposal tran1
[CE2-ipsec-proposal-tran1]
[CE2-ipsec-proposal-tran1]esp encryption-algorithm  des
Warning: The security level of des/3des this algorithm is low.
[CE2-ipsec-proposal-tran1]
[CE2-ipsec-proposal-tran1]esp authentication-algorithm md5
Warning: The security level of md5/sha1 is low.
[CE2-ipsec-proposal-tran1]
[CE2-ipsec-proposal-tran1]quit
```

（3）创建 IKE 提议。

```
[CE2]
[CE2]ike  proposal 5
[CE2-ike-proposal-5]
[CE2-ike-proposal-5]dh group2
Warning: The security level of group1/group2/group5 is low.
[CE2-ike-proposal-5]
[CE2-ike-proposal-5]authentication-method pre-share
[CE2-ike-proposal-5]
[CE2-ike-proposal-5]authentication-algorithm md5
Warning: The security level of md5/sha1 is low.
[CE2-ike-proposal-5]
[CE2-ike-proposal-5]encryption-algorithm  des
 Warning: The security level of des/3des is low.
[CE2-ike-proposal-5]
[CE2-ike-proposal-5]quit
[CE2]
```

（4）创建 ike 对等体和 IPSEC 安全策略并应用于接口。

```
[CE2]
[CE2]ike peer spua
[CE2-ike-peer-spua]
[CE2-ike-peer-spua]ike-proposal 5
[CE2-ike-peer-spua]                                    # 密钥要与CE1侧相同
[CE2-ike-peer-spua]pre-shared-key  cipher  gzqk@123
[CE2-ike-peer-spua]
[CE2-ike-peer-spua]
[CE2-ike-peer-spua]remote-address 20.1.2.13
[CE2-ike-peer-spua]
[CE2-ike-peer-spua]quit
[CE2]
[CE2]ipsec policy  use1 10 isakmp
Info: The ISAKMP policy sequence number should be smaller than the template policy s
[CE2-ipsec-policy-isakmp-use1-10]
Aug 20 2025 07:59:19+00:00 CE2 IPSEC/4/IPSECPOLICYADD:OID 1.3.6.1.4.1.2011.6.122.26.
[CE2-ipsec-policy-isakmp-use1-10]
[CE2-ipsec-policy-isakmp-use1-10]ike-peer spua
[CE2-ipsec-policy-isakmp-use1-10]
[CE2-ipsec-policy-isakmp-use1-10]proposal tran1
[CE2-ipsec-policy-isakmp-use1-10]
[CE2-ipsec-policy-isakmp-use1-10]security acl 3001
[CE2-ipsec-policy-isakmp-use1-10]
[CE2-ipsec-policy-isakmp-use1-10]quit
[CE2]
[CE2]
[CE2]int g 0/0/1
[CE2-GigabitEthernet0/0/1]ipsec policy use1
[CE2-GigabitEthernet0/0/1]
```

8. CE3 侧配置

（1）创建 acl，匹配内网流量。

```
[CE3]
[CE3]acl number 3002
[CE3-acl-adv-3002]
[CE3-acl-adv-3002]rule 5 permit ip source 172.16.0.0 0.0.0.255 destination 192.168.10.0 0.0.0.255
[CE3-acl-adv-3002]
```

（2）创建 IPSEC 提议。

```
[CE3]
[CE3]ipsec  proposal tran2
[CE3-ipsec-proposal-tran2]
[CE3-ipsec-proposal-tran2]esp encryption-algorithm  des
Warning: The security level of des/3des this algorithm is low.
[CE3-ipsec-proposal-tran2]
[CE3-ipsec-proposal-tran2]esp authentication-algorithm  md5
Warning: The security level of md5/sha1 is low.
[CE3-ipsec-proposal-tran2]
```

（3）创建 IKE 提议。

```
[CE3]
[CE3]ike proposal 10
[CE3-ike-proposal-10]
[CE3-ike-proposal-10] dh group2
Warning: The security level of group1/group2/group5 is low.
[CE3-ike-proposal-10]
[CE3-ike-proposal-10]authentication-method pre-share
[CE3-ike-proposal-10]
[CE3-ike-proposal-10]authentication-algorithm md5
Warning: The security level of md5/sha1 is low.
[CE3-ike-proposal-10]
[CE3-ike-proposal-10]encryption-algorithm des
 Warning: The security level of des/3des is low.
[CE3-ike-proposal-10]
```

（4）创建 ike 对等体。

```
[CE3]
[CE3]ike peer spua2
[CE3-ike-peer-spua2]
[CE3-ike-peer-spua2]ike-proposal 10
[CE3-ike-peer-spua2]
[CE3-ike-peer-spua2]pre-shared-key cipher gzqk@123
[CE3-ike-peer-spua2]
[CE3-ike-peer-spua2]remote-address 20.1.2.13
[CE3-ike-peer-spua2]
```

（5）创建 ipsec 安全策略。

```
[CE3]
[CE3]ipsec policy auto 1 isakmp
Info: The ISAKMP policy sequence number should be smaller than the
ISAKMP policy does not take effect.
[CE3-ipsec-policy-isakmp-auto-1]
[CE3-ipsec-policy-isakmp-auto-1]ike-peer spua2
[CE3-ipsec-policy-isakmp-auto-1]
[CE3-ipsec-policy-isakmp-auto-1]proposal tran2
[CE3-ipsec-policy-isakmp-auto-1]
[CE3-ipsec-policy-isakmp-auto-1]security acl 3002
[CE3-ipsec-policy-isakmp-auto-1]
[CE3-ipsec-policy-isakmp-auto-1]quit
[CE3]
```

（6）将安全策略应用到接口上。

```
[CE3]interface GigabitEthernet0/0/0
[CE3-GigabitEthernet0/0/0]
[CE3-GigabitEthernet0/0/0]ipsec  policy auto
[CE3-GigabitEthernet0/0/0]
```

五．结果验证

1. 在总部的 VPCS 10 ping 分支的终端设备，显示可以 ping 通，而 VPCS 30 上 ping 分支的终端设备，是 ping 不通的，因为没有配置匹配该网段的 acl。

```
VPCS> ping 172.16.0.1

84 bytes from 172.16.0.1 icmp_seq=1 ttl=61 time=5.216 ms
84 bytes from 172.16.0.1 icmp_seq=2 ttl=61 time=2.742 ms
84 bytes from 172.16.0.1 icmp_seq=3 ttl=61 time=2.554 ms
84 bytes from 172.16.0.1 icmp_seq=4 ttl=61 time=2.468 ms
84 bytes from 172.16.0.1 icmp_seq=5 ttl=61 time=2.708 ms

VPCS> ping 10.2.1.1

84 bytes from 10.2.1.1 icmp_seq=1 ttl=61 time=3.851 ms
84 bytes from 10.2.1.1 icmp_seq=2 ttl=61 time=2.514 ms
84 bytes from 10.2.1.1 icmp_seq=3 ttl=61 time=2.921 ms
84 bytes from 10.2.1.1 icmp_seq=4 ttl=61 time=2.658 ms
84 bytes from 10.2.1.1 icmp_seq=5 ttl=61 time=2.866 ms
```

2. 查看 IKE SA，输出显示有 4 条 IKE SA ，说明设备当前和对端成功建立了 IKE 安全联盟且状态标识 RD 表明它们处于 “就绪” 可用状态，可正常为 IPsec 业务（若有）提供密钥协商等支撑 。

```
<CE1>display  ike sa
 Conn-ID    Peer                                        VPN             Flag(s)               Phase  Rem
oteType  RemoteID
-------------------------------------------------------------------------------------------------------------
------------------------
 312        20.1.2.22/500                                               RD|A                  v2:2   IP
        20.1.2.22
 152        20.1.2.22/500                                               RD|A                  v2:1   IP
        20.1.2.22
 353        20.1.2.18/500                                               RD|A                  v2:2   IP
        20.1.2.18
 155        20.1.2.18/500                                               RD|A                  v2:1   IP
        20.1.2.18

  Number of IKE SA : 4
-------------------------------------------------------------------------------------------------------------
------------------------

 Flag Description:
 RD--READY   ST--STAYALIVE   RL--REPLACED   FD--FADING   TO--TIMEOUT
 HRT--HEARTBEAT   LKG--LAST KNOWN GOOD SEQ NO.   BCK--BACKED UP
 M--ACTIVE   S--STANDBY   A--ALONE  NEG--NEGOTIATING
```

3. 查看 IPsec SA，输出的 IPsec 安全联盟（IPsec SA）信息，显示基于 GigabitEthernet0/0/1 接口的 IPsec SA，关联 IPsec 策略 “map1”，用于保障特定流量的加密传输。

```
<CE1>display ipsec sa

ipsec sa information:

===============================
Interface: GigabitEthernet0/0/1
===============================

  ----------------------------
  IPSec policy name: "map1"
  Sequence number  : 1
  Acl group        : 3001/IPv4
  Acl rule         : 5
  Mode             : ISAKMP
  ----------------------------
    Connection ID     : 353
    Encapsulation mode: Tunnel
    Holding time      : 0d 1h 22m 29s
    Tunnel local      : 20.1.2.13/500
    Tunnel remote     : 20.1.2.18/500
    Flow source       : 192.168.10.0/255.255.255.0 0/0-65535
    Flow destination  : 10.2.1.0/255.255.255.0 0/0-65535
```

```
  ----------------------------
  IPSec policy name: "map1"
  Sequence number  : 2
  Acl group        : 3002/IPv4
  Acl rule         : 10
  Mode             : ISAKMP
  ----------------------------
    Connection ID     : 312
    Encapsulation mode: Tunnel
    Holding time      : 0d 1h 21m 51s
    Tunnel local      : 20.1.2.13/500
    Tunnel remote     : 20.1.2.22/500
    Flow source       : 192.168.10.0/255.255.255.0 0/0-65535
    Flow destination  : 172.16.0.0/255.255.255.0 0/0-65535

    [Outbound ESP SAs]
      SPI: 15942980 (0xf34544)
      Proposal: ESP-ENCRYPT-DES-64 ESP-AUTH-MD5
      SA remaining soft duration (kilobytes/sec): 1290240/168
      SA remaining hard duration (kilobytes/sec): 1843200/1247
      Outpacket count       : 0
      Outpacket encap count : 0
      Outpacket drop count  : 0
      Max sent sequence-number: 0
      UDP encapsulation used for NAT traversal: N
```