

СОДЕРЖАНИЕ

ЗАДАНИЕ 1	2
ЗАДАНИЕ 2	Error! Bookmark not defined.
ЗАДАНИЕ 3	Error! Bookmark not defined.
ЗАДАНИЕ 4	Error! Bookmark not defined.

ЗАДАНИЕ 1

1) Для заданной на схеме schema-lab4 сети, состоящей из управляемых коммутаторов, маршрутизаторов и персональных компьютеров

выполнить планирование и документирование адресного пространства в подсетях LAN1, LAN2, LAN3 и назначить статические адреса маршрутизаторам и динамическое конфигурирование адресов для VPC

R1#enable

R1#show ip interface brief

Interface	IP-Address	OK?	Method	Status	Protocol
FastEthernet0/0	192.168.1.200	YES	NVRAM	up	up
FastEthernet1/0	217.1.1.2	YES	NVRAM	up	up
FastEthernet2/0	192.168.2.200	YES	NVRAM	up	up

R1#show cdp neighbors

Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
S - Switch, H - Host, I - IGMP, r - Repeater

Device ID	Local Intrfce	Holdtme	Capability	Platform	Port ID
vIOS-L2-01	Fas 2/0	143	R S I	IOSv	Gig 0/0
vIOS-L2-01	Fas 0/0	139	R S I	IOSv	Gig 0/2

R1#

R2#enable

R2#show ip interface brief

Interface	IP-Address	OK?	Method	Status	Protocol
FastEthernet0/0	217.1.1.1	YES	NVRAM	administratively down	

down

R2#show cdp neighbors

Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
S - Switch, H - Host, I - IGMP, r - Repeater

Device ID	Local Intrfce	Holdtme	Capability	Platform	Port ID
-----------	---------------	---------	------------	----------	---------

R2#

R2#enable

R2#configure terminal

Enter configuration commands, one per line. End with CNTL/Z.

R2(config)#interface FastEthernet0/0

R2(config-if)#no shutdown

R2(config-if)#

*Mar 1 00:06:25.611: %LINK-3-UPDOWN: Interface FastEthernet0/0,
changed state to up

*Mar 1 00:06:26.611: %LINEPROTO-5-UPDOWN: Line protocol on
Interface FastEthernet0/0, changed state to up

R2(config-if)#end

R2#

*Mar 1 00:06:30.535: %SYS-5-CONFIG_I: Configured from console by
console

R2#

R2#show ip interface brief

Interface	IP-Address	OK?	Method	Status	Protocol
FastEthernet0/0	217.1.1.1	YES	NVRAM	up	up

R2#ping 217.1.1.2

Type escape sequence to abort.

Sending 5, 100-byte ICMP Echos to 217.1.1.2, timeout is 2 seconds:

.!!!!

Success rate is 80 percent (4/5), round-trip min/avg/max = 60/68/92 ms

R2#

R1#ping 217.1.1.1

Type escape sequence to abort.

Sending 5, 100-byte ICMP Echos to 217.1.1.1, timeout is 2 seconds:

!!!!

Success rate is 100 percent (5/5), round-trip min/avg/max = 32/48/60 ms

R1#

R1#show running-config | section interface

interface FastEthernet0/0

ip address 192.168.1.200 255.255.255.0

ip helper-address 217.1.1.1

duplex auto

speed auto

interface FastEthernet1/0

ip address 217.1.1.2 255.255.255.0

duplex auto

speed auto

interface FastEthernet2/0

ip address 192.168.2.200 255.255.255.0

ip helper-address 217.1.1.1

duplex auto

speed auto

R2#show running-config | section interface

interface FastEthernet0/0

ip address 217.1.1.1 255.255.255.0

duplex auto

speed auto

R2#show running-config | section interface

interface FastEthernet0/0

ip address 217.1.1.1 255.255.255.0

duplex auto

speed auto

vIOS-L2-01>enable

vIOS-L2-01#

*Sep 8 17:59:25.503: %CDP-4-DUPLEX_MISMATCH: duplex mismatch discovered on GigabitEthernet0/2 (not full duplex), with R1 FastEthernet0/0 (full duplex).

vIOS-L2-01#show cdp neighbors

Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge

S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone,

D - Remote, C - CVTA, M - Two-port Mac Relay

Device ID	Local Intrfce	Holdtme	Capability	Platform	Port ID
R1	Gig 0/2	175	R S I 3640	Fas 0/0	

Total cdp entries displayed : 1

vIOS-L2-01>enable

vIOS-L2-01#show cdp neighbors

Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge

S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone,

D - Remote, C - CVTA, M - Two-port Mac Relay

Device ID	Local Intrfce	Holdtme	Capability	Platform	Port ID
R1	Gig 0/0	155	R S I 3640	Fas 2/0	

Total cdp entries displayed : 1

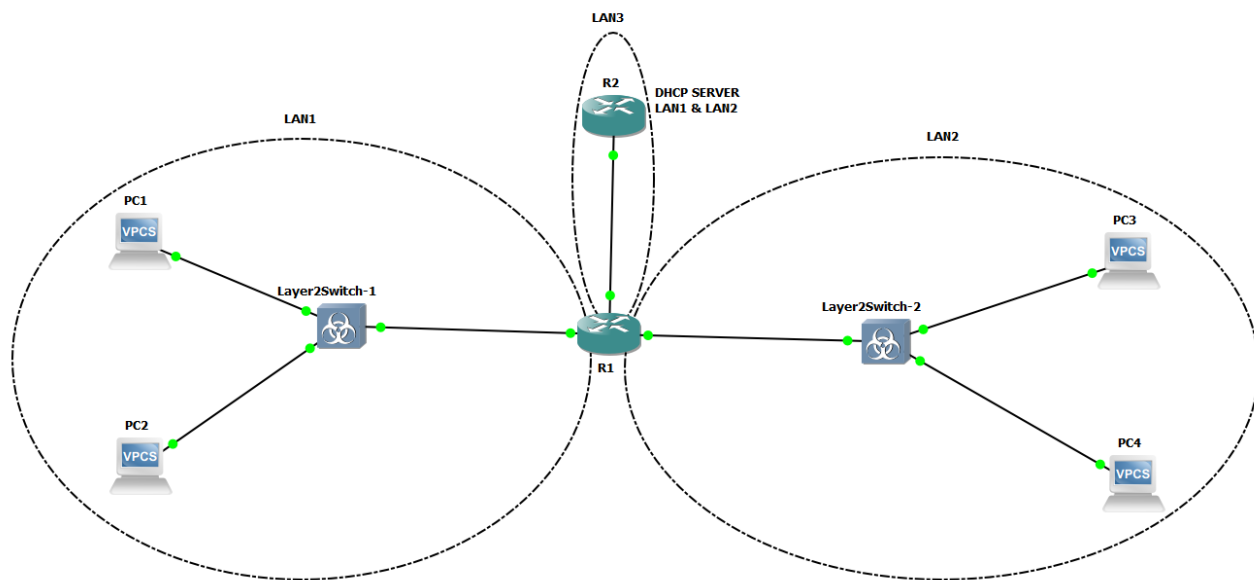


Рисунок 1 — Топология сети для настройки протокола DHCP

ЗАДАНИЕ 2

2) Настроить сервер DHCP на маршрутизаторе R2 для обслуживания адресных пулов адресного пространства подсетей LAN1 и LAN2

```
R2#enable
```

```
R2#configure terminal
```

```
Enter configuration commands, one per line. End with CNTL/Z.
```

```
R2(config)#ip dhcp excluded-address 192.168.1.200
```

```
R2(config)#ip dhcp excluded-address 192.168.2.200
```

```
R2(config)#ip dhcp pool LAN1
```

```
R2(dhcp-config)# network 192.168.1.0 255.255.255.0
```

```
R2(dhcp-config)#default-router 192.168.1.200
```

```
R2(dhcp-config)# exit
```

```
R2(config)#ip dhcp pool LAN2
```

```
R2(dhcp-config)#network 192.168.2.0 255.255.255.0
```

```
R2(dhcp-config)#default-router 192.168.2.200
```

```
R2(dhcp-config)#exit
```

```
R2(config)#end
```

```
R2#
```

```
*Mar  1 00:33:34.655: %SYS-5-CONFIG_I: Configured from console by console
```

```
R2#
```

```
R2#show ip dhcp pool
```

```
Pool LAN1 :
```

```
Utilization mark (high/low)   : 100 / 0
```

```
Subnet size (first/next)       : 0 / 0
```

```
Total addresses                 : 254
```

```
Leased addresses                : 0
```

```
Pending event                  : none
```

```
1 subnet is currently in the pool :
```

Current index	IP address range	Leased addresses
192.168.1.1	192.168.1.1 - 192.168.1.254	0

Pool LAN2 :

Utilization mark (high/low) : 100 / 0

Subnet size (first/next) : 0 / 0

Total addresses : 254

Leased addresses : 0

Pending event : none

1 subnet is currently in the pool :

Current index	IP address range	Leased addresses
192.168.2.1	192.168.2.1 - 192.168.2.254	0

R2#

R2#show running-config | section dhcp

no ip dhcp use vrf connected

ip dhcp excluded-address 192.168.1.200

ip dhc

ЗАДАНИЕ 3

3) Настроить статическую (nb!) маршрутизацию между подсетями

R2#enable

R2#show ip route

Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP

D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area

N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2

E1 - OSPF external type 1, E2 - OSPF external type 2

i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2

ia - IS-IS inter area, * - candidate default, U - per-user static route

o - ODR, P - periodic downloaded static route

Gateway of last resort is not set

C 217.1.1.0/24 is directly connected, FastEthernet0/0

S 192.168.1.0/24 [1/0] via 217.1.1.2

S 192.168.2.0/24 [1/0] via 217.1.1.2

R2#

R2#configure terminal

Enter configuration commands, one per line. End with CNTL/Z.

R2(config)#ip route 192.168.1.0 255.255.255.0 217.1.1.2

R2(config)#ip route 192.168.2.0 255.255.255.0 217.1.1.2

R2(config)#end

R2#

*Mar 1 00:37:34.635: %SYS-5-CONFIG_I: Configured from console by console

R2#

R2#show ip route

Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP

D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route

Gateway of last resort is not set

C 217.1.1.0/24 is directly connected, FastEthernet0/0

S 192.168.1.0/24 [1/0] via 217.1.1.2

S 192.168.2.0/24 [1/0] via 217.1.1.2

R2#

R2#ping 192.168.1.200

Type escape sequence to abort.

Sending 5, 100-byte ICMP Echos to 192.168.1.200, timeout is 2 seconds:

!!!!

Success rate is 100 percent (5/5), round-trip min/avg/max = 48/86/208 ms

R2#ping 192.168.2.200

Type escape sequence to abort.

Sending 5, 100-byte ICMP Echos to 192.168.2.200, timeout is 2 seconds:

!!!!

Success rate is 100 percent (5/5), round-trip min/avg/max = 48/56/60 ms

R2#

ЗАДАНИЕ 4

4) Проверить работоспособность протокола DHCP и маршрутизации, выполнив ping между всеми VPC

```
PC1> ip dhcp
```

```
DDORA IP 192.168.1.1/24 GW 192.168.1.200
```

```
PC1> show ip
```

```
NAME      : PC1[1]
```

```
IP/MASK    : 192.168.1.1/24
```

```
GATEWAY    : 192.168.1.200
```

```
DNS        :
```

```
DHCP SERVER : 217.1.1.1
```

```
DHCP LEASE  : 86393, 86400/43200/75600
```

```
MAC         : 00:50:79:66:68:00
```

```
LPORT      : 27222
```

```
RHOST:PORT  : 127.0.0.1:27223
```

```
MTU         : 1500
```

```
PC2> ip dhcp
```

```
DDORA IP 192.168.1.2/24 GW 192.168.1.200
```

```
PC2> show ip
```

```
NAME      : PC2[1]
```

```
IP/MASK    : 192.168.1.2/24
```

```
GATEWAY    : 192.168.1.200
```

```
DNS        :
```

```
DHCP SERVER : 217.1.1.1
```

```
DHCP LEASE  : 86398, 86400/43200/75600
```

```
MAC         : 00:50:79:66:68:01
```

LPORT : 27224
RHOST:PORT : 127.0.0.1:27225
MTU : 1500

PC3> ip dhcp
DDORA IP 192.168.2.1/24 GW 192.168.2.200

PC3> show ip

NAME : PC3[1]
IP/MASK : 192.168.2.1/24
GATEWAY : 192.168.2.200
DNS :
DHCP SERVER : 217.1.1.1
DHCP LEASE : 86397, 86400/43200/75600
MAC : 00:50:79:66:68:02
LPORT : 27226
RHOST:PORT : 127.0.0.1:27227
MTU : 1500

PC4> ip dhcp
DDORA IP 192.168.2.2/24 GW 192.168.2.200

PC4> show ip

NAME : PC4[1]
IP/MASK : 192.168.2.2/24
GATEWAY : 192.168.2.200
DNS :
DHCP SERVER : 217.1.1.1
DHCP LEASE : 86398, 86400/43200/75600
MAC : 00:50:79:66:68:03

LPORT : 27228

RHOST:PORT : 127.0.0.1:27229

MTU : 1500

R2#show ip dhcp binding

Bindings from all pools not associated with VRF:

IP address	Client-ID/ Hardware address/ User name	Lease expiration	Type
192.168.1.1	0100.5079.6668.00	Mar 02 2002 12:41 AM	Automatic
192.168.1.2	0100.5079.6668.01	Mar 02 2002 12:42 AM	Automatic
192.168.2.1	0100.5079.6668.02	Mar 02 2002 12:42 AM	Automatic
192.168.2.2	0100.5079.6668.03	Mar 02 2002 12:43 AM	Automatic

R2#

PC1> ping 192.168.1.2

84 bytes from 192.168.1.2 icmp_seq=1 ttl=64 time=18.545 ms

84 bytes from 192.168.1.2 icmp_seq=2 ttl=64 time=18.589 ms

84 bytes from 192.168.1.2 icmp_seq=3 ttl=64 time=28.678 ms

84 bytes from 192.168.1.2 icmp_seq=4 ttl=64 time=13.687 ms

84 bytes from 192.168.1.2 icmp_seq=5 ttl=64 time=5.531 ms

PC1> ping 192.168.2.1

84 bytes from 192.168.2.1 icmp_seq=1 ttl=63 time=80.794 ms

84 bytes from 192.168.2.1 icmp_seq=2 ttl=63 time=32.816 ms

84 bytes from 192.168.2.1 icmp_seq=3 ttl=63 time=36.645 ms

84 bytes from 192.168.2.1 icmp_seq=4 ttl=63 time=49.921 ms

84 bytes from 192.168.2.1 icmp_seq=5 ttl=63 time=53.933 ms

PC1> ping 192.168.2.2

84 bytes from 192.168.2.2 icmp_seq=1 ttl=63 time=78.864 ms
84 bytes from 192.168.2.2 icmp_seq=2 ttl=63 time=46.848 ms
84 bytes from 192.168.2.2 icmp_seq=3 ttl=63 time=39.826 ms
84 bytes from 192.168.2.2 icmp_seq=4 ttl=63 time=45.226 ms
84 bytes from 192.168.2.2 icmp_seq=5 ttl=63 time=46.604 ms

PC2> ping 192.168.2.1

84 bytes from 192.168.2.1 icmp_seq=1 ttl=63 time=44.402 ms
84 bytes from 192.168.2.1 icmp_seq=2 ttl=63 time=35.226 ms
84 bytes from 192.168.2.1 icmp_seq=3 ttl=63 time=25.382 ms
84 bytes from 192.168.2.1 icmp_seq=4 ttl=63 time=38.300 ms
84 bytes from 192.168.2.1 icmp_seq=5 ttl=63 time=43.105 ms

PC2> ping 192.168.2.2

84 bytes from 192.168.2.2 icmp_seq=1 ttl=63 time=32.657 ms
84 bytes from 192.168.2.2 icmp_seq=2 ttl=63 time=39.580 ms
84 bytes from 192.168.2.2 icmp_seq=3 ttl=63 time=69.853 ms
84 bytes from 192.168.2.2 icmp_seq=4 ttl=63 time=35.992 ms
84 bytes from 192.168.2.2 icmp_seq=5 ttl=63 time=33.909 ms

PC3> ping 192.168.2.2

84 bytes from 192.168.2.2 icmp_seq=1 ttl=64 time=15.857 ms
84 bytes from 192.168.2.2 icmp_seq=2 ttl=64 time=17.635 ms
84 bytes from 192.168.2.2 icmp_seq=3 ttl=64 time=5.275 ms
84 bytes from 192.168.2.2 icmp_seq=4 ttl=64 time=26.911 ms
84 bytes from 192.168.2.2 icmp_seq=5 ttl=64 time=21.619 ms

ЗАДАНИЕ 5

5) Перехватить в Wireshark диалог одного из VPC с сервером DHCP, разобрать с комментариями

```
PC1> ip dhcp -r
```

```
DORA IP 192.168.1.1/24 GW 192.168.1.200
```

```
PC1> show ip
```

```
NAME      : PC1[1]
```

```
IP/MASK    : 192.168.1.1/24
```

```
GATEWAY    : 192.168.1.200
```

```
DNS        :
```

```
DHCP SERVER : 217.1.1.1
```

```
DHCP LEASE  : 86398, 86400/43200/75600
```

```
MAC        : 00:50:79:66:68:00
```

```
LPORT      : 27222
```

```
RHOST:PORT  : 127.0.0.1:27223
```

```
MTU        : 1500
```

```
PC1> ip dhcp -r
```

```
DORA IP 192.168.1.1/24 GW 192.168.1.200
```

```
PC1> ip dhcp
```

```
DORA IP 192.168.1.1/24 GW 192.168.1.200
```

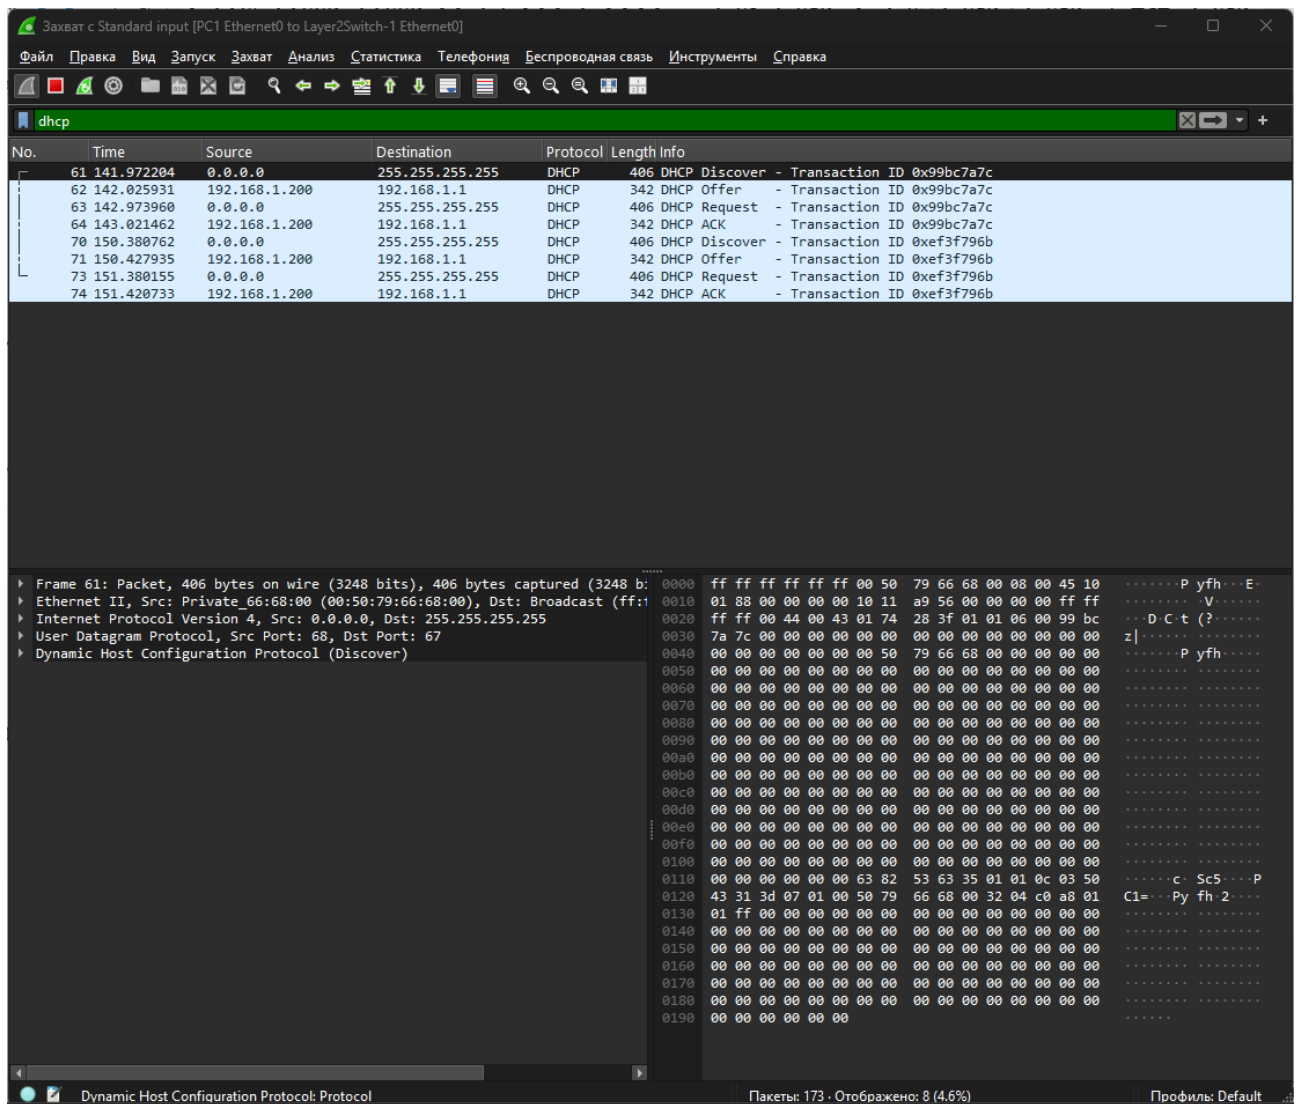


Рисунок 2 — Последовательность DHCP Discover, Offer, Request и ACK при получении сетевых параметров компьютером PC1

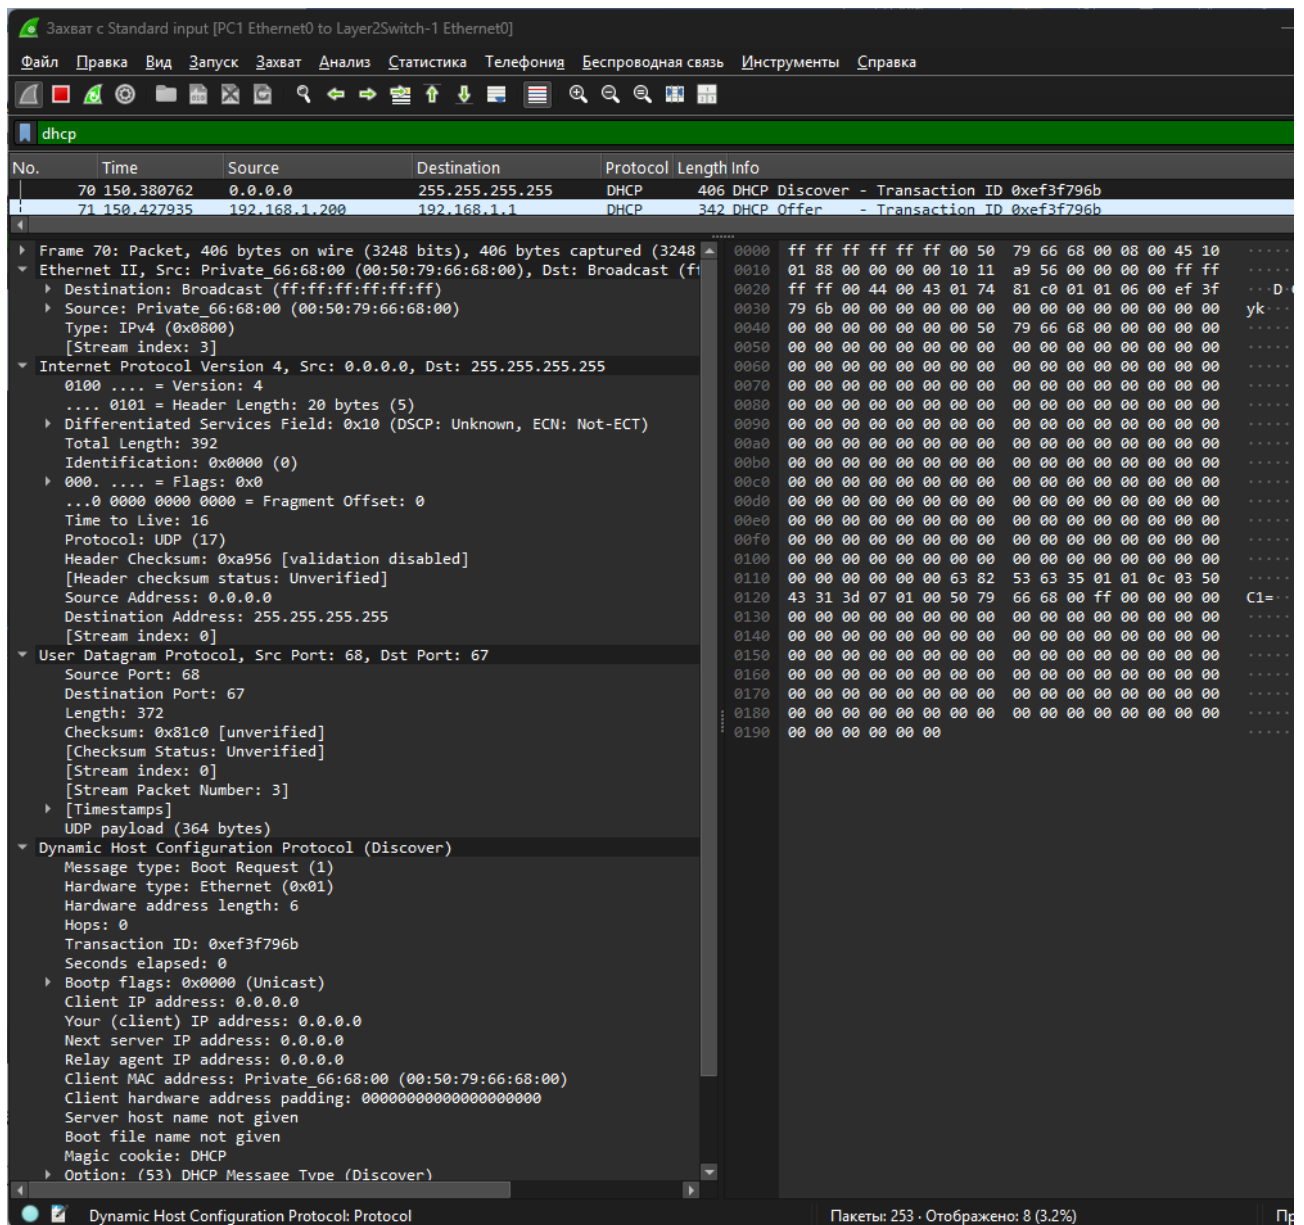


Рисунок 3 — Заголовки сообщения DHCP Discover от компьютера PC1

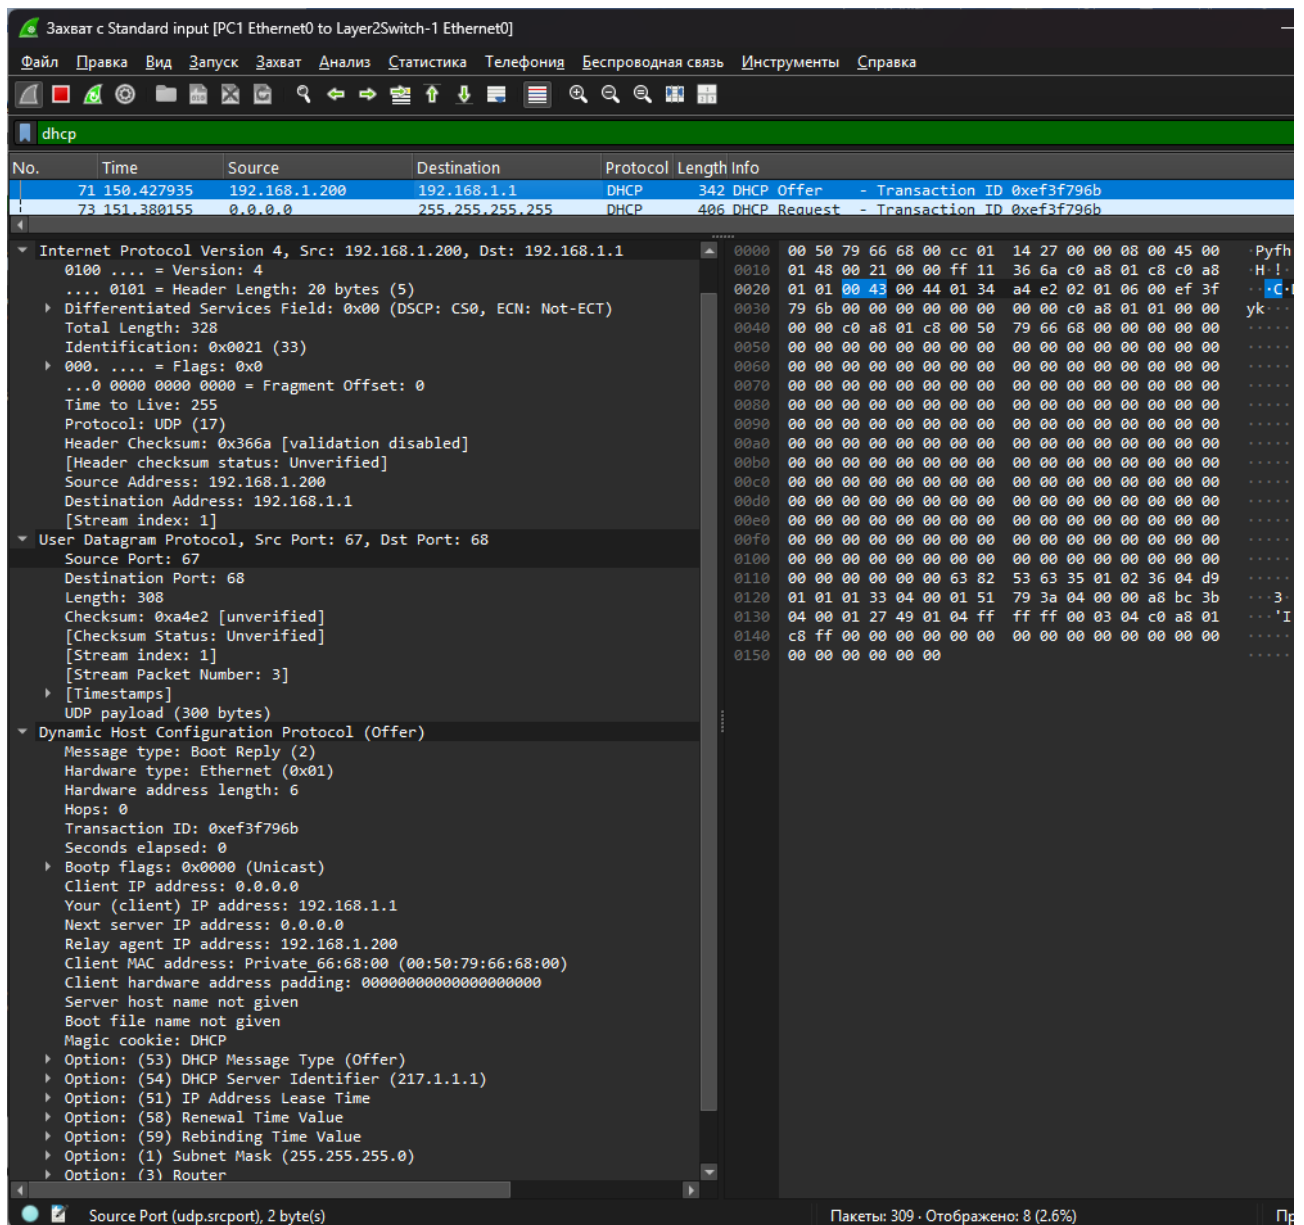


Рисунок 4 — Заголовки сообщения DHCP Offer для компьютера PC1

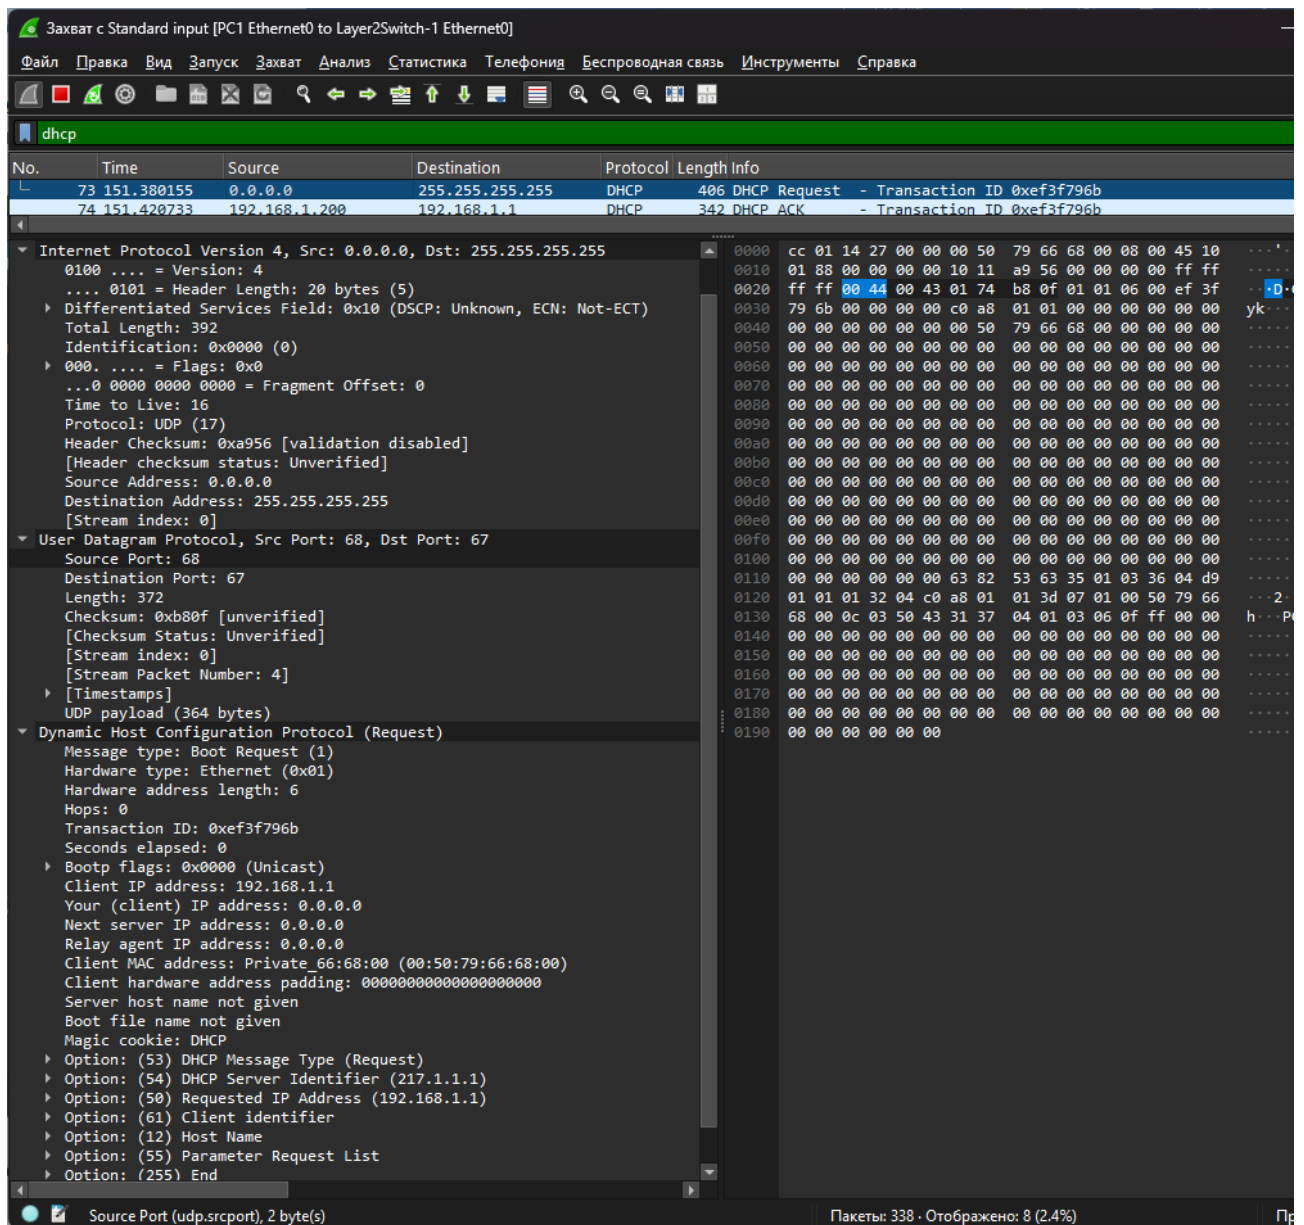


Рисунок 5 — Заголовки сообщения DHCP Request от компьютера PC1

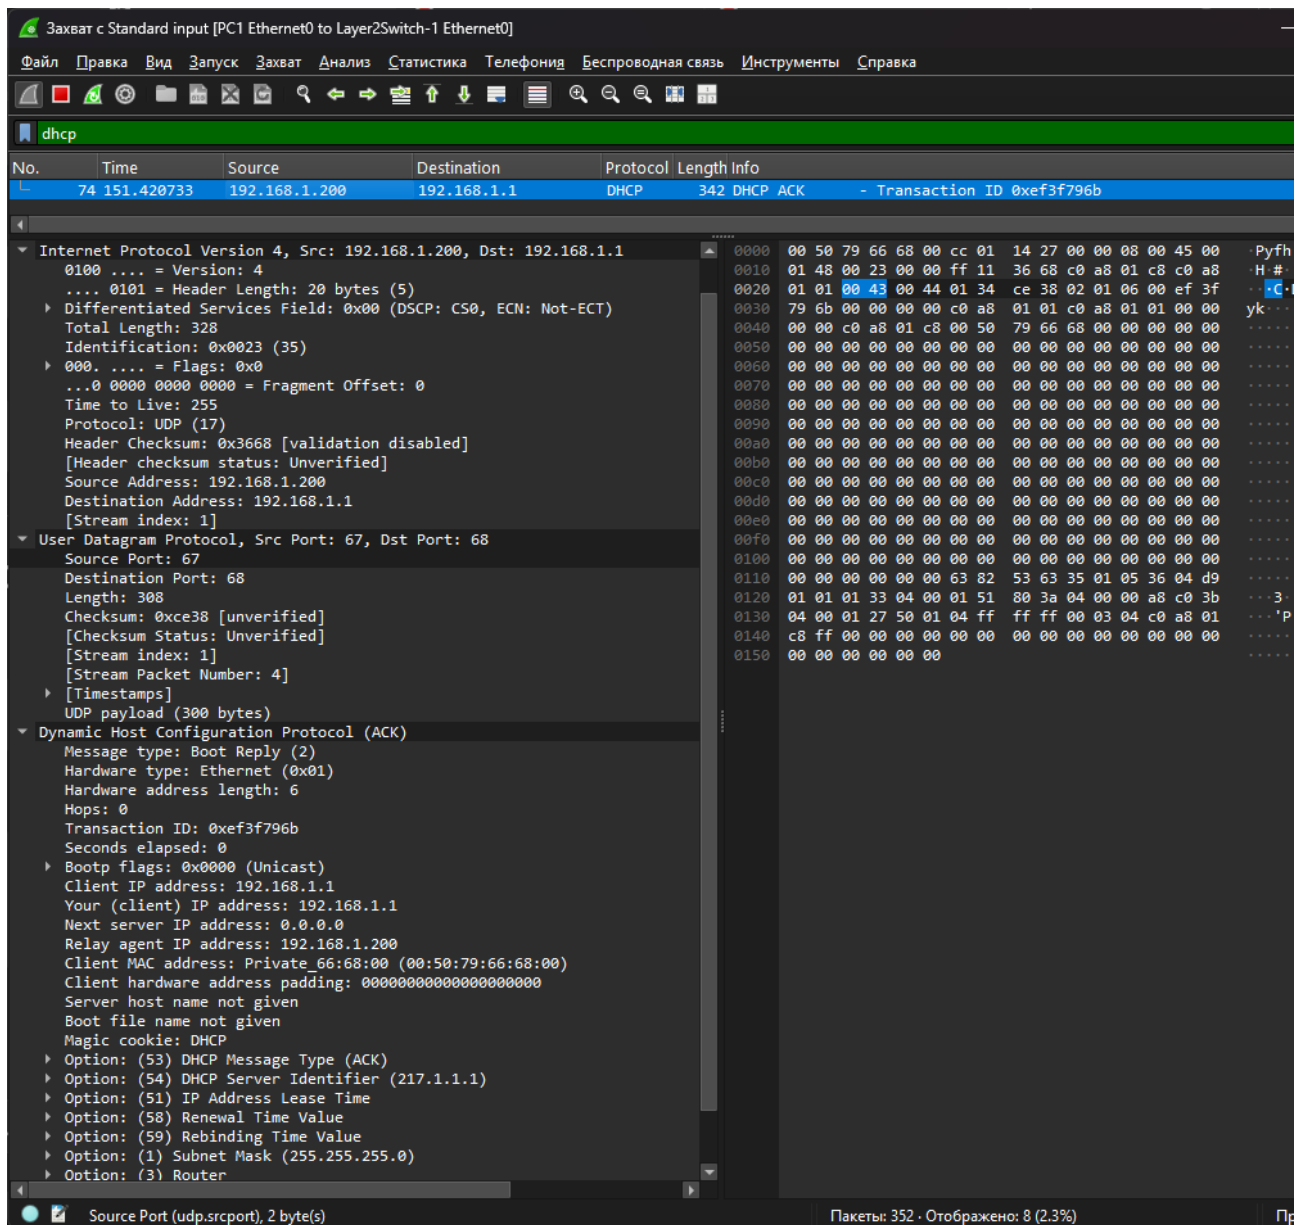


Рисунок 6 — Заголовки сообщения DHCP ACK для компьютера PC1

ЗАДАНИЕ 6

6) Сохранить файлы конфигураций устройств в виде набора файлов с именами, соответствующими именам устройств

```
R1#enable
```

```
R1#copy running-config startup-config
```

```
Destination filename [startup-config]?
```

```
Building configuration...
```

```
[OK]
```

```
R1#show running-config
```

```
Building configuration...
```

```
Current configuration : 954 bytes
```

```
!
```

```
version 12.4
```

```
service timestamps debug datetime msec
```

```
service timestamps log datetime msec
```

```
no service password-encryption
```

```
!
```

```
hostname R1
```

```
!
```

```
boot-start-marker
```

```
boot-end-marker
```

```
!
```

```
!
```

```
no aaa new-model
```

```
memory-size iomem 5
```

```
no ip icmp rate-limit unreachable
```

```
!
```

```
!
```

```
ip cef
```

no ip domain lookup

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

ip tcp synwait-time 5

!

!

!

interface FastEthernet0/0

ip address 192.168.1.200 255.255.255.0

ip helper-address 217.1.1.1

duplex auto

speed auto

!

interface FastEthernet1/0

ip address 217.1.1.2 255.255.255.0

duplex auto

```

speed auto
!
interface FastEthernet2/0
ip address 192.168.2.200 255.255.255.0
ip helper-address 217.1.1.1
duplex auto
speed auto
!
!
no ip http server
ip forward-protocol nd
!
!
!
no cdp log mismatch duplex
!
!
!
control-plane
!
!
!
!
!
!
!
!
!
!
line con 0
exec-timeout 0 0

```

```
privilege level 15
logging synchronous
line aux 0
exec-timeout 0 0
privilege level 15
logging synchronous
line vty 0 4
login
!
!
end
```

R1#

```
vIOS-L2-01#terminal length 0
vIOS-L2-01#show running-config
Building configuration...
```

Current configuration : 4843 bytes

```
!
! Last configuration change at 17:51:01 UTC Tue Sep 8 2026
!
version 15.0
service timestamps debug datetime msec
service timestamps log datetime msec
no service password-encryption
service compress-config
!
hostname vIOS-L2-01
!
boot-start-marker
```



```
boot-end-marker
!
!
!
no aaa new-model
!
!
!
!
!
vtp domain CISCO-vIOS
vtp mode transparent
!
!
!
ip cef
no ipv6 cef
!
!
spanning-tree mode pvst
spanning-tree extend system-id
!
vlan internal allocation policy ascending
!
vlan 100
    name VLAN100
!
vlan 200,300
!
!
```

```
!  
!  
!  
!  
!  
!  
!  
!  
!  
!  
!  
!  
!  
interface GigabitEthernet0/0  
  media-type rj45  
  negotiation auto  
!  
interface GigabitEthernet0/1  
  media-type rj45  
  negotiation auto  
!  
interface GigabitEthernet0/2  
  media-type rj45  
  negotiation auto  
!  
ip forward-protocol nd  
!  
no ip http server  
no ip http secure-server  
!  
!  
!
```

!
!
!
control-plane
!
banner exec ^C

* IOSv - Cisco Systems Confidential *

* *

* This software is provided as is without warranty for internal *

* development and testing purposes only under the terms of the Cisco *

* Early Field Trial agreement. Under no circumstances may this software *

* be used for production purposes or deployed in a production *

* environment. *

* *

* By using the software, you agree to abide by the terms and conditions *

* of the Cisco Early Field Trial Agreement as well as the terms and *

* conditions of the Cisco End User License Agreement at *

* <http://www.cisco.com/go/eula> *

* *

* Unauthorized use or distribution of this software is expressly *

* Prohibited. *

*****^C

banner incoming ^C

* IOSv - Cisco Systems Confidential *

* *

```

* This software is provided as is without warranty for internal      *
* development and testing purposes only under the terms of the Cisco *
* Early Field Trial agreement. Under no circumstances may this software *
* be used for production purposes or deployed in a production      *
* environment.                                                     *
*                                                                    *
* By using the software, you agree to abide by the terms and conditions *
* of the Cisco Early Field Trial Agreement as well as the terms and *
* conditions of the Cisco End User License Agreement at            *
* http://www.cisco.com/go/eula                                     *
*                                                                    *
* Unauthorized use or distribution of this software is expressly *
* Prohibited.                                                       *

```

```

*****

```

```

*****^C

```

```

banner login ^C

```

```

*****

```

```

*****

```

```

* IOSv - Cisco Systems Confidential                                *
*                                                                    *
* This software is provided as is without warranty for internal      *
* development and testing purposes only under the terms of the Cisco *
* Early Field Trial agreement. Under no circumstances may this software *
* be used for production purposes or deployed in a production      *
* environment.                                                     *
*                                                                    *
* By using the software, you agree to abide by the terms and conditions *
* of the Cisco Early Field Trial Agreement as well as the terms and *
* conditions of the Cisco End User License Agreement at            *
* http://www.cisco.com/go/eula                                     *

```

*
*
* Unauthorized use or distribution of this software is expressly *
* Prohibited. *

*****^C

!
line con 0
 logging synchronous
line aux 0
line vty 0 4
 logging synchronous
 login
line vty 5 15
 logging synchronous
 login
!
!
end

vIOS-L2-01#

*Sep 8 18:50:16.223: %CDP-4-DUPLEX_MISMATCH: duplex mismatch
discovered on GigabitEthernet0/2 (not full duplex), with R1 FastEthernet0/0 (full
duplex).

vIOS-L2-01#

vIOS-L2-01#terminal length 0

vIOS-L2-01#show running-config

Building configuration...

Current configuration : 4843 bytes

!

```
! Last configuration change at 17:51:16 UTC Tue Sep 8 2026
!
version 15.0
service timestamps debug datetime msec
service timestamps log datetime msec
no service password-encryption
service compress-config
!
hostname vIOS-L2-01
!
boot-start-marker
boot-end-marker
!
!
!
no aaa new-model
!
!
!
!
!
!
vtp domain CISCO-vIOS
vtp mode transparent
!
!
!
ip cef
no ipv6 cef
!
!
```



```
interface GigabitEthernet0/2
```

```
media-type rj45
```

```
negotiation auto
```

```
!
```

```
ip forward-protocol nd
```

```
!
```

```
no ip http server
```

```
no ip http secure-server
```

```
!
```

```
!
```

```
!
```

```
!
```

```
!
```

```
!
```

```
control-plane
```

```
!
```

```
banner exec ^C
```

```
*****
```

```
*****
```

```
* IOSv - Cisco Systems Confidential
```

```
*
```

```
*
```

```
*
```

```
* This software is provided as is without warranty for internal
```

```
*
```

```
* development and testing purposes only under the terms of the Cisco
```

```
*
```

```
* Early Field Trial agreement. Under no circumstances may this software
```

```
* be used for production purposes or deployed in a production
```

```
*
```

```
* environment.
```

```
*
```

```
*
```

```
*
```

```
* By using the software, you agree to abide by the terms and conditions
```

```
*
```

```
* of the Cisco Early Field Trial Agreement as well as the terms and
```

```
*
```

```
* conditions of the Cisco End User License Agreement at
```

```
*
```



```

* http://www.cisco.com/go/eula
*
*
* Unauthorized use or distribution of this software is expressly
* Prohibited.
*****

*****^C

banner incoming ^C

*****

*****

* IOSv - Cisco Systems Confidential
*
*
* This software is provided as is without warranty for internal
* development and testing purposes only under the terms of the Cisco
* Early Field Trial agreement. Under no circumstances may this software
* be used for production purposes or deployed in a production
* environment.
*
*
* By using the software, you agree to abide by the terms and conditions
* of the Cisco Early Field Trial Agreement as well as the terms and
* conditions of the Cisco End User License Agreement at
* http://www.cisco.com/go/eula
*
*
* Unauthorized use or distribution of this software is expressly
* Prohibited.
*****

*****^C

banner login ^C

*****

*****

* IOSv - Cisco Systems Confidential

```

```

*
*
* This software is provided as is without warranty for internal
* development and testing purposes only under the terms of the Cisco
* Early Field Trial agreement. Under no circumstances may this software
* be used for production purposes or deployed in a production
* environment.
*
*
* By using the software, you agree to abide by the terms and conditions
* of the Cisco Early Field Trial Agreement as well as the terms and
* conditions of the Cisco End User License Agreement at
* http://www.cisco.com/go/eula
*
*
* Unauthorized use or distribution of this software is expressly
* Prohibited.

```

```

*****

```

```

*****^C

```

```

!
line con 0
 logging synchronous
line aux 0
line vty 0 4
 logging synchronous
 login
line vty 5 15
 logging synchronous
 login
!
!
End

```

NAME : PC1[1]
IP/MASK : 192.168.1.1/24
GATEWAY : 192.168.1.200
DNS :
DHCP SERVER : 217.1.1.1
DHCP LEASE : 84501, 86400/43200/75600
MAC : 00:50:79:66:68:00
LPORT : 27222
RHOST:PORT : 127.0.0.1:27223
MTU : 1500

PC2> show ip

NAME : PC2[1]
IP/MASK : 192.168.1.2/24
GATEWAY : 192.168.1.200
DNS :
DHCP SERVER : 217.1.1.1
DHCP LEASE : 83679, 86400/43200/75600
MAC : 00:50:79:66:68:01
LPORT : 27224
RHOST:PORT : 127.0.0.1:27225
MTU : 1500

PC3> show ip

NAME : PC3[1]
IP/MASK : 192.168.2.1/24
GATEWAY : 192.168.2.200
DNS :

DHCP SERVER : 217.1.1.1
DHCP LEASE : 83625, 86400/43200/75600
MAC : 00:50:79:66:68:02
LPORT : 27226
RHOST:PORT : 127.0.0.1:27227
MTU : 1500

PC4> show ip

NAME : PC4[1]
IP/MASK : 192.168.2.2/24
GATEWAY : 192.168.2.200
DNS :
DHCP SERVER : 217.1.1.1
DHCP LEASE : 83270, 86400/43200/75600
MAC : 00:50:79:66:68:03
LPORT : 27228
RHOST:PORT : 127.0.0.1:27229
MTU : 1500

R2#terminal length 0

R2#show running-config

Building configuration...

Current configuration : 1087 bytes

!

version 12.4

service timestamps debug datetime msec

service timestamps log datetime msec

no service password-encryption

!

hostname R2

```
!  
boot-start-marker  
boot-end-marker  
!  
!  
no aaa new-model  
memory-size iomem 5  
no ip icmp rate-limit unreachable  
!  
!  
ip cef  
no ip domain lookup  
no ip dhcp use vrf connected  
ip dhcp excluded-address 192.168.1.200  
ip dhcp excluded-address 192.168.2.200  
!  
ip dhcp pool LAN1  
    network 192.168.1.0 255.255.255.0  
    default-router 192.168.1.200  
!  
ip dhcp pool LAN2  
    network 192.168.2.0 255.255.255.0  
    default-router 192.168.2.200  
!  
!  
!  
!  
!  
!  
!
```

```

!
!
!
!
!
!
!
!
!
ip tcp synwait-time 5
!
!
!
interface FastEthernet0/0
ip address 217.1.1.1 255.255.255.0
duplex auto
speed auto
!
!
no ip http server
ip forward-protocol nd
ip route 192.168.1.0 255.255.255.0 217.1.1.2
ip route 192.168.2.0 255.255.255.0 217.1.1.2
!
!
!
no cdp log mismatch duplex
!
!
!

```

control-plane

!

!

!

!

!

!

!

!

!

line con 0

exec-timeout 0 0

privilege level 15

logging synchronous

line aux 0

exec-timeout 0 0

privilege level 15

logging synchronous

line vty 0 4

login

!

!

End

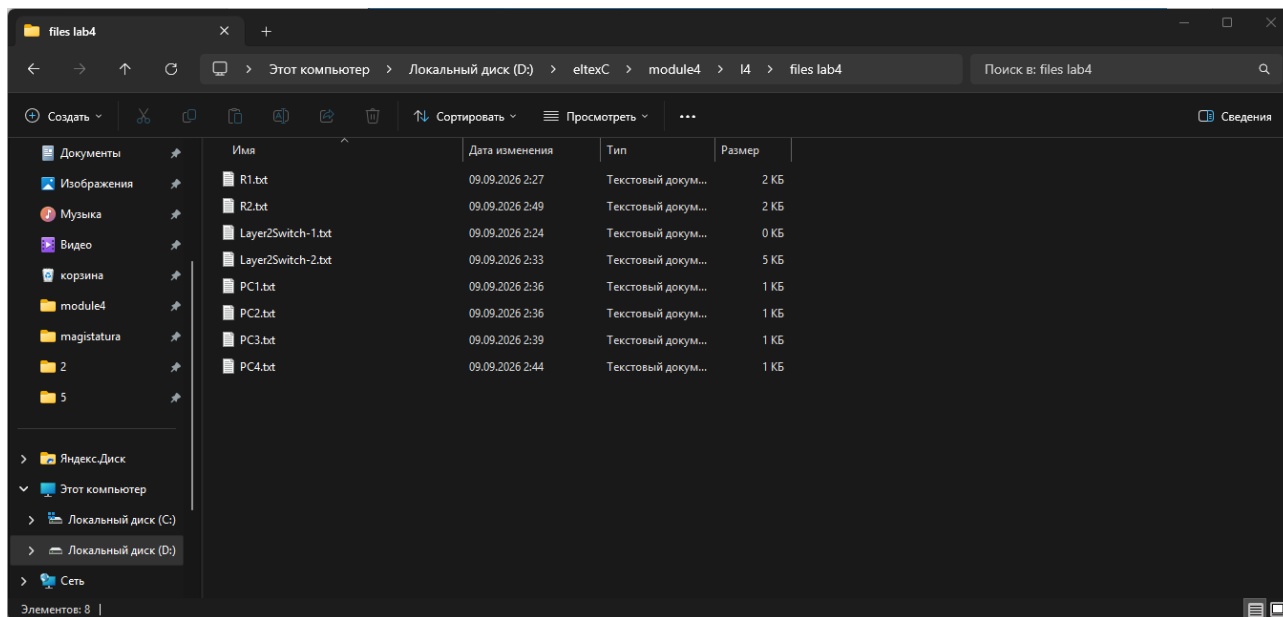


Рисунок 7 — Набор файлов конфигураций устройств