


Ubuntu ISO File Download from website - ubuntu.com/download/desktop

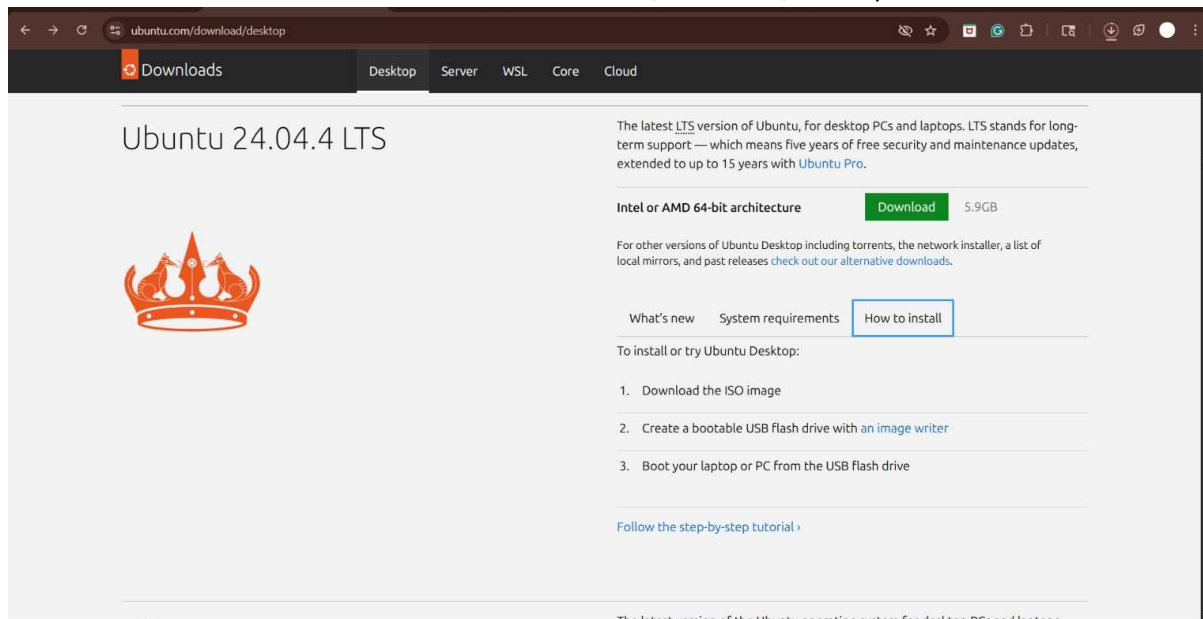

The screenshot shows the Ubuntu 24.04.4 LTS download page. The page features the Ubuntu logo (a crown) and the text "Ubuntu 24.04.4 LTS". A navigation bar at the top includes "Downloads", "Desktop", "Server", "WSL", "Core", and "Cloud". The main content area explains that this is the latest LTS version, offering five years of free security and maintenance updates. A green "Download" button is visible next to the "5.9GB" file size. Below this, there are links for "What's new", "System requirements", and "How to install". A section titled "To install or try Ubuntu Desktop:" lists three steps: 1. Download the ISO image, 2. Create a bootable USB flash drive with an image writer, and 3. Boot your laptop or PC from the USB flash drive. A link to "Follow the step-by-step tutorial" is also present.

Ubuntu 24.04.4 LTS

The latest [LTS](#) version of Ubuntu, for desktop PCs and laptops. LTS stands for long-term support — which means five years of free security and maintenance updates, extended to up to 15 years with [Ubuntu Pro](#).

Intel or AMD 64-bit architecture [Download](#) 5.9GB


For other versions of Ubuntu Desktop including torrents, the network installer, a list of local mirrors, and past releases [check out our alternative downloads](#).

[What's new](#) [System requirements](#) [How to install](#)

To install or try Ubuntu Desktop:

1. Download the ISO image
2. Create a bootable USB flash drive with an [image writer](#)
3. Boot your laptop or PC from the USB flash drive

[Follow the step-by-step tutorial](#)

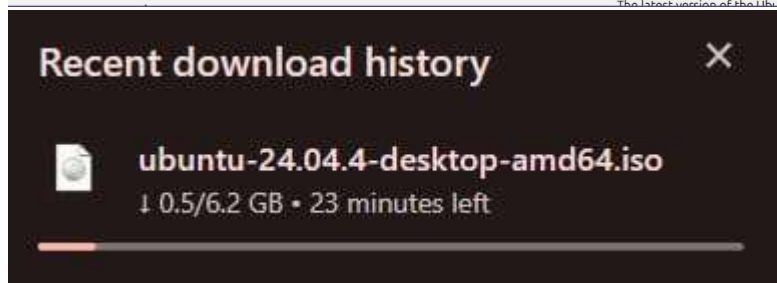


The screenshot shows a "Recent download history" window. It displays a download of "ubuntu-24.04.4-desktop-amd64.iso" with a progress bar indicating that 0.5/6.2 GB has been downloaded and 23 minutes are left.

Recent download history

 **ubuntu-24.04.4-desktop-amd64.iso**
↓ 0.5/6.2 GB • 23 minutes left

Download Rufus to create Bootable Pendrive - rufus.ie/en

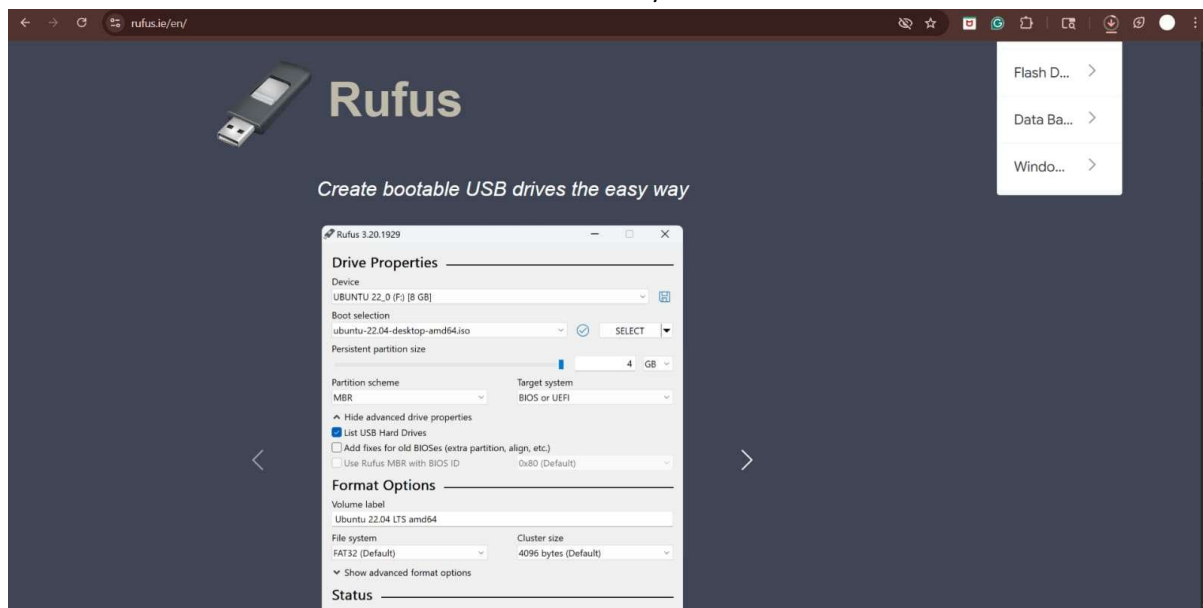

The screenshot shows the Rufus website and the application interface. The website header includes the Rufus logo and the tagline "Create bootable USB drives the easy way". A sidebar on the right lists "Flash D...", "Data Ba...", and "Windo...". The application window shows the "Drive Properties" tab, where the device is "UBUNTU 22.0 (F3) [8 GB]", the boot selection is "ubuntu-22.04-desktop-amd64.iso", and the persistent partition size is set to 4 GB. The "Partition scheme" is MBR, and the "Target system" is BIOS or UEFI. The "Format Options" section shows the volume label as "Ubuntu 22.04 LTS amd64", the file system as FAT32 (Default), and the cluster size as 4096 bytes (Default).

Rufus

Create bootable USB drives the easy way

Flash D...
Data Ba...
Windo...

Rufus 3.20.1929

Drive Properties

Device: UBUNTU 22.0 (F3) [8 GB]

Boot selection: ubuntu-22.04-desktop-amd64.iso [SELECT](#)

Persistent partition size: 4 GB

Partition scheme: MBR Target system: BIOS or UEFI

☒ Hide advanced drive properties

☒ List USB Hard Drives

☐ Add fixes for old BIOSes (extra partition, align, etc.)

☐ Use Rufus MBR with BIOS ID 0x80 (Default)

Format Options

Volume label: Ubuntu 22.04 LTS amd64

File system: FAT32 (Default) Cluster size: 4096 bytes (Default)

☒ Show advanced format options

Status

Download

Latest releases:

Link	Type	Platform	Size	Date
rufus-4.13.exe	Standard	Windows x64	1.9 MB	2026.02.17
rufus-4.13p.exe	Portable	Windows x64	1.9 MB	2026.02.17
rufus-4.13_x86.exe	Standard	Windows x86	1.8 MB	2026.02.17
rufus-4.13_arm64.exe	Standard	Windows ARM64	4.9 MB	2026.02.17

[Other versions \(GitHub\)](#)

[Other versions \(dAppCDN\)](#)

System Requirements:

Windows 8 or later. Once downloaded, the application is ready to use.



[rufus-4.13.exe](#)

From <https://rufus.ie>



Run the Rufus.exe file - select the USB Drive which is meant to be the bootable USB (make sure to be it 8GB or more)

Rufus 4.13.2316

Drive Properties

Device
RUFUS-USB (D:) [8 GB]

Boot selection
Disk or ISO image (Please select) ☒ SELECT

Partition scheme
MBR

Target system
BIOS (or UEFI-CSM) ?

▼ Show advanced drive properties

Format Options

Volume label
RUFUS-USB

File system
FAT32 (Default)

Cluster size
4096 bytes (Default)

▼ Show advanced format options

Status


READY


START CLOSE

1 device found

Select the Downloaded ISO File (Ubuntu) for boot selection

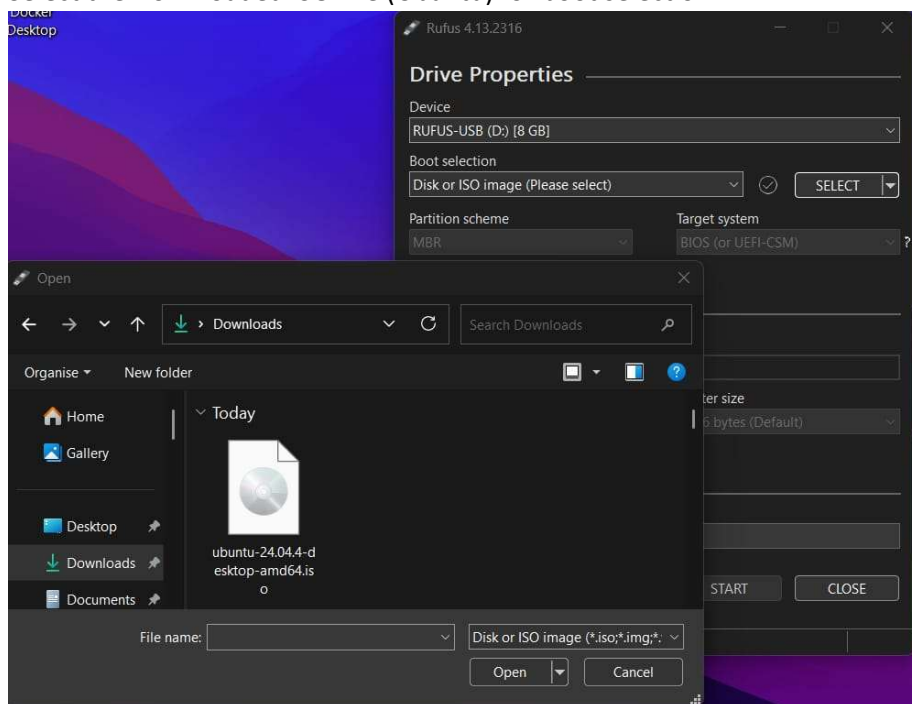


ISO File will be scanned and then selected for installation on USB

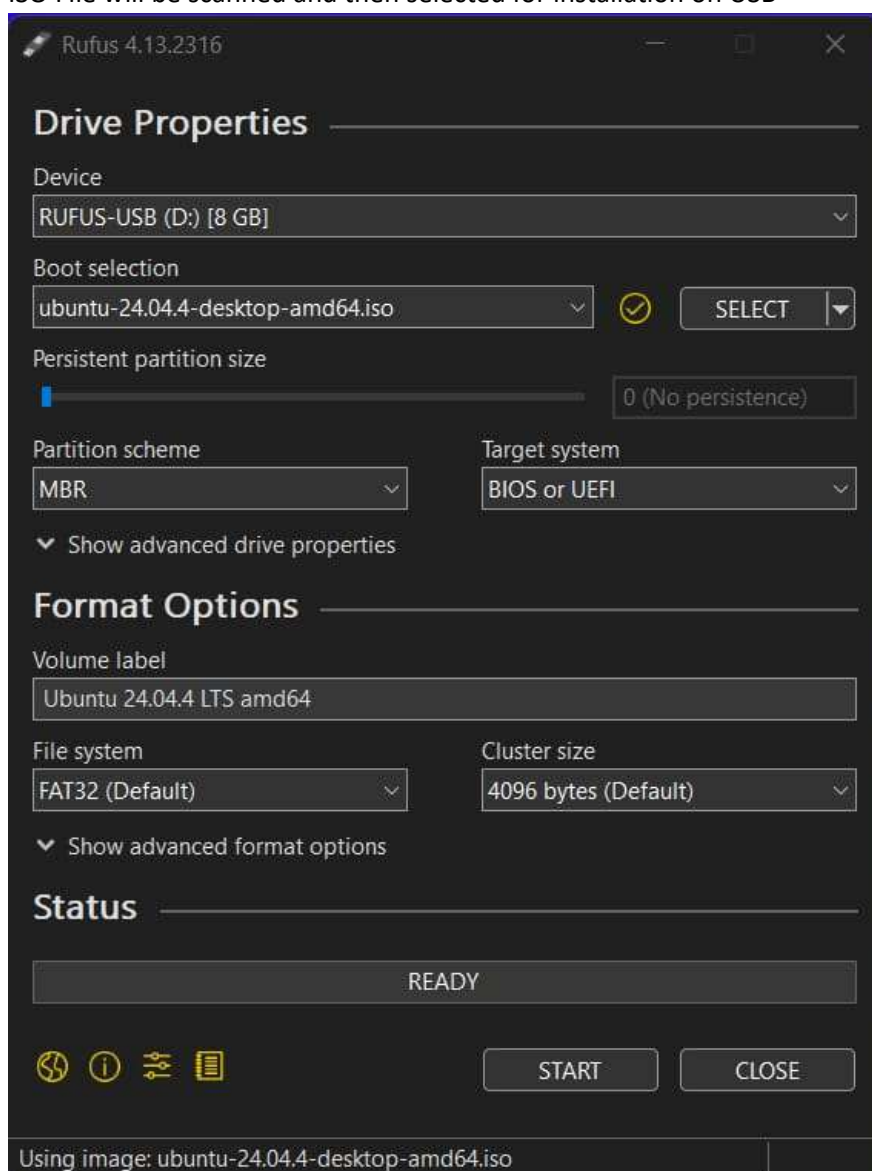

Make sure to match your Processor Type - AMD or Intel.... installation may fail if you don't select the right one.

(You can check on Ubuntu Download Website for more options for Intel or AMD processor installations)

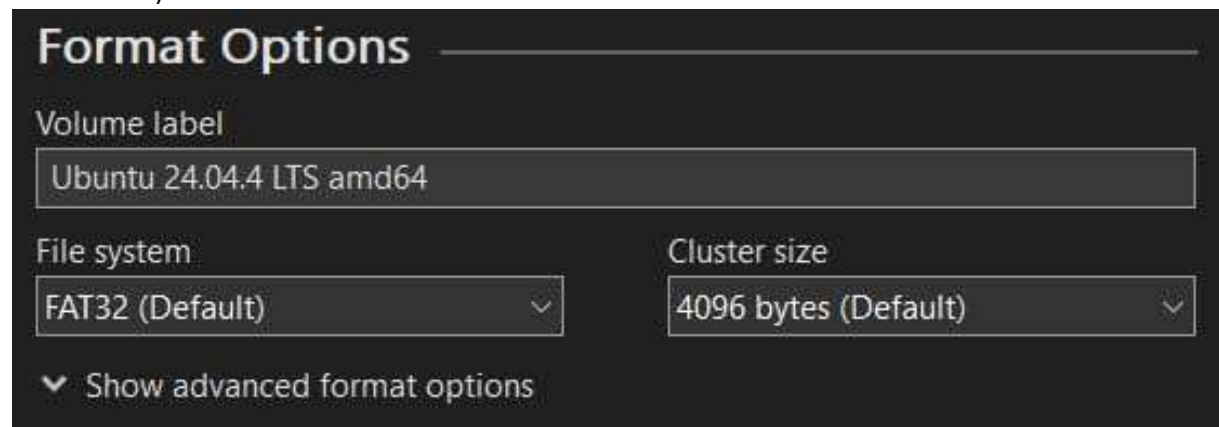

Format Options


Volume label
Ubuntu 24.04.4 LTS amd64

File system: FAT32 (Default) Cluster size: 4096 bytes (Default)

▼ Show advanced format options

IMPORTANT -

Select the recommendation. In case the recommendation option fails (i.e. installation fails due to ISO Image Mode) then use DD image mode. However, most of the time ISO Image Mode works the best.

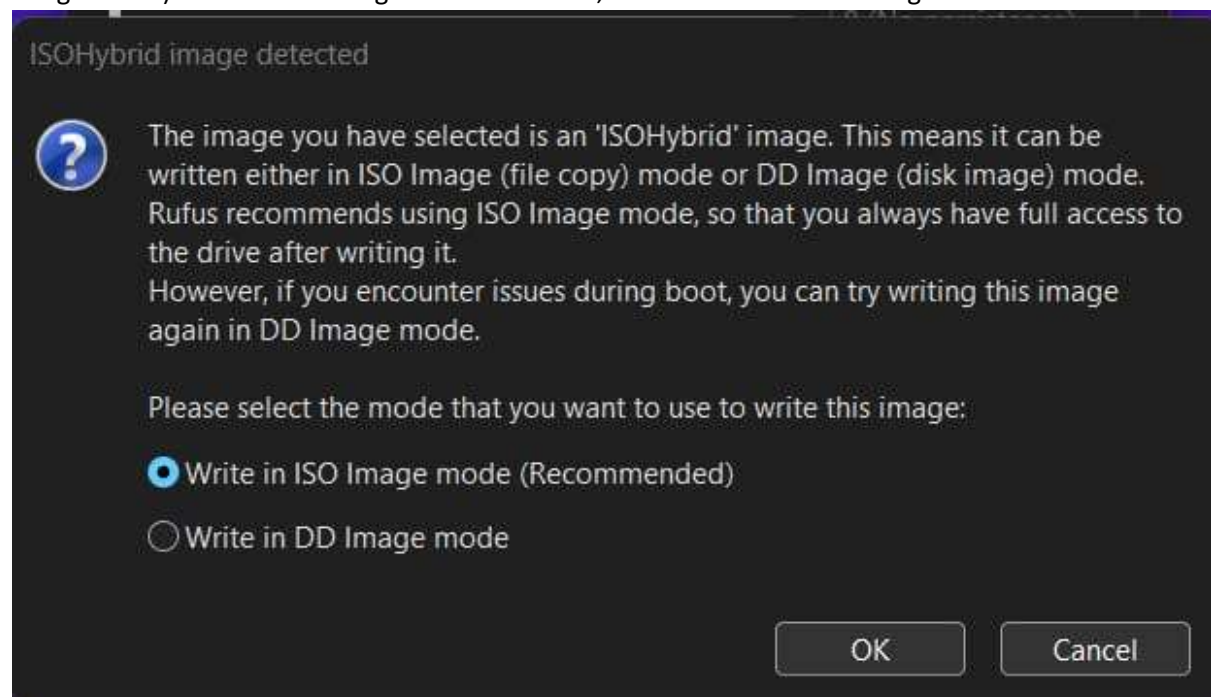

ISOHybrid image detected

 The image you have selected is an 'ISOHybrid' image. This means it can be written either in ISO Image (file copy) mode or DD Image (disk image) mode. Rufus recommends using ISO Image mode, so that you always have full access to the drive after writing it. However, if you encounter issues during boot, you can try writing this image again in DD Image mode.


Please select the mode that you want to use to write this image:

☒ Write in ISO Image mode (Recommended)

☐ Write in DD Image mode

OK Cancel

Select OK

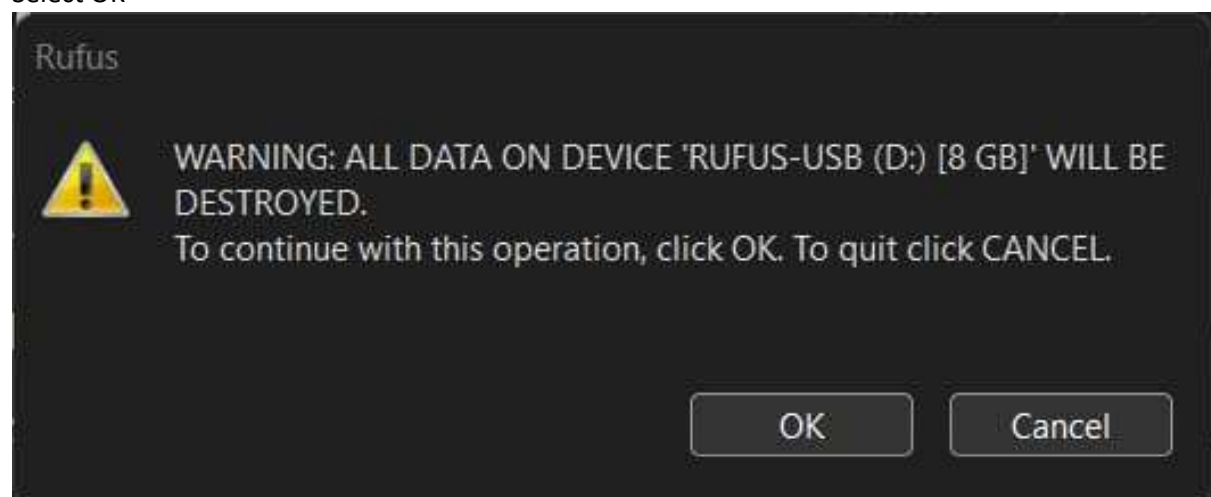

Rufus

 **WARNING: ALL DATA ON DEVICE 'RUFUS-USB (D:) [8 GB]' WILL BE DESTROYED.**
To continue with this operation, click OK. To quit click CANCEL.

OK Cancel

Green Bar will be visible after completion

Rufus 4.13.2316

Drive Properties

Device
Ubuntu Rufus (D:) [8 GB]

Boot selection
ubuntu-24.04.4-desktop-amd64.iso  SELECT

Persistent partition size
 0 (No persistence)

Partition scheme
GPT

Target system
UEFI (non CSM) ?

▼ Show advanced drive properties

Format Options

Volume label
Ubuntu Rufus

File system
FAT32 (Default)

Cluster size
4096 bytes (Default)

▼ Show advanced format options

Status

READY


START CLOSE

1 device found00:22:04

Plug the USB Drive in the designated Device after installation is complete




Reboot the system with USB Plugged in

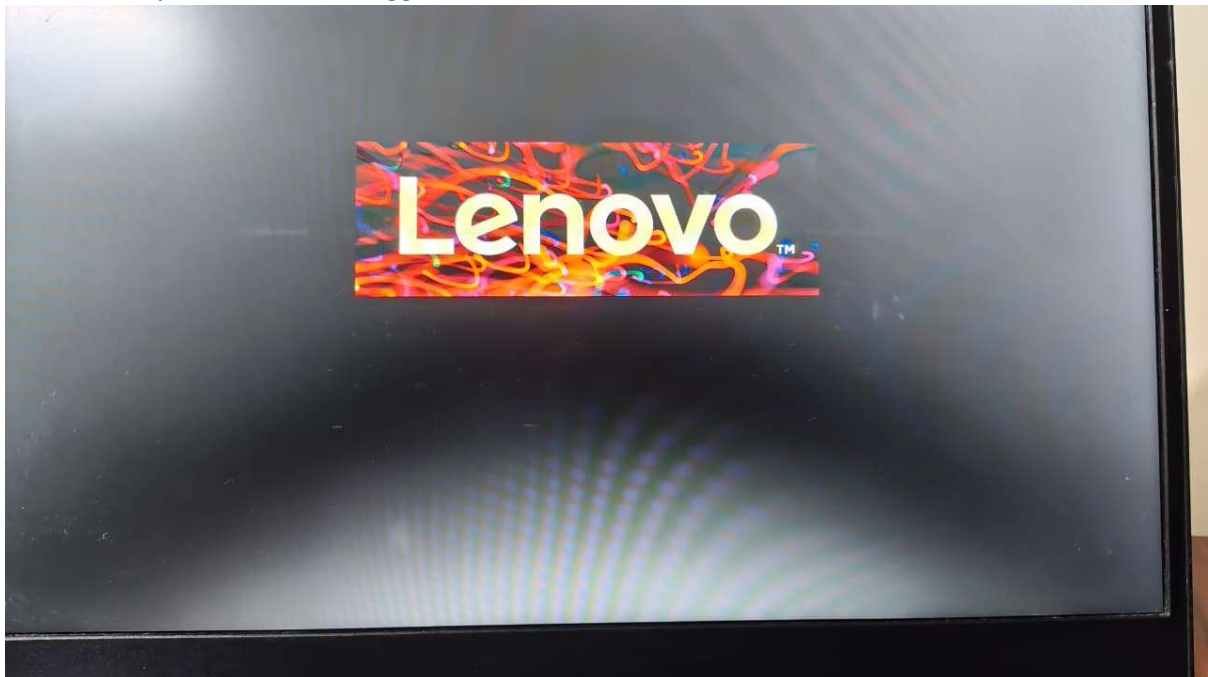


Press F10/F12 - depending on your system. It is mostly F10/F12/F7 or F5.

This needs to be done just after you press the power button to get yourself into the Boot Selection Menu.

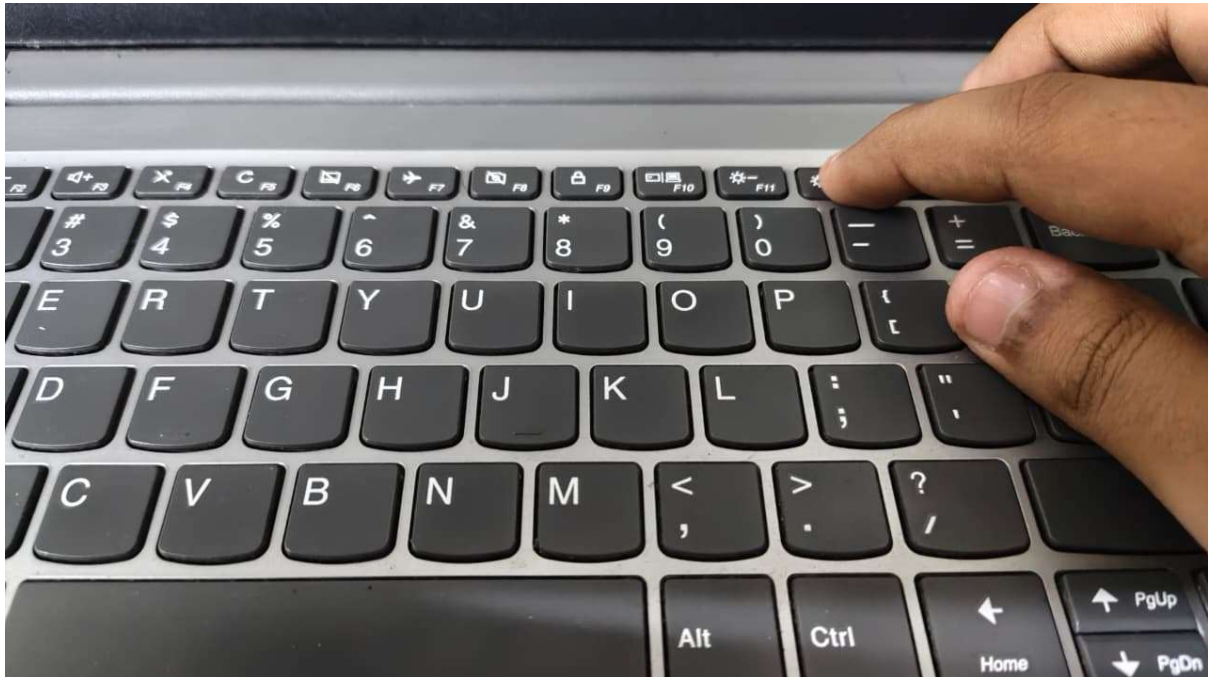


You can also get into BIOS settings for the same...if you can't find the key to get into Boot Selection Menu.


Note: It is rather dangerous to play with BIOS settings so stick to the Boot Selection Menu if possible.

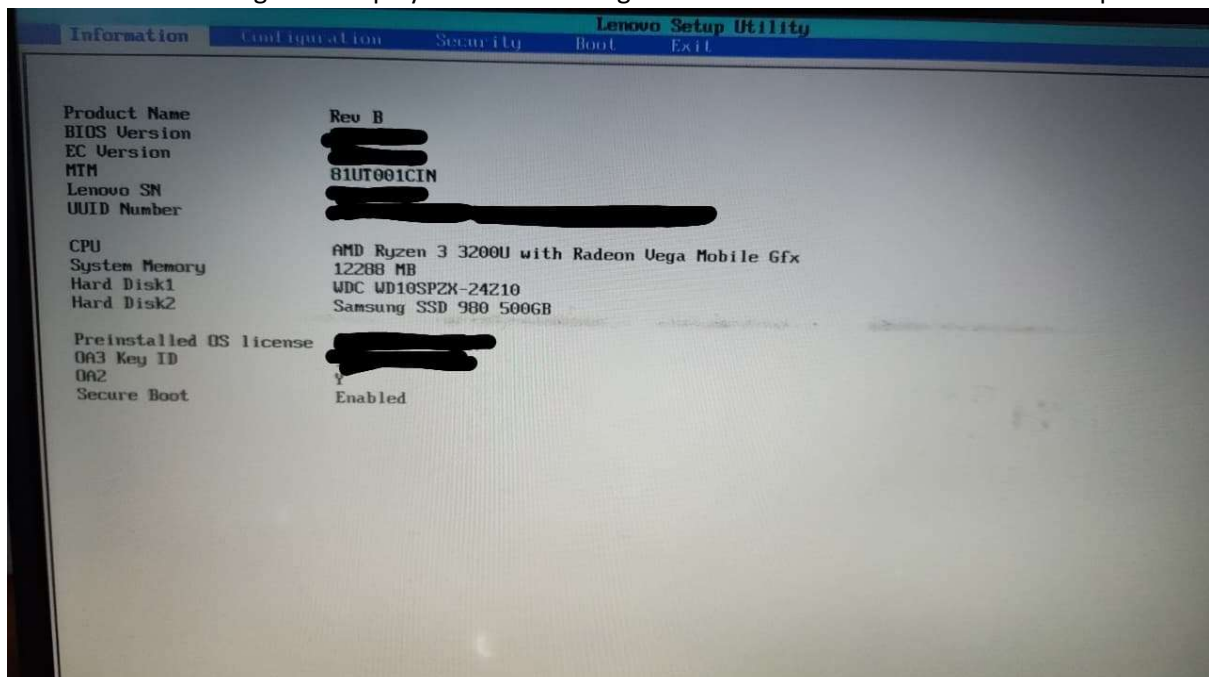


Select the USB Drive for booting in this menu
(use the arrow keys to navigate as the mouse won't work)
Then Press enter and let the system boot.

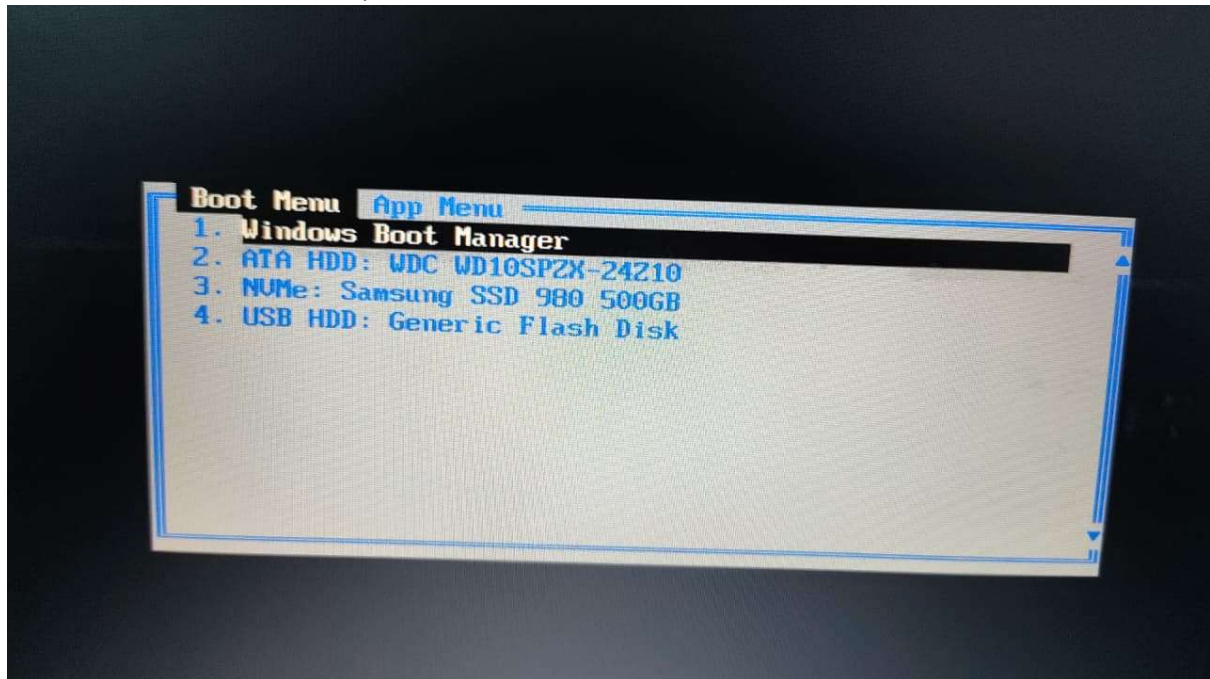

Select 'Try or Install Ubuntu'

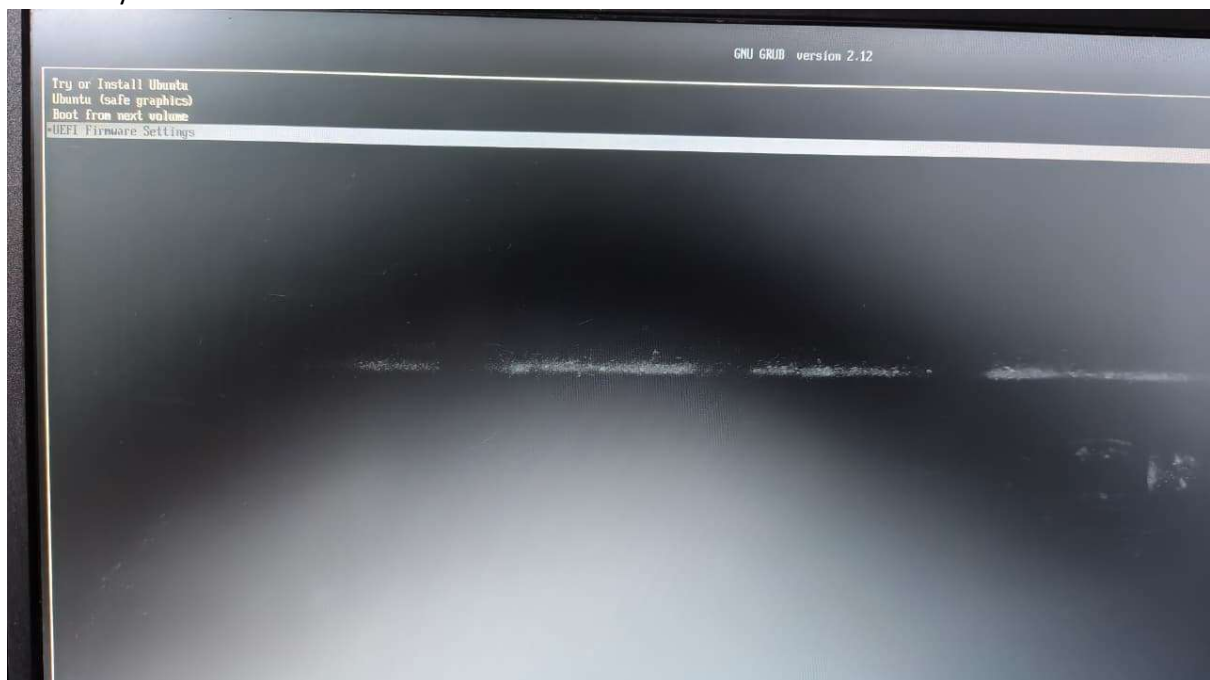


This Ubuntu Logo will pop up and then it'll load for ~1-2 minutes.
(No. It is not deleting anything, so rest easy)

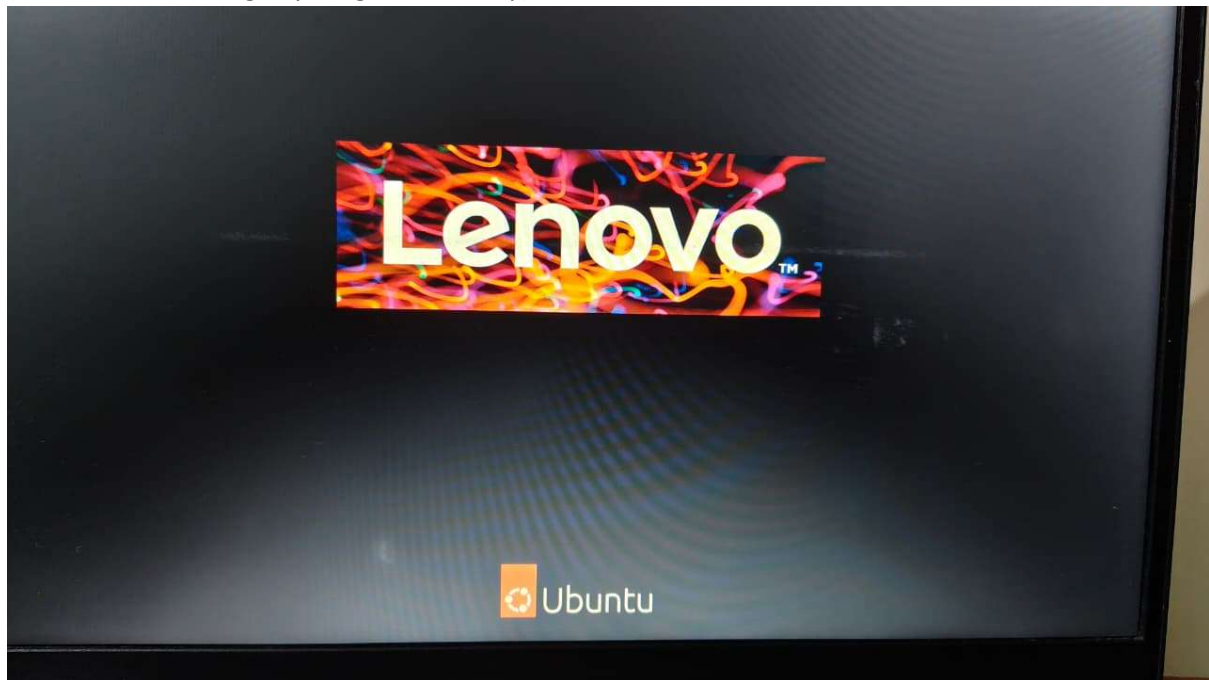


It'll ask some basic questions just like it asks for INSTALLATION. After those Select "Try Ubuntu"


NOTE: You'll get to this screen after a bunch of setups like Wifi, and Welcome Screen. So don't panic but make sure to not select the wrong option!

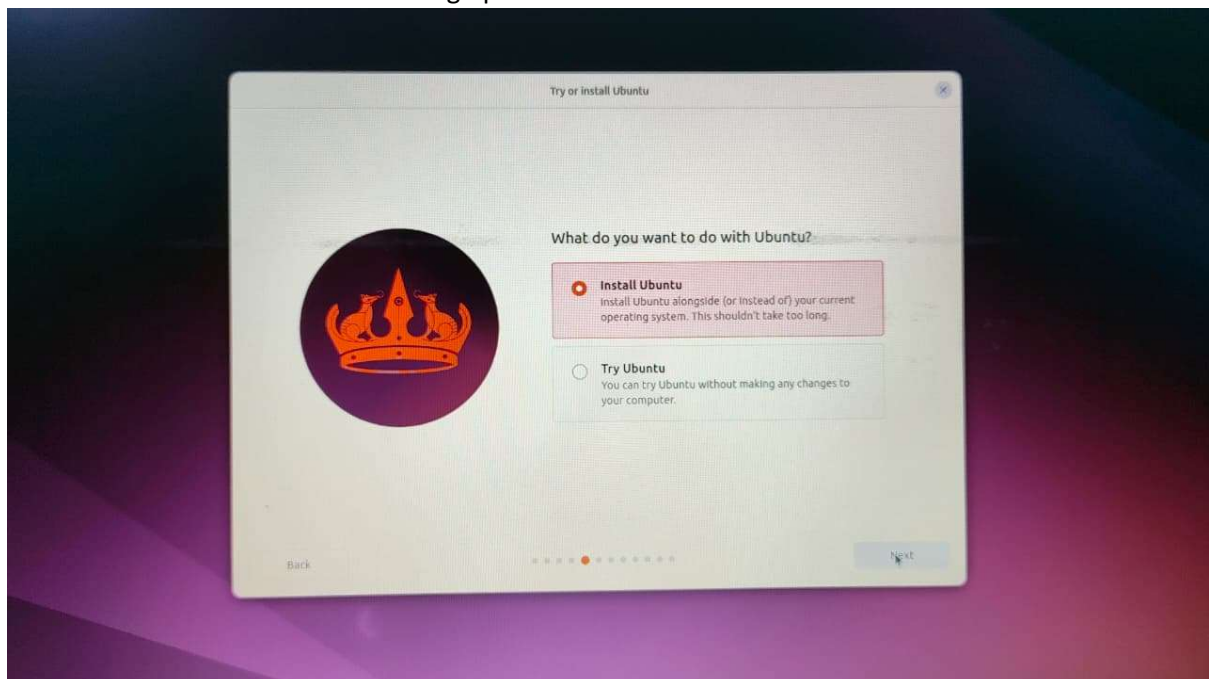



Select 'Try Ubuntu' and then close

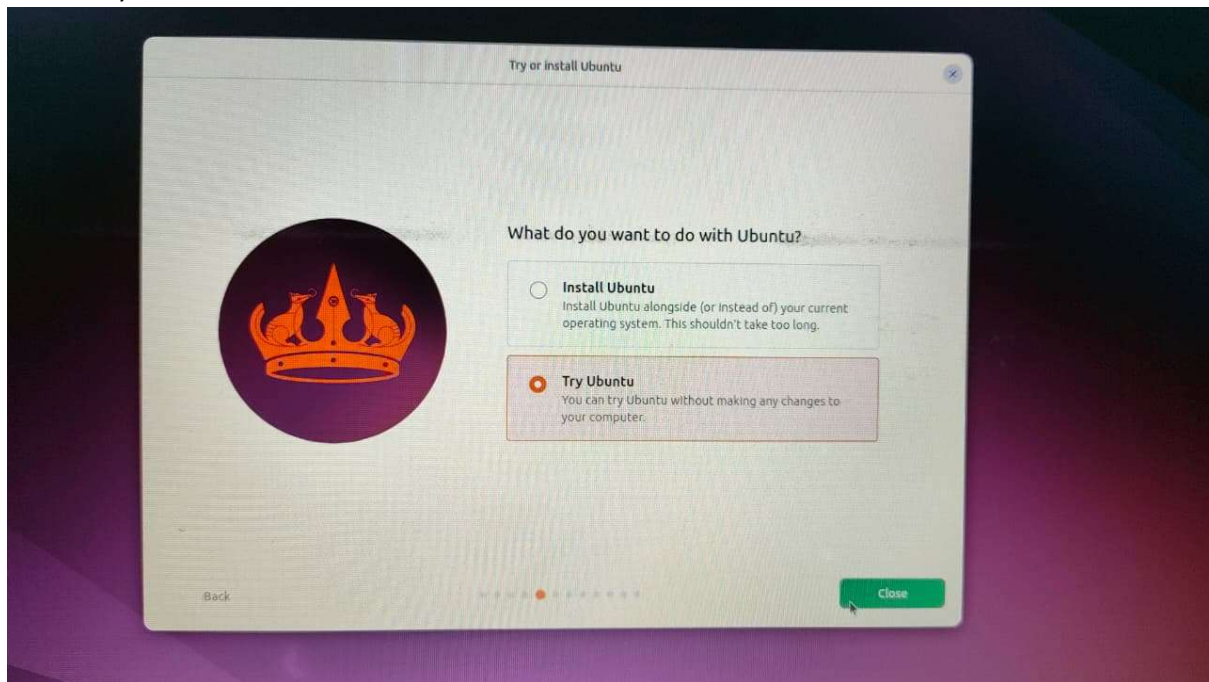


UBUNTU TRIAL MODE

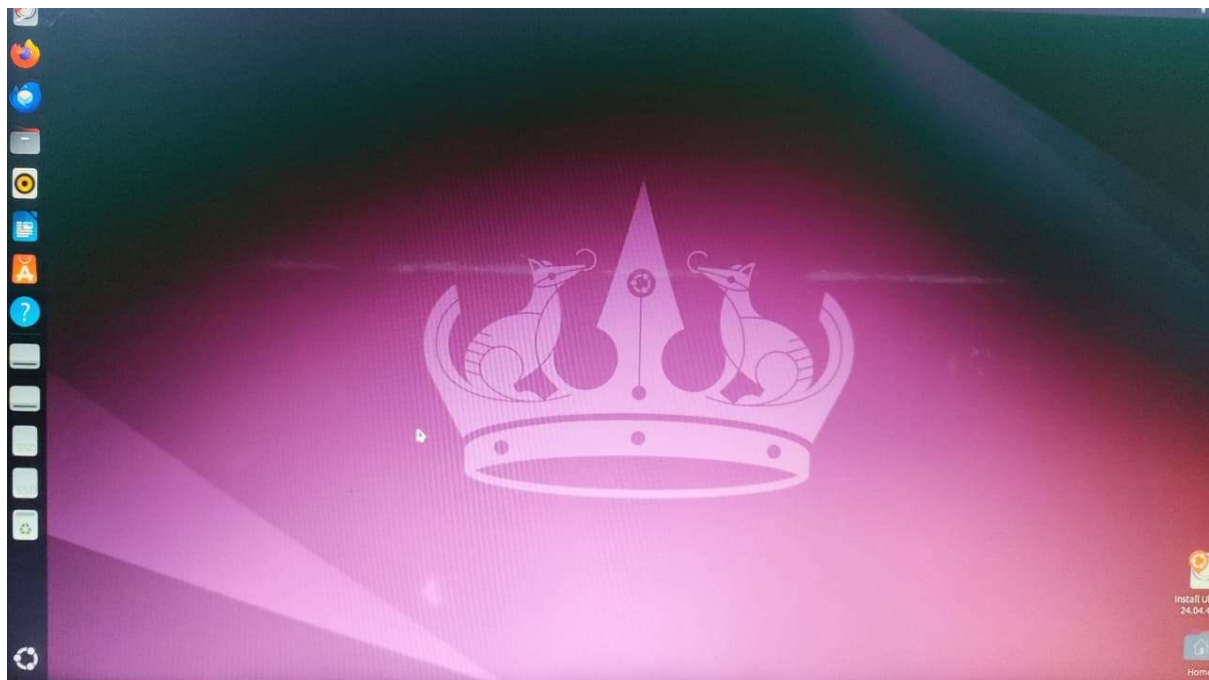

Select 'Show Apps' option from bottom left and search for terminal

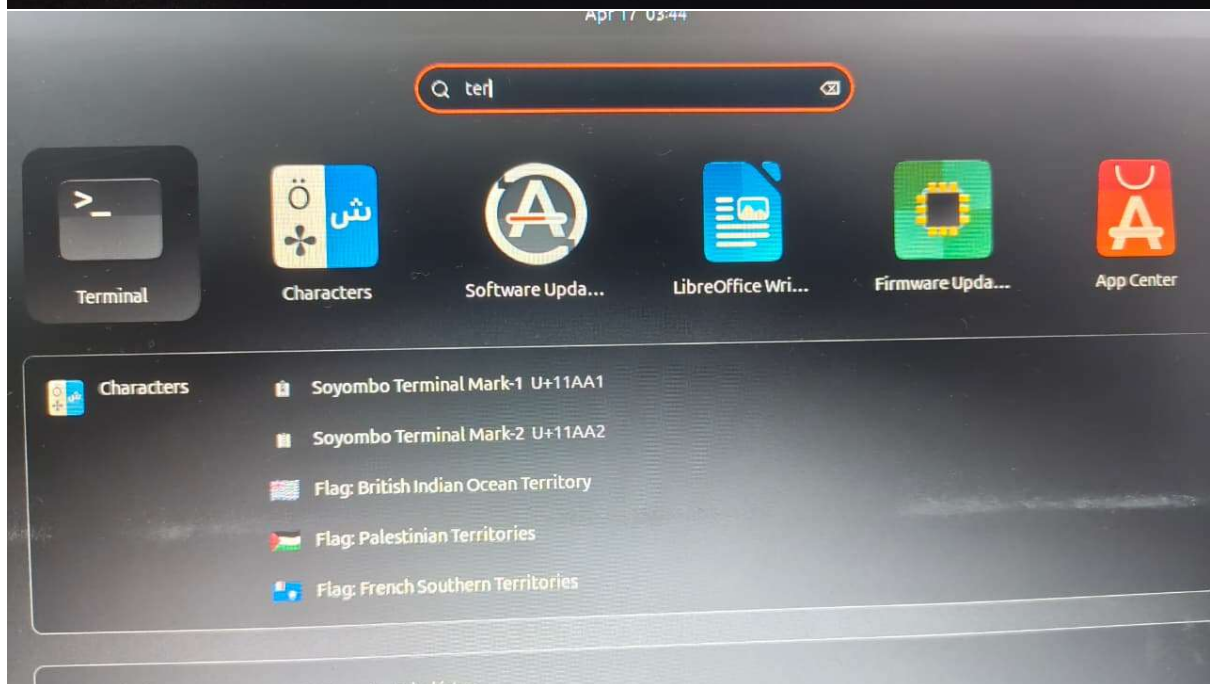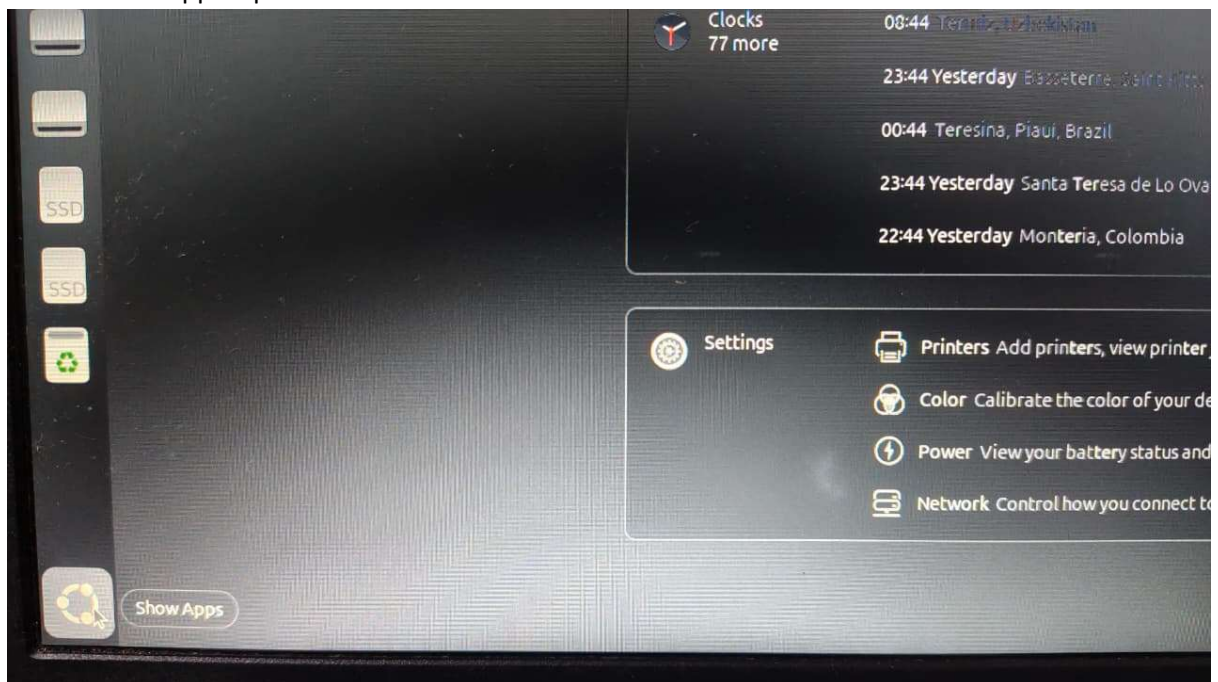

Open the Terminal

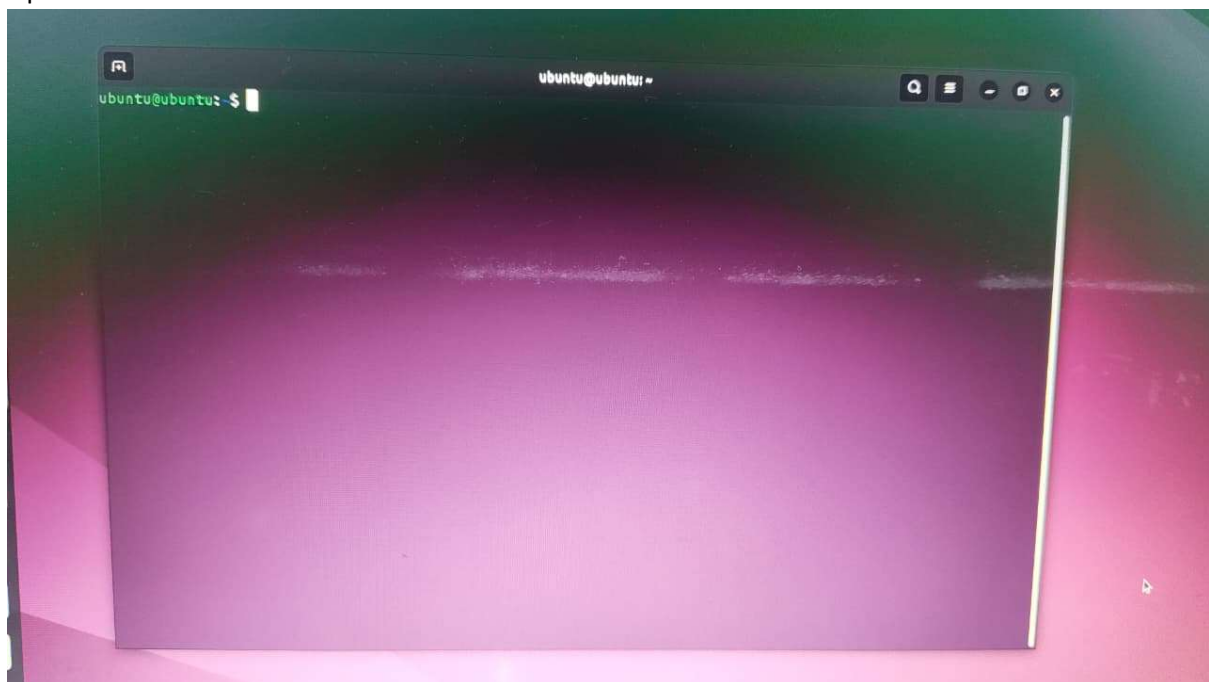


Use these commands -

Pwd

Ls

Whoami

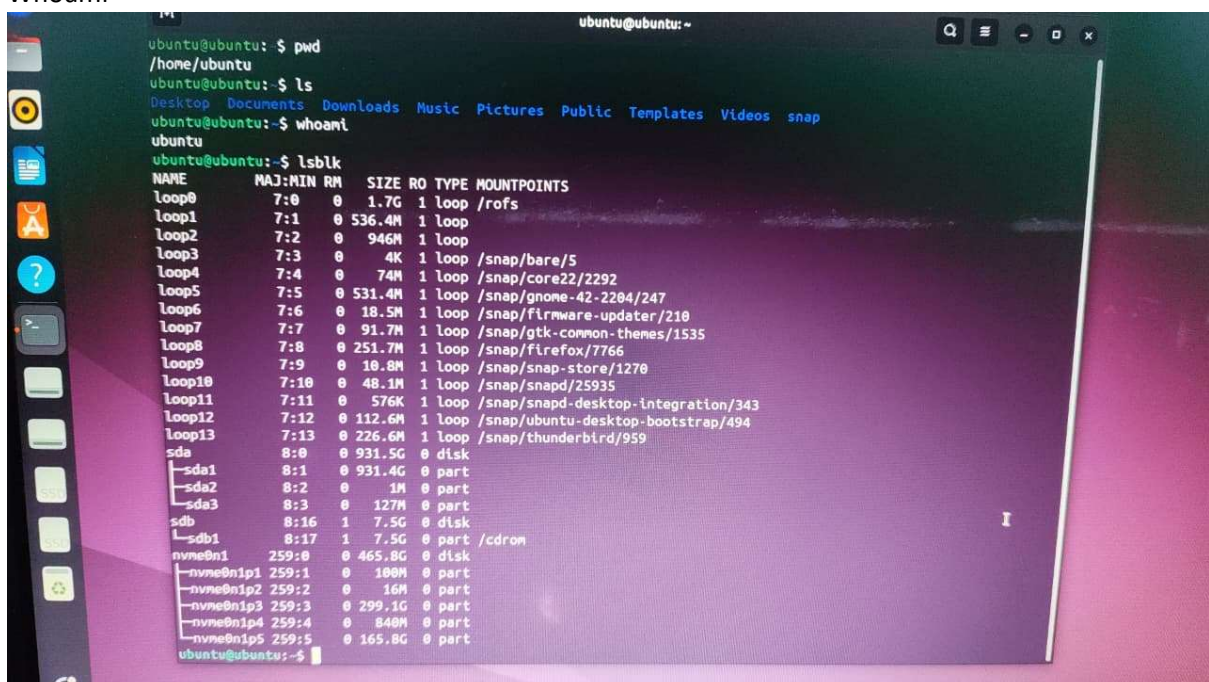

lsblk – to check disk partitions

```
ubuntu@ubuntu:~$ lsblk
NAME        MAJ:MIN RM  SIZE RO TYPE MOUNTPOINTS
loop0       7:0      0   1.7G  1 loop /rofs
loop1       7:1      0  536.4M  1 loop 
loop2       7:2      0   946M  1 loop 
loop3       7:3      0    4K  1 loop /snap/bare/5
loop4       7:4      0    74M  1 loop /snap/core22/2292
loop5       7:5      0  531.4M  1 loop /snap/gnome-42-2204/247
loop6       7:6      0   18.5M  1 loop /snap/firmware-updater/210
loop7       7:7      0   91.7M  1 loop /snap/gtk-common-themes/1535
loop8       7:8      0  251.7M  1 loop /snap/firefox/7766
loop9       7:9      0   10.8M  1 loop /snap/snap-store/1270
loop10      7:10     0   48.1M  1 loop /snap/snapd/25935
loop11      7:11     0   576K  1 loop /snap/snapd-desktop-integration/343
loop12      7:12     0  112.6M  1 loop /snap/ubuntu-desktop-bootstrap/494
loop13      7:13     0  226.6M  1 loop /snap/thunderbird/959
sda         8:0      0  931.5G  0 disk 
├─sda1      8:1      0  931.4G  0 part 
├─sda2      8:2      0     1M  0 part 
├─sda3      8:3      0   127M  0 part 
└─sdb       8:16     1    7.5G  0 disk 
   └─sdb1    8:17     1    7.5G  0 part /cdrom
nvme0n1     259:0    0  465.8G  0 disk 
├─nvme0n1p1 259:1    0   100M  0 part 
├─nvme0n1p2 259:2    0    16M  0 part 
├─nvme0n1p3 259:3    0  299.1G  0 part 
├─nvme0n1p4 259:4    0   840M  0 part 
└─nvme0n1p5 259:5    0  165.8G  0 part
ubuntu@ubuntu:~$
```

Use these commands to create, mount a partition, check files and demount the partition.

```
sudo mkdir /mnt/mydrive
```

```
sudo mount /dev/sda1 /mnt/mydrive
```

```
ls /mnt/mydrive
```

```
sudo umount /mnt/mydrive
```

```
├─nvme0n1p2 259:2    0    16M  0 part 
├─nvme0n1p3 259:3    0  299.1G  0 part 
├─nvme0n1p4 259:4    0   840M  0 part 
└─nvme0n1p5 259:5    0  165.8G  0 part
ubuntu@ubuntu:~$ sudo mkdir /mnt/mydrive
ubuntu@ubuntu:~$ sudo mount /dev/sda1 /mnt/mydrive
```

Use - dmesg | less - To check on all kernel programs and boot messages.

Note: if it fails, restart the terminal and use the command again.

Use CTRL + Z to end the process view

```
ubuntu@ubuntu:~$ dmesg | less
dmesg: read kernel buffer failed: Operation not permitted

[1]+  Stopped                  dmesg | less
ubuntu@ubuntu:~$
```

Journalctl -xe – get all the system logs

```
ubuntu@ubuntu: ~$ journalctl -xe
The job identifier is 1116.
Apr 17 04:00:07 ubuntu systemd[1]: Starting sysstat-collect.service - system activity accounting.
Subject: A start job for unit sysstat-collect.service has begun execution
Defined-By: systemd
Support: http://www.ubuntu.com/support

A start job for unit sysstat-collect.service has begun execution.

The job identifier is 4138.
Apr 17 04:00:07 ubuntu systemd[1]: sysstat-collect.service: Deactivated successfully.
Subject: Unit succeeded
Defined-By: systemd
Support: http://www.ubuntu.com/support

The unit sysstat-collect.service has successfully entered the 'dead' state.
Apr 17 04:00:07 ubuntu systemd[1]: Finished sysstat-collect.service - system activity accounting.
Subject: A start job for unit sysstat-collect.service has finished successfully
Defined-By: systemd
Support: http://www.ubuntu.com/support

A start job for unit sysstat-collect.service has finished successfully.


The job identifier is 4138.
lines 1521-1541/1541
The job identifier is 1116.
Apr 17 04:00:07 ubuntu systemd[1]: Starting sysstat-collect.service - system activity accounting.
Subject: A start job for unit sysstat-collect.service has begun execution
Defined-By: systemd
Support: http://www.ubuntu.com/support

A start job for unit sysstat-collect.service has begun execution.
```

Systemctl list-units type=service – to check for all services

```
ubuntu@ubuntu: ~$ systemctl list-units --type=service
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
accounts-daemon.service            loaded active running Accounts Service
alsa-restore.service               loaded active exited Save/Restore Sound Card State
apport.service                     loaded active exited automatic crash report generation
avahi-daemon.service               loaded active running Avahi mDNS/DNS-SD Stack
blk-availability.service            loaded active exited Availability of block devices
bluetooth.service                  loaded active running Bluetooth service
casper-md5check.service             loaded active exited casper-md5check Verify Live ISO
cloud-config.service                loaded active exited Cloud-init: Config Stage
cloud-final.service                 loaded active exited Cloud-init: Final Stage
cloud-init-local.service            loaded active exited Cloud-init: Local Stage (pre-networking)
cloud-init.service                  loaded active exited Cloud-init: Network Stage
colord.service                      loaded active running Manage, Install and Generate CUPS printer drivers
console-setup.service               loaded active exited Set console font and keymap
cron.service                        loaded active running Regular background program processing
cups-browsed.service                loaded active running Make remote CUPS printers available
cups.service                        loaded active running CUPS Scheduler
dbus.service                        loaded active running D-Bus System Message Bus
finalrd.service                     loaded active exited Create final runtime dir for systemd
gdm.service                         loaded active running GNOME Display Manager
gnome-remote-desktop.service        loaded active running GNOME Remote Desktop
kerneloops.service                 loaded active running Tool to automatically collect kernel oops
keyboard-setup.service              loaded active exited Set the console keyboard layout
kmod-static-nodes.service            loaded active exited Create List of Static Device Nodes
ldconfig.service                    loaded active exited Rebuild Dynamic Linker Cache
lvm2-monitor.service                loaded active exited Monitoring of LVM2 mirrors, snapshots etc
ModemManager.service                loaded active running Modem Manager
NetworkManager-wait-online.service loaded active exited Network Manager Wait Online
NetworkManager.service              loaded active running Network Manager
openvpn.service                     loaded active exited OpenVPN service
plymouth-quit-wait.service           loaded active exited Hold until boot process finishes up
...skipping...
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
accounts-daemon.service            loaded active running Accounts Service
alsa-restore.service               loaded active exited Save/Restore Sound Card State
apport.service                     loaded active exited automatic crash report generation
avahi-daemon.service               loaded active running Avahi mDNS/DNS-SD Stack
```


Systemctl - state=running – to check all running services

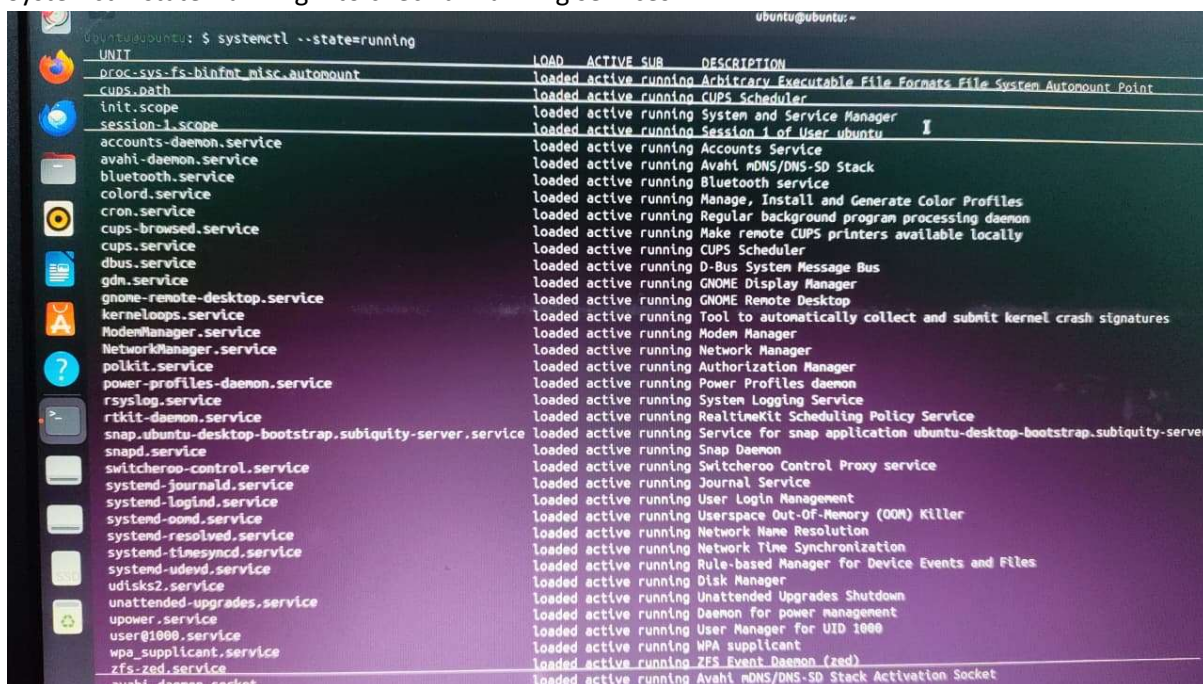

Terminal screenshot showing the output of the command `systemctl --state=running`. The output lists various system services and their status. The terminal window has a dark background with a light blue title bar. The command prompt is `ubuntu@ubuntu:~$`. The output is as follows:

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
proc-sys-fs-binfmt_misc.automount	loaded	active	running	Arbitrary Executable File Formats File System Automount Point
cups.path	loaded	active	running	CUPS Scheduler
init.scope	loaded	active	running	System and Service Manager
session-1.scope	loaded	active	running	Session 1 of User ubuntu
accounts-daemon.service	loaded	active	running	Accounts Service
avahi-daemon.service	loaded	active	running	Avahi mDNS/DNS-SD Stack
bluetooth.service	loaded	active	running	Bluetooth service
colord.service	loaded	active	running	Manage, Install and Generate Color Profiles
cron.service	loaded	active	running	Regular background program processing daemon
cups-browsed.service	loaded	active	running	Make remote CUPS printers available locally
cups.service	loaded	active	running	CUPS Scheduler
dbus.service	loaded	active	running	D-Bus System Message Bus
gdm.service	loaded	active	running	GNOME Display Manager
gnome-remote-desktop.service	loaded	active	running	GNOME Remote Desktop
kerneloops.service	loaded	active	running	Tool to automatically collect and submit kernel crash signatures
ModemManager.service	loaded	active	running	Modem Manager
NetworkManager.service	loaded	active	running	Network Manager
polkit.service	loaded	active	running	Authorization Manager
power-profiles-daemon.service	loaded	active	running	Power Profiles daemon
rsyslog.service	loaded	active	running	System Logging Service
rtkit-daemon.service	loaded	active	running	RealtimeKit Scheduling Policy Service
snap.ubuntu-desktop-bootstrap.subiquity-server.service	loaded	active	running	Service for snap application ubuntu-desktop-bootstrap.subiquity-server
snapsd.service	loaded	active	running	Snap Daemon
switcheroo-control.service	loaded	active	running	Switcheroo Control Proxy service
systemd-journald.service	loaded	active	running	Journal Service
systemd-logind.service	loaded	active	running	User Login Management
systemd-oomd.service	loaded	active	running	Userspace Out-Of-Memory (OOM) Killer
systemd-resolved.service	loaded	active	running	Network Name Resolution
systemd-timesyncd.service	loaded	active	running	Network Time Synchronization
systemd-udev.service	loaded	active	running	Rule-based Manager for Device Events and Files
udisks2.service	loaded	active	running	Disk Manager
unattended-upgrades.service	loaded	active	running	Unattended Upgrades Shutdown
upower.service	loaded	active	running	Daemon for power management
user@1000.service	loaded	active	running	User Manager for UID 1000
wpa_supplicant.service	loaded	active	running	WPA supplicant
zfs-zed.service	loaded	active	running	ZFS Event Daemon (zed)
avahi-daemon.socket	loaded	active	running	Avahi mDNS/DNS-SD Stack Activation Socket

Lsblk – check storage

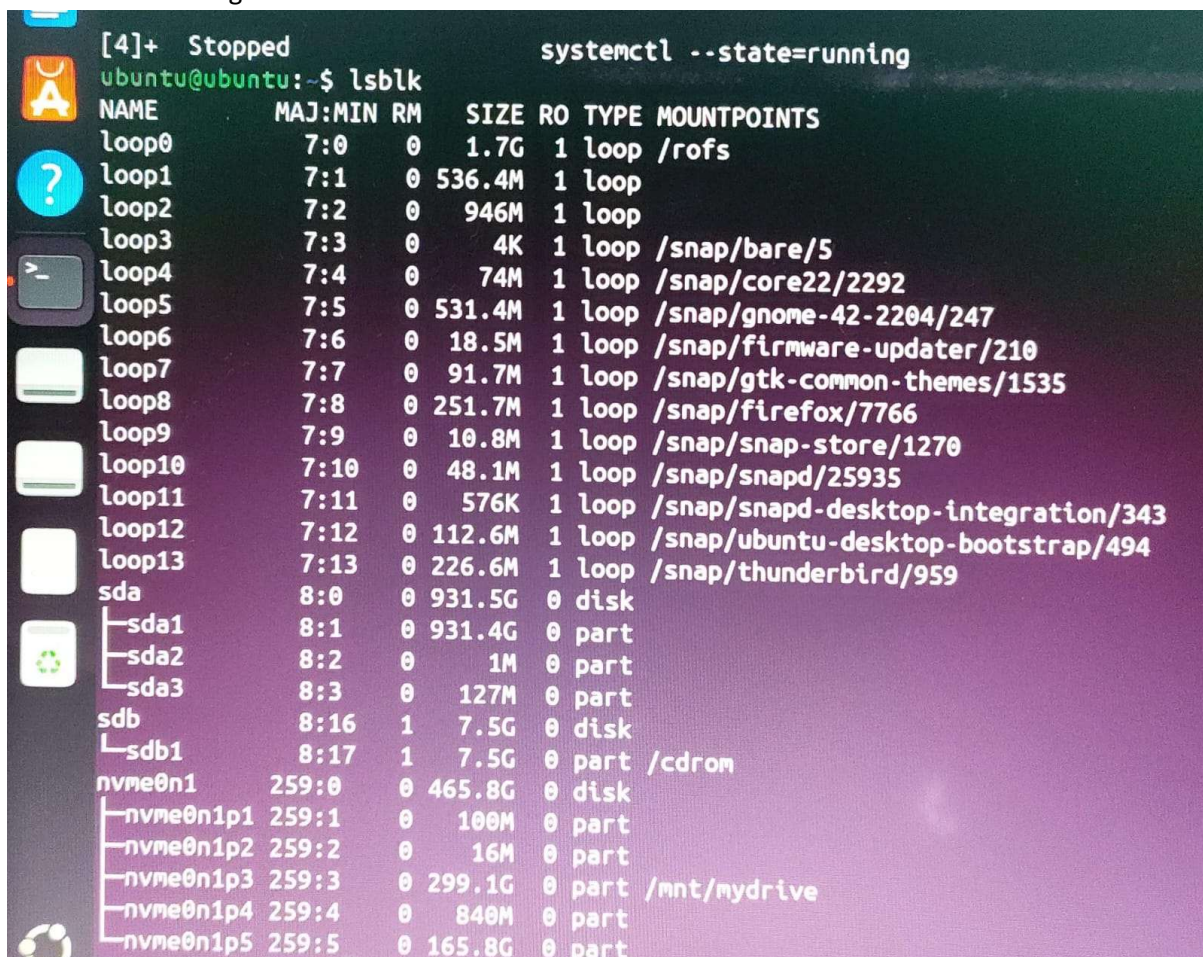

Terminal screenshot showing the output of the command `lsblk`. The terminal window has a dark background with a light blue title bar. The command prompt is `ubuntu@ubuntu:~$`. The output is as follows:

NAME	MAJ:MIN	RM	SIZE	RO	TYPE	MOUNTPOINTS
loop0	7:0	0	1.7G	1	loop	/rofs
loop1	7:1	0	536.4M	1	loop	
loop2	7:2	0	946M	1	loop	
loop3	7:3	0	4K	1	loop	/snap/bare/5
loop4	7:4	0	74M	1	loop	/snap/core22/2292
loop5	7:5	0	531.4M	1	loop	/snap/gnome-42-2204/247
loop6	7:6	0	18.5M	1	loop	/snap/firmware-updater/210
loop7	7:7	0	91.7M	1	loop	/snap/gtk-common-themes/1535
loop8	7:8	0	251.7M	1	loop	/snap/firefox/7766
loop9	7:9	0	10.8M	1	loop	/snap/snap-store/1270
loop10	7:10	0	48.1M	1	loop	/snap/snapd/25935
loop11	7:11	0	576K	1	loop	/snap/snapd-desktop-integration/343
loop12	7:12	0	112.6M	1	loop	/snap/ubuntu-desktop-bootstrap/494
loop13	7:13	0	226.6M	1	loop	/snap/thunderbird/959
sda	8:0	0	931.5G	0	disk	
├─sda1	8:1	0	931.4G	0	part	
├─sda2	8:2	0	1M	0	part	
├─sda3	8:3	0	127M	0	part	
sdb	8:16	1	7.5G	0	disk	
└─sdb1	8:17	1	7.5G	0	part	/cdrom
nvme0n1	259:0	0	465.8G	0	disk	
├─nvme0n1p1	259:1	0	100M	0	part	
├─nvme0n1p2	259:2	0	16M	0	part	
├─nvme0n1p3	259:3	0	299.1G	0	part	/mnt/mydrive
├─nvme0n1p4	259:4	0	840M	0	part	
└─nvme0n1p5	259:5	0	165.8G	0	part	

Lsblk -f – check storage with file systems


```
nvme0n1p5 259:5 0 165.8G 0 part
ubuntu@ubuntu:~$ lsblk -f
```

NAME	FSTYPE	FSVER	LABEL	UUID	FSAVAIL	FSUSEX	MOUNTPOINTS
loop0	squashfs	4.0			0	100%	/rofs
loop1	squashfs	4.0					
loop2	squashfs	4.0					
loop3	squashfs	4.0					
loop4	squashfs	4.0					
loop5	squashfs	4.0			0	100%	/snap/bare/5
loop6	squashfs	4.0			0	100%	/snap/core22/2292
loop7	squashfs	4.0			0	100%	/snap/gnome-42-2204/247
loop8	squashfs	4.0			0	100%	/snap/firmware-updater/210
loop9	squashfs	4.0			0	100%	/snap/gtk-common-themes/1535
loop10	squashfs	4.0			0	100%	/snap/firefox/7766
loop11	squashfs	4.0			0	100%	/snap/snap-store/1270
loop12	squashfs	4.0			0	100%	/snap/snapd/25935
loop13	squashfs	4.0			0	100%	/snap/snapd-desktop-integration/343
sda							
sda1							
sda2							
sda3							
sdb							
sdb1	vfat	FAT32	UBUNTU RUFU B84D-D768		1.3G	83%	/cdrom
nvme0n1							
nvme0n1p1	vfat	FAT32		C0C7-74E6			
nvme0n1p2							
nvme0n1p3	ntfs			7872085C72D82124	64.8G	78%	/mnt/mydrive
nvme0n1p4	ntfs			F49438249437E82E			
nvme0n1p5	ntfs		SSD 150	DC74CD8774CD653C			

```
ubuntu@ubuntu:~$
```

After all of this is done - just click on the top right corner to use the power button to switch off the system and then remove the USB so that it doesn't logs into Ubuntu again.

You won't need to get into boot manager after you have removed the USB as it'll just set to your default drive (i.e. SSD or HDD)

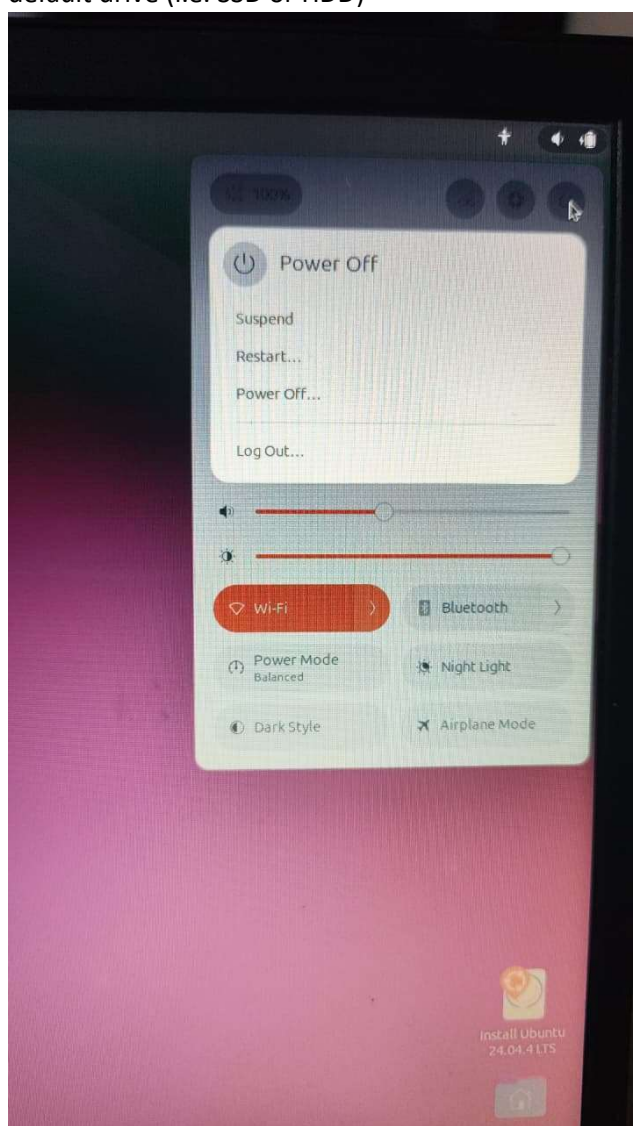

Remove the USB Drive and then press enter as instructed on the screen.
Your system will boot into your default OS after reboot.

