



WELCOME TO
MIKROTIK INDONESIA
CITRAWEB NUSA INFOMEDIA

Mikrotik Authorized Reseller
Mikrotik Certified Training Partner
Mikrotik Certified Consultant



login

username
password
[daftar](#) | [lupa password](#)



Keranjang Belanja | [Detail](#)

barang, Rp ,-
Di luar PPN, diskon %



Artikel

Setup, Melakukan Basic Setting via CLI

Kategori: [Tips & Trik](#)

Share Tweet [g+](#)

Cari produk:

- [Halaman Muka](#)
- [Produk](#)
 - [Voucher MUM](#)
 - [Lisensi \(tanpa DOM\)](#)
 - [Lisensi \(dgn DOM\)](#)
 - [Upgrade Lisensi](#)
 - [Switch](#)
 - [Cloud Router Switch](#)
 - [RouterBoard \(only\)](#)
 - [Router Indoor](#)
 - [Wireless Indoor NEW](#)
 - [RouterBoard 2011](#)
 - [MikroBits Aneto](#)
 - [MikroBits Ainos](#)
 - [MikroBits Celoeica](#)
 - [MikroBits Dinara NEW](#)
 - [Cloud Core Router](#)
 - [Wireless Outdoor 800](#)
 - [Wireless Indoor 800](#)
 - [Wireless Indoor 493](#)
 - [Wireless Outdoor 435](#)
 - [Wireless Outdoor 433](#)
 - [Wireless Indoor 433](#)

Sebelumnya, kami pernah memberikan contoh bagaimana melakukan konfigurasi dasar Mikrotik melalui Winbox, yang bisa dibaca di [Konfigurasi Dasar Mikrotik](#).

Selain menggunakan Menu pada winbox, Mikrotik juga menyediakan menu **Setup** pada Command Line Interface yang dapat digunakan untuk melakukan setting dasar pada Mikrotik.

Untuk mengakses menu ini, bisa dilakukan dengan mengetikkan command **"Setup"**.

```
[admin@MikroTik] > setup
Setup uses Safe Mode. It means that all changes that are made during setup
are reverted in case of error, or if Ctrl-C is used to abort setup. To keep
changes exit setup using the 'x' key.

[Safe Mode taken]
Choose options by pressing one of the letters in the left column, before
dash. Pressing 'x' will exit current menu, pressing Enter key will select the
entry that is marked by an '*'. You can abort setup at any time by pressing
Ctrl-C.
Entries marked by '+' are already configured.
Entries marked by '-' cannot be used yet.
Entries marked by 'X' cannot be used without installing additional packages.
  x - reset all router configuration
+ a - configure ip address and gateway
+ d - setup dhcp client
* s - setup dhcp server
  p - setup pppoe client
+ t - setup pptp client
  x - exit menu
your choice [press Enter to setup dhcp server]:
```

- [Wireless Outdoor 411](#)
- [Wireless Indoor 411](#)
- [Wireless Outdoor 900](#)
- [Groove](#)
- [Metal](#)
- [Embedded 2.4GHz](#)
- [Embedded 5.xGHz](#)
- [Interface](#)
- [Outdoor Antenna](#)
- [Indoor Antenna](#)
- [Perlengkapan Lain](#)
- [RF Elements](#)
- [Discontinued](#)
- [NetProtector NEW](#)
- [SFP Transceiver](#)
- [Rancang Sendiri](#)

- [Aplikasi Bantu](#)
- [Pelatihan](#)
- [Manual & Dokumentasi](#)
- [Download Area](#)
- [Artikel](#)
- [Fitur & Penggunaan](#)
- [Tips & Trik](#)
- [Mikrotik @ Media](#)
- [Tentang Kami](#)
- [Aturan & Tata Cara](#)
- [Layanan Pelanggan](#)
- [BGP-Peer NEW](#)
- [Kontak Kami](#)

Ada beberapa konfigurasi dasar yang dapat dilakukan pada menu Setup, seperti DHCP Server & Client, IP Address, Default Gateway, PPPoE Client, PPTP Client, serta bisa juga digunakan untuk reset semua konfigurasi router.


Pada saat perintah setup dipanggil, maka secara otomatis Router berada dalam Safe Mode. Artinya konfigurasi yang dilakukan hanya akan disimpan sementara. Jika konfigurasi tersebut menyebabkan Router error, maka safe mode akan menghapus konfigurasi yang dibuat dan mengembalikan Router pada konfigurasi sebelumnya.

Jika konfigurasi benar dan akan dilakukan penyimpanan, bisa keluar dari menu Setup dengan tombol CTRL+X. Selengkapnya dapat dilihat pada artikel [Safe Mode](#).

Sebagai contoh kita akan melakukan konfigurasi DHCP Client melalui menu Setup.

```
that is marked by an '*'. You can abort setup at any time by pressing Ctrl-C.
Entries marked by '+' are already configured.
Entries marked by '-' cannot be used yet.
Entries marked by 'X' cannot be used without installing additional packages.
r - reset all router configuration
+ a - configure ip address and gateway
d - setup dhcp client
+ s - setup dhcp server
p - setup pppoe client
t - setup pptp client
* x - exit menu
your choice: d
interface: ether1
#Adding DHCP client
/ip dhcp-client add disabled=no interface=ether1 comment="added by setup"
```

Maka, secara otomatis jika dilihat melalui menu pada Winbox, DHCP Client akan muncul. Untuk semua rule yang di-config melalui menu Setup, akan terdapat comment "added by setup".

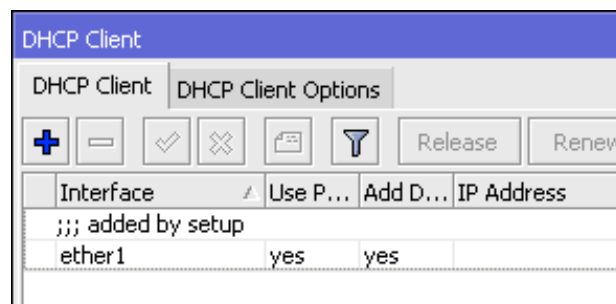

Jika setting ini tidak akan disimpan, gunakan **CTRL+C** untuk keluar dari menu Setup

```
#Adding DHCP client
/ip dhcp-client add disabled=no interface=ether1 comment="added by setup"
r - reset all router configuration
+ a - configure ip address and gateway
+ d - setup dhcp client
+ s - setup dhcp server
  p - setup pppoe client
  t - setup pptp client
* x - exit menu
your choice:
Undoing any changes made by setup. Exiting Safe Mode.
Following commands were executed during this setup:
#Adding DHCP client
/ip dhcp-client add disabled=no interface=ether1 comment="added by setup"

Setup did not finish successfully.
Any configuration changes are reverted.
interrupted
[admin@MikroTik] >
```

Contoh lain, misalnya untuk distribusi pemasangan IP ke arah client akan menggunakan metode DHCP, sehingga diperlukan DHCP Server pada Router.

```
r - reset all router configuration
+ a - configure ip address and gateway
d - setup dhcp client
* s - setup dhcp server
p - setup pppoe client
t - setup pptp client
x - exit menu
your choice [press Enter to setup dhcp server]: s
dhcp server interface: ether2
dhcp address space: 172.16.1.0/24
gateway for dhcp network: 172.16.1.1
addresses to give out: 172.16.1.2-172.16.1.254
dns servers: 8.8.8.8
lease time: 3d
```

Jika setting ini ingin disimpan, bisa menggunakan tombol **CTRL+X**. Perintah CTRL+X digunakan untuk keluar dari menu setup sekaligus melepas (release) Safe Mode Router.

```
t - setup pptp client
* x - exit menu
your choice: x

[Safe Mode released]

Setup completed successfully.
Following commands were executed during this setup:
#Adding DHCP server IP address pool
/ip pool add name=dhcp-pool-1 ranges=172.16.1.2-172.16.1.254
#Adding DHCP network
/ip dhcp-server network add address=172.16.1.0/24 dns-server=8.8.8.8 \
gateway=172.16.1.1 comment="added by setup"
#Adding DHCP server
/ip dhcp-server add interface=ether2 address-pool=dhcp-pool-1 \
lease-time=3d00:00:00 disabled=no
[Safe mode released by another user]
[admin@MikroTik] >
```

Akan tetapi hati-hati, walaupun Router dalam keadaan Safe Mode, pilihan Reset All Routers Configuration akan menghapus semua konfigurasi kecuali User & Password untuk Login ke Router.

```

  r - reset all router configuration
+ a - configure ip address and gateway
+ d - setup dhcp client
+ s - setup dhcp server
+ p - setup pppoe client
+ t - setup pptp client
* x - exit menu
your choice: r
Do you really want to delete all configuration on this router?
  y - yes, reset everything except user configuration
  * n - no, continue setup
your choice [y/n]:
```

Kembali ke :

[Halaman Artikel](#) | [Kategori Tips & Trik](#)

muka - tentang kami - produk - artikel - kontak kami

Copyrights ©2005-2015 Citraweb Nusa Infomedia. All Rights Reserved. Generated in 0.0043 second(s).

Your IP: 103.26.208.254