VURIX Mobile User Manual

이노뎁 innovative development INODEP

© Copyright 2025, Innodep Inc. All Rights Reserved

Contents

Starting

Installing the Mobile App 5

Mobile App 5
Checking Installation Requirements 5
Installing the App 6

Basic Operations 7

Login and Logout 7
Logging In 7
Log In With Another Account 8
Logging Out 9
Main Screen 10
Main Screen Composition 10
Viewing Videos 12
Device List 13
Viewing Device List 13
Searching Device 14
Favorites 15
Viewing Favorites 15
Saving to Favorites 16
Deleting from Favorites 17

Live Video

Monitoring Live Video 19

Live Video 19
Viewing Live Video 19
Viewing Live Video Menu 21
Live Video Settings 22
Selecting Split Screen 23
Setting Lock Screen Mode 24
Control Mode 25
Saving Image File 26
Zooming Videos With Digital Zoom 27
Controlling PTZ 28
Immediate Video Search 29
Searching Live Video 29
Change or Delete Devices 31
Changing the Device 31
Deleting Devices 32

Recorded Video

Searching Recorded Videos 34

Recorded Video Search 34
Viewing Recorded Video 34
Viewing Recorded Video Menu 36
Searching Recorded Videos 37
Saving Image File 39
Zooming Videos With Digital Zoom 40
Selecting the Playback Speed 41
Change or Delete Devices 42
Changing the Device 42
Deleting Devices 44

Event

Viewing Events 46

Events 46
Monitoring Events 46
Viewing Event Menu 47
Receiving Events 48
Searching Events 49
Immediate Event Video Search 50
Searching Event Video 50

Settings

Viewing My Page 53

Configuring the APP 54

Display 55
Setting Display Information 55
Security 56
Setting Up Automatic Login 56
Language 57
Setting the Language 57
Theme 58
Setting the Theme 58
Event 59
Setting Event Reception 59

Others

Starting the Client 61

Event Management 62
Creating Events 62
User Settings 64
Adding Users 64
Equipment Management 66
Adding Equipment 66

Notes

Information on the Manual 70

Symbols in the Manual 70
Legal Notice 71
Copyright 71
Disclaimer 71
Trademarks 71

Troubleshooting 72

Customer Support 73

Customer Service 73

Starting

Installing the Mobile App

The actual screen and images in the manual may differ.

Mobile App

Check the app installation requirements and install the app.

Checking Installation Requirements

Check the installation requirements to ensure smooth app performance.


Supported OS	• Android 10 or Later • iOS / iPadOS 14.0 or Later
Supported Codecs	• H.264 • H.265
Recommended VURIX Server Version	• 1.7.0.220214 or Later
Recommended Web API Version	• 1.7.0.220214 or Later

Note

- VURIX Mobile connects via Web API, so the mobile network environment must allow external access to the Web API server's IP address.
- To enable VURIX Mobile to communicate with the VURIX server from an external network, port forwarding must be configured.
- Additional port forwarding is also required for RTSP video streaming.

Installing the App

Install the mobile app.

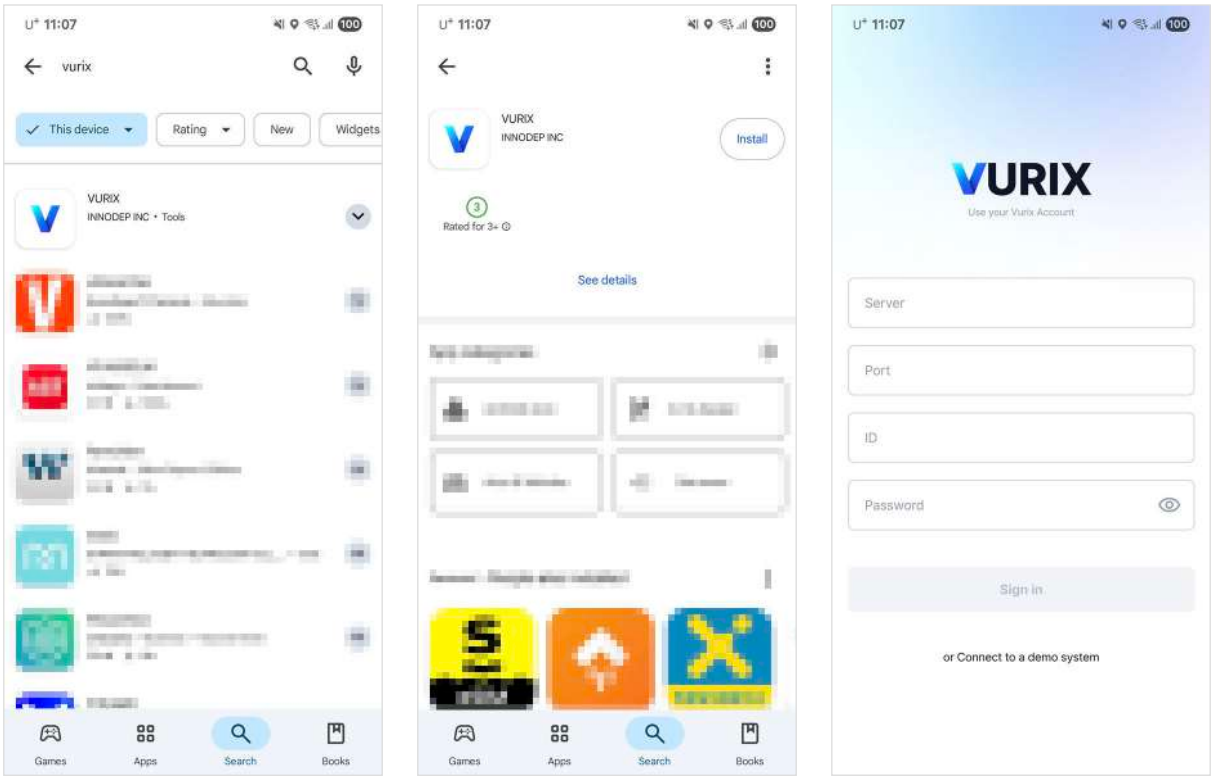

❶ ❷ ❸

1. Search for "VURIX" on the **[Play Store]** or **[App Store]**.
2. Tap **[Install]**.
3. Launch the app.

Note

- On iOS devices, a local network access popup appears when the app is launched for the first time and video playback is attempted.
- Tap 'Don't Allow' on the local network prompt. Turn off local network access.

Basic Operations


The actual screen and images in the manual may differ.

Login and Logout

Log in to or log out of the app.

Logging In

Enter login information to access the app.

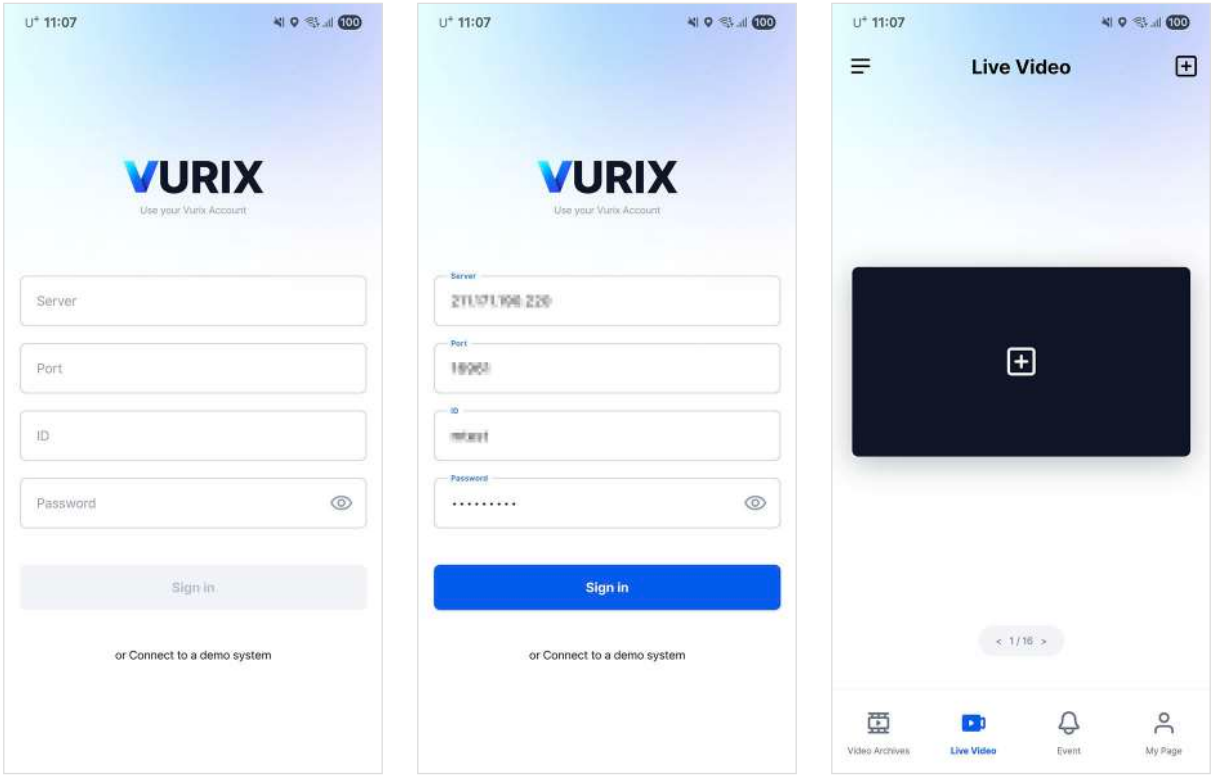


❶ ❷ ❸

1. Enter login information.
2. Tap **[Sign in]**.
3. Access the app.

> **Note**
>
> The account used to access the app will be saved in the login list.

Log In With Another Account

Access the app using a different account.

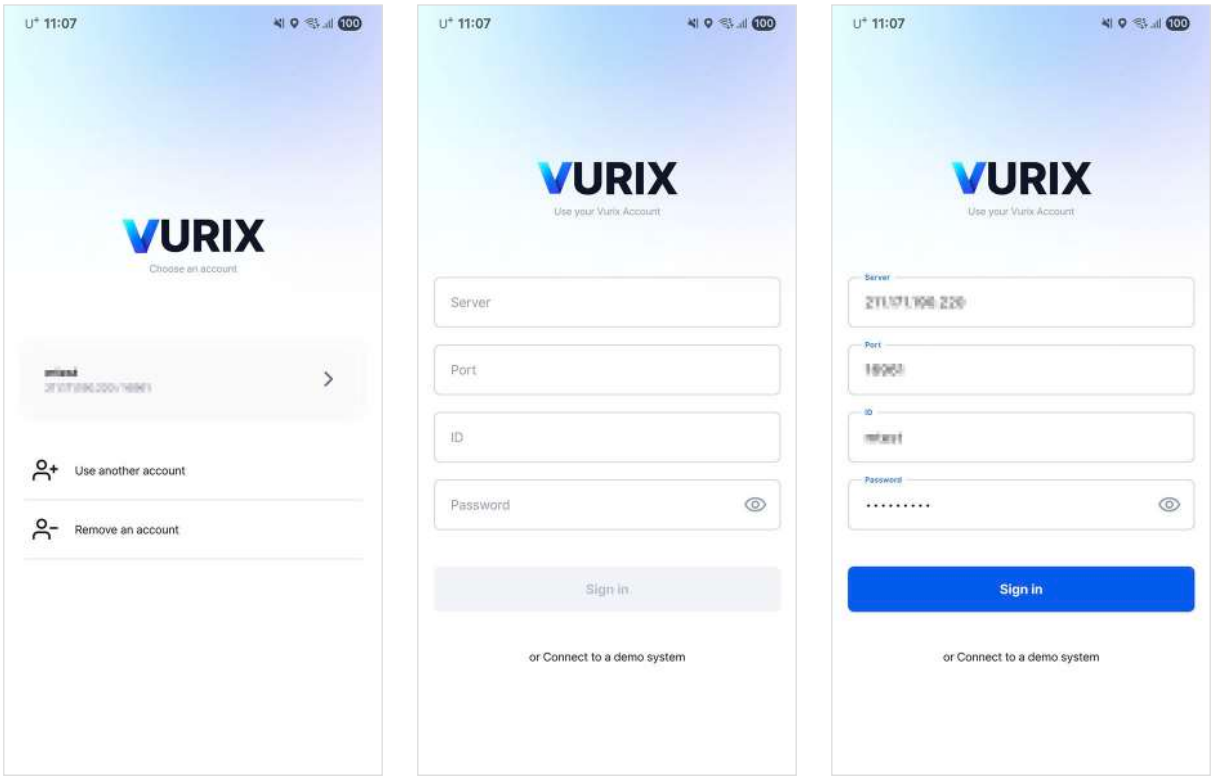

❶ ❷ ❸


1. Tap **[Use another account]** on the login screen.
2. Enter login information.
3. Tap **[Sign in]**.
4. Access the app.

Note

Tap **[Remove an account]**. Delete the account saved in the login list.

Logging Out

Log out of the app.

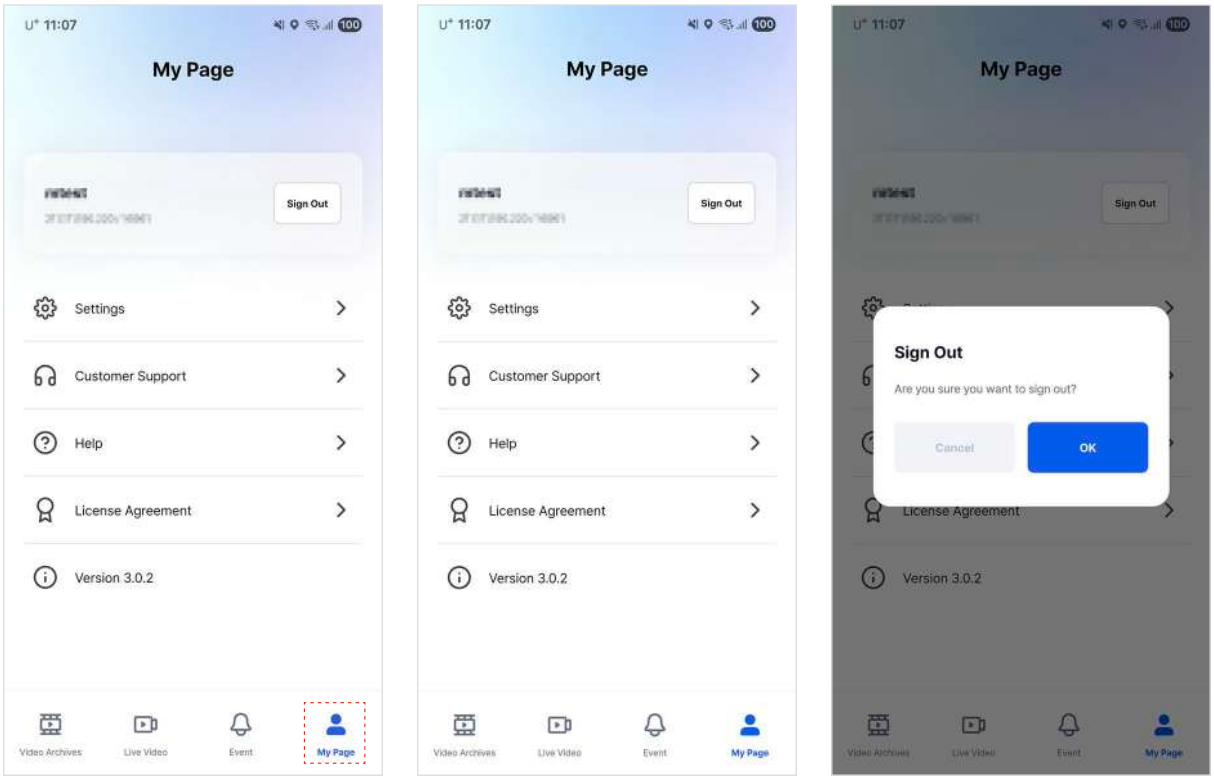


1. Tap **[👤]** on the main screen. The my page will be displayed.
2. Tap **[Sign Out]**.
3. Tap **[OK]**.
4. Log out of the app.

Main Screen

Check the screen and video.

Main Screen Composition

Check the screen layout.

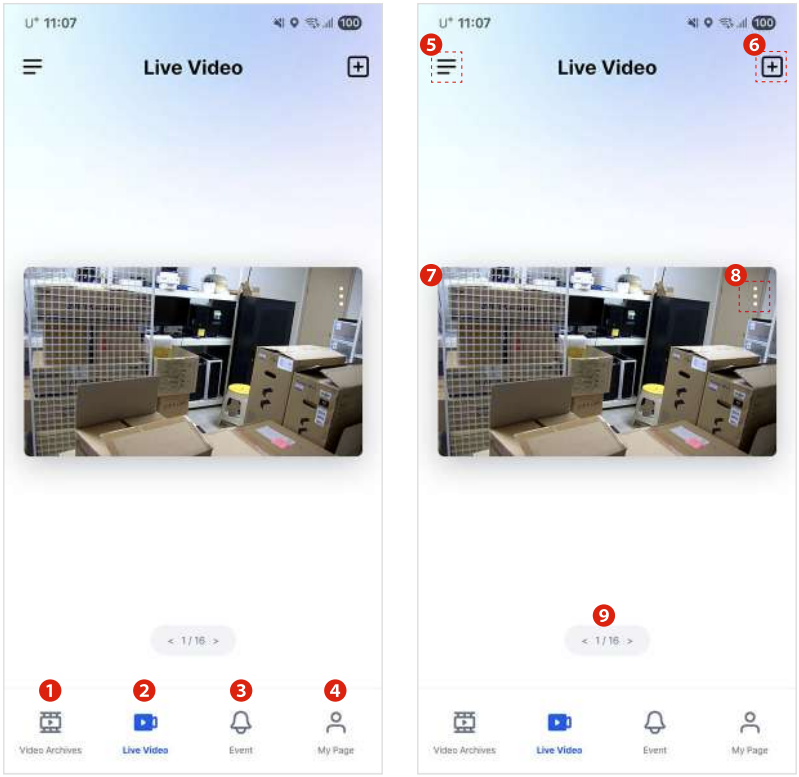

❶ Video Archives (Recorded Video)

Go to the recorded video screen.

❷ Live Video

Go to the live video screen.

❸ Event

Go to the event screen.

❹ My Page (Settings)

Go to the settings screen.

❺ ☰

Set the live video view layout, screen lock mode, etc.

(Displayed only in live video.)

❻ ⊞ (Device List)

Go to the device list screen.

❼ Video Section

Display video.

❽ ⋮ (More)

Displays menus such as control mode, search, device change, and deletion.


(Menus may vary depending on the feature.)

❾ Display Current Page / Display All Pages

Display the current page number and the number of all pages.

Viewing Videos

Add the video to a cell and view it.

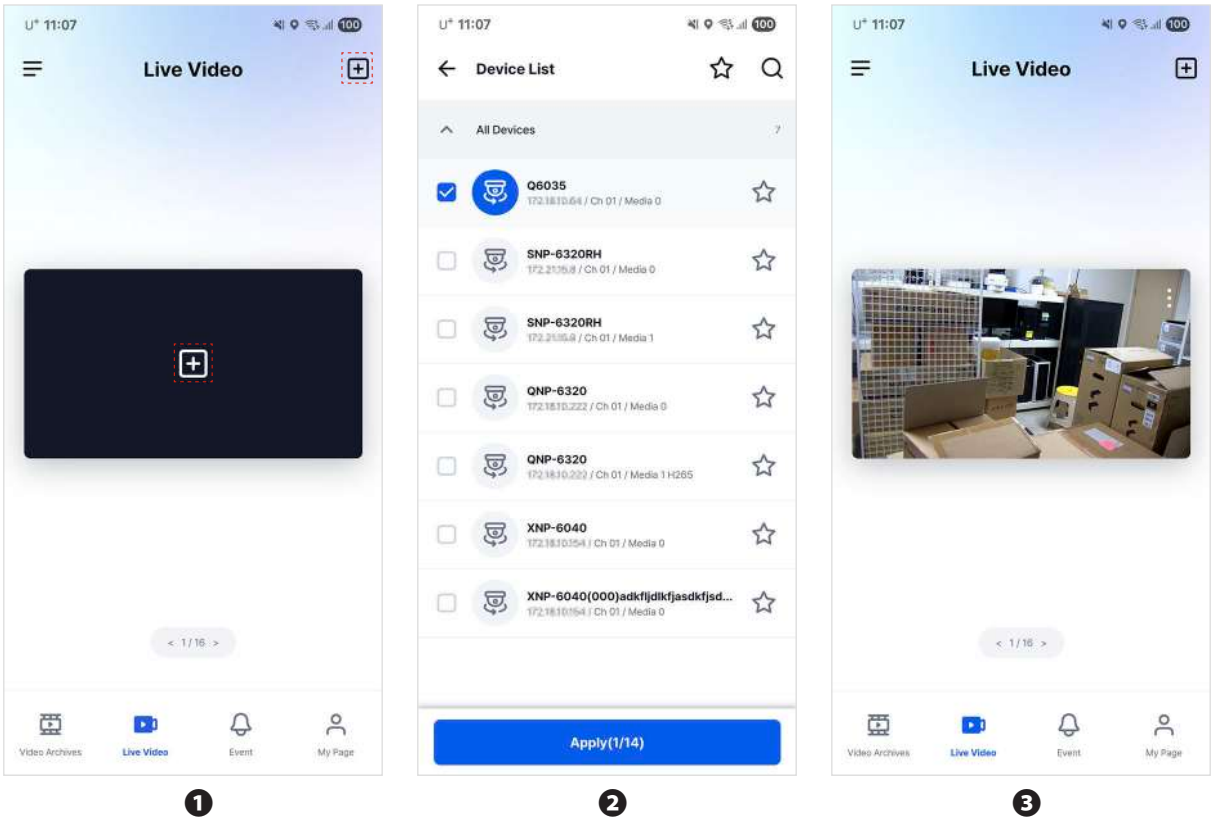

❶ ❷ ❸

1. Tap **[⊞]**. The device list will be displayed.
2. Select the item you want, and tap **[Apply]**.
3. View the selected video.

Note


Display the number of selected devices and the number of assignable devices on the **[Apply]** button.

Device List

Check or search for a device in the device list.

Viewing Device List

Check the device list.

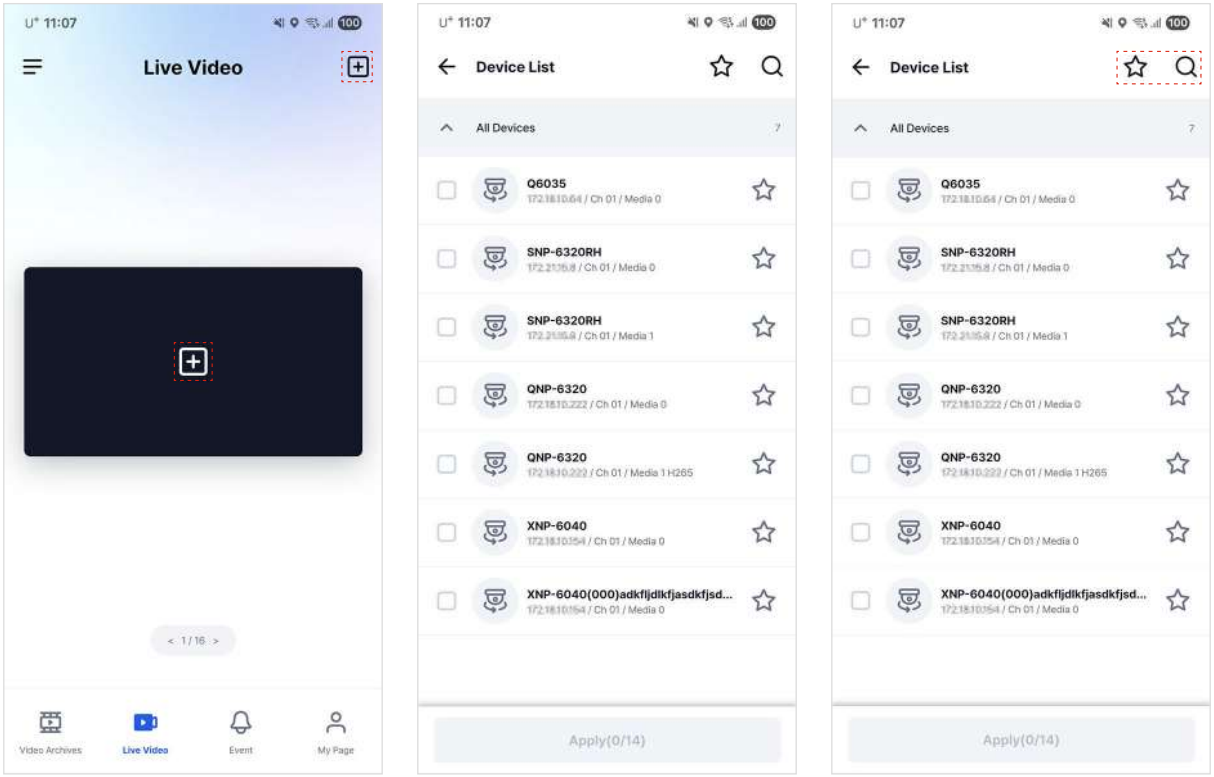


❶ ❷ ❸

1. Tap **[⊞]**. The device list will be displayed.
2. Check the device list.
3. Tap the item you want.
   - **[☆]**: Go to the favorites screen.
   - **[Q]**: Go to the device search screen.

Searching Device

Search for a device.

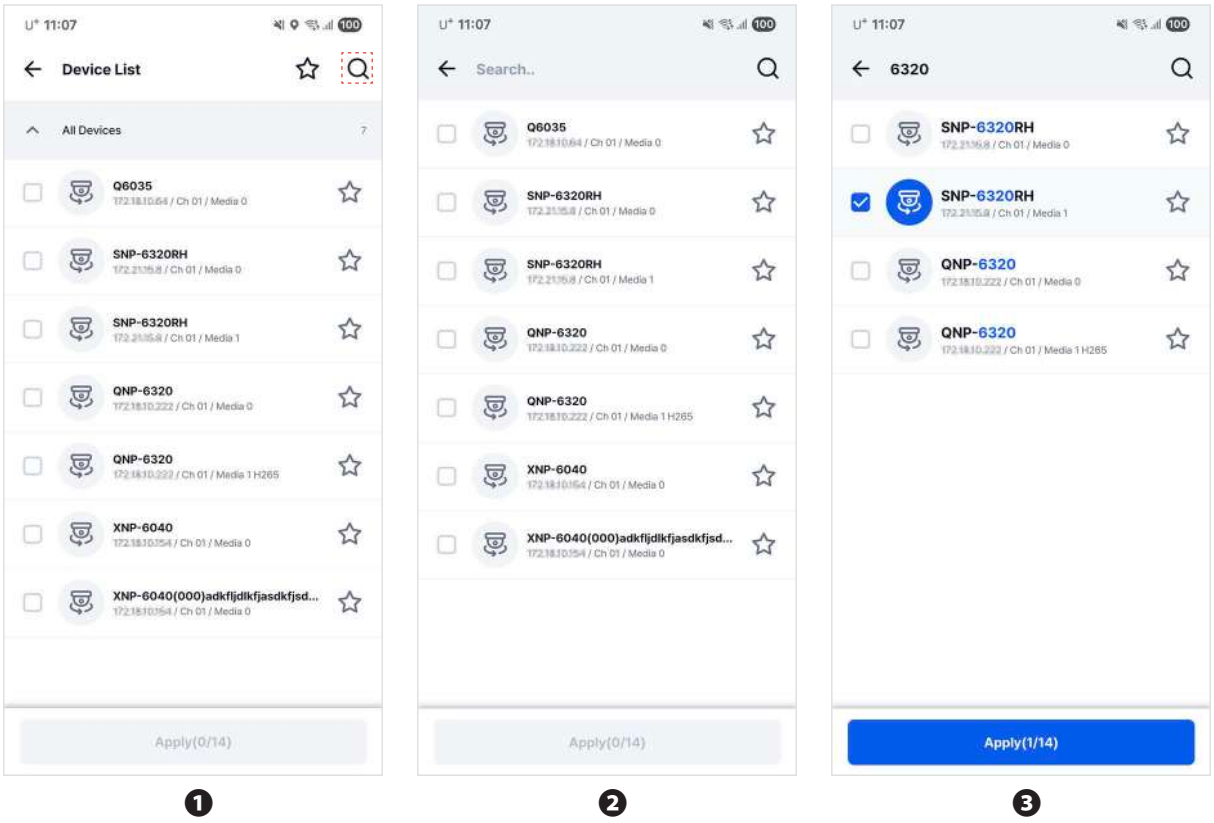


1. Tap [⊞] > [🔍]. The device search will be displayed.
2. Enter a search term.
3. Search for a device by device name or server name.

Favorites

Add or remove devices from favorites.

Viewing Favorites

Check the favorites.

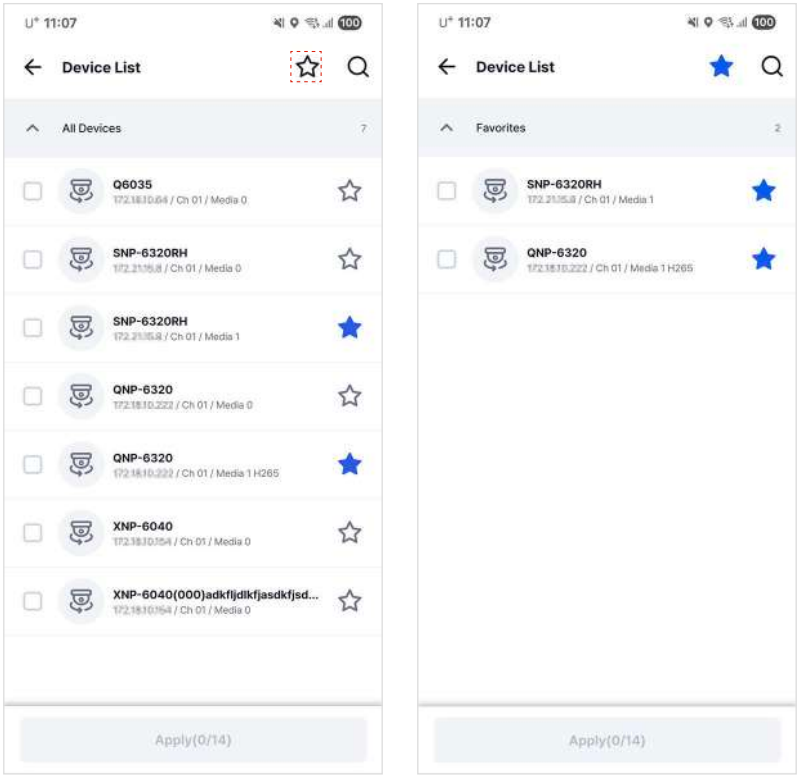

❶ ❷


1. Tap **[⊞]** > **[☆]**. The favorites will be displayed.
2. Check the favorites.

Note

Favorites saved in the mobile app are not synced with the VURIX client.

Saving to Favorites


Save the device to favorites.

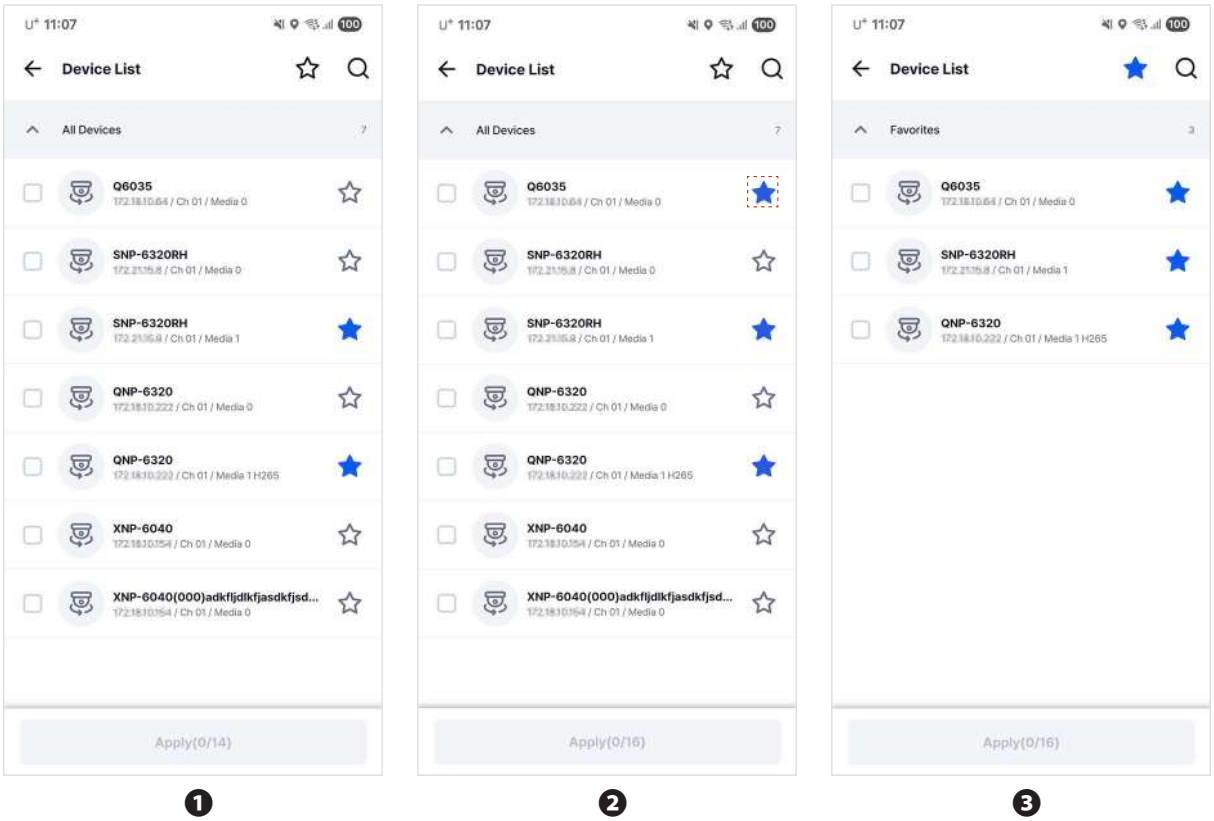

1. Tap **[⊞]**. The device list will be displayed.
2. Tap **[☆]**.
3. Save the device to favorites.

Deleting from Favorites

Delete the saved favorites.

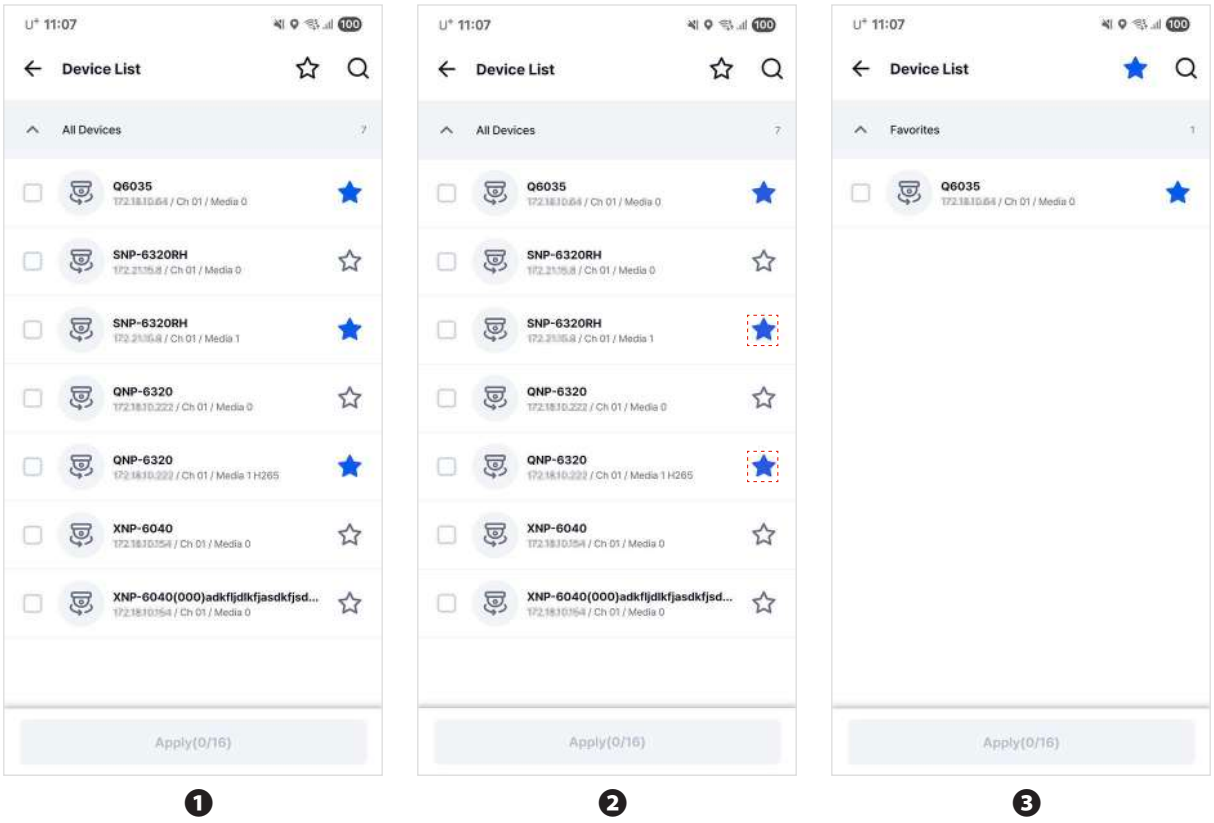

1. Tap **[⊞]**. The device list will be displayed.
2. Tap **[★]**.
3. Delete the saved favorites.

Live Video

Monitoring Live Video


The actual screen and images in the manual may differ.

Live Video


Check the live video and menu.

Viewing Live Video

Check the live video.

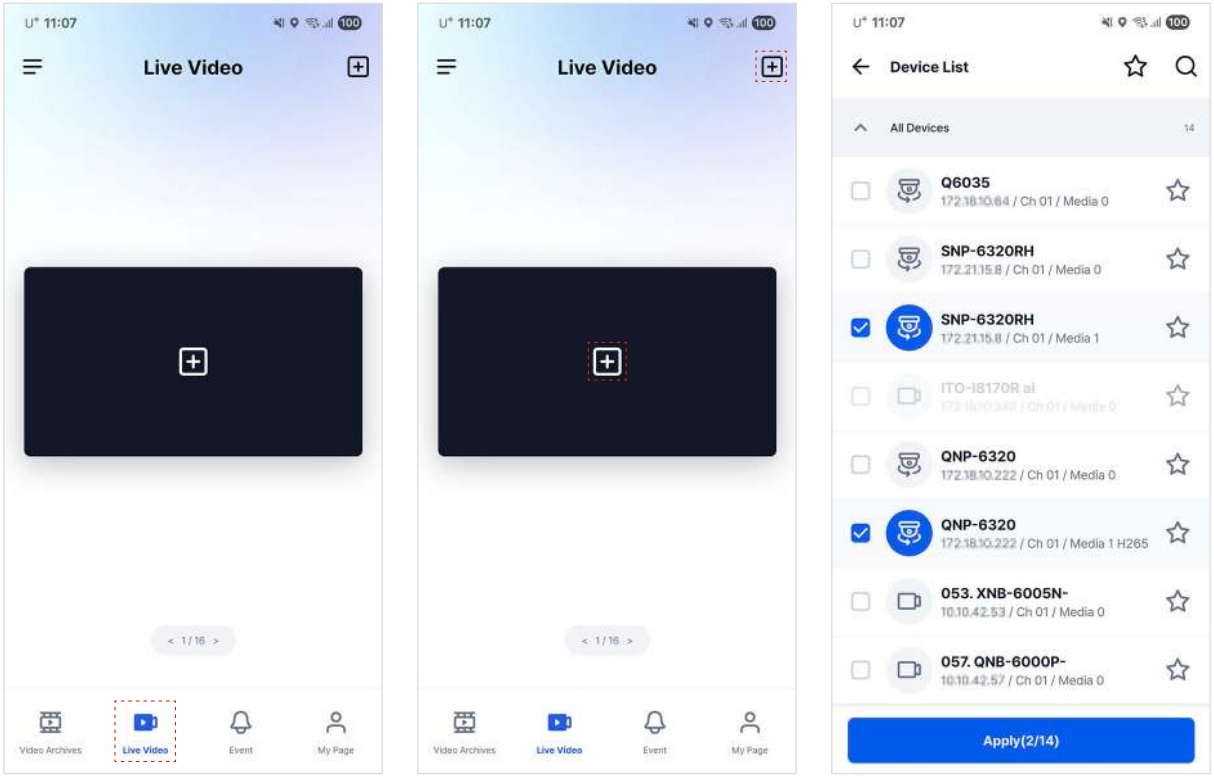

❶ ❷ ❸

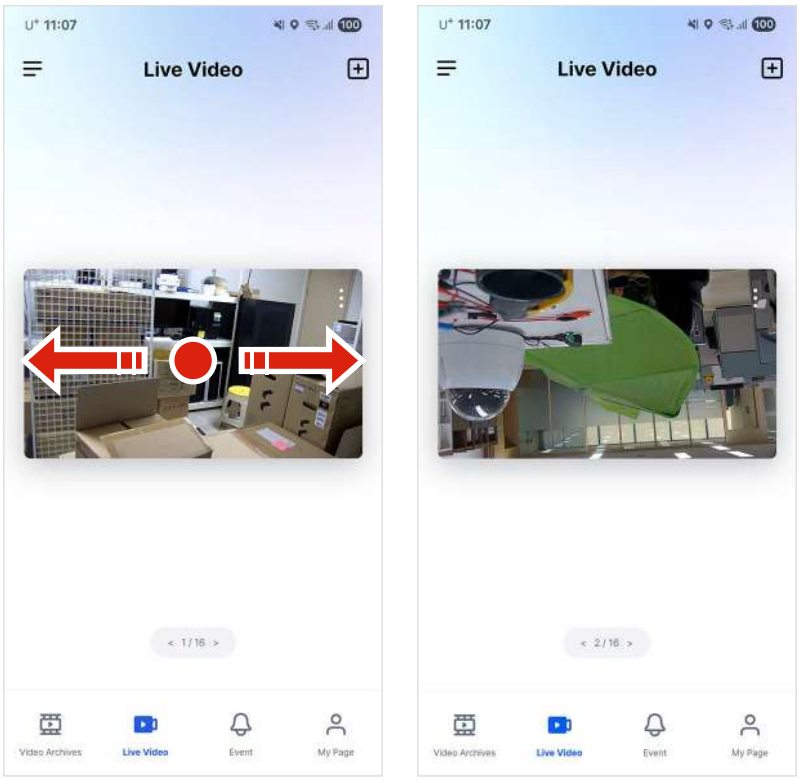

❹ ❺


1. Tap **[]** on the main screen. The live video will be displayed.
2. Tap **[]**.
3. Select the item you want, and tap **[Apply]**.
4. Swipe the screen to the left or right.
5. Swipe to the side to view all video feeds.

Note

Display the number of selected devices and the number of assignable devices on the **[Apply]** button.

Viewing Live Video Menu

Check the menu.

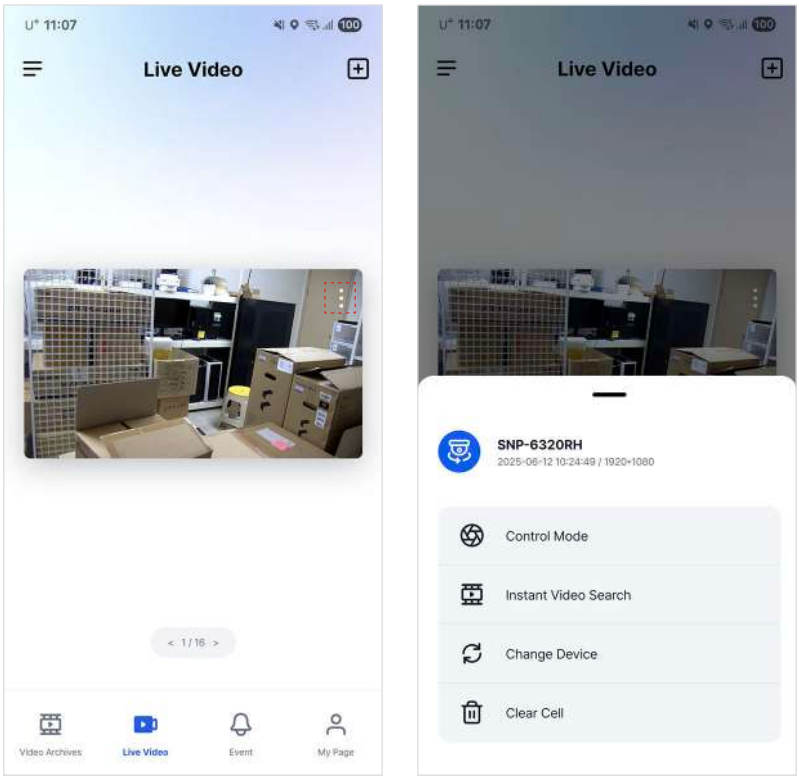


❶ ❷

1. Tap **[▶]** > **[⋮]** on the main screen.
2. Tap the item you want.
   - **[Control Mode]**: Display the control mode screen.
   - **[Instant Video Search]**: Search recorded videos while monitoring live videos.
   - **[Change Device]**: Change the device.
   - **[Clear Cell]**: Unassign the device from the cell.

Live Video Settings

Set the live video settings.

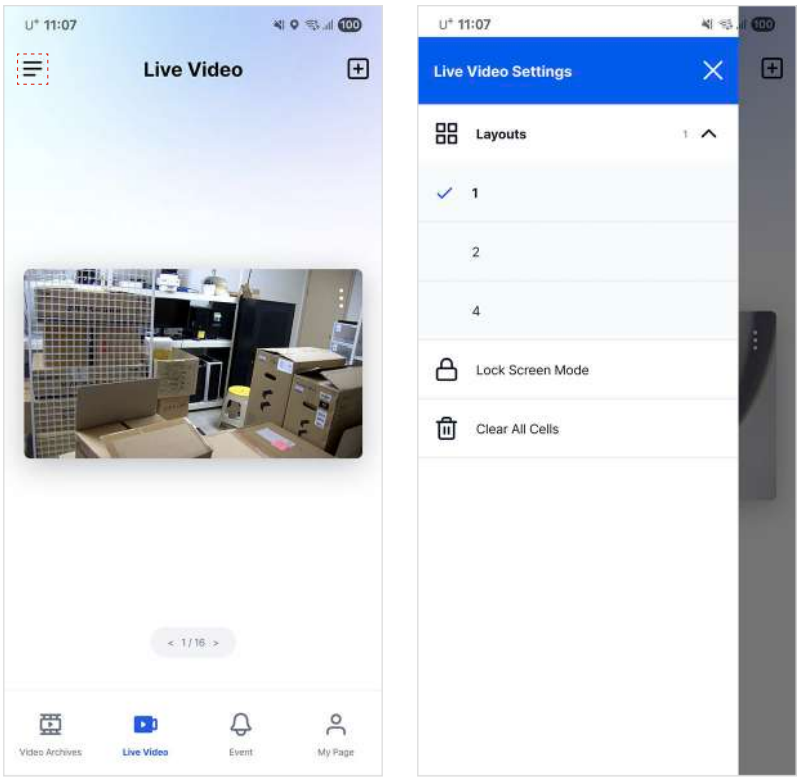


❶ ❷

1. Tap [📺] > [☰] on the main screen.
2. Tap the item you want.
   - **[Layouts]**: Select the number of cells to be displayed on the screen.
   - **[Lock Screen Mode]**: Hide all menus and lock the screen with only the video visible.
   - **[Clear All Cells]**: Unassign all devices from the cells.

Selecting Split Screen

Select the number of cells to be displayed on the screen.

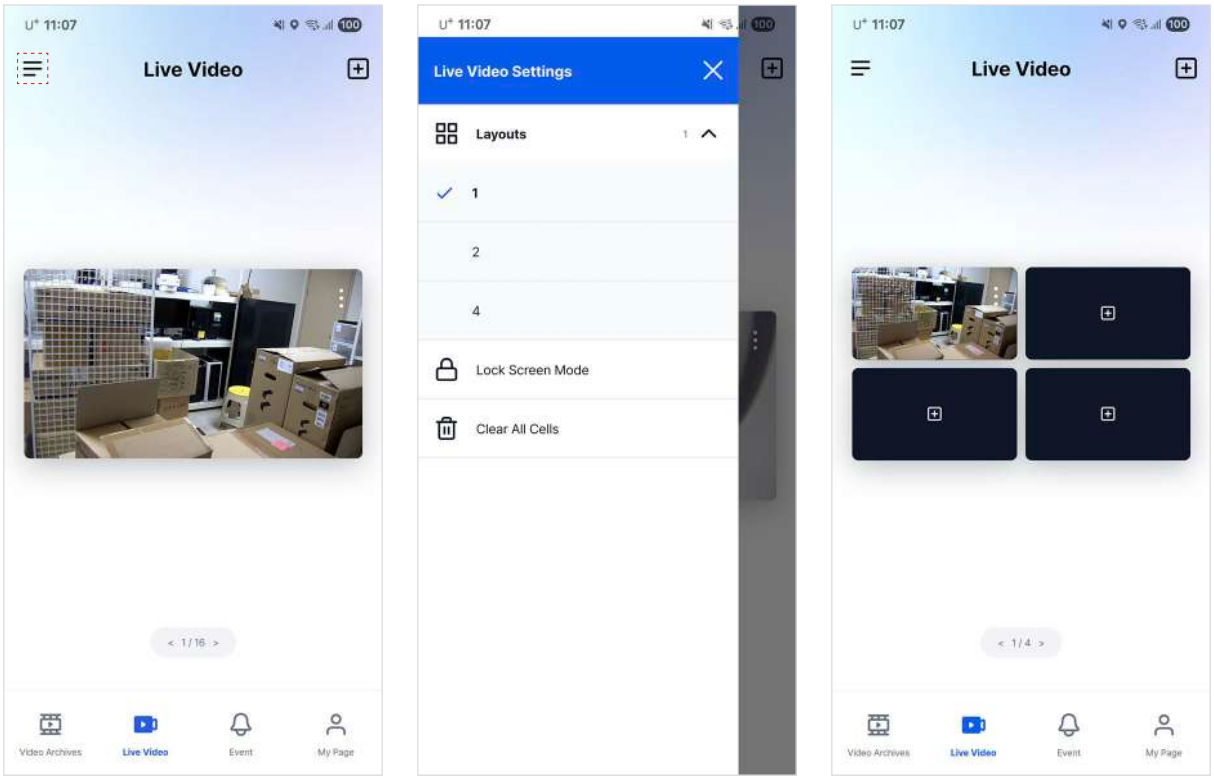


1. Tap **[]** > **[]** on the main screen.
2. Tap **[Layouts]**. Select the item you want.
3. Change the number of cells on the screen.

Note

- Up to 16 live video channels can be assigned per cell.
- Up to 4 live video channels can be displayed on screen simultaneously.

Setting Lock Screen Mode

Hide all menus and lock the screen with only the video visible.

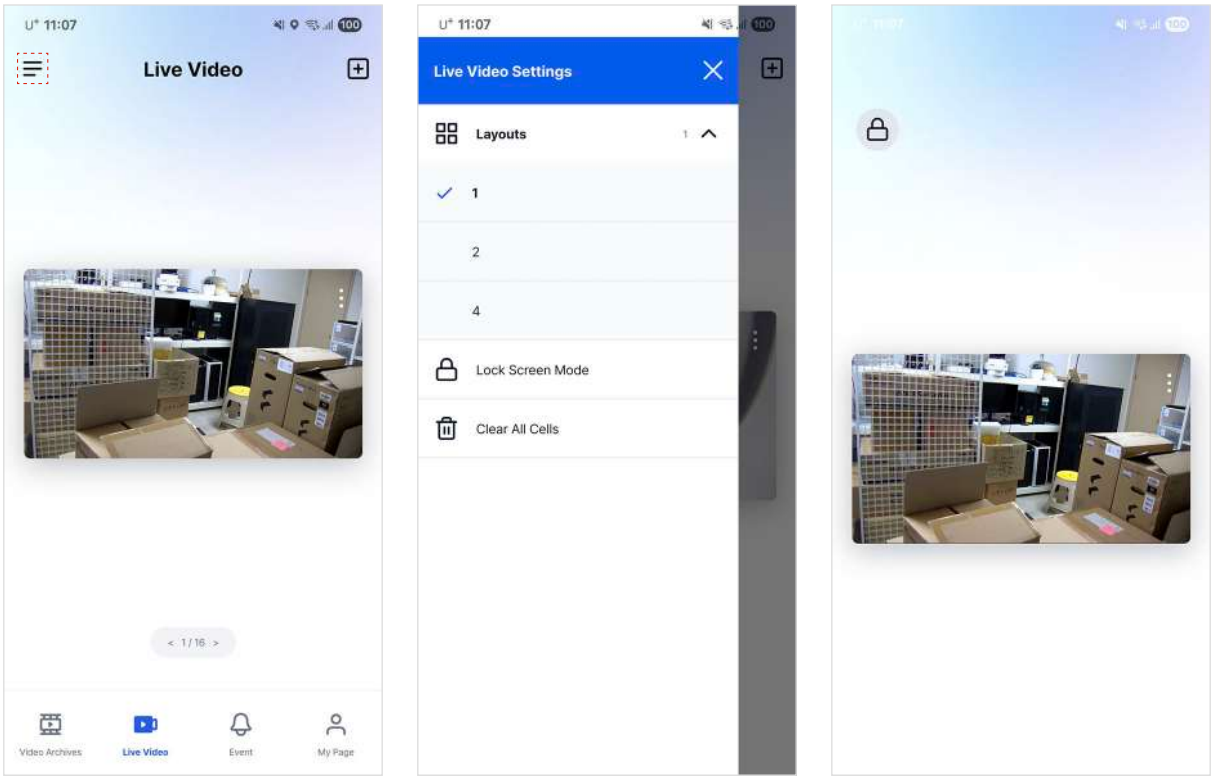


1. Tap **[]** > **[]** on the main screen.
2. Tap **[Lock Screen Mode]**.
3. Lock the screen.

Note

Tap **[]**. The screen lock mode will be disabled.

Control Mode

Use screen capture, digital zoom, and PTZ control features.

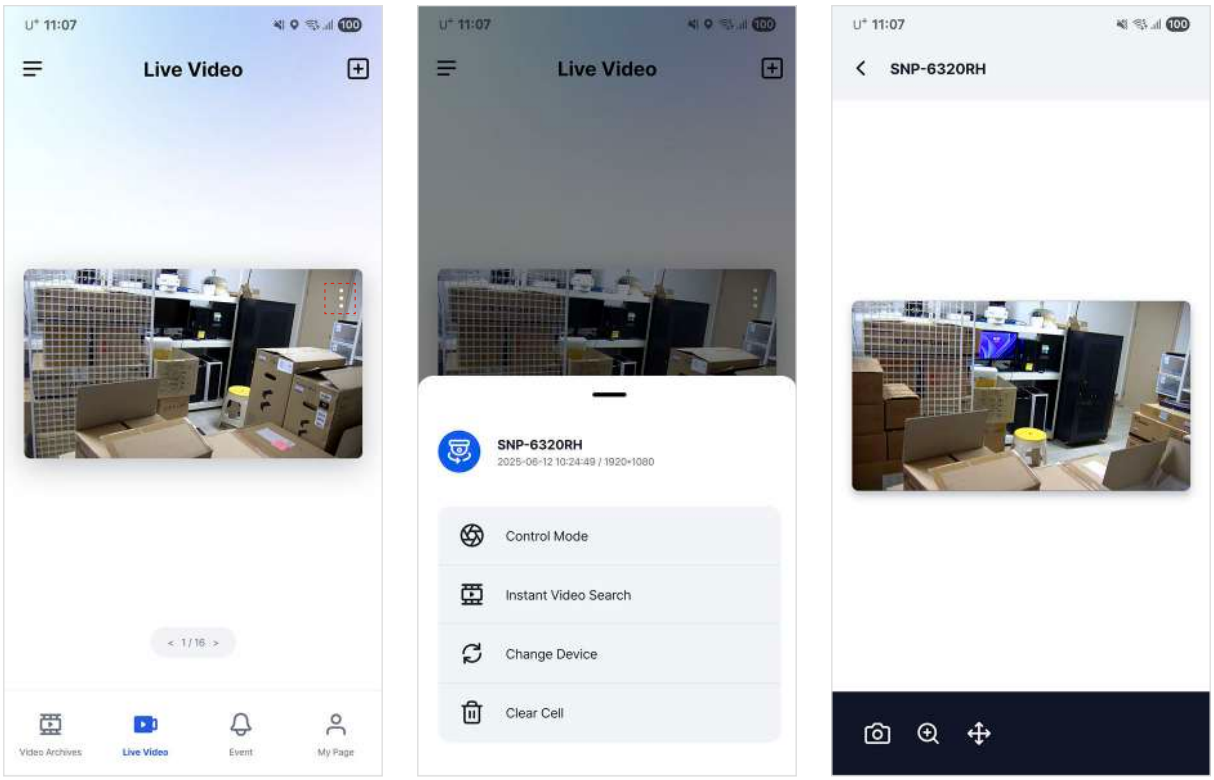


❶ ❷ ❸

1. Tap **[📹]** > **[⋮]** on the main screen.
2. Tap **[Control Mode]**.
3. Tap the item you want.
   - **[📷]**: Save the screen as a JPG file.
   - **[🔍]**: Activate digital zoom.
   - **[✥]**: Use PTZ controls.

> **Note**
>
> Functions and menus vary depending on the equipment specifications.

Saving Image File

Save the screen as a JPG file.

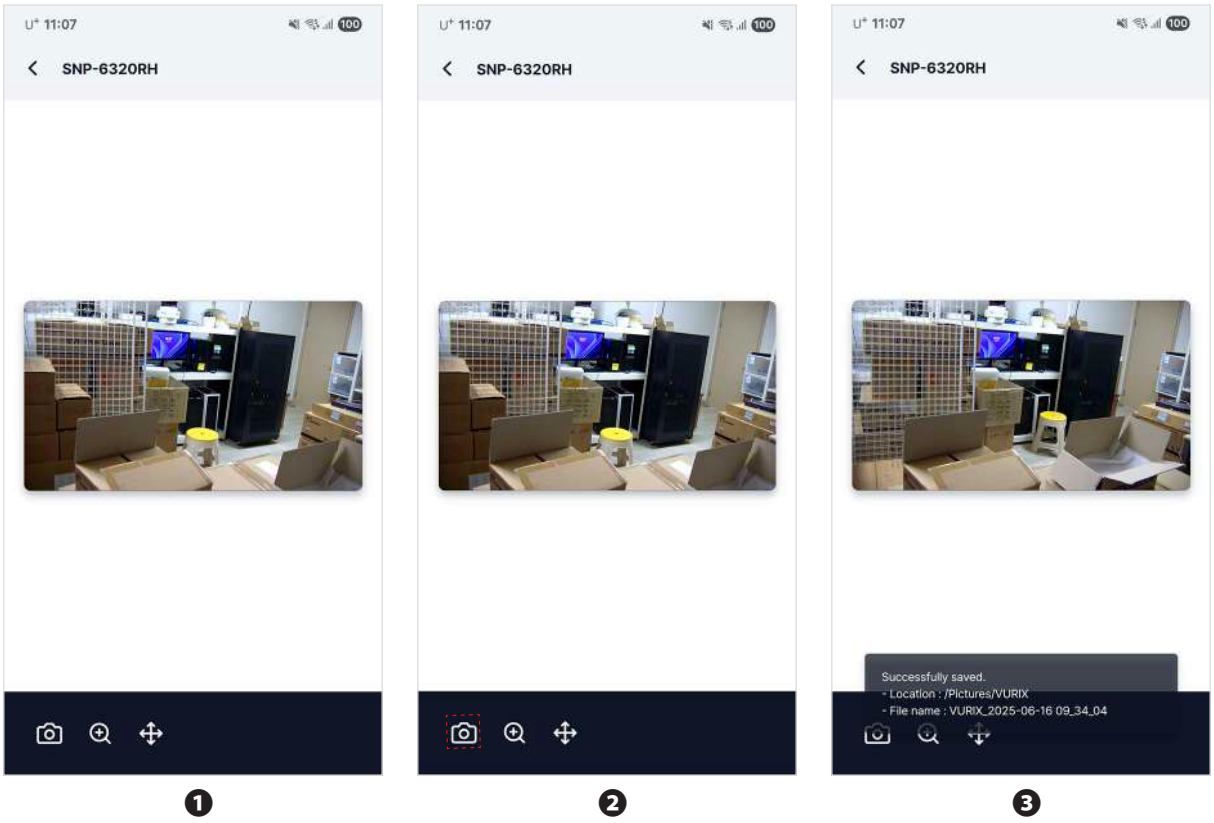


1. Tap **[]** > **[⋮]** > **[Control Mode]** on the main screen.
2. Tap **[]**.
3. Save the screen as a JPG file.

Note

The image file is saved in the 'VURIX' folder.

Zooming Videos With Digital Zoom

Zoom in on videos using digital zoom.

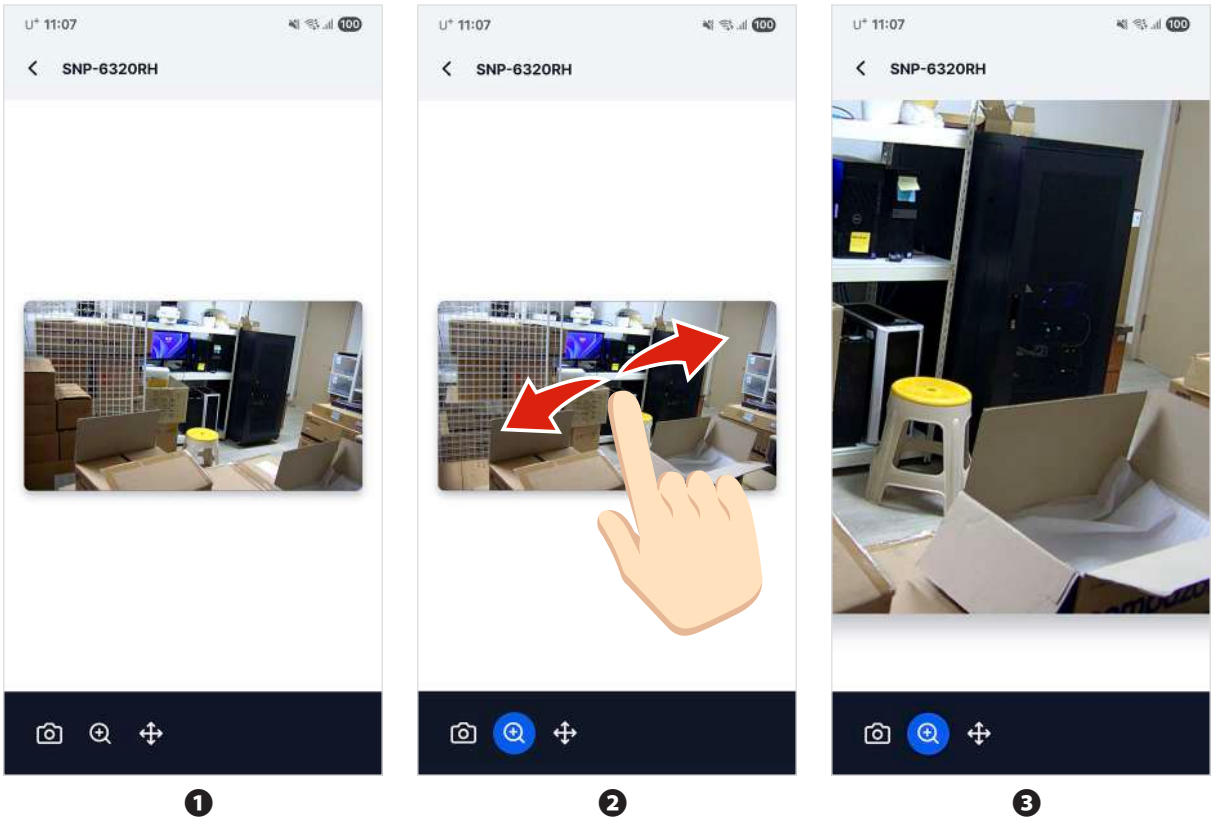

❶ ❷ ❸

1. Tap **[▶]** > **[⋮]** > **[Control Mode]** on the main screen.
2. Tap **[⊕]**.


   Place two fingers on the screen, then spread them apart or pinch them together as shown in the image.
3. Zoom in or out on the screen.

Note

Tap **[⊕]**. The digital zoom mode will be disabled.

Controlling PTZ

Remotely zoom in or out on the video, or adjust the camera's direction.

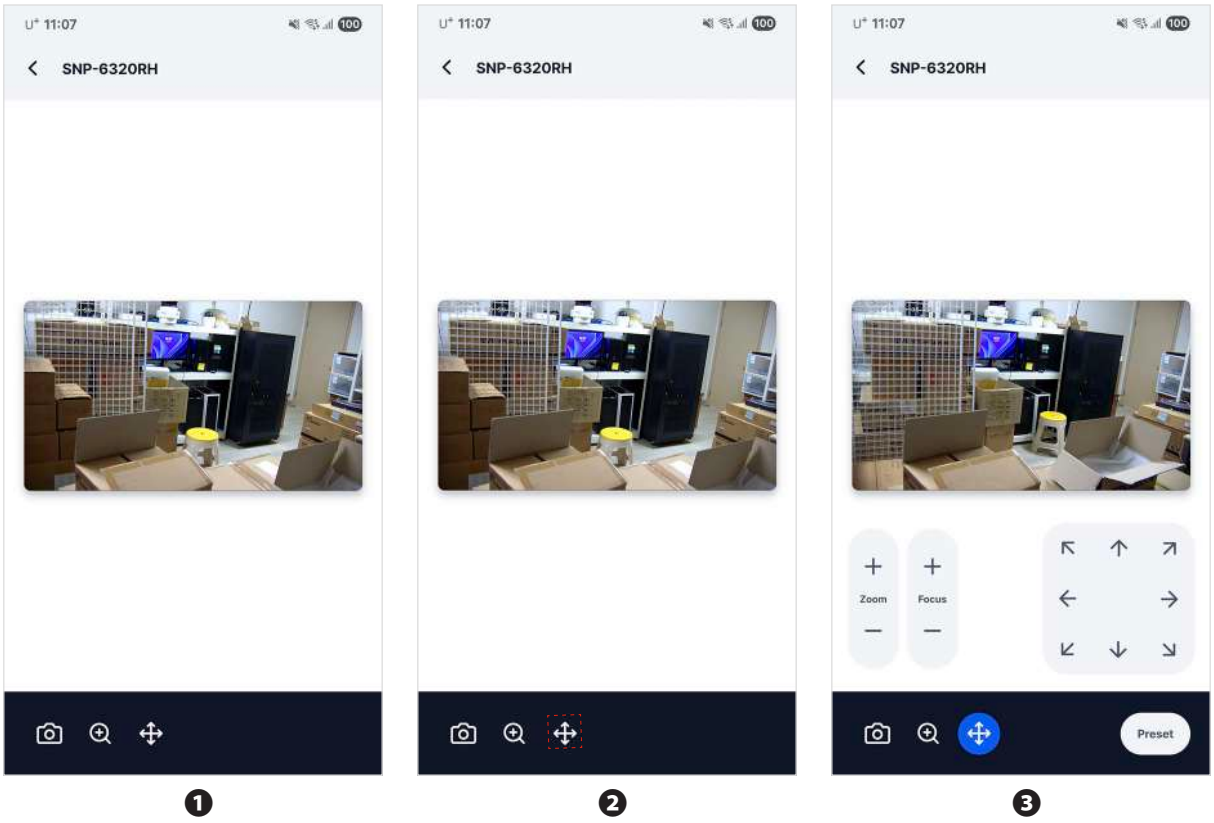

❶ ❷ ❸

1. Tap **[▣]** > **[⋮]** > **[Control Mode]** on the main screen.
2. Tap **[✣]**.
3. Tap the item you want.
   - **[Zoom]**: Adjust the screen magnification of the camera.
   - **[Focus]**: Adjust focus of the camera.
   - **[Preset]**: Select a preset number and move to the saved preset.
   - Direction Buttons: Adjust the direction of the camera.

Note


- Tap **[✣]**. The PTZ mode will be disabled.
- Pan Tilt Zoom (PTZ) cameras can be panned (left and right), tilted (up and down), or zoomed (zoom magnification).

Immediate Video Search


Search recorded videos while monitoring live videos.

Searching Live Video

Search recorded videos.

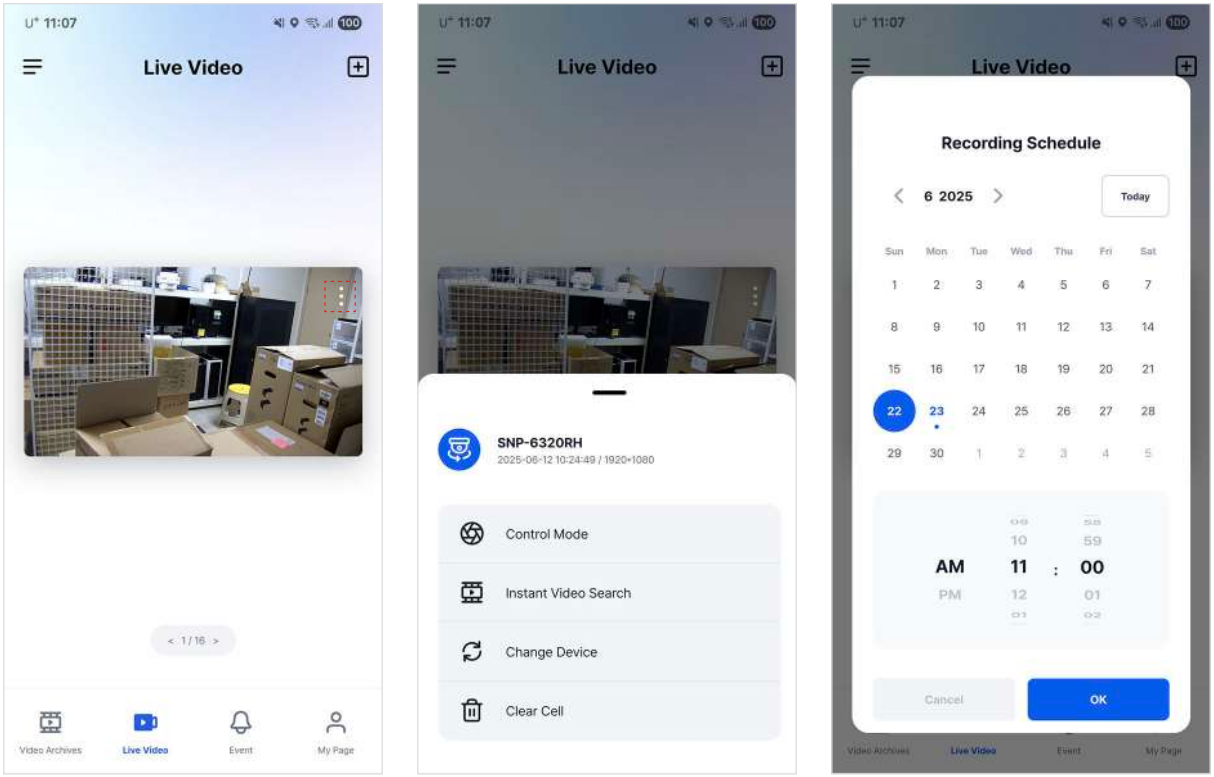

❶ ❷ ❸

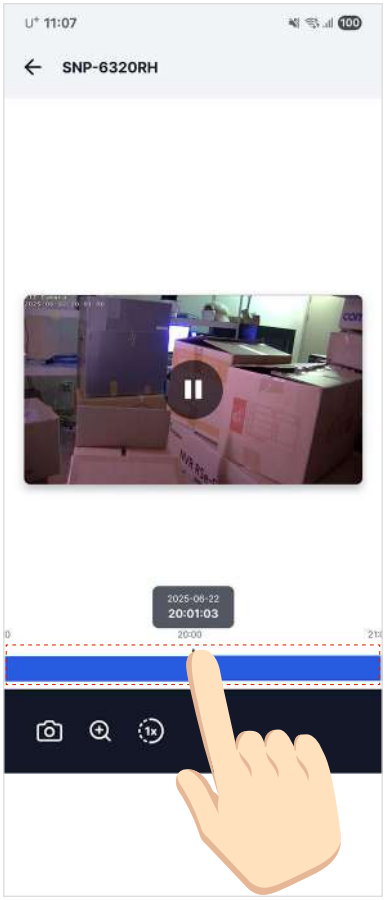

❹

1. Tap **[📹]** > **[⋮]** on the main screen.
2. Tap **[Instant Video Search]**.
3. Select the date and time, and tap **[OK]**.
4. Touch and hold the dotted area, then drag it to the left or right. Search the video manually.
5. Tap the item you want.
   - **[📷]**: Save the screen as a JPG file.
   - **[🔍]**: Activate digital zoom.
   - **[1x]**: Select the playback speed. (0.5x, 1x, 2x, 4x)
6. Search recorded videos.

Note


- Only dates with recorded video data can be selected.
- Recorded video data is available on the dates marked in blue on the recording schedule.

Change or Delete Devices

Change or delete a device.

Changing the Device

Change the device.

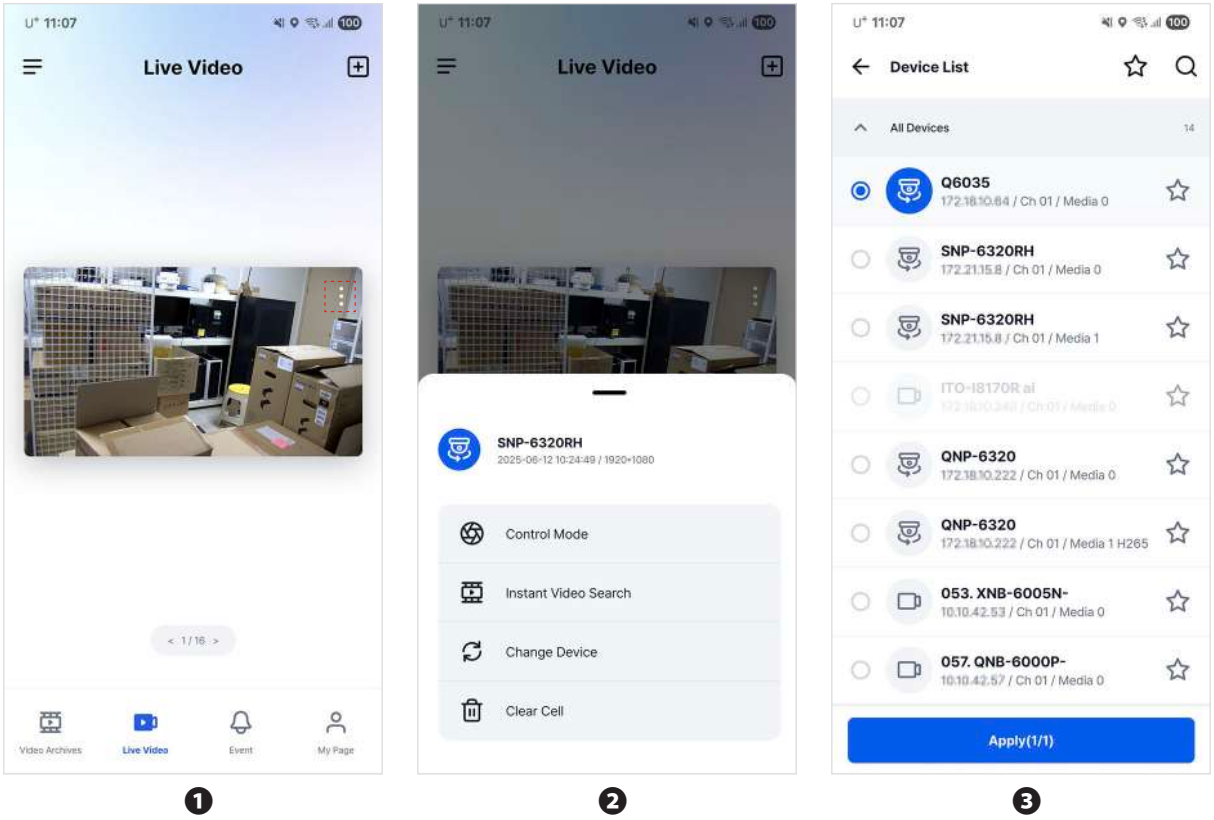


❶ ❷ ❸

1. Tap **[ ]** > **[⋮]** on the main screen.
2. Tap **[Change Device]**.
3. Select the item you want, and tap **[Apply]**.
4. Change the device.

Deleting Devices

Unassign the device from the cell.

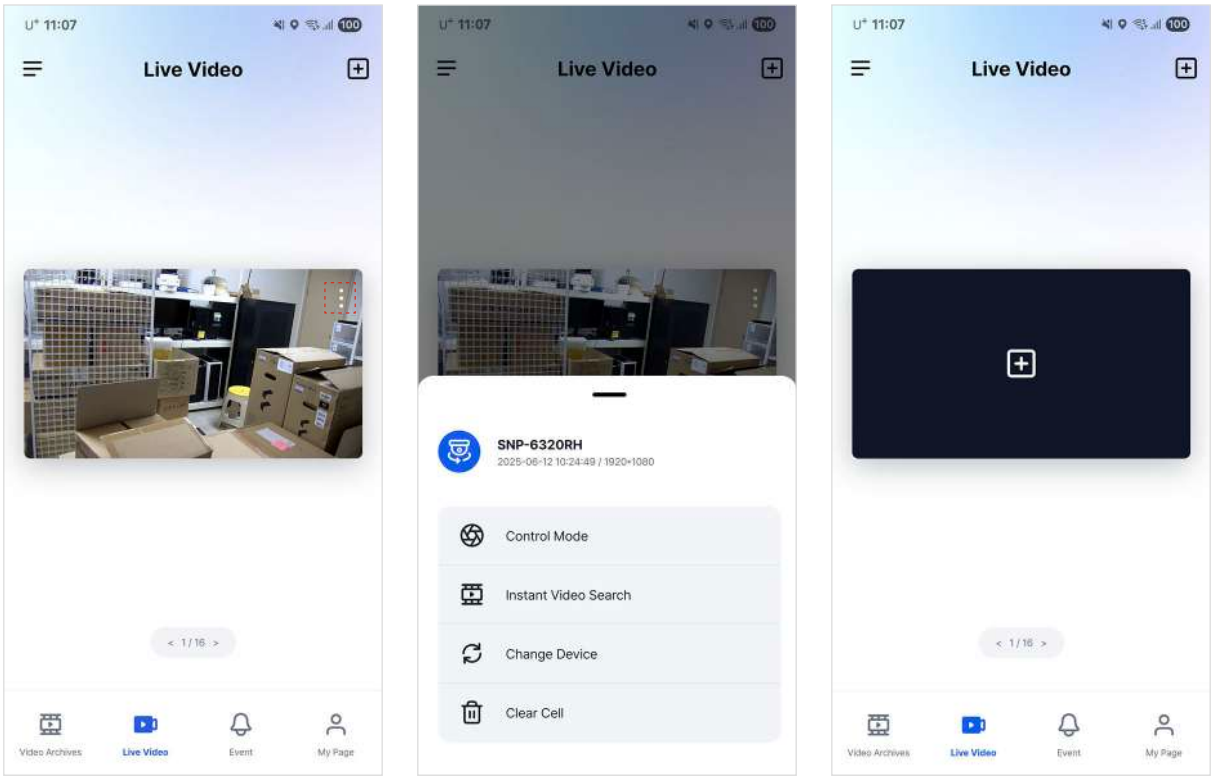

1. Tap **[ ]** > **[⋮]** on the main screen.
2. Tap **[Clear Cell]**.
3. Unassign the device from the cell.

Recorded Video

Searching Recorded Videos


The actual screen and images in the manual may differ.


Recorded Video Search

Check the recorded video and menu.

Viewing Recorded Video

Check the recorded video.

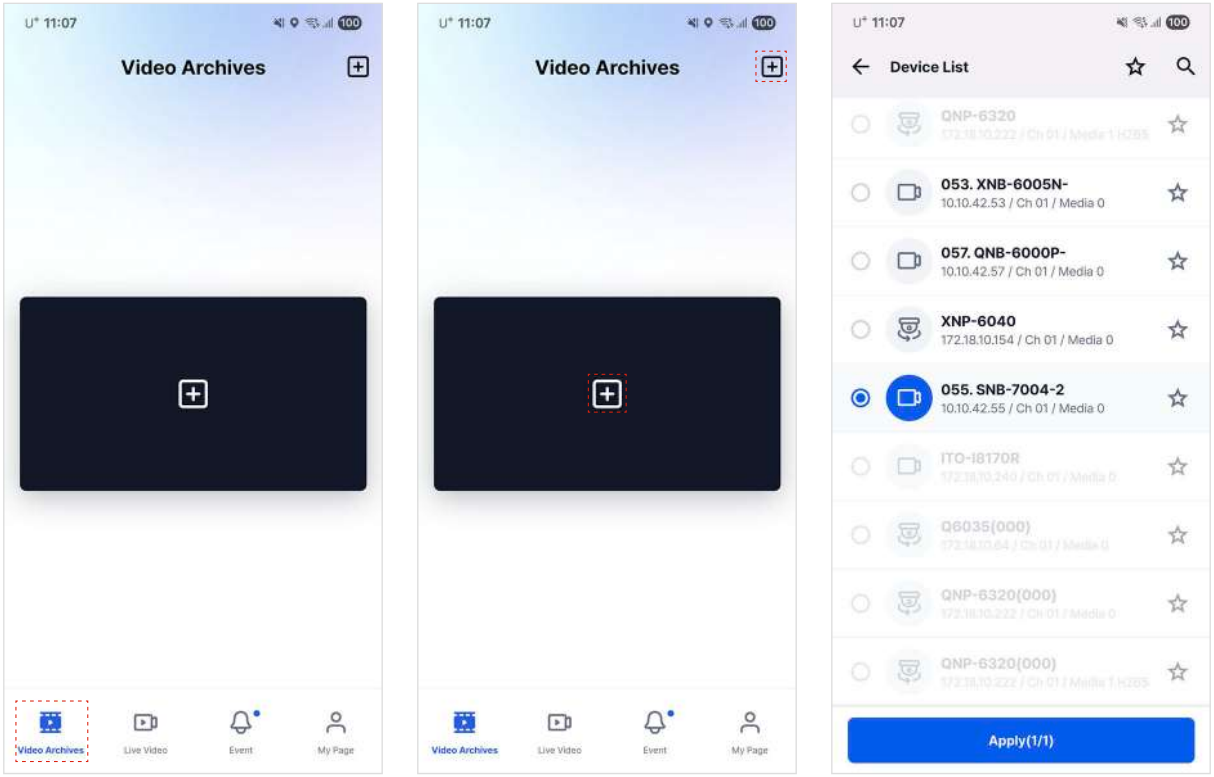

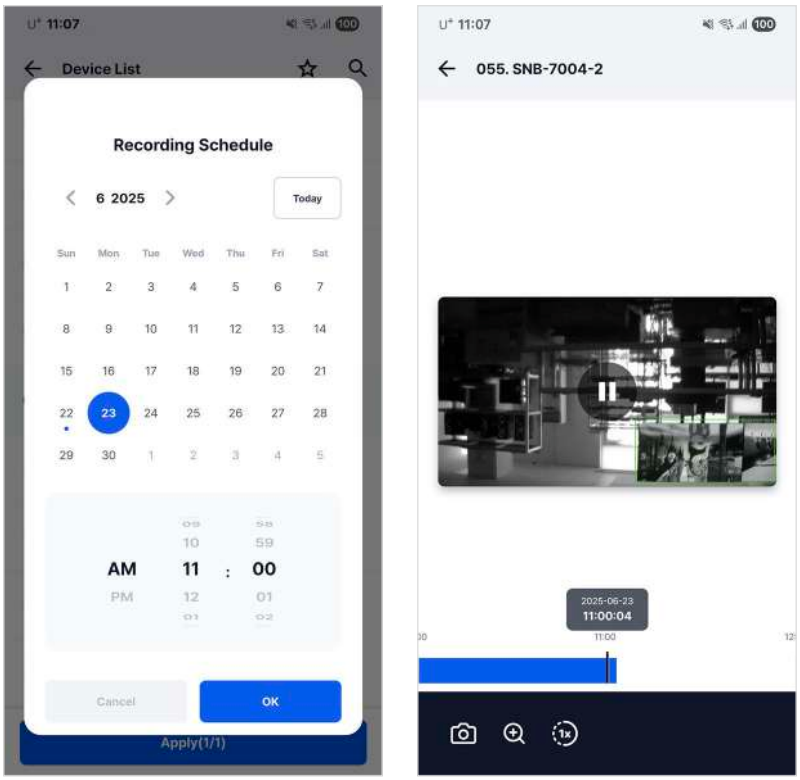

❹ ❺


1. Tap **[]** on the main screen. The recorded video will be displayed.
2. Tap **[]**.
3. Select the item you want, and tap **[Apply]**.
4. Select the date and time, and tap **[OK]**.
5. Check the video.

Note

- Only dates with recorded video data can be selected.
- Recorded video data is available on the dates marked in blue on the recording schedule.

Viewing Recorded Video Menu

Check the menu.

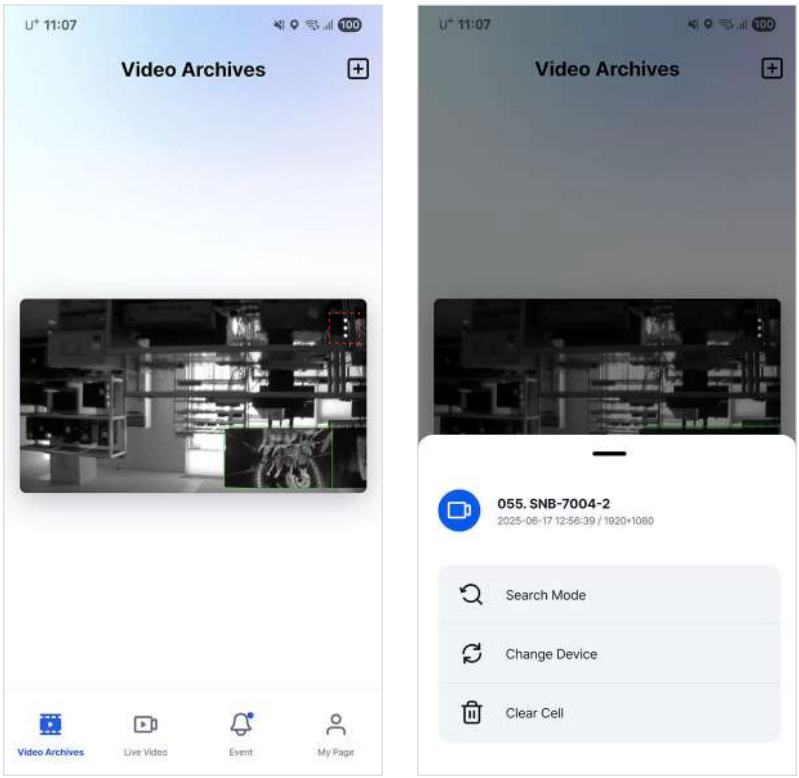


❶ ❷

1. Tap **[⊞]** > **[⋮]** on the main screen.
2. Tap the item you want.
   - **[Search Mode]**: Search recorded videos.
   - **[Change Device]**: Change the device.
   - **[Clear Cell]**: Unassign the device from the cell.

Searching Recorded Videos

Search recorded videos.

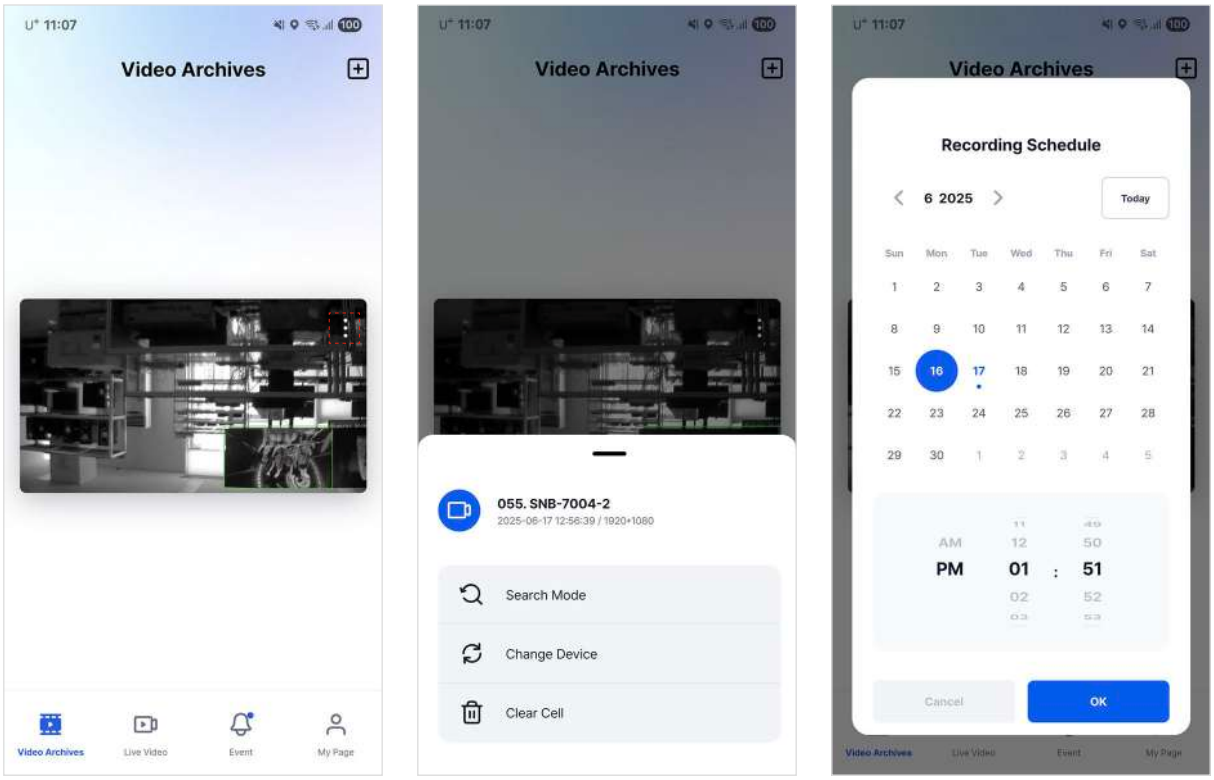

❶ ❷ ❸



❹


1. Tap **[⊡]** > **[⋮]** on the main screen.
2. Tap **[Search Mode]**.
3. Select the date and time, and tap **[OK]**.
4. Touch and hold the dotted area, then drag it to the left or right. Search the video manually.
5. Tap the item you want.
   - **[📷]**: Save the screen as a JPG file.
   - **[🔍]**: Activate digital zoom.
   - **[1x]**: Select the playback speed. (0.5x, 1x, 2x, 4x)
6. Search recorded videos.

Note

- Only dates with recorded video data can be selected.
- Recorded video data is available on the dates marked in blue on the recording schedule.

Saving Image File

Save the screen as a JPG file.

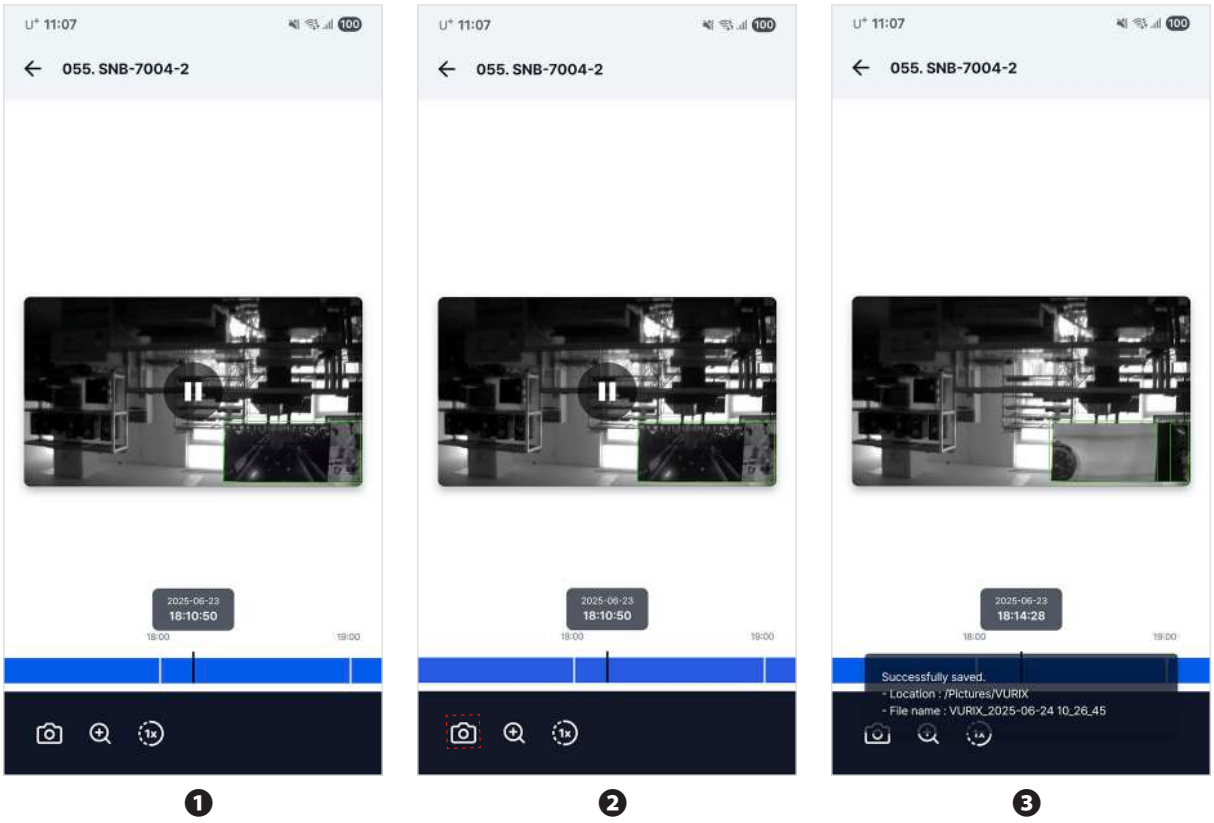

❶ ❷ ❸


1. Tap **[⊞]** > **[⋮]** > **[Search Mode]** on the main screen.
2. Tap **[📷]**.
3. Save the screen as a JPG file.

Note

The image file is saved in the 'VURIX' folder.

Zooming Videos With Digital Zoom

Zoom in on videos using digital zoom.

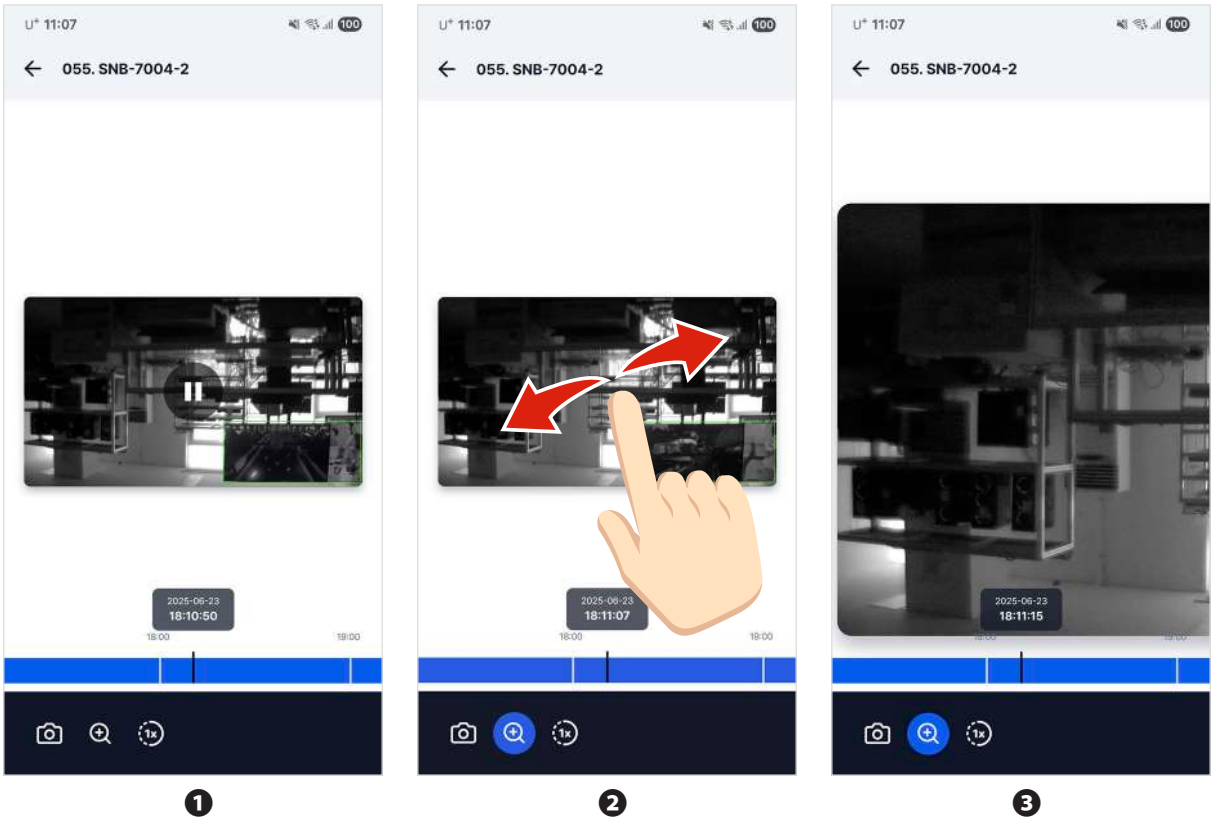

❶ ❷ ❸

1. Tap **[⊞]** > **[⋮]** > **[Search Mode]** on the main screen.
2. Tap **[⊕]**.


   Place two fingers on the screen, then spread them apart or pinch them together as shown in the image.
3. Zoom in or out on the screen.

Note

Tap **[⊕]**. The digital zoom mode will be disabled.

Selecting the Playback Speed

Select the playback speed. (0.5x, 1x, 2x, 4x)

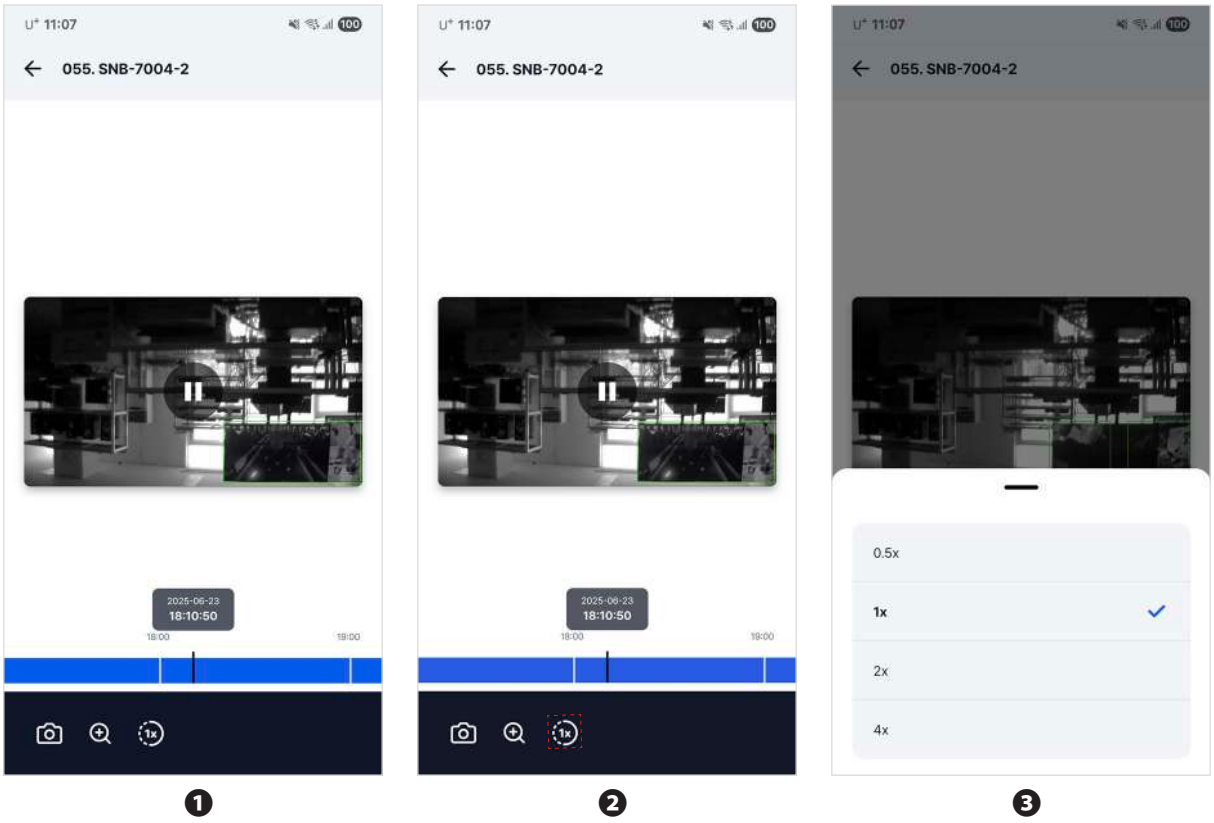

❶ ❷ ❸


1. Tap **[⊞]** > **[⋮]** > **[Search Mode]** on the main screen.
2. Tap **[1x]**.
3. Select the item you want.
4. Select the playback speed.

Change or Delete Devices


Change or delete a device.

Changing the Device

Change the device.

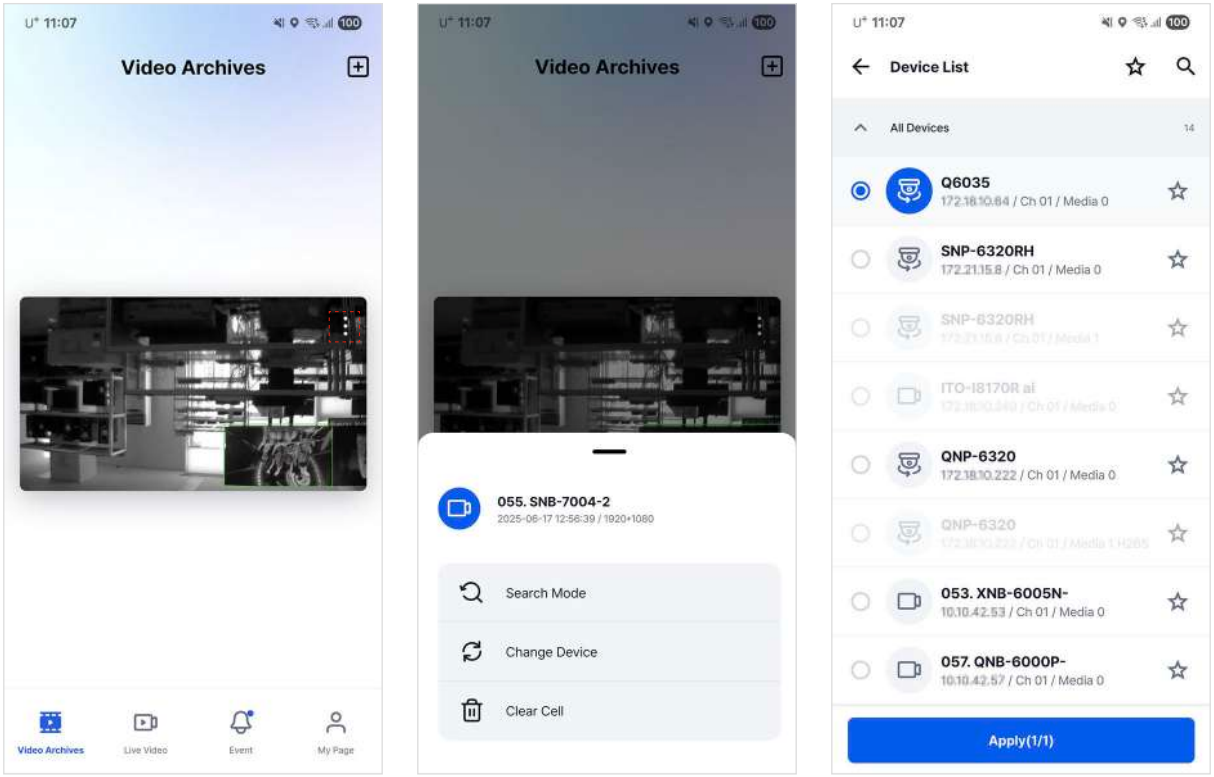

❶ ❷ ❸

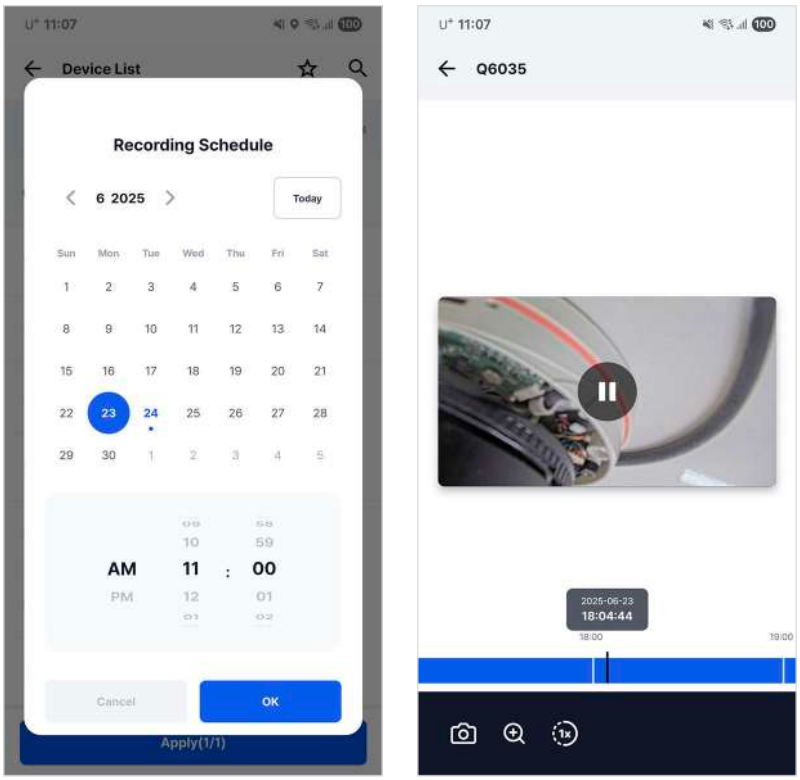

❹ ❺


1. Tap **[⊡]** > **[⋮]** on the main screen.
2. Tap **[Change Device]**.
3. Select the item you want, and tap **[Apply]**.
4. Select the date and time, and tap **[OK]**.
5. Change the device.

Note

- Only dates with recorded video data can be selected.
- Recorded video data is available on the dates marked in blue on the recording schedule.

Deleting Devices

Unassign the device from the cell.

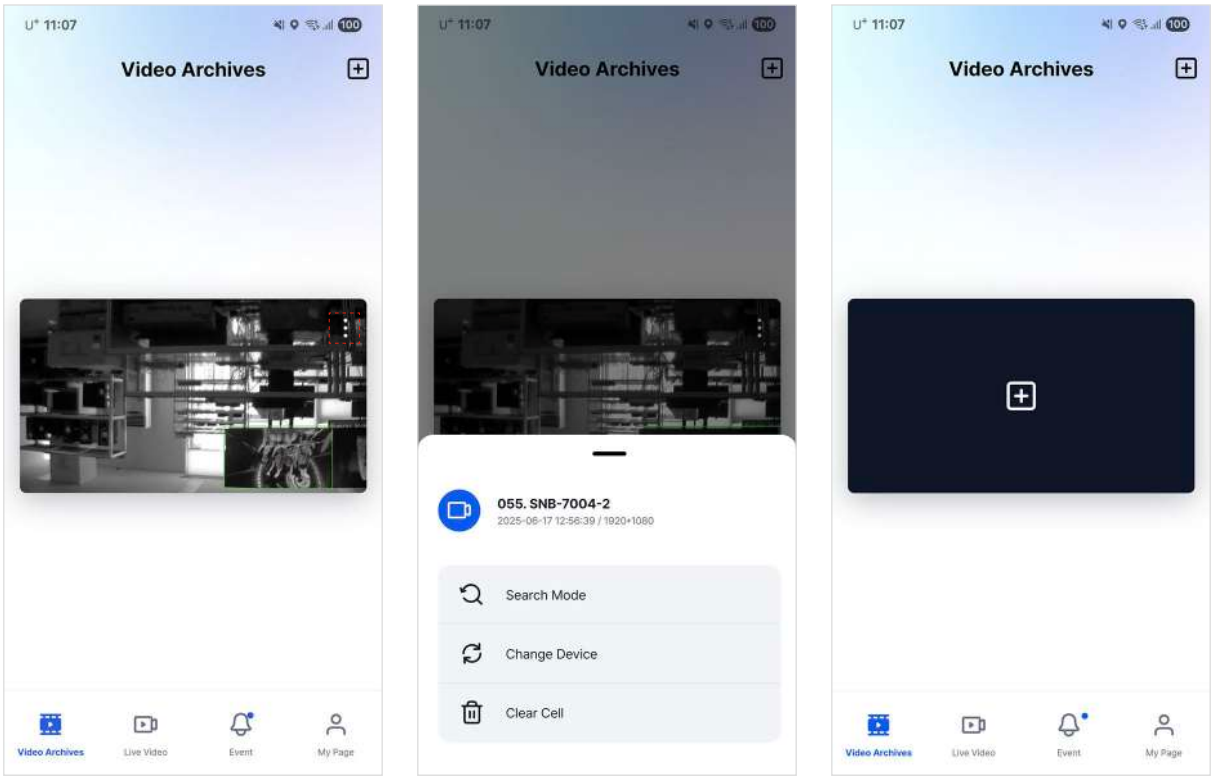

1. Tap **[⊞]** > **[⋮]** on the main screen.
2. Tap **[Clear Cell]**.
3. Unassign the device from the cell.

Event

Viewing Events


The actual screen and images in the manual may differ.

Events

Receive and check the occurred events.

Monitoring Events

Check the events.

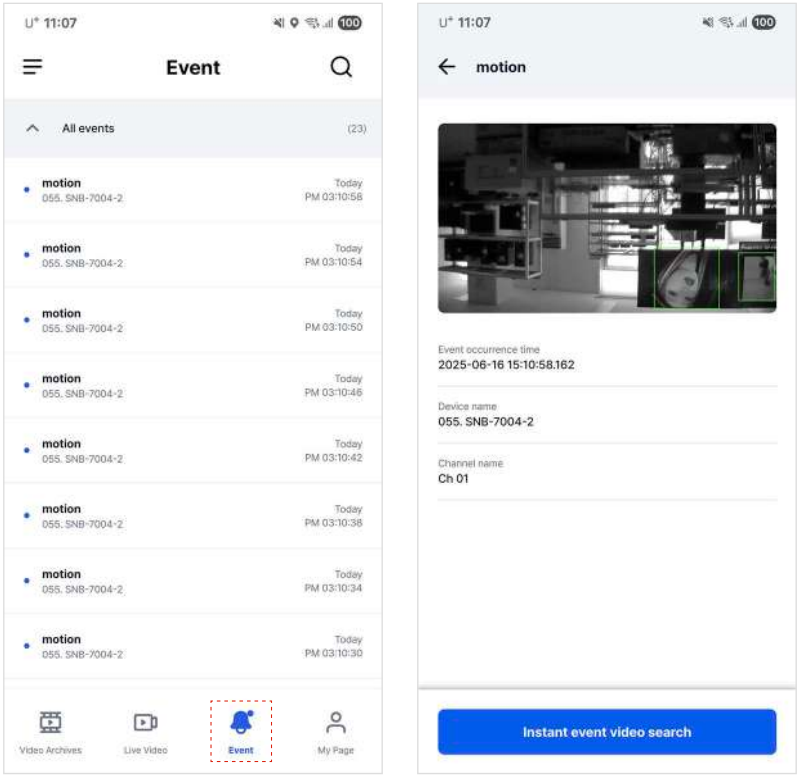


❶ ❷

1. Tap **[🔔]** on the main screen. Events will be displayed.
2. Check the events.

Viewing Event Menu

Check the menu.

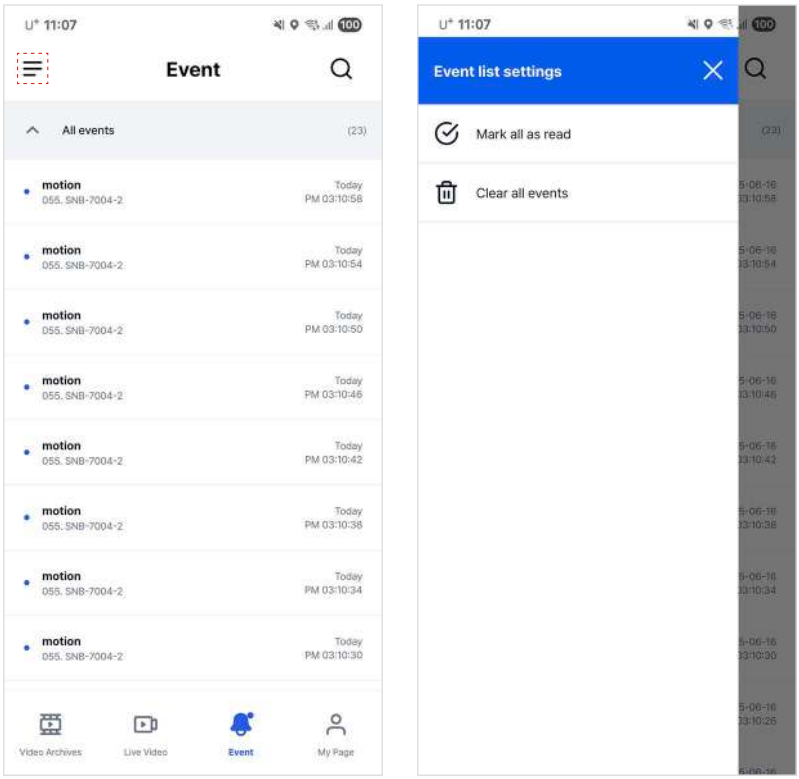


❶ ❷

1. Tap **[🔔]** > **[☰]** on the main screen.
2. Tap the item you want.
   - **[Mark all as read]**: Mark all events as read.
   - **[Clear all events]**: Delete all events.

Receiving Events

Receive event notifications and check the events.

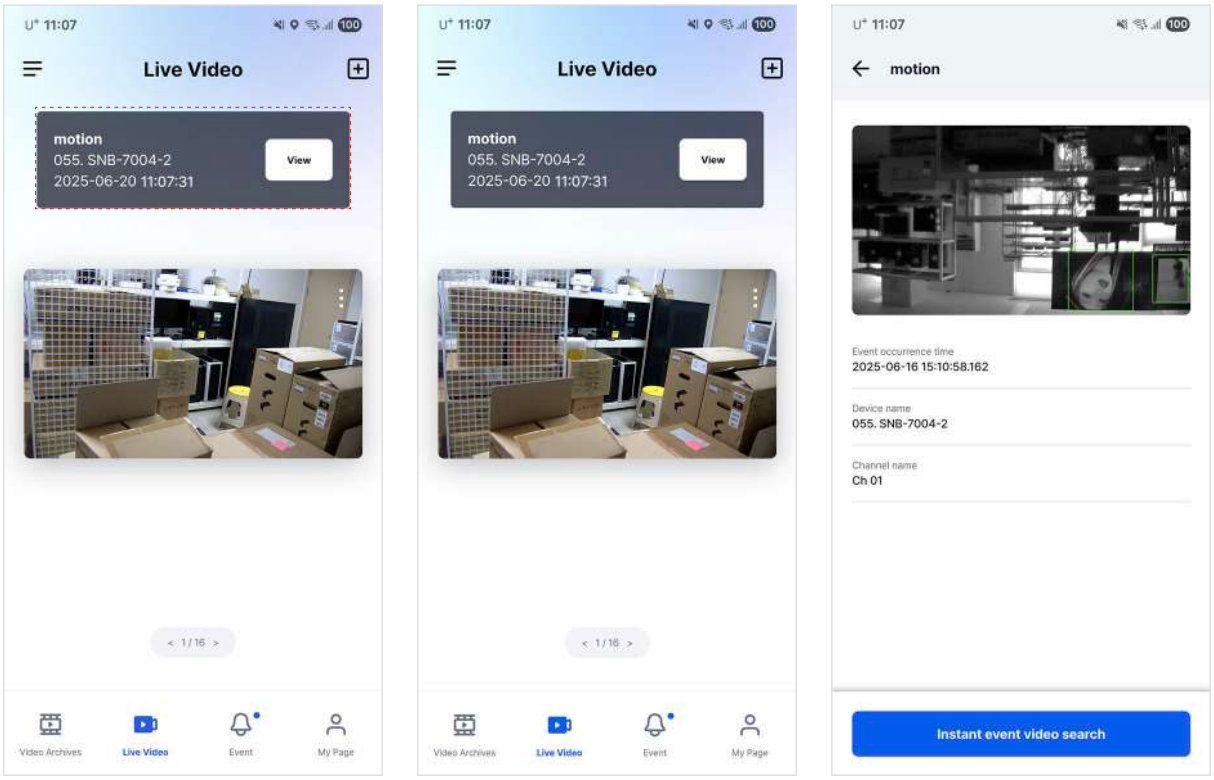

❶ ❷ ❸


1. An event notification popup appears
2. Tap **[Apply]**.
3. Check the events.

Note

Tap **[👤]** > **[Settings]** > **[Event]** > **[Receving events]** on the main screen. Set whether to receive events.

Searching Events

Search events.

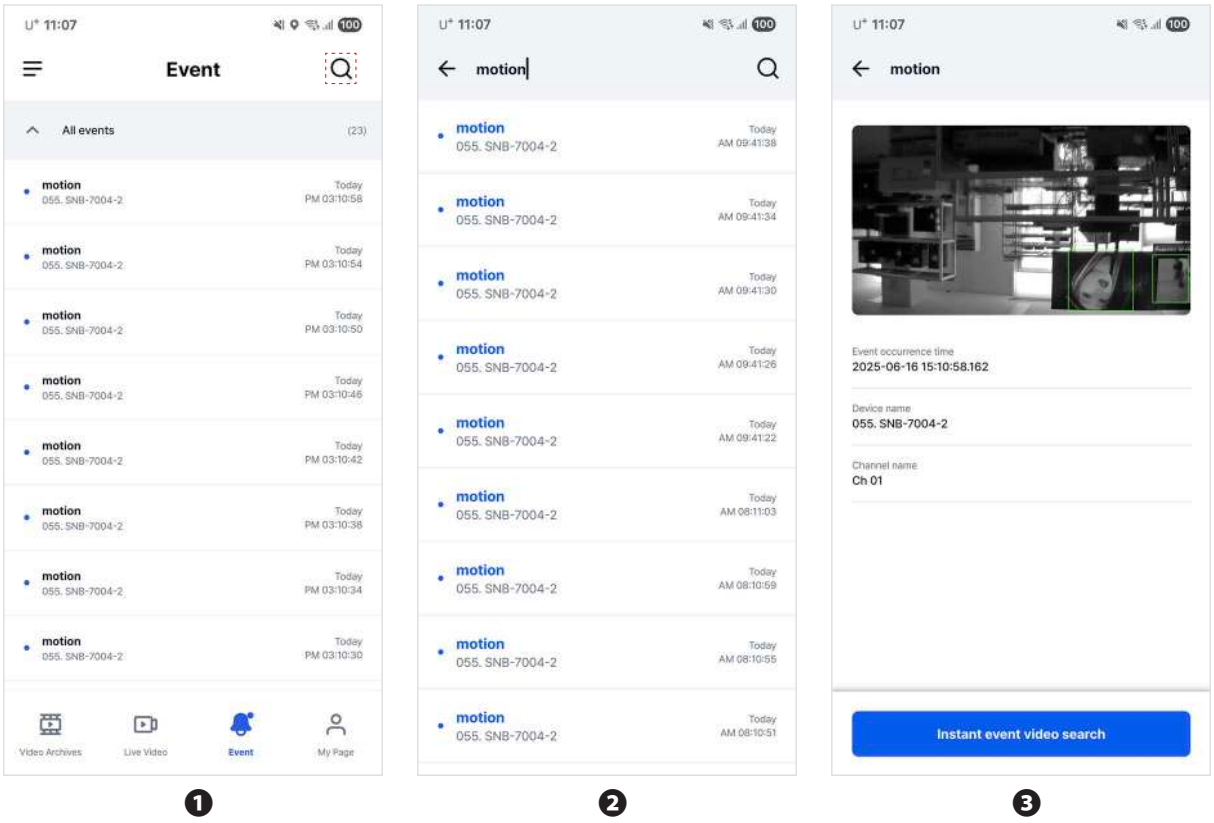

❶ ❷ ❸


1. Tap **[🔔]** > **[🔍]** on the main screen. The event search will be displayed.
2. Enter a search term.
3. Search for events by event name or device name.

Immediate Event Video Search

Check the event video.

Searching Event Video

Search recorded videos.

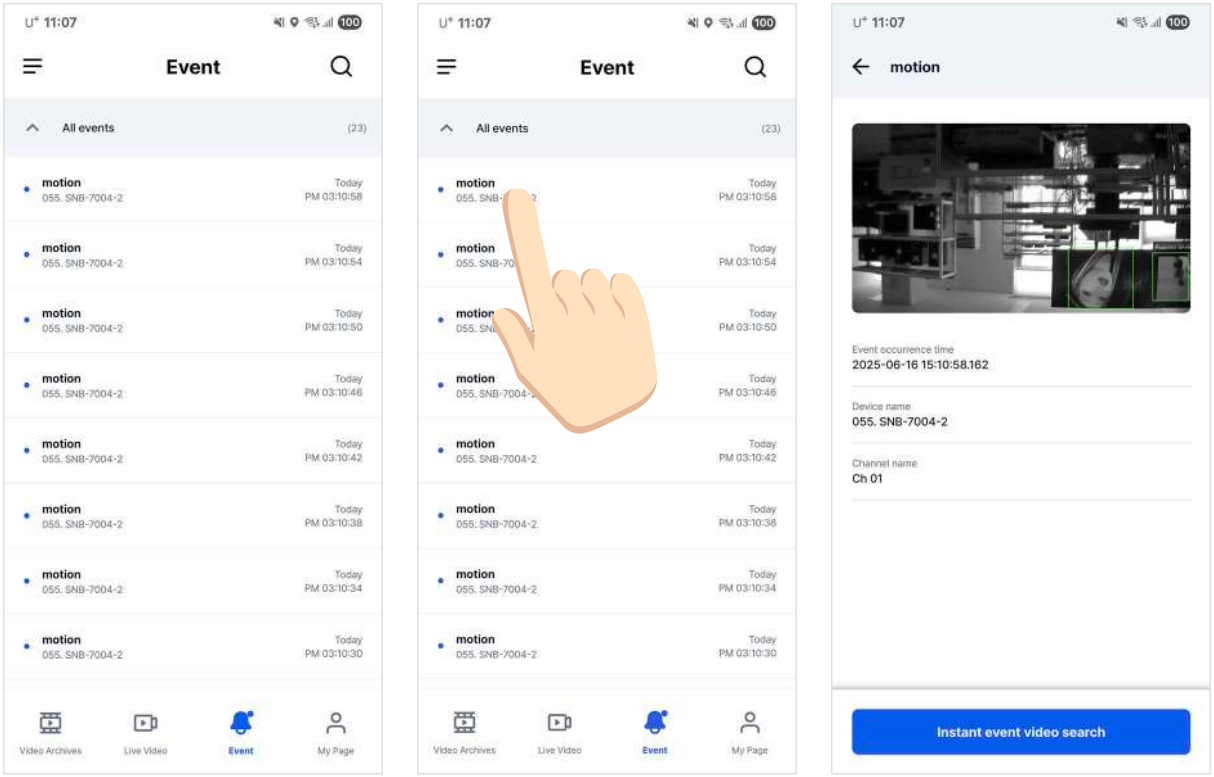

❶ ❷ ❸



4

1. Tap **[🔔]** on the main screen. Events will be displayed.
2. Tap the item you want.
3. Tap **[Instant event video search]**.
4. Touch and hold the dotted area, then drag it to the left or right. Search the video manually.
5. Tap the item you want.
   - **[📷]**: Save the screen as a JPG file.
   - **[🔍]**: Activate digital zoom.
   - **[1x]**: Select the playback speed. (0.5x, 1x, 2x, 4x)
6. Search recorded videos.


Note

It may take some time before the latest event video is saved to the storage server.

Settings

Viewing My Page


The actual screen and images in the manual may differ.

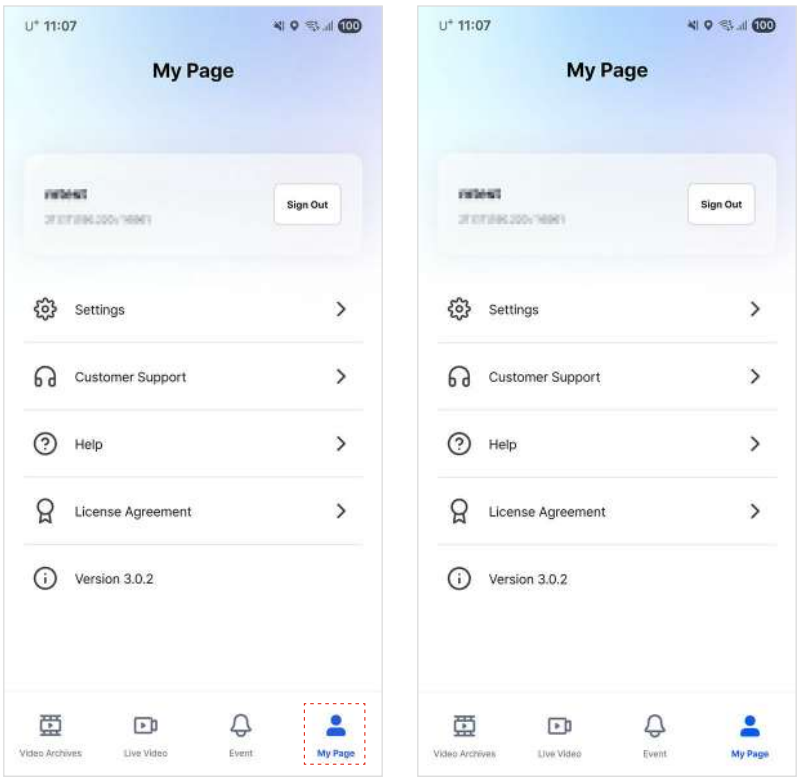

1. Tap **[👤]** on the main screen. The my page will be displayed.
2. Tap the item you want.
   - **[Settings]**: Configure the app settings.
   - **[Customer Support]**: Check the customer support center.
   - **[Help]**: Check the help guide.
   - **[License Agreement]**: Check the open-source components and licenses.

Configuring the APP

The actual screen and images in the manual may differ.

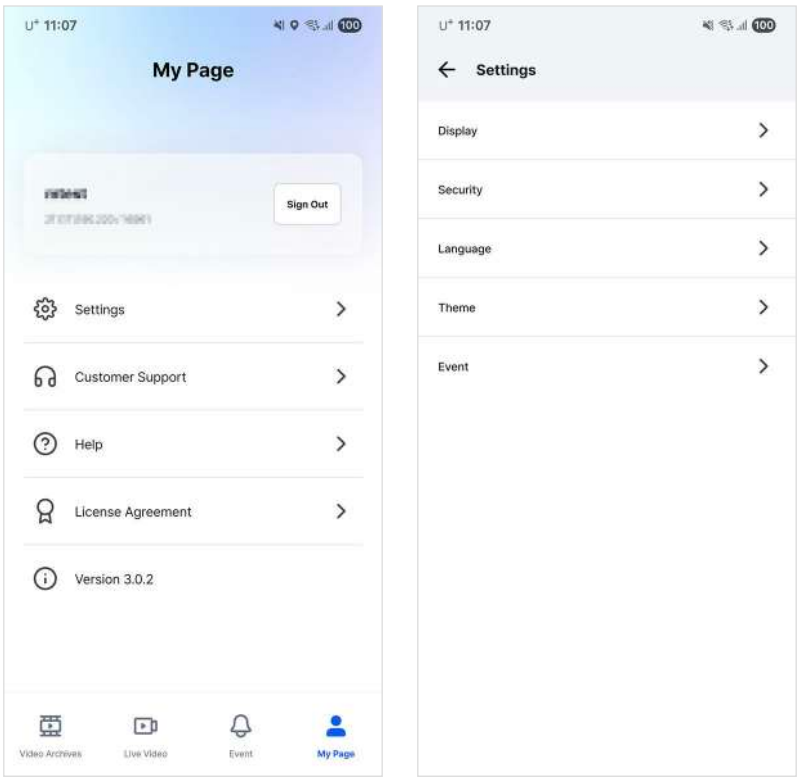

❶ ❷


1. Tap **[👤]** > **[Settings]** on the main screen. Settings will be displayed.
2. Tap the item you want.
   - **[Display]**: Configure display settings.
   - **[Security]**: Configure security settings.
   - **[Language]**: Configure language settings.
   - **[Theme]**: Configure theme settings.
   - **[Event]**: Configure event reception settings.

Display

Configure display settings.

Setting Display Information

Configure the display information settings.

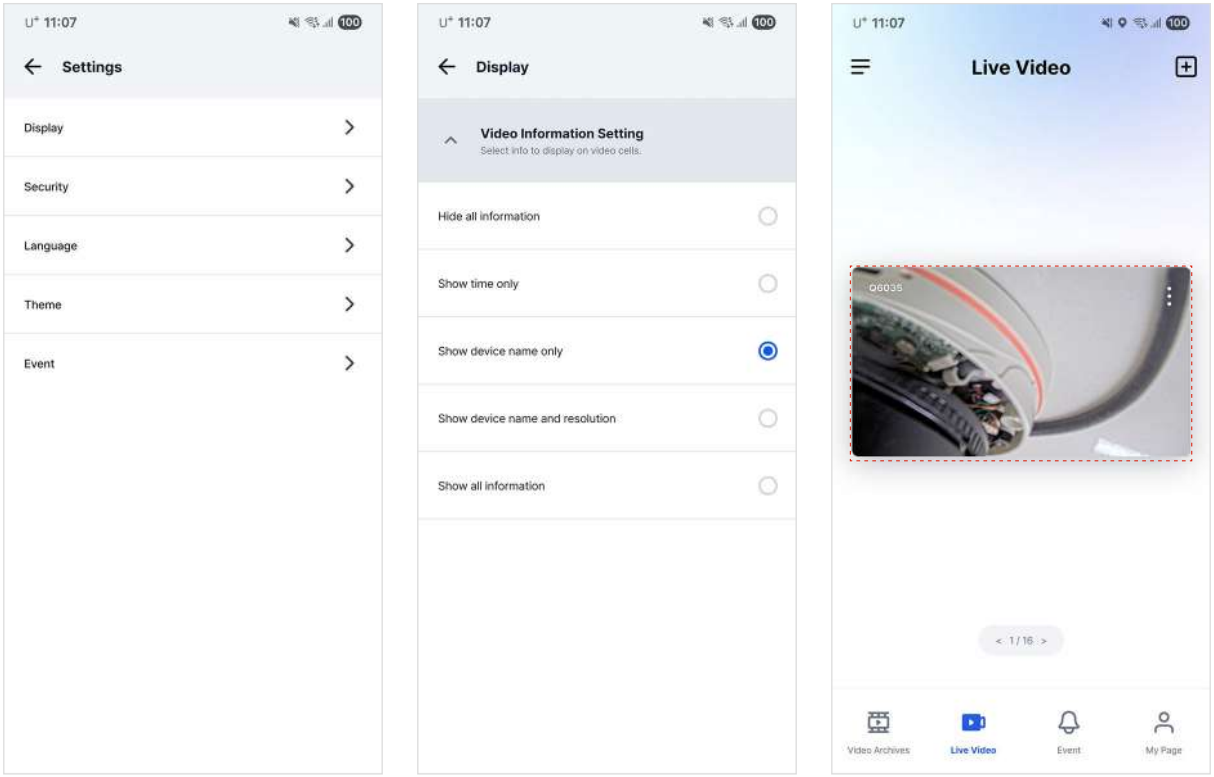

❶ ❷ ❸


1. Tap **[👤]** > **[Settings]** > **[Display]** on the main screen.
2. Tap the item you want.
   - **[Hide all information]**: Do not display any information on the screen.
   - **[Show time only]**: Display only the time on the screen.
   - **[Show device name only]**: Display only the device name on the screen.
   - **[Show device name and resolution]**: Display the device name and resolution on the screen.
   - **[Show all information]**: Display all available information on the screen.
3. Display information on the screen.

Security

Configure security settings.

Setting Up Automatic Login

Set up automatic login.

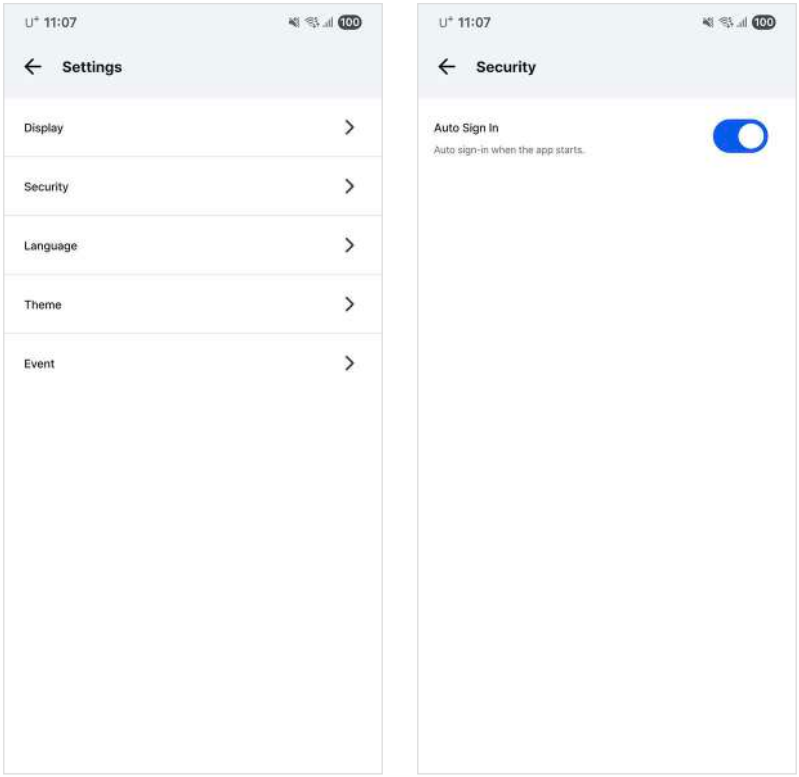

❶ ❷


1. Tap **[👤]** > **[Settings]** > **[Security]** on the main screen.
2. Tap **[Auto Sign In]**.
3. Automatically log in when the app starts.

Language

Configure language settings.

Setting the Language

Set languages such as Korean and English.

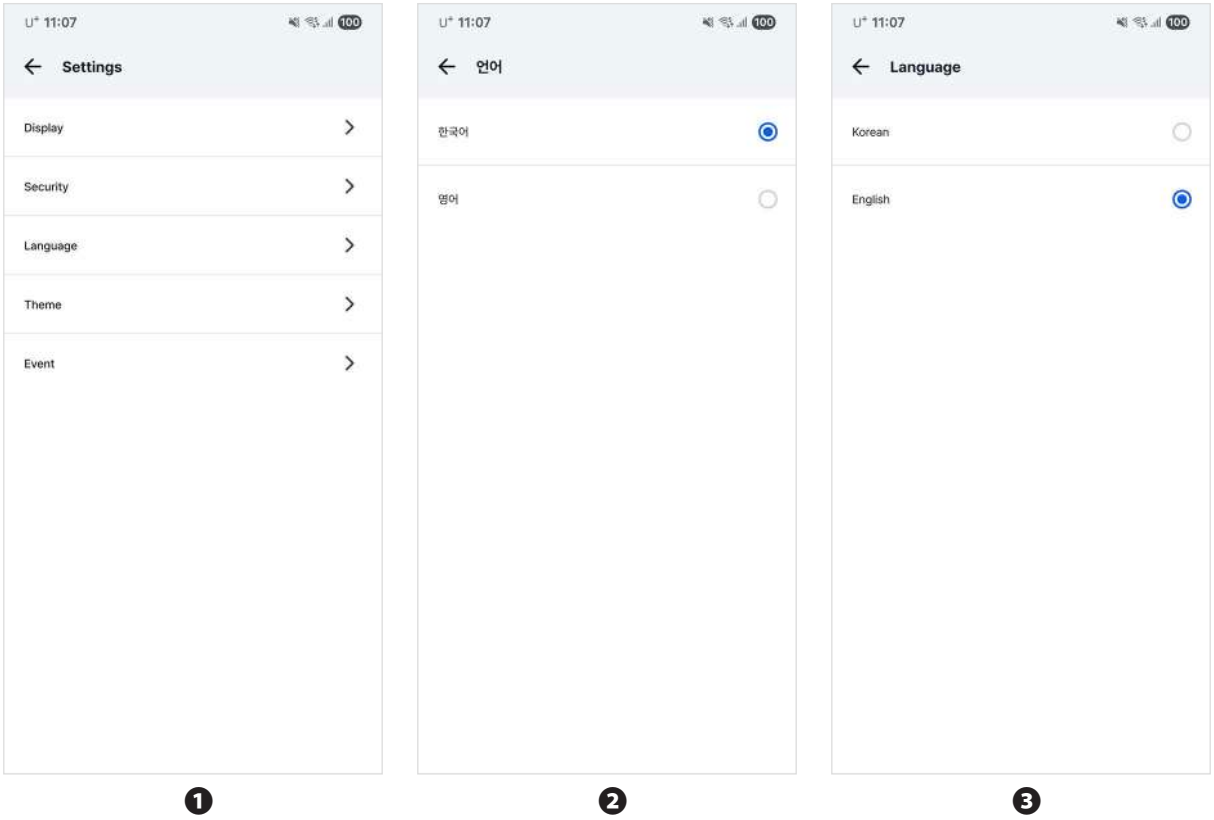


1. Tap **[👤]** > **[Settings]** > **[Language]** on the main screen.
2. Tap the item you want.
3. Configure language settings.

Theme

Configure theme settings.

Setting the Theme

Set themes such as system, light, and dark.

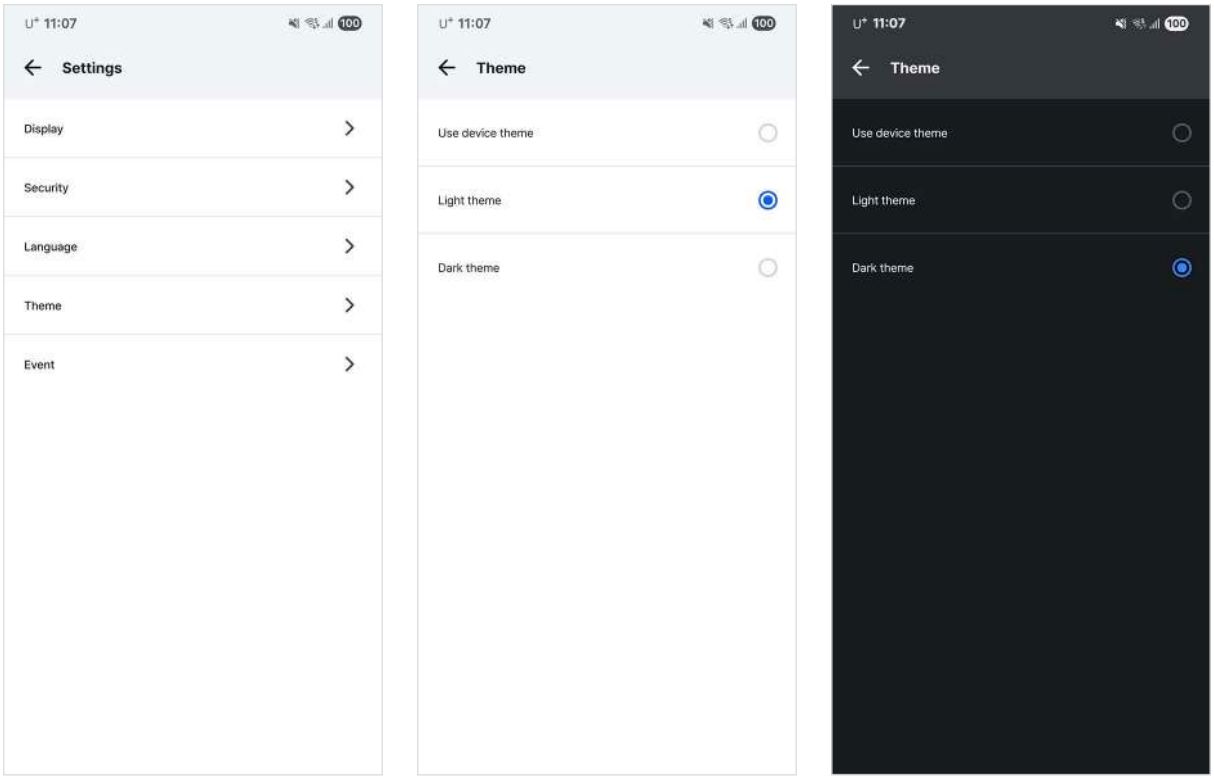

❶ ❷ ❸


1. Tap **[👤]** > **[Settings]** > **[Theme]** on the main screen.
2. Tap the item you want.
   - **[Use device theme]**: Set the device system theme.
   - **[Light theme]**: Set the light theme.
   - **[Dark theme]**: Set the dark theme.
3. Configure theme settings.

Event

Configure event reception settings.

Setting Event Reception

Set event reception.

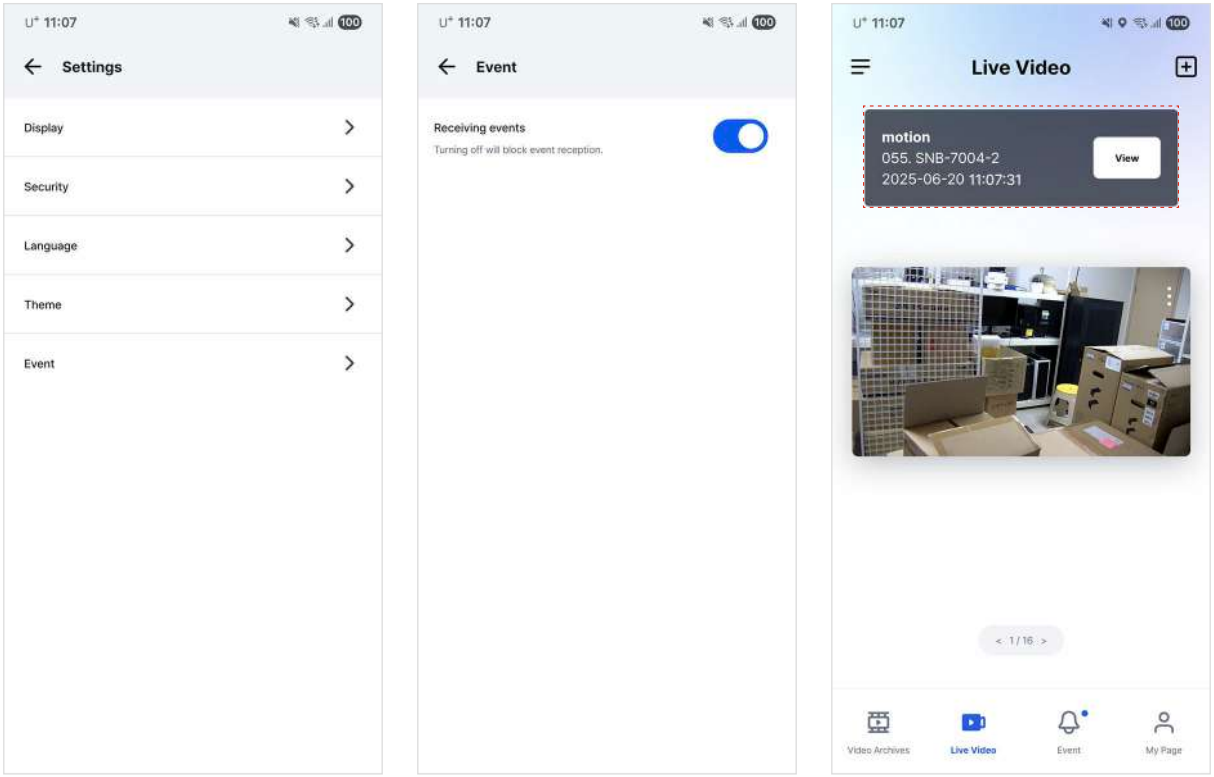

❶ ❷ ❸


1. Tap **[👤]** > **[Settings]** > **[Event]** on the main screen.
2. Tap **[Receving events]**.
3. Configure event reception settings.

Others

Starting the Client

The actual screen and images in the manual may differ.

1. Launch the client.

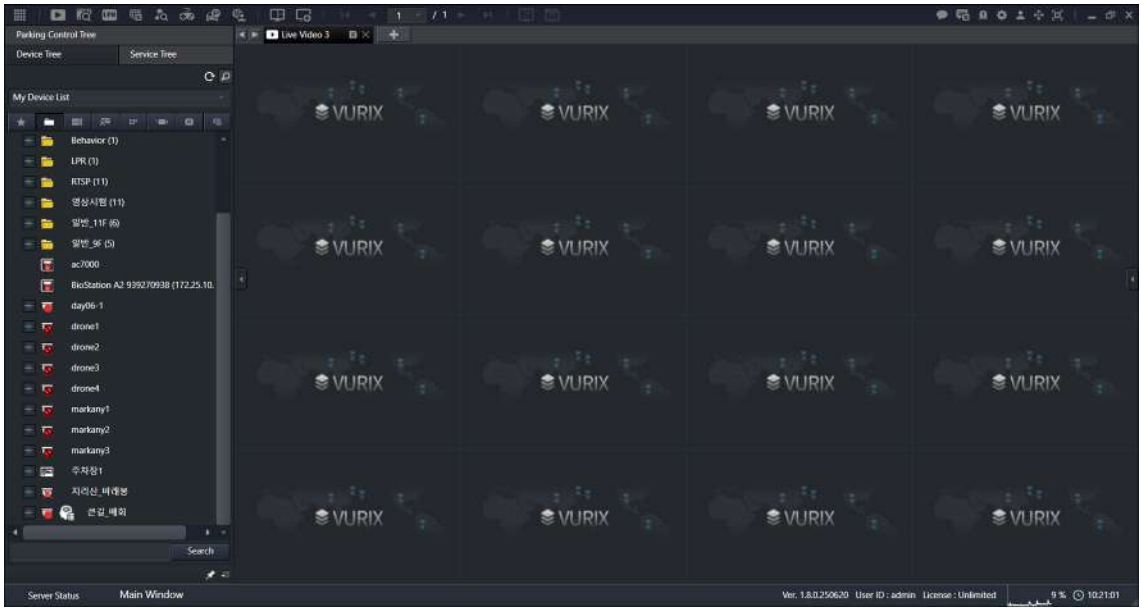

2. Clict the item you want.

Event Management


Manage events.

Creating Events


Create new events.

STEP 1: Setting up event criteria

1. Click **[ ]** > **[ ]** on the client screen. The event settings window will be displayed.

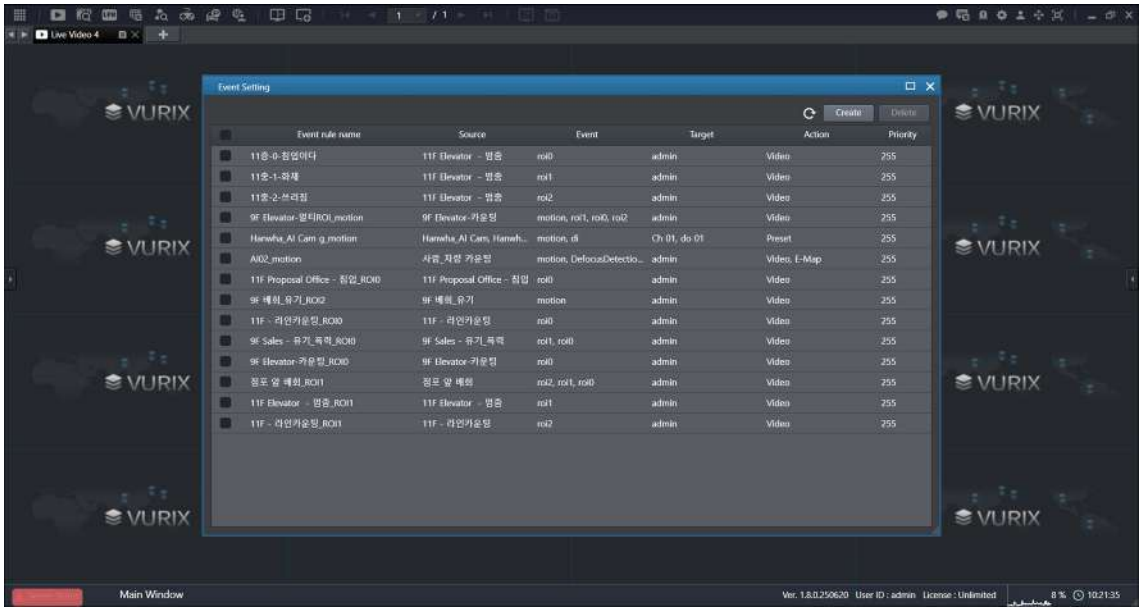


2. Click **[Create]**.

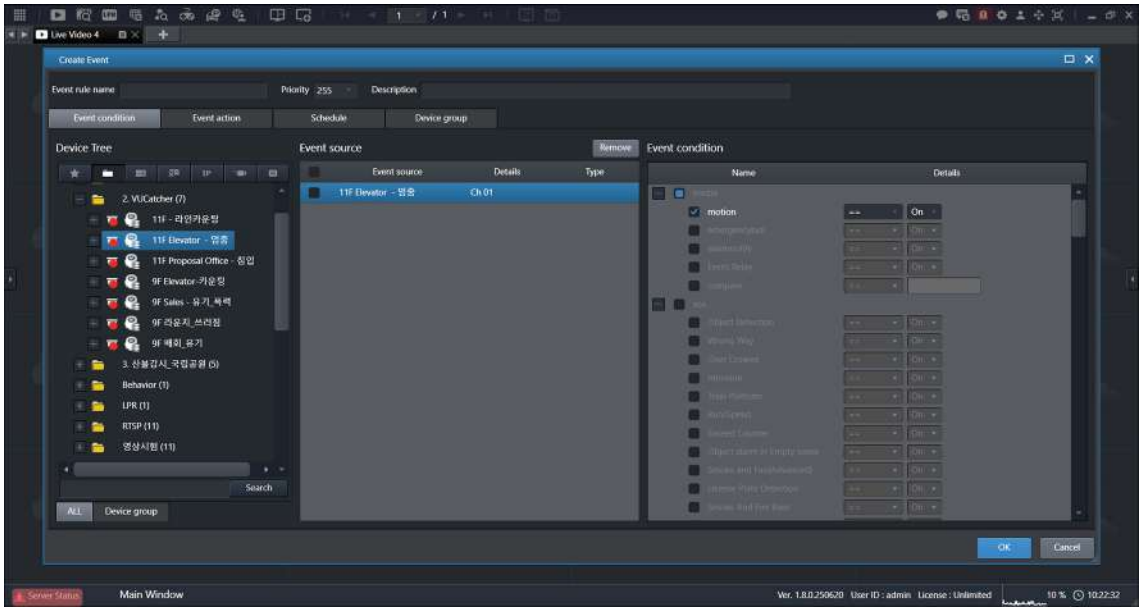

3. Hold down the mouse button on the equipment, and move to **[Event source]**.

STEP 2: Setting up event actions

1. Set up criteria and click **[Event action]**.

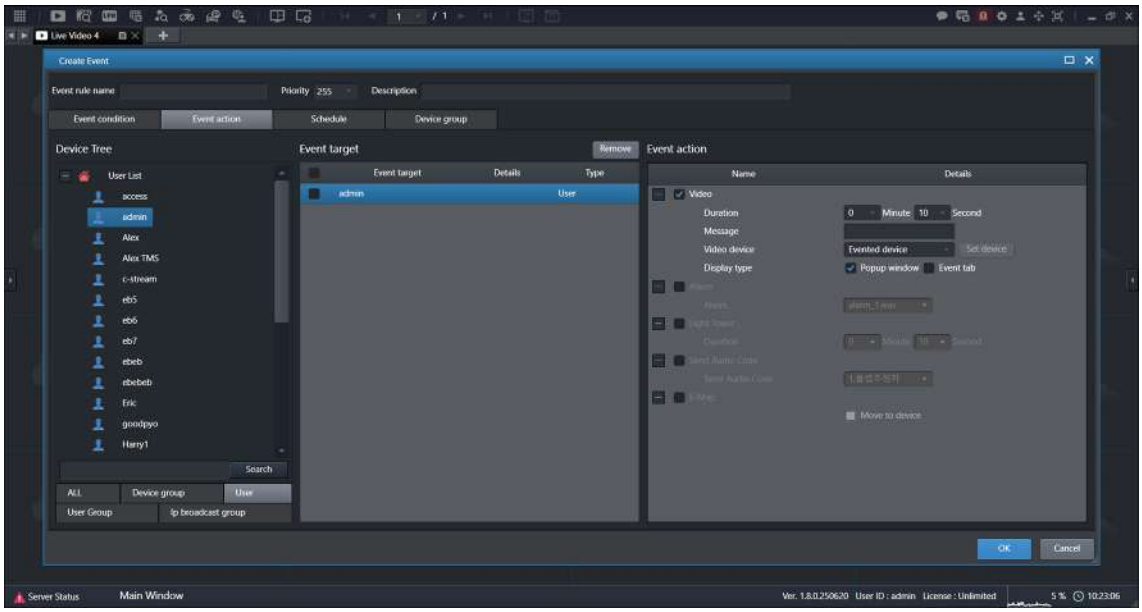

2. Select the item you want.
   - **[ALL]**: Display the list of registered equipment.
   - **[Event group]**: Display the list of registered equipment groups.
   - **[User]**: Display the list of registered users.
   - **[User Group]**: Display the list of registered user groups.
   - **[IP broadcast group]**: Display the list of registered public address groups.
3. Hold down the mouse button on the selected item, and move to **[Event target]**.
4. Set up criteria.
5. Click **[OK]**.


User Settings

Set permissions and users.


Adding Users

Add user accounts.

1. Click **[⚙]** > **[User]** > **[User setting]** on the client screen.
2. Select a group in the **[User List]** and right-click.

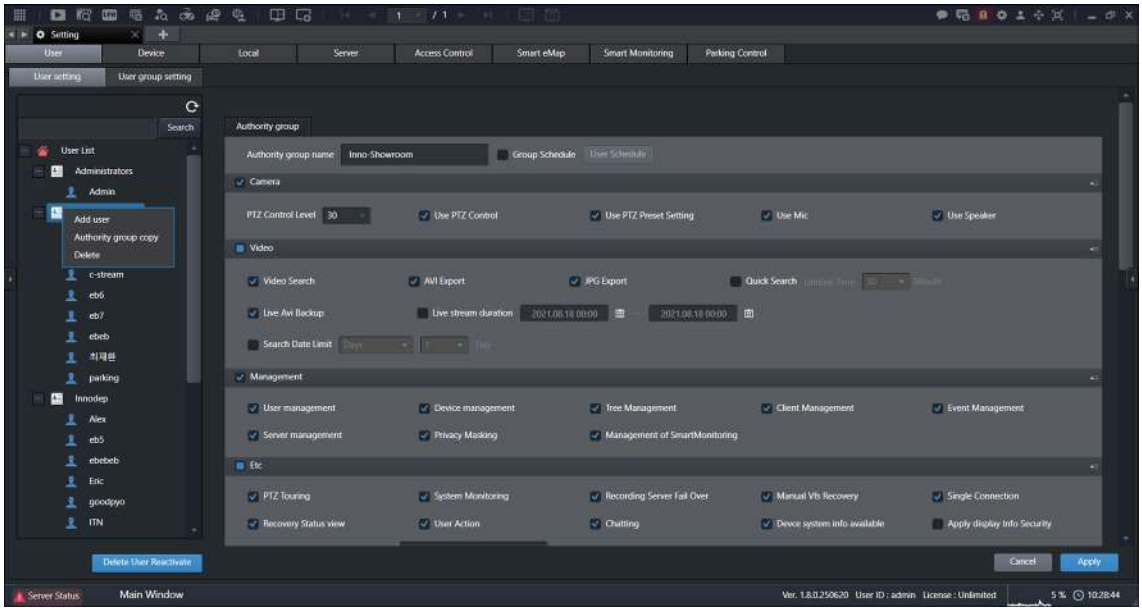

3. Click **[Add user]**.

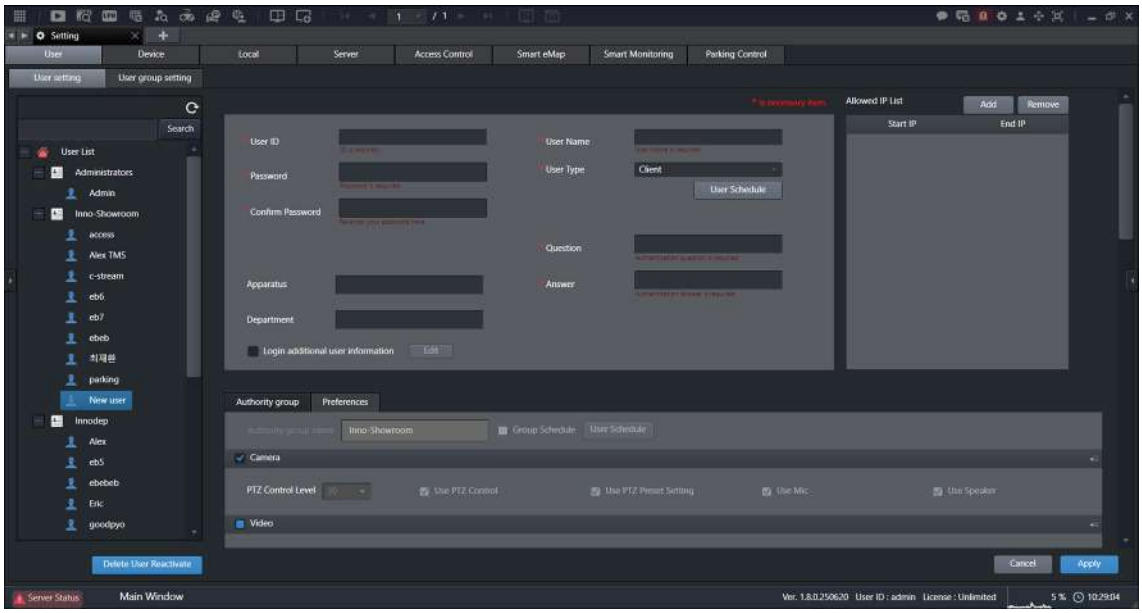

4. Enter information.
   - **[User ID]**: Enter a user account ID.
   - **[Password]** / **[Confirm Password]**: Enter the password for the user account.
   - **[Apparatus]** / **[Department]**: Enter the organization name and department name.
   - **[User Name]**: Enter the user name.
   - **[User Type]**: Set the user account type as **[Client]**, **[Emergency Bell]**, **[Primary Account]**, **[Secondary Account]**, **[Subordinate Account]**, etc.
   - **[User Schedule]**: Set the login schedule of the user account.
   - **[Question]** / **[Answer]**: Enter an authentication question and answer.
   - **[Login additional user information]**: Set additional information required for login.
5. Click **[Apply]**.
6. Restart the program. The setup will be completed.

Note

- **[Password]** should include English uppercase and lowercase letters, numbers, and special characters. (9-16 digits)
- Click **[Add]** in the **[Allowed IP List]**. The accessible IP list will be added.
- Deleted user account IDs cannot be reused.


Equipment Management

Manage equipment, for example, add, delete, or copy.

Adding Equipment


Add equipment.

1. Click **[⚙]** > **[Device]** > **[Device management]** on the client screen.

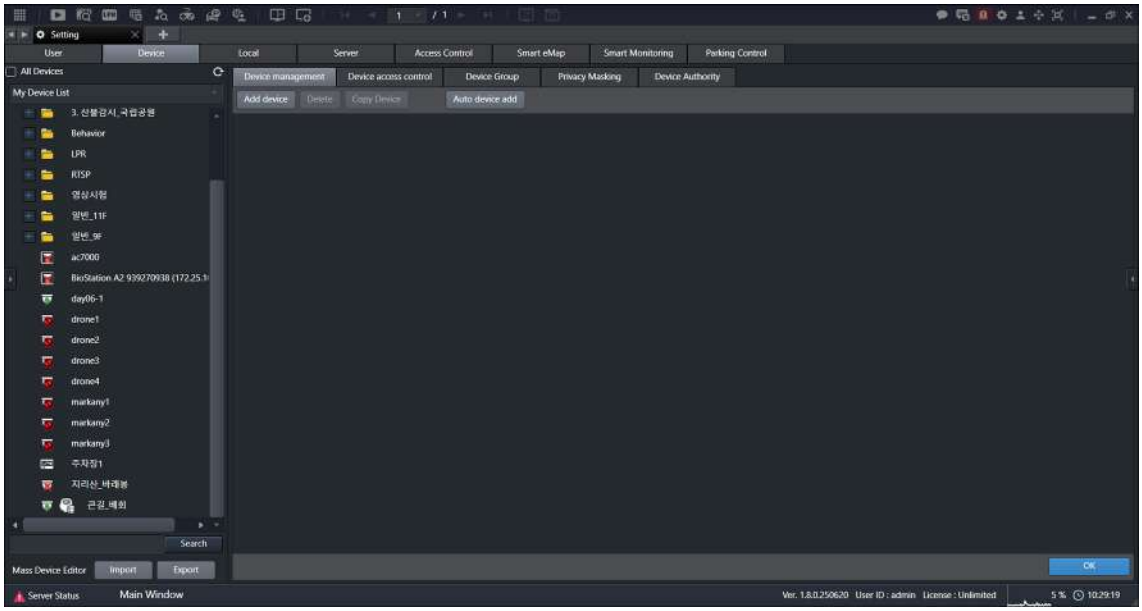


2. Click **[Add device]**.

3. Set up criteria and click **[Search]**.

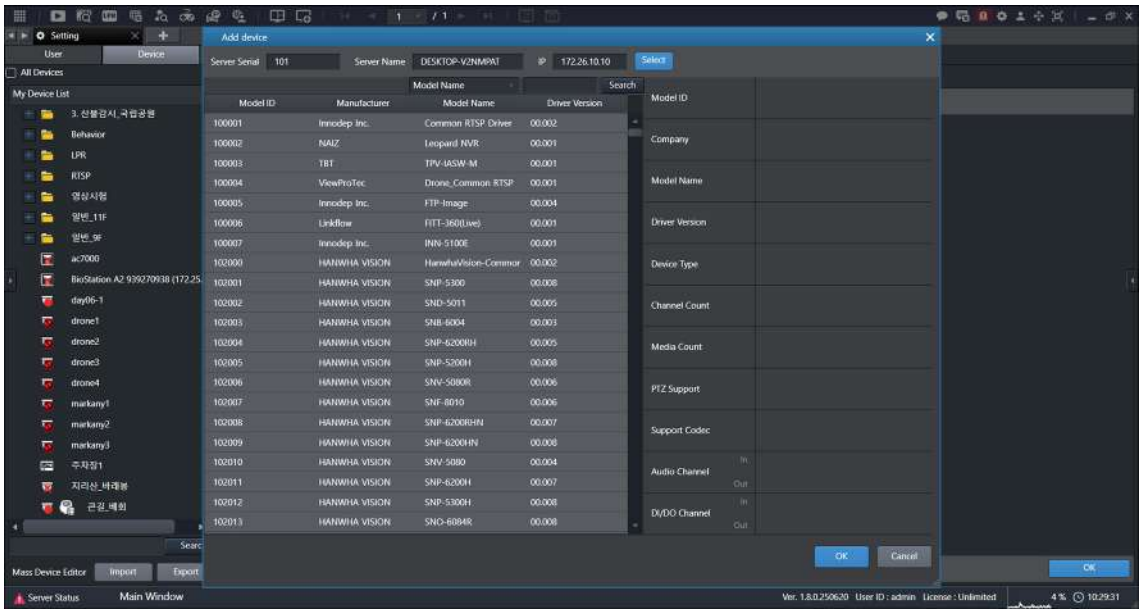

4. Select desired item and click **[OK]**.

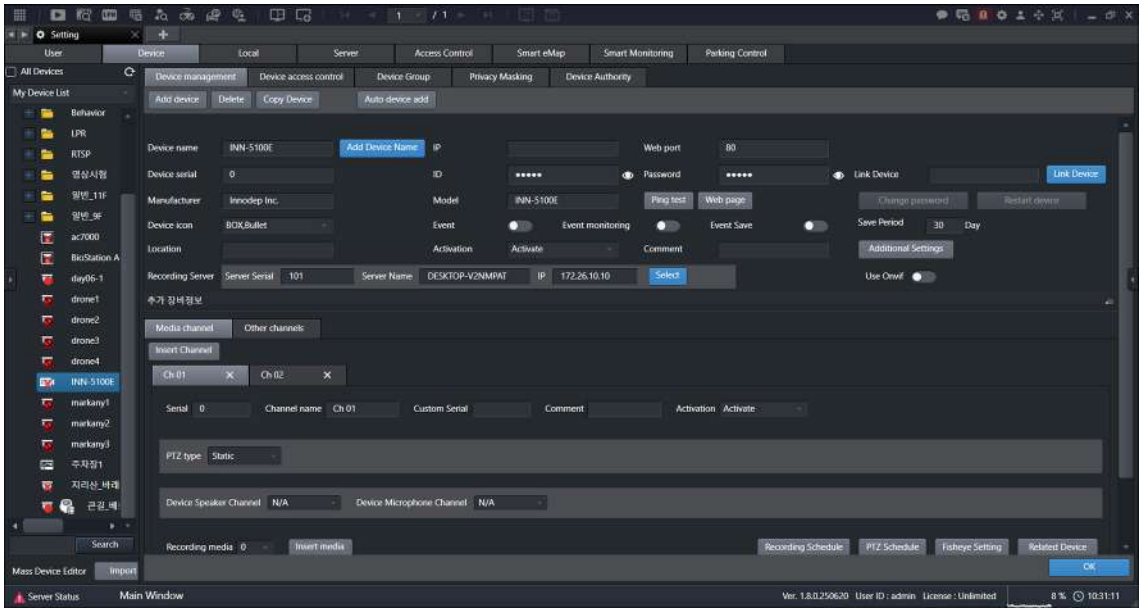

5. Enter **[IP]**.
6. Click **[Select]** in the **[Recording Server]**.
7. Select a server and click **[OK]**.
8. Set the items you want.
   - **[Recording media]**: Configure the recording media. (If using dual-stream, select the stream to be used for recording.)
   - **[Insert media]**: Add media. (Dual-stream is only supported by compatible devices.)
   - **[Recording Schedule]**: Set a recording schedule.
   - **[PTZ Schedule]**: Set a PTZ control schedule.
   - **[Fisheye Setting]**: Set the fisheye lens.
   - **[Related Device]**: Set integrated equipment.
9. Click **[OK]**.
10. Restart the program. The setup will be completed.

Note

- **[ID]** and **[Password]** confirmation is required after entering **[IP]**.
- In **[Fisheye Setting]**, selected values, such as **[X Axis Radius Change]**, **[Y Axis Radius Change]**, or **[Rotate Control Show]** are applied only when the fisheye lens is set. It is not an item that is stored from the equipment settings.

Notes

Information on the Manual

- Please read this manual carefully before using the product and follow the instructions properly.
- This manual provides usage instructions based on the product's default screen.
- It contains important safety information that must be fully understood before operation.
- Product features may vary depending on the license type, model grade, and specifications.
- The actual product and the content of this manual may differ depending on the firmware version, configuration files, or device model.

Symbols in the Manual

Symbol	Meaning
Warning	Ignoring warnings may lead to severe injuries or accidents.
Caution	Ignoring cautions may lead to minor injuries or product damage.
Note	Notes describe detailed information, such as correct usage, and explain operations.

Legal Notice

This document and the product it describes are provided by Innodep Inc. and are subject to the following terms:

Copyright

- This document is protected by copyright law. © Innodep Inc. All rights reserved.
- No part of this document may be copied, transmitted, distributed, reproduced, or modified in any form without the prior written consent of Innodep Inc.

Disclaimer

- The information in this document is based on the status of the product at the time of writing and may differ from the current condition of the product.
- Innodep Inc. shall not be held liable under any circumstances for any direct, indirect, incidental, or consequential damages arising from the use of the information in this document or the use of the product.
- While every effort has been made to ensure the accuracy of the information in this document, Innodep Inc. makes no express or implied warranties regarding its completeness, accuracy, or reliability, and assumes no responsibility for any errors or omissions.
- This document is provided "as is," and Innodep Inc. makes no warranties of any kind, express or implied, including but not limited to warranties of merchantability, fitness for a particular purpose, or non-infringement.
- Innodep Inc. reserves the right to modify, improve, or discontinue its products and the contents of this document at any time without prior notice.
- This disclaimer shall apply to the fullest extent permitted by applicable law.

Trademarks

- This product is a registered trademark of Innodep Inc.
- All other trademarks mentioned in this document are the property of their respective manufacturers or suppliers.

Troubleshooting

Check the following before reporting a malfunction.

This section outlines possible causes and solutions for commonly encountered issues.

Symptom – Video playback takes a long time to load.
• Delete the device and reassign it. • If the issue persists, restart the web API server.
Symptom – "Check your network or VURIX server status." error message is displayed.
• Restart the web API server.
Symptom – "Please check your input information." error message is displayed.
• Check the ID and password registered in the VURIX client.
Symptom – Events are not being received despite having configured the event reception settings.
• Check the events registered in the VURIX client. • If the issue persists, restart the web API server.
Symptom – The device is missing from the device list.
• Check the device access control permissions in the VURIX client.
Symptom – PTZ control is not available due to lack of permission.
• Check the PTZ control permissions in the VURIX client.
Symptom – The connection instability warning popup appears frequently.
• Check the device allocation status. • If the issue persists, restart the recording server.

Customer Support

Customer Service

Contact partner companies or Customer Service for inquiries about the products.

Customer Service	1661-6806
Business Hours	24 hours a day, 365 days a year
Email	sales@innodep.com
Website	innodep.co.kr
Headquarters	9F, Hansin IT Tower 2, 47, Digital-ro 9-gil (Gasan-dong), Geumcheon-gu, Seoul, Korea
Anyang Center	62 Simin-daero 109 beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do



* U S M 1 0 3 0 *