

CMSC 320

INTRODUCTION TO DATA SCIENCE



AKILESH PRAVEEN
PROF. JOHN DICKERSON • FALL 2020 • UNIVERSITY OF MARYLAND
<https://cmsc320.github.io>

Last Revision: May 6, 2020

Table of Contents

1	Notes & Preface	3
2	Lecture 1	3
	What is Data Science?	3
	Topics	3
	Tools	3
	Conda	4
3	Lecture 2	4
	Literate Programming	4
	Jupyter Notebook + Alternatives	4
	List Comprehensions in Python	4
	Using Python3	5
	Python vs. R for Data Scientists	5
	The Classic Statistical View of Data	6
	Nominal Data	6
	Ordinal Data	6
	Interval and Ratio Data	7
	Data Science at a Glance	8
4	Lecture 3	9
	Acquiring Data	9
	RESTful APIs	9
	OAuth	9
	GET Requests	10
	More on Data Storage Formats	10
	SAX	10
	Parsing HTML	10

5	Lecture 4	11
	Available Technologies	11
	NumPy Stack	11
	Misc About NumPy	11
	Linear Algebra with NumPy	12
	SciPy	12
	The Idea of Reproducibility	12
	Best Practices	12
	The Idea of Open Data	12
	General Process	13
	Project Organization	13
	A Little on Bias, Ethics, Responsibility	14
6	Lecture 5 & 6	14
	Tables	14
	Selecting / Slicing	15
	Aggregating / Reducing	15
	Map	15
	Group By	16
	Group By + Aggregate	17
	Union, Intersection, Difference	17
7	Footnotes	17

1 Notes & Preface


Course notes for CMSC320, under Prof. John Dickerson. Notes collected from previous and current lectures.

2 Lecture 1

What is Data Science?

Data Science is the application of computation and statistical techniques to address or gain insight. It's the intersection of statistics and Computer Science. Based on what I've learned thus far, learning to do data science is like learning how to use a TI-84 in statistics class. You're simply learning how to leverage programming tools in order to perform advanced, complex, and meaningful data-related operations.

It's the use of statistics and computer science in order to find real-world insights.

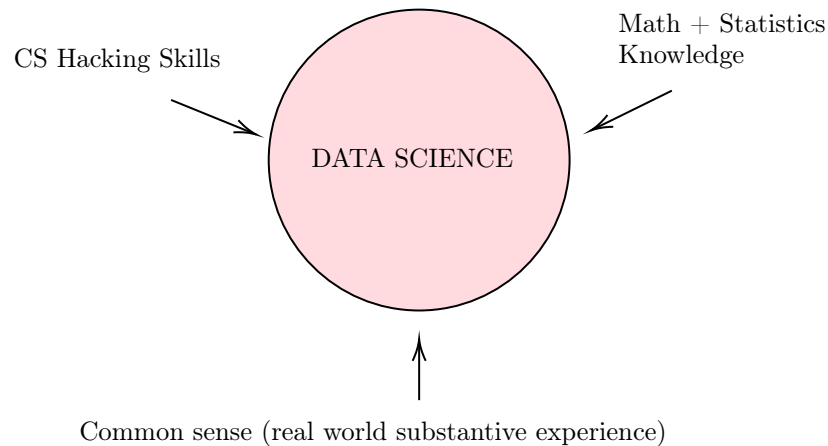

Topics

Here are the general topics that this class will cover.

- Processing data
- Visualizing data
- Understanding data
- Communicating data
- Extracting value from data

Tools

Here are some tools commonly employed by data scientists. We'll try to cover how to use most of them here.

- Python
- Scikit-Learn

- Docker
- PANDAS
- Spark
- TensorFlow

Conda

Conda is a package and environment manager for python that we can use with the command line. We can create multiple environments for us and install separate packages in each of them. This will be highly useful to us, as we sometimes want to consolidate the tools we use into separate environments.

3 Lecture 2

Definition:

Data Collection → The process of measuring and gathering information on targeted variables.

Literate Programming

The idea of **literate programming** is that you have the source code, an explanation of the source code, and the end result of running the code all in one file. Usually, this file is identified as a *notebook*. In other words, the syntax is no different from regular code, you just get a more organized way to show off tables, plots, and other outputs generated from your code.

Jupyter Notebook + Alternatives

Jupyter Notebook is a service that started off as iPython, but it's basically a web-based platform that we use for literate programming. Specifically, it supports Python-based literate programming. Most data scientists prefer it, and it can also apparently leverage big data tools, such as Apache Spark.

It saves files in `.ipynb` format, which most platforms (i.e. GitHub) have built in viewers for. Options to export in other readable formats are available. Basically, it's just Python with a bunch of bells and whistles on top to make the output of your code look pretty.

Apache Zeppelin is an alternative data analysis tool, but we will stick to Jupyter for our purposes. This is because Jupyter seems to be preferred in industry.

RStudio is the equivalent, for people who prefer to use the R programming language for data science.

This course will be centered around Jupyter Notebook.

List Comprehensions in Python

To make lists in Python, you can use loops or the `map()` function, but a *pythonic* way of doing this would be to use a list comprehension. Below is a simple example.

Example: Make a list of all the squares of $\{0,1,2,3,4,5,6,7,8,9\}$

List Comprehension:

```
squares = [i * i for i in range(10)]
```

A good way of thinking about this is that it allows you to build sets like a mathematician. This is a common theme in data science, where we can find the intersection between a lot of math stuff and computer science stuff. It's good to know how lists are generated in a mathematical sense in Python for that reason. Here's an example where we translate mathematical notation into a Python list comprehension.

Example: Make a list of all odd natural numbers from 0 to 999

Math Notation:

$$E = \{x \mid x \in \mathbb{N} \wedge x \text{ is odd} \wedge x < 1000\}$$

List Comprehension:

```
E = [x for x in range(1000) if x % 2 != 0]
```

Using Python3

We will use Python3. Since I used Python2 during my internship, I'm going to note some big changes to keep track of.

- Python3 is backwards incompatible. (Don't write in Python2!)
- Print has changed from a command to a function, so make sure to use proper function notation when invoking it.
- Division has changed. $1/2$ no longer equals 0. $1/2 == 0.5$ and floored division is now taken care of this way: $1//2 == 0$

Python vs. R for Data Scientists


Some arguments for both sides in terms of what to use.

- Python is a 'full' programming language. Also, if you've got prior experience with Python paradigms or just programming in general, that's a big plus in terms of learning curve.
- R has more mature 'pure statistics' libraries, but Python is apparently catching up.
- In terms of **processing speed**, R is certainly faster. It was designed and optimized for statistics processing.
- Python is preferable for machine learning operations, which is pretty big right now.

My personal choice will be to use Python as much as I can when I'm studying this course. Since it's more prominent in the tech industry, I should be using it more anyway.

The Classic Statistical View of Data

There are **four** main types of data: Nominal, Ordinal, Interval, and Ratio data. They can each be classified under two main subgroups, Categorical and Numerical data. Here's a visualization.

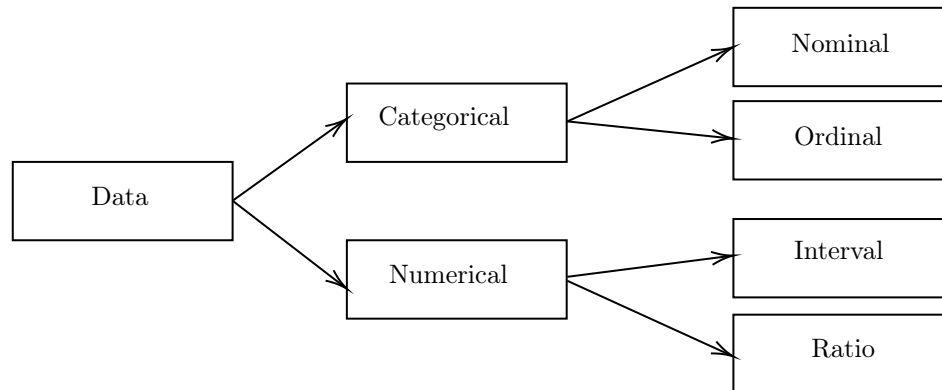

Nominal Data

A type of categorical data, nominal data values have names and describe the state of things. For example, your marriage status is nominal data because you can either be *single*, *married*, or *separated*. Another example is the type of drink you're going to have. Will it be *Milk*, *Beer*, or *Juice*?

The key here is that there can be no quantitative values assigned to each of these categories, as that would allow us to do math with them and would defeat the purpose of these labels. These values **cannot be easily compared**, so they have no material value. *E.g. being single is not quantitatively better than being married (objectively), and vice versa.*

Example: What is your marital status?

- Married
- Divorced (separated)
- Single

Ordinal Data

Ordinal data represents values that have names that describe the state of things, but in this case, there is an ordering of those values. This is what sets it apart from nominal data.

Example: What did you think of the movie?

- Strongly liked
- Liked
- Indifferent
- Disliked
- Strongly Disliked

Given how subjective some of these things can be, the distinction between nominal and ordinal can be **blurry** at times. For example, going back to our nominal example, some people may think that being single is quantitatively better than being married.

Interval and Ratio Data

Interval and Ratio data are pretty similar, and both can be used to measure things that can be represented by either integers or real numbers.

Interval data scales with fixed but arbitrary values. That might sound silly, but a good example is **dates**. Below is an example of two data comparisons of interval data that seem arbitrary, but indeed hold integer value.

Example: The following two operations are equal.

10/1/2019 - 9/1/2019
10/1/2018 - 9/1/2018

The measures don't look like integer values at first, but we can quantify them by marking them with days.

Here's what sets **Interval** data apart, however. You have **no method** of computing ratios or scales with it. For example, never mind that you can try computing $(9/1/2019 \times 8/25/2015)$, the unit of the answer would be totally useless to us, and neither would the actual number, even if you went ahead with the operation.

Ratio data is, in essence, the same as interval data in that it is numerical, but the scale itself **has a true zero**. While dates don't necessarily have a true zero, we can say that money counts as ratio data. For example, having zero money means that you're at the absolute zero of that scale, whereas the absolute zero for dates is disputable. Are we saying we're starting at O A.D.? The Big Bang? Even earlier?

Differentiating between the two is usually a case-by-case basis thing, which is what I'm thinking is the best way to handle any conflicts I end up running into between ratio and interval data.

Example: Interval data

Temperature on the scale of Celsius or Fahrenheit is interval-type data because 0° is set to an arbitrarily fixed point. Also, we can't scale it properly- $30^\circ F$ isn't twice as hot as $15^\circ F$.

Example: Ratio data

Temperature on the Kelvin scale is ratio data. $0K$ is set at legitimate absolute zero, and $50K$ is truly twice as cold as $100K$.

Data Science at a Glance

Data science is basically manipulating and computing using data. As such, we need to shift our thinking from writing **imperative** code to manipulate **data structures** to creating **sequences and pipelines** to conduct operations on **data**. That stuff is covered more in 420 and 424, for reference.

More often than not, we have to take the data that we've found and make it easily understandable for humans. This is called Data Representation.

Definition:

Data Representation → The natural way to think about data, in a human way.

Here are some ways that we think about data in this class:

- **One Dimensional Arrays** → E.g. `<'red', 'blue', 'green'>` or `<0,3,4>`. We can use functions like `map`, `fold` and `filter` to manipulate these.
- **N-Dimensional Arrays** → Also known as **tensors**.
 - For example, a Tensor of dimensions `[6,4]` is just a 6×4 matrix.
 - Similarly, a Tensor of dimensions `[4,4,2]` is a 3D array.
 - Here, we can start to make use of **Linear Algebra** for further data manipulation. Some example operations that we can use to mess with tensors:
 - * Matrix/Tensor Multiplications
 - * Transpose
 - * Vector Multiplication
 - * Matrix Factorization (we will explore this later)
- **Sets** of objects, or **Key/Value Pairs**
- **Tables/Relations** → This goes into relational databases, which is the basis of SQL. We'll go into this later.
- **Hierarchies/Trees/Graphs** → This sort of spills over into data structures, but they've got some additional nuances included with them.
 - They tend to make use of `'path'` queries
 - Graph and Tree Algorithms will be useful here, efficiency is key
 - Example: networks are represented this way, we'll cover that later in this class

4 Lecture 3

Acquiring Data

Here are some examples of how we can grab data from places. Pretty obvious, common sense stuff. We're going to explore all of these as we move forward.

- Direct download from online or loading it from local storage
- Generate the data locally via a simulation or equivalent program
- Query data from a database
- Query data from an API
- Scrape data from a website

When you pull from APIs, you're going to want to be using HTTP Requests.

RESTful APIs

This stands for REpresentational State Transfer APIs, and it's basically a standard that enforces that APIs do a few things. It says that they should support these basic operations:

- GET → Query a data entry
- POST → Create a new data entry
- PUT → Update an existing data entry
- DELETE → Delete an existing data entry

RESTful APIs are also supposed to be stateless. That is, with every API request, you send a token of who you are, and you get a current capture of the data at that time/edit the data.

A good example of a REST API is Github, where you can use REST API calls on your repositories.

There are other guiding principles and miscellaneous guidelines for RESTful APIs, which can all be found at <https://restfulapi.net>

Aside: GraphQL

GraphQL → REST has been adopted by many developers and is widely regarded as the traditional way to send data over HTTP. GraphQL, on the other hand, is a revolutionary new player that's presented as a way to *replace* legacy REST APIs (*back4apps*)

OAuth

If you want to grant an app access to your identity without actually giving it your username and password, is there a way to do that? The answer is **yes**, because this is a common software engineering problem.

OAuth is the standard for *access delegation* used for internet users to grant websites access to their information on other sites. A pretty good example of this is Google's sign in page on other websites. How do you think other websites conduct sign in without knowing your password for your Google account?

GET Requests

Assume we used Python's `requests` module to query a server with a GET request.

First, we'd get either a CSV, JSON, or HTML/XML/XHTML file back, in response. This is the data that we have to sift through. *Note:* You might also get a domain-specific file, like an `rvt` file. You're always welcome to make your own filetype for storing data, but make sure it's actually documented somewhere.

Aside: Parsing CSVs and JSON

Never write your own CSV or JSON parsers. This is another example of reinventing the wheel. We'll use Python Libraries to do this more easily. *E.g. PANDAS*

More on Data Storage Formats

Definition:

Serialization → The process of converting objects into strings.

Deserialization → The process of converting strings back into objects.

JSON is a pretty common format for serializing objects. Plus, serializing objects makes it easier for humans to read and perform sanity-checks on. In Python, JSON is built with Strings, Lists, Dictionaries, and sometimes mixes of a few of those together.

Definition:

Document Object Model → A tree-based data storage method. For example, HTML is structured this way.

SAX

SAX is a lightweight way to process XML. It generates a stream of events as it parses an XML file. IT helps us pay attention to individual parts of an XML file without having to process through the rest of it.

Parsing HTML

Parsing HTML is the hardest to do in this case, as I've seen many times before in hackathon projects. Although HTML's specifications are pure, the real world examples of it are pretty nightmarish, thanks to how it interacts with JavaScript and loads dynamic content. All in all, it's fairly unreliable in terms of parsing it manually.

In this case, we're best off using the Python library `BeautifulSoup`. We can also make use of Python's `Regex`, which is similar enough to Ruby `regex` that we worked with in 330. A website like `Rubular-https://pythex.org` will be useful in this case.

By combining `BeautifulSoup`, Regular expressions, and GET requests, we can make the process fairly streamlined. This is usually what we'll be using to scrape websites. In order to scrape more dynamic websites, we'd probably have to make use of Selenium. Check my 320 folder to find an example of a simple webscraper with `BeautifulSoup`.

5 Lecture 4

Overview: Numpy, PANDAS, Relational Databases, Apache Spark

Available Technologies

Python has a bunch of 3rd party packages for scientific and numerical computation. Some examples are..

- **Numpy and Scipy** → Numerical and scientific function libraries.
- **NUMBA** → A Python compiler supporting 'Just in Time' compilation. That is, it supports compilation of code while code is running.
- **ALGLIB** → A cross-platform numerical analysis library
- **PANDAS** → An extensive data analysis tool with some neat built-in data structures
- **PyGSL** → GNU Scientific Library in Python
- **Scientific Python** → A collection of scientific computing modules for Python

These are a bunch of examples of what's available to developers right now, but we won't focus on all of it. Particular emphasis will be placed on **Numpy** and **PANDAS**.

NumPy Stack

The **NumPy** stack is the most commonly used out of all of these packages. It includes the following:

- **Numpy** - Works sort of like MatLab, just lets us handle a lot of number manipulation and mathematical operations
- **Matplotlib** - This is a plotting and graphing library
- **PANDAS** - This gives us a bunch of data structures and data analysis tools to play with/keep track of our data. (Usually, you'll want to import your data into a **PANDAS dataframe** or something.)
- **SciPy**
- **SymPy**
- **Jupyter** - This will be our medium for **literate programming**.

To see more about this stuff, search Google for the **NumPy Stack** and you'll find everything you need.

Misc About NumPy

Here are a few more notable things about **Numpy**:

- It contains the **n-dimensional array** object
- It contains 'sophisticated' functions that we can use
- It provides us with excellent tools to integrate C++, C, and even FORTRAN
- It has math capabilities that are highly useful to us (e.g. Linear Algebra, Fourier Transform, etc)
- **Numpy** also comes with a bunch of new **DataTypes** for us to use.

Aside: Numpy Arrays

Arrays in Numpy are different from regular lists in Python, so make sure your syntax is correct and you know the difference when you decide to use either one in practice.

Linear Algebra with NumPy

One of NumPy's most common uses lies within its **Linear Algebra** module. It allows us to do regular LA stuff, like `.transpose()` and `.inverse()` to matrices stored as n-dim arrays. Here's an example.

```
1 # Note: remember, we have to use NumPy's n-dimensional array ↔  
2   object here  
3 array([[1.0, 2.0],  
4        [3.0, 4.0]]).transpose()
```

SciPy

SciPy includes various tools and functions for solving common problems in **scientific computing**.

We won't use it much for now, but it's supposed to be good to know. Often you'll be able to find higher-level Scipy functions that will work around the need to call lower-level Scipy functions. It's got a lot of functionality built in, so make sure not to overlook it.

The Idea of Reproducibility

Starting from the same dataset, can we reproduce your analysis and get the same results? **This is the goal that we're trying to fulfill with our analysis**- we want our stuff to be reproducible! (Otherwise, what exactly does it even mean?)

Best Practices

Honestly, most of this stuff should be common sense.

- Use version control to keep track of code. (e.g. `git`)
- Use unit testing. (e.g. `unittest` module in python)
- Use libraries when you can. (don't reinvent the wheel!)


The Idea of Open Data

Some data should be widely available for everyone to use as they want, without restrictions from copyright, etc.


This is probably where all of our free data comes from, so this idea is super helpful to us as data scientists.

General Process

Here's the general process for data science- just so we have an idea of what's going on.

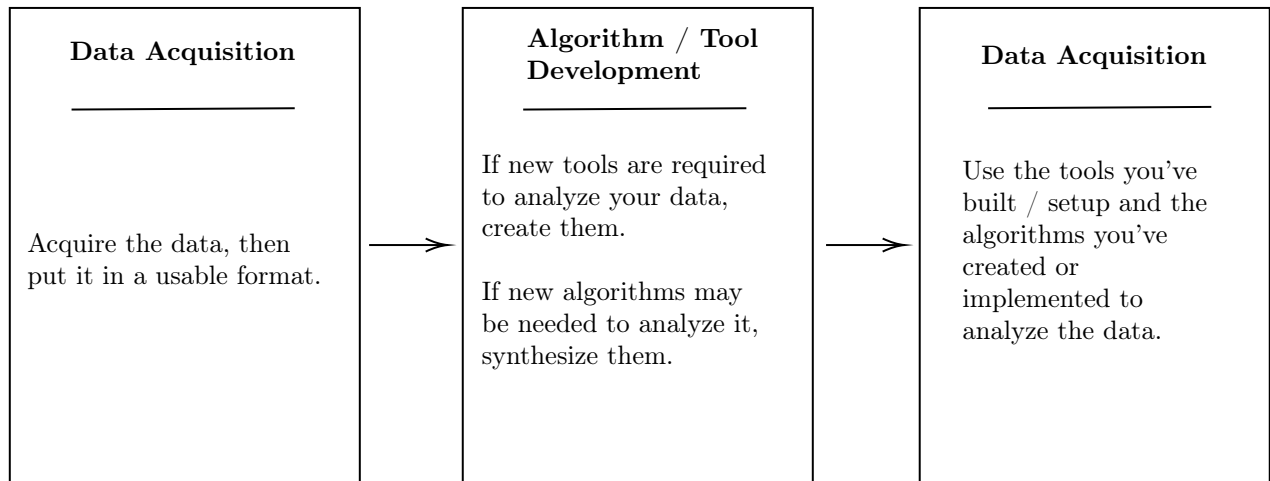

After we do that, we still technically have some programming left. In this new era of literate programming, there's one more step of processing we have to do with our results in order to make them publicly presentable and meaningful.

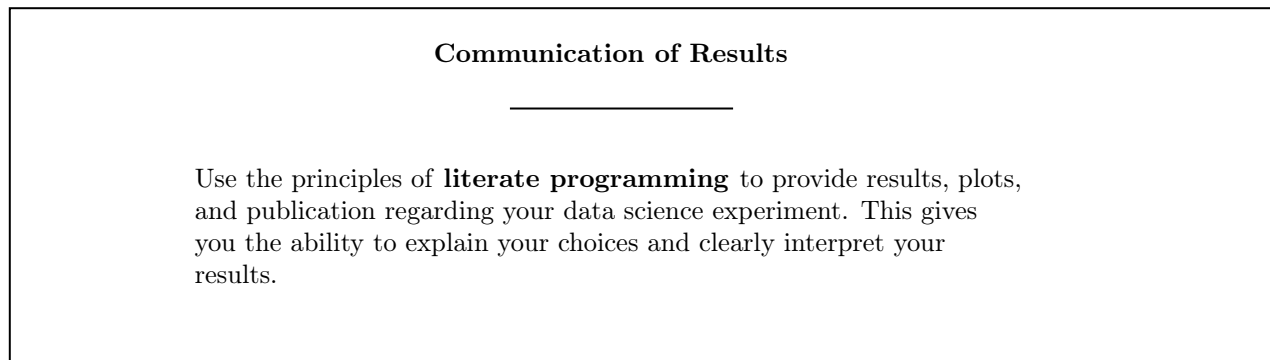

It's emphasized a lot here to think like an **algorithm developer**, as you're going to need efficiency in the data analysis that you perform. However, you also need to think like an experiment-conducting **data scientist**. We don't usually get enough training as the latter, so hopefully this course should be an introduction to that sort of stuff.

Project Organization

Make sure to organize your project in folders appropriately. Specifically, even if you have a lot of components, group with with a focus on experimental procedure.

You should certainly be isolating things like **data**, **tools**, and **experiments** into their own folders. Data could include your raw input data, along with data that you've done some processing on. Tools could include Python environment you're using, and experiments could include the meat of what your data science work will be- pipeline scripts, results, figures, plots, analysis scripts, etc.

A Little on Bias, Ethics, Responsibility

Aside: Fairness Through Blindness

The concept of not letting an algorithm look at protected attributes in order to keep it from forming potentially harmful biases.

A great example of fairness through blindness could be software that determines the outcome for a loan application. We want the results to be **independent** of an applicant's race, but they can be **dependent** on non-protected attributes, such as credit history and income.

Aside: FATML

FATML stands for Fairness, Accountability, and Transparency in Machine Learning.

Overall, here are some guiding principles for data ethics:

- Start with clear user need, with a focus on public benefit. (Can't go wrong with this!)
- Use data and tools that emphasize **minimum** intrusion/invasion of privacy. (Sometimes, we have no choice but to handle sensitive data)
- Create robust data science models that minimize bias and focus on objective accuracy.
- Be alert to public perceptions.
- Be open and accountable for your actions.
- Security is key- especially if working with sensitive data.

6 Lecture 5 & 6

Big ideas: Pandas + Relational Databases

- Tables (Specifically, the abstraction + operations)
- PANDAS
- The idea of 'tidy' data
- SQL

Tables

Here's the idea- we can abstract data into our own little data structures just like computer scientists do, and a lot of the time, in data science, tables are the optimal way to do that. (This is why software like PANDAS and Numpy have excellent support for these structures.)

id	age	weight	height
1	12	42.3	145.6
2	11	50.9	161.2
3	13.5	61.3	181.3
4	14	41.4	121.4
5	15	55	135.5

Variables (Attributes/Labels/Columns)

Observations (rows, tuples)

Known as the Index (ID) column. Usually, there are no duplicates of these allowed, and they're often ordered like this.

Here's an example table. I've highlighted and color coded the important aspects of it. Remember, don't think of this as the data structure itself- this is just an abstraction to help us keep track of our vast amounts of data. However, most table implementations do a pretty good job of representing the stuff I've color coded.

Selecting / Slicing

Selecting one or more of the rows or columns in particular to analyze. Examples:

- Select only columns ID + Age
- Select all rows with weight > 41
- We can also apply a combination of the above 2. (*You can combine select rules!*)

Aggregating / Reducing


Combining values across a column into a single value. (We don't do this across rows, because that obviously wouldn't make any sense. Think about it!). Examples:

- Find the sum of all row's columns
- Find the max of the weight column

Note: It's usually never useful to aggregate/reduce the ID column, so for most cases, we ignore it when we perform such operations.

Map

Apply a function to every row, possibly creating fewer or more columns. This one's a little weird to think about without a clear example, so I'm including one below.

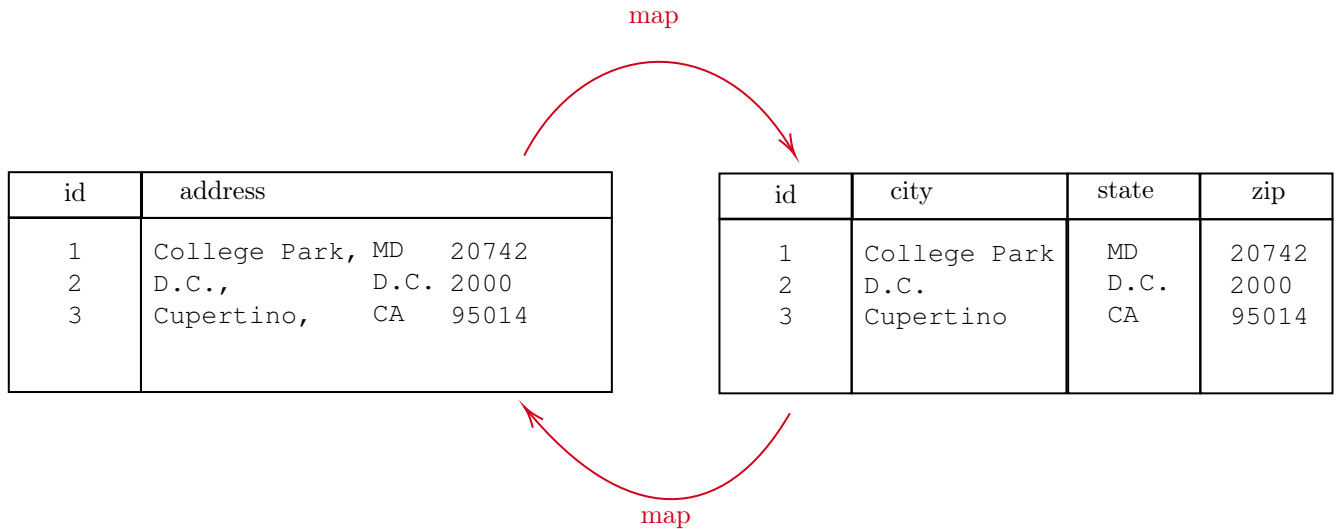

Notice how applying map to either table is valid in this case- sometimes we want to break down columns into more specific values, and sometimes we want to combine them into singular columns. Each of these operations is totally valid, and has its uses. (This is evident in the projects for this class).

Again, this is mostly about what you need. There's no necessary better or worse in this case (more columns does not always equal better data).

Group By

Group By is an operation that allows you to group tuples together based on the values in columns/dimensions. Let's say we had the following table of house addresses like earlier. This time, we'll add the number of people in each house as a column as well.

id	city	state	zip	people
1	College Park	MD	20742	3
2	Washington	D.C.	2000	4
3	Cupertino	CA	95014	3
4	College Park	MD	20742	2

Let's say we only wanted to see the data from a **single city**. In this case, let's pick College Park.

id	city	state	zip	people
1	College Park	MD	20742	3
2	Washington	D.C.	2000	4
3	Cupertino	CA	95014	3
4	College Park	MD	20742	2

This is what a 'Group By' operation would be perfect for. It'll basically just get us the rows that are from the city that we want.

Group By + Aggregate

We can combined Group By and Aggregate in pretty cool ways to get results that we want. For example, let's say we wanted to leverage the above table and get the sum total of all people who live in College Park, D.C., and Cupertino, respectively. By using a combo of Group By and Aggregate, we can totally do that. (*Group By* City, then perform summing *aggregation* operation.)

Union, Intersection, Difference

These are your usual set operations from statistics. However, this only works if the tables have identical attributes (columns). If they have identical columns, they are called **compatible tables**.

Examples: $(\text{Table A}) \cup (\text{Table B})$ results in (Table C) where all three tables have the same attributes. Likewise, $(\text{Table A}) \cap (\text{Table B})$ results in (Table D) where all three also have the same attributes.

7 Footnotes

Taken by Akilesh Praveen.