

Bandit

OverTheWire Wargame — Levels 0 to 33 — Walkthrough


<https://github.com/Akinloye3264/overthewiregames>

Level 0 $\rightarrow$ 1

The game starts by connecting to the OverTheWire server over SSH on port 2220. The username and password are both `bandit0`.

The password for the next level lives in a file called `readme` in the home directory, so listing the directory and reading that file is all it takes.

```
ssh bandit0@bandit.labs.overthewire.org -p 2220
ls
cat readme
```

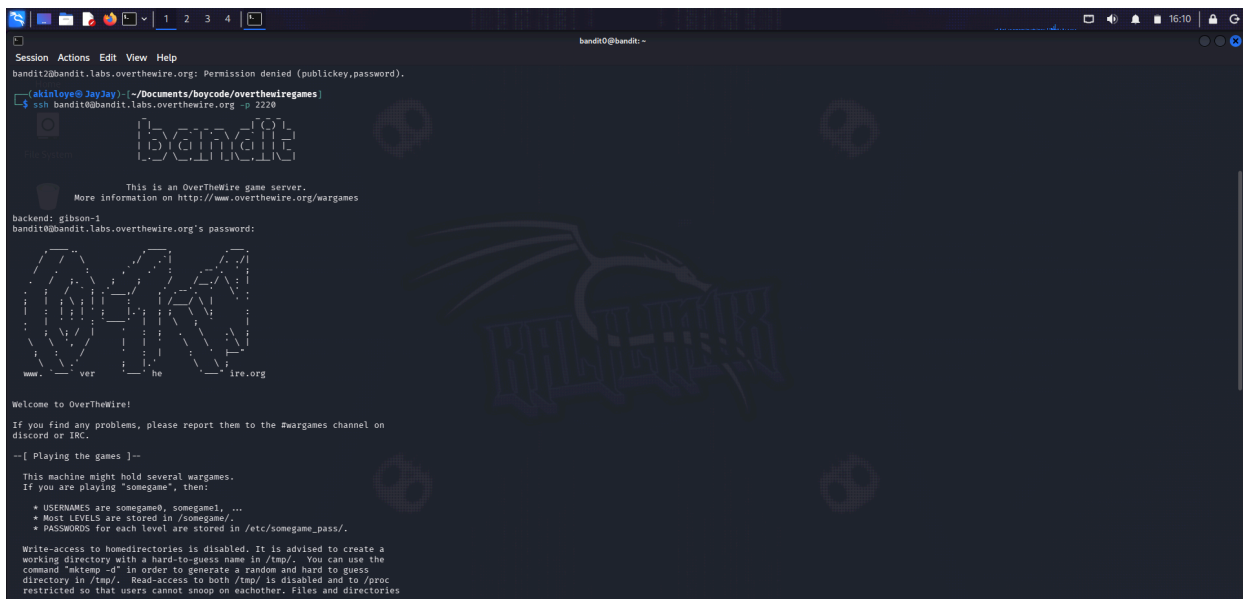

Password 6y2kwnwK6grgvwvpvLaa2T1cpFEKOhNR

Level 1 → 2

The password is stored in a file literally named `-`. A bare dash is interpreted by most tools as "read from standard input" rather than as a filename, so it has to be disambiguated with a path prefix.

```
cat ./-
```

```
bandit1@bandit:~  
Session Actions Edit View Help  
Disconnected from 127.0.0.1 port 2220  
bandit1@bandit:~$ exit  
logout  
Connection to bandit.labs.overthewire.org closed.  
--(ekino@3j3j3j)~/Documents/boycode/overthewiregames (main)  
$ ssh bandit1@bandit.labs.overthewire.org -p 2220  
  
bandit1@bandit:~  
This is an OverTheWire game server.  
More information on http://www.overthewire.org/wargames  
backend: gibson-1  
bandit1@bandit.labs.overthewire.org's password:  
  
Welcome to OverTheWire!  
If you find any problems, please report them to the #wargames channel on  
discord or IRC.  
--[ Playing the games ]--  
This machine might hold several wargames.  
If you are playing "somegame", then:  
* USERNAMES are somegame0, somegame1, ...  
* Most LEVELS are stored in /somegame/.  
* PASSWORDS for each level are stored in /etc/somegame_pass/.  
Write-access to homedirectories is disabled. It is advised to create a  
working directory with a hard-to-guess name in /tmp/. You can use the
```

Password PK8fYLZg2hnHSz83p1BL1iEPKdD3QT0B

Level 2 → 3

This file name contains spaces and leading dashes (--spaces in this filename--). Quoting the name handles the spaces and the ./ prefix handles the leading dashes.

```
cat "./--spaces in this filename--"
```


```
Select bandit2@bandit:~  
bandit1@bandit:~$ echo -  
bandit1@bandit:~$ cat ./-  
PK8fYLZg2hnHSz83p1BL1iEPKdD3QT0B  
bandit1@bandit:~$ ^C  
bandit1@bandit:~$ ^C  
bandit1@bandit:~$ exit  
logout  
Connection to bandit.labs.overthewire.org closed.  
--(ekino@3j3j3j)~/Documents/boycode/overthewiregames (main)  
$ ssh bandit2@bandit.labs.overthewire.org -p 2220  
  
bandit2@bandit:~  
This is an OverTheWire game server.  
More information on http://www.overthewire.org/wargames  
backend: gibson-1  
bandit2@bandit.labs.overthewire.org's password:  
  
Welcome to OverTheWire!
```

Password 7ZZ2LFrykP2zEyyvB14m3c1cL7tGYJPME

Level 3 → 4

The password sits in a hidden file inside the `inhere` directory. Hidden files (names beginning with a dot) are revealed with `ls -a`.

```
cd inhere
ls -a
cat ...Hiding-From-You
```

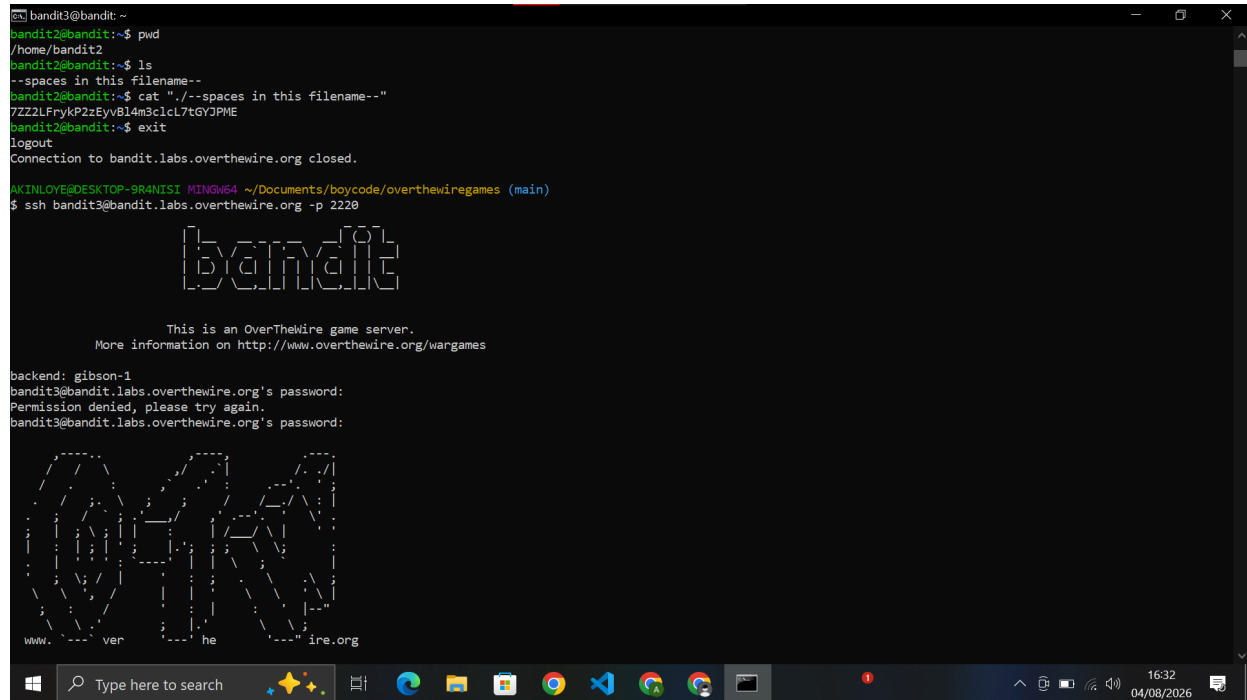

```
bandit3@bandit:~
bandit2@bandit:~$ pwd
/home/bandit2
bandit2@bandit:~$ ls
--spaces in this filename--
bandit2@bandit:~$ cat "--spaces in this filename--"
7ZZ2LFrykP2zEyvB14m3clcl7tGVJPME
bandit2@bandit:~$ exit
logout
Connection to bandit.labs.overthewire.org closed.
MAINLOVE@DESKTOP-9RANESI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ ssh bandit3@bandit.labs.overthewire.org -p 2220

bandit

This is an OverTheWire game server.
More information on http://www.overthewire.org/wargames

backend: gibson-1
bandit3@bandit.labs.overthewire.org's password:
Permission denied, please try again.
bandit3@bandit.labs.overthewire.org's password:
```

Password xzTXq1rDJQVVAzdV5cHq1TQytTWufAMq

Level 4 → 5

The `inhere` directory holds ten files named `-file00` through `-file09`. Only one is human-readable, so the `file` command identifies which one reports as ASCII text.

```
cd inhere
file ./*
cat ./-file07
```

```
bandit4@bandit:~  
For support, questions or comments, contact us on discord or IRC.  
  
Enjoy your stay!  
  
bandit3@bandit:~$ ls  
inhere  
bandit3@bandit:~$ cd inhere/  
bandit3@bandit:~/inhere$ ls  
bandit3@bandit:~/inhere$ ls -a  
..  .  ...Hiding-From-You  
bandit3@bandit:~/inhere$ cat ...Hiding-From-You  
xztXq1rDJQVVAzdV5cHq1TQytTWuFAMq  
bandit3@bandit:~/inhere$ exit  
logout  
Connection to bandit.labs.overthewire.org closed.  
  
MINILOYES@DESKTOP-9RAN1ST MINGW64 ~/Documents/boycode/overthewiregames (main)  
$ ssh bandit4@bandit.labs.overthewire.org -p 2220  
  
bandit  
  
This is an OverTheWire game server.  
More information on http://www.overthewire.org/wargames  
  
backend: gibson-1  
bandit4@bandit.labs.overthewire.org's password:  
  
0044
```

Password 6C7h9GD8M6ai5nr7wo1RonrzFjj9yIrG

Level 5 → 6

The target file is somewhere under inhere and is defined by three properties: human-readable, exactly 1033 bytes, and not executable. `find` can match all of these at once — the `c` suffix on `-size` means bytes.

```
find inhere -type f -size 1033c ! -executable  
cat inhere/maybehere07/.file2
```

```
bandit5@bandit:~  
bandit4@bandit:~/inhere$ cat ./-file07  
6C7h9GD8M6ai5nr7wo1RonrzFjj9yIrG  
bandit4@bandit:~/inhere$ exit  
logout  
Connection to bandit.labs.overthewire.org closed.  
AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)  
$ ssh bandit5@bandit.labs.overthewire.org -p 2220  
  
bandit  
  
This is an OverTheWire game server.  
More information on http://www.overthewire.org/wargames  
  
backend: gibson-1  
bandit5@bandit.labs.overthewire.org's password:  
  
0404  
www. ver he ire.org  
  
Welcome to OverTheWire!  
  
If you find any problems, please report them to the #wargames channel on  
discord or IRC.
```

Password pXa26xhMWaC2SvDotA4r9EgZku10eSBW

Level 6 → 7

This time the file is somewhere on the whole server, owned by user bandit7 and group bandit6, and 33 bytes in size. Searching from / produces many "permission denied" messages, which are discarded by redirecting standard error.

```
find / -type f -user bandit7 -group bandit6 -size 33c 2>/dev/null  
cat /var/lib/dpkg/info/bandit7.password
```

```
bandit6@bandit:~  
* gdbinit (https://github.com/gdbinit/Gdbinit) in /opt/gdbinit/  
* pwntools (https://github.com/Gallopsled/pwntools)  
* radare2 (http://www.radare.org/)  
--[ More information ]--  
  
For more information regarding individual wargames, visit  
http://www.overthewire.org/wargames/  
  
For support, questions or comments, contact us on discord or IRC.  
  
Enjoy your stay!  
  
bandit5@bandit:~$ find inhere -type f -size 1033c ! -executable  
inhere/maybehere07/.file2  
bandit5@bandit:~$ cat inhere/maybehere07/.file2  
pXa26xHMMaC25vDotA4r9EgZku1OeSBW  
  
bandit5@bandit:~$ exit  
logout  
Connection to bandit.labs.overthewire.org closed.  
  
AKINLOVE@DESKTOP-9R4N1SI MINGW64 ~/Documents/boycode/overthewiregames (main)  
$ ssh bandit6@bandit.labs.overthewire.org -p 2220  
  
[b]andit6[0]  
  
This is an OverTheWire game server.  
More information on http://www.overthewire.org/wargames  
  
backend: gibbon-1  
bandit6@bandit.labs.overthewire.org's password:
```

Password Bmnnvf82KzQ1fxgAI2d1zYbr1u9pr3E3

Level 7 → 8

The password is in data.txt, on the same line as the word millionth. Because the file is large, grep pulls out just the matching line.

```
grep millionth data.txt
```

```
bandit7@bandit:~$ find / -type f -user bandit7 -group bandit6 -size 33c 2>/dev/null -exec cat {} \;
Bnnvf82KzQlFvgAI2dizYbr1u9pr3E3
bandit6@bandit:~$ exit
logout
Connection to bandit.labs.overthewire.org closed.
AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ ssh bandit7@bandit.labs.overthewire.org -p 2220

bandit7@bandit:~$

This is an OverTheWire game server.
More information on http://www.overthewire.org/wargames

backend: gibson-1
bandit7@bandit.labs.overthewire.org's password:

Welcome to OverTheWire!

If you find any problems, please report them to the #wargames channel on
discord or IRC.
```

Password VR1ljMayciFxbnUokuQmJFw6QC9VKtub

Level 8 → 9

The password is the only line in `data.txt` that occurs exactly once. `uniq -u` prints only non-repeated lines, but it compares adjacent lines only, so the input must be sorted first.

```
sort data.txt | uniq -u
```

```

bandit8@bandit: ~
bandit7@bandit:~$ ls
data.txt
bandit7@bandit:~$ grep millionth data.txt
millionth      VR1ljMayciFxbnUokuQmJFw6QC9VKtub
bandit7@bandit:~$ exit
logout
Connection to bandit.labs.overthewire.org closed.

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ ssh bandit8@bandit.labs.overthewire.org -p 2220

      [B] [O] [N] [E]
    [B] [O] [N] [E]

      This is an OverTheWire game server.
      More information on http://www.overthewire.org/wargames

backend: gibbon-1
bandit8@bandit.labs.overthewire.org's password:

      [B] [O] [N] [E]
    [B] [O] [N] [E]

      www. ver he ire.org

Welcome to OverTheWire!

```

Password EjmOSvuAu7sGAHqHVcBDPirRe9T03kx1

Level 9 → 10

The password is one of a few human-readable strings in a mostly-binary `data.txt`, preceded by several `=` characters. `strings` extracts printable text, and `grep` narrows it to the lines with equals signs.

```
strings data.txt | grep ===
```


[illegible]

Password pYf0Y6HwUsDj5rL9UvyhU7MCmv8vN5Ro

Level 11 → 12

Every letter in `data.txt` has been rotated 13 positions (ROT13). `tr` remaps each alphabet range onto itself shifted by 13 to undo it.

```
cat data.txt | tr 'A-Za-z' 'N-ZA-Mn-za-m'
```



```
cat data
```

[illegible]

Password qYQIhOBPR8zR61qxYqX45quvihF2uzk

Level 13 → 14

Instead of a password, this level provides an SSH private key (`sshkey.private`) that logs in as `bandit14`. The current version of the server blocks level-to-level logins over localhost, so the key is saved on the local machine and used to connect to the real host. Once in as `bandit14`, the password is read from the usual location.

```
ssh -i sshkey.private bandit14@bandit.labs.overthewire.org -p 2220
cat /etc/bandit_pass/bandit14
```

```

bandit13@bandit: ~
data5.bin: POSIX tar archive (GNU)
bandit12@bandit:/tmp/bandit12work$ mv data5.bin data && file data
data: POSIX tar archive (GNU)
bandit12@bandit:/tmp/bandit12work$ mv data data.tar && tar xf data.tar
bandit12@bandit:/tmp/bandit12work$ ls
data.tar data.txt data6.bin
bandit12@bandit:/tmp/bandit12work$ mv data6.bin data && file data
data: bzip2 compressed data, block size = 900k
bandit12@bandit:/tmp/bandit12work$ mv data data.bz2 && bzip2 -d data.bz2
bandit12@bandit:/tmp/bandit12work$ file data
data: POSIX tar archive (GNU)
bandit12@bandit:/tmp/bandit12work$ mv data data.tar && tar xf data.tar
bandit12@bandit:/tmp/bandit12work$ ls
data.tar data.txt data8.bin
bandit12@bandit:/tmp/bandit12work$ file data8.bin
data8.bin: cannot open `data8.bin' (No such file or directory)
bandit12@bandit:/tmp/bandit12work$ ls
data.tar data.txt data8.bin
bandit12@bandit:/tmp/bandit12work$ mv data8.bin data && file data
data: gzip compressed data, was "data9.bin", last modified: Wed Jun 24 14:58:46 2026, max compression, from Unix, o
bandit12@bandit:/tmp/bandit12work$ mv data data.gz && gzip -d data.gz
bandit12@bandit:/tmp/bandit12work$ cat data
The password is qQYQiHOBPR8zR61qxYqX45quvihF2uzk
bandit12@bandit:/tmp/bandit12work$ xit
Command 'xit' not found, did you mean:
  command 'xwit' from deb xwit (3.4-16.1)
  command 'wit' from deb wit (3.01a-5.3)
  command 'xir' from deb libxir-utils (2.5-2build1)
  command 'vit' from deb vit (2.3.3-1build1)
  command 'git' from deb git (1:2.53.0-1ubuntu1)
Try: apt install <deb name>
bandit12@bandit:/tmp/bandit12work$ exit
logout
Connection to bandit.labs.overthewire.org closed.

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ ssh bandit13@bandit.labs.overthewire.org -p 2220

```

Password aaWecNkG4FhxJQxz07uiwzVP6bJiYS65

Level 14 → 15

The bandit15 password is obtained by submitting the current (bandit14) password to a service listening on port 30000 of localhost. nc opens the connection and returns the reply.

```
cat /etc/bandit_pass/bandit14 | nc localhost 30000
```



```

bandit17@bandit: ~
Permissions for 'bandit17key' are too open.
It is required that your private key files are NOT accessible by others.
This private key will be ignored.
Load key "bandit17key": bad permissions
bandit17@bandit.labs.overthewire.org's password:

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ icacls bandit17key /inheritance:r /grant:r "$env:USERNAME:R"
Invalid parameter ":USERNAME:R"

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ icacls bandit17key /inheritance:r /grant:r "$env:AKINLOYE:R"
Invalid parameter ":AKINLOYE:R"

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ icacls bandit17key //inheritance:r //grant:r "AKINLOYE:R"
processed file: bandit17key
Successfully processed 1 files; Failed processing 0 files

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ ssh -i bandit17key bandit17@bandit.labs.overthewire.org -p 2220

  _ _ _ _ _
 | | | | |
 | | | | |
 | | | | |
 | | | | |

This is an OverTheWire game server.
More information on http://www.overthewire.org/wargames

backend: gibson-1

  _ _ _ _ _
 | | | | |
 | | | | |
 | | | | |
 | | | | |

```

Password OQxXZjELndr90zuh0TDYBEomI0SZITXI

Level 18 → 19

The .bashrc for bandit18 logs the user out immediately on an interactive login. Passing a command directly to SSH runs it before the shell profile can force the disconnect.

```
ssh bandit18@bandit.labs.overthewire.org -p 2220 cat readme
```

```

For support, questions or comments, contact us on discord or IRC.

Enjoy your stay!

Byebye !
Connection to bandit.labs.overthewire.org closed.

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ ssh bandit18@bandit.labs.overthewire.org -p 2220 cat readme

      _ _ _ _ _
     | | | | |
    _|_|_|_|_|_
   | | | | | |
  _|_|_|_|_|_|
 | | | | | | |
_|_|_|_|_|_|_|

This is an OverTheWire game server.
More information on http://www.overthewire.org/wargames

backend: gibson-1
bandit18@bandit.labs.overthewire.org's password:
Permission denied, please try again.
bandit18@bandit.labs.overthewire.org's password:
Permission denied, please try again.
bandit18@bandit.labs.overthewire.org's password:

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ ssh bandit18@bandit.labs.overthewire.org -p 2220 "cat readme" 2>/dev/null | tail -5
bandit18@bandit.labs.overthewire.org's password:
KpsOfPkcP7i1F1IEk2QEjyt6dw8dxZI

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ ssh bandit19@bandit.labs.overthewire.org -p 2220 "cat readme" 2>/dev/null | tail -5
bandit19@bandit.labs.overthewire.org's password:

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ ssh bandit19@bandit.labs.overthewire.org -p 2220

```

Password KpsOfPkcP7i1F1IEk2QEjyt6dw8dxZI

Level 19 → 20

A setuid binary, bandit20-do, runs commands as bandit20. Running the binary with no arguments shows its usage; pointing it at the password file reads bandit20's password.

```
./bandit20-do cat /etc/bandit_pass/bandit20
```

```

* pwntools (https://github.com/Gallopsled/pwntools)
* radare2 (http://www.radare.org/)

--[ More information ]--

For more information regarding individual wargames, visit
http://www.overthewire.org/wargames/

For support, questions or comments, contact us on discord or IRC.

Enjoy your stay!

bandit19@bandit:~$ ./bandit20-do
Run a command as another user.
Example: ./bandit20-do whoami
bandit19@bandit:~$ ./bandit20-do cat /etc/bandit_pass/bandit20
4pIjcunZ0fK2vmp3IwfG8Vf7VhxD6p0A
bandit19@bandit:~$ exit
logout
Connection to bandit.labs.overthewire.org closed.

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ ssh bandit20@bandit.labs.overthewire.org -p 2220

      b a n d i t 2 0

      This is an OverTheWire game server.
      More information on http://www.overthewire.org/wargames

backend: gibbon-1
bandit20@bandit.labs.overthewire.org's password:

```

Password 4pIjcunZ0fK2vmp3IwfG8Vf7VhxD6p0A

Level 20 → 21

The suconnect binary connects to a port you specify, reads one line, and — if it matches the bandit20 password — returns the bandit21 password. A listener serving the current password is set up first (backgrounded), then suconnect is pointed at that port.

```

echo '<bandit20 password>' | nc -l -p 1337 &
./suconnect 1337

```

```

* gdbinit (https://github.com/gdbinit/Gdbinit) in /opt/gdbinit/
* pwntools (https://github.com/Gallopsled/pwntools)
* radare2 (http://www.radare.org/)

--[ More information ]--

For more information regarding individual wargames, visit
http://www.overthewire.org/wargames/

For support, questions or comments, contact us on discord or IRC.

Enjoy your stay!

bandit20@bandit:~$ echo '4pIjcunZ0fK2vmp3IwfG8Vf7VhxD6pOA' | nc -l -p 1337 &
[1] 37
bandit20@bandit:~$ ./suconnect 1337
Read: 4pIjcunZ0fK2vmp3IwfG8Vf7VhxD6pOA
Password matches, sending next password
bW9kBv5WC3P4yoDyf12LSdGuNz5ka6hY
[1]+  Done                  echo '4pIjcunZ0fK2vmp3IwfG8Vf7VhxD6pOA' | nc -l -p 1337
bandit20@bandit:~$ exit
logout
Connection to bandit.labs.overthewire.org closed.

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ ssh bandit21@bandit.labs.overthewire.org -p 2220

bandit

```

Password bW9kBv5WC3P4yoDyf12LSdGuNz5ka6hY

Level 21 → 22

A cron job runs on a schedule. Its configuration in `/etc/cron.d/` points to a script that writes the bandit22 password into a file under `/tmp`. Reading that file gives the password.

```

cat /etc/cron.d/cronjob_bandit22
cat /usr/bin/cronjob_bandit22.sh
cat /tmp/t706lds9S0RqQh9aMcz6ShpAoZKF7fgv

```



```

    rm -rf "$i"
fi
donebandit23@bandit:~$ mkdir -p /tmp/mywork23 && cd /tmp/mywork23
bandit23@bandit:/tmp/mywork23$ cat > run.sh << 'EOF'
> #!/bin/bash
> cat /etc/bandit_pass/bandit24 > /tmp/mywork23/pass.txt
> EOF
bandit23@bandit:/tmp/mywork23$ touch /tmp/mywork23/pass.txt
bandit23@bandit:/tmp/mywork23$ chmod 777 /tmp/mywork23 /tmp/mywork23/pass.txt
bandit23@bandit:/tmp/mywork23$ chmod +x run.sh
bandit23@bandit:/tmp/mywork23$ cp run.sh /var/spool/bandit24/foo/
bandit23@bandit:/tmp/mywork23$ cat /tmp/mywork23/pass.txt
hVQMk3lJNsmQ7VF3ubyrNNBom7B0gVXv
bandit23@bandit:/tmp/mywork23$ exit
logout
Connection to bandit.labs.overthewire.org closed.

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ ssh bandit24@bandit.labs.overthewire.org -p 2220

```

```

bandit

```

Password hVQMk3lJNsmQ7VF3ubyrNNBom7B0gVXv

Level 24 → 25

A daemon on port 30002 returns the bandit25 password when given the bandit24 password followed by a secret 4-digit PIN. There is no shortcut but to try all 10000 combinations — and it can be done over a single connection. A loop generates every "password PIN" line, and the whole batch is piped to the daemon at once.

```

for i in $(seq -w 0000 9999); do echo "<bandit24 password> $i"; done > attempts.txt
cat attempts.txt | nc localhost 30002 | grep -v "Wrong"

```

```

hVQMk3lJNsmQ7VF3ubyrNNBom7BOgVXv
Wrong! Please enter the correct current password and pincode. Try again.
^C
bandit24@bandit:~$ mkdir -p /tmp/bf24 && cd /tmp/bf24
0000 9999); do echo "hVQMk3lJNsmQ7VF3ubyrNNBom7BOgVXv $i"; done > attempts.txt
cat attempts.txt | bandit24@bandit:/tmp/bf24$ for i in $(seq -w 0000 9999); do echo "hVQMk3lJ
nc localhost 30002 | grep -v "Wrong"bandit24@bandit:/tmp/bf24$ cat attempts.txt | nc localhos
I am the pincode checker for user bandit25. Please enter the password for user bandit24 and t
Correct!
The password of user bandit25 is SoHfqMOEqIX2IYKVciZxvgpR9a2Djx4P

bandit24@bandit:/tmp/bf24$ exit
logout
Connection to bandit.labs.overthewire.org closed.

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ ssh bandit25@bandit.labs.overthewire.org -p 2220

```

Password SoHfqMOEqIX2IYKVciZxvgpR9a2Djx4P

Level 25 → 26

The shell for bandit26 is not bash — it is showtext, which pipes a text file through more and then exits. The trick is to make the terminal window very short so more has to pause instead of quitting. At the pause, pressing v opens vim, and from vim a normal shell can be launched.

```

# shrink the terminal to ~4 lines, then connect with the bandit26 key
ssh -i bandit26.sshkey bandit26@bandit.labs.overthewire.org -p 2220
# at the --More-- pause, press v to open vim, then:
:set shell=/bin/bash
:shell
cat /etc/bandit_pass/bandit26

```

```

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ ssh -i bandit26key bandit26@bandit.labs.overthewire.org -p 2220

```



```

This is an OverTheWire game server.
More information on http://www.overthewire.org/wargames

backend: gibson-1

```

Password jHdv2ELQhT22BkprMNDjybZDAkw1zeBJ

Level 26 → 27

From the bandit26 shell opened via the vim break-out, another setuid helper bandit27-do runs commands as bandit27, exactly like bandit20-do earlier. It reads bandit27's password directly.

```
./bandit27-do cat /etc/bandit_pass/bandit27
```



The screenshot shows a terminal window with a black background and white text. At the top, there is a large ASCII art logo for 'OverTheWire'. Below it, the text 'Connection to bandit.labs.overthewire.org closed.' is displayed. The user's prompt is 'AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)'. The user has entered the command '\$ ssh bandit27@bandit.labs.overthewire.org -p 2220'. The terminal shows the 'OverTheWire' logo again, followed by the text 'This is an OverTheWire game server. More information on http://www.overthewire.org/wargames'. The prompt 'backend: gibson-1' is shown, followed by 'bandit27@bandit.labs.overthewire.org's password:'. At the bottom, there is another large ASCII art logo for 'OverTheWire'.

Password STJLJBRRphMxKB392CT4i0r5CbzPU9ER

Level 27 → 28

The remaining levels use git. The repository is cloned from the local machine (localhost logins are blocked), authenticating with the bandit27 password. The bandit28 password is written plainly in the README.

```
git clone ssh://bandit27-git@bandit.labs.overthewire.org:2220/home/bandit27-git/repo
cd repo && cat README
```



```

commit 13bbc4d2414ffe0439b8ee4f5e5c2949780cf4b3
Author: Morla Porla <morla@overthewire.org>
Date:   Wed Jun 24 14:59:06 2026 +0000

    add missing data

commit f3334fbccbf9446a6af88a3c71021c2f57163322
Author: Ben Dover <noone@overthewire.org>
Date:   Wed Jun 24 14:59:06 2026 +0000

    initial commit of README.md

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames/repo28 (master)
$ git show 13bbc4d2414ffe0439b8ee4f5e5c2949780cf4b3
commit 13bbc4d2414ffe0439b8ee4f5e5c2949780cf4b3
Author: Morla Porla <morla@overthewire.org>
Date:   Wed Jun 24 14:59:06 2026 +0000

    add missing data

diff --git a/README.md b/README.md
index 7ba2d2f..42331d9 100644
--- a/README.md
+++ b/README.md
@@ -4,5 +4,5 @@ Some notes for level29 of bandit.
 ## credentials

- username: bandit29
-- password: <TBD>
+- password: Em7eGtqaMySwNFjCpwzzHhLhospOcdt0

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames/repo28 (master)
$ ssh bandit29@bandit.labs.overthewire.org -p 2220

bandit

```

Password Em7eGtqaMySwNFjCpwzzHhLhospOcdt0

Level 29 → 30

On the master branch the README shows a placeholder ("no passwords in production"). The real password lives on a separate branch, found by listing all branches and checking out the development one.

```

git clone ssh://bandit29-git@bandit.labs.overthewire.org:2220/home/bandit29-git/repo
cd repo && git branch -a
git checkout dev && cat README.md

```

```

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames/repo29 (master)
$ git branch -a
* master
  remotes/origin/HEAD -> origin/master
  remotes/origin/dev
  remotes/origin/master
  remotes/origin/spl0its-dev

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames/repo29 (master)
$ git checkout dev
branch 'dev' set up to track 'origin/dev'.
Switched to a new branch 'dev'

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames/repo29 (dev)
$ cat README.md
# Bandit Notes
Some notes for bandit30 of bandit.

## credentials

- username: bandit30
- password: jq9Dfg2rXsfYsWMgFuKlXhphjdH7USgX

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames/repo29 (dev)
$ ssh bandit30@bandit.labs.overthewire.org -p 2220

  _ _ _ _ _
 | b | a | n | d | i | t |
 | _ | _ | _ | _ | _ |

```

Password jq9Dfg2rXsfYsWMgFuKlXhphjdH7USgX

Level 30 → 31

The README and branches lead nowhere here. The password is hidden in a git tag named secret.

```

git clone ssh://bandit30-git@bandit.labs.overthewire.org:2220/home/bandit30-git/repo
cd repo && git tag
git show secret

```

```
remote: Total 4 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (4/4), done.

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ cd repo30


AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames/repo30 (master)
$ cat README.md
just an empty file... muahaha

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames/repo30 (master)
$ git tag
secret

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames/repo30 (master)
$ git show secret
82Nkymb1pGBYmIXG6ZQ8YldBYstHpFUf

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames/repo30 (master)
$ cd ~/Documents/boycode/overthewiregames

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames (main)
$ git clone ssh://bandit31-git@bandit.labs.overthewire.org:2220/home/bandit31-git/repo repo31
Cloning into 'repo31'...
```

The logo for the game 'Bandit' is displayed in a stylized, blocky font. The letters are composed of a grid of small squares, giving it a digital or pixelated appearance. The word 'bandit' is written in lowercase.

This is an OverTheWire game server.
More information on <http://www.overthewire.org/wargames>

Password 82Nkymb1pGBYmIXG6ZQ8YldBYstHpFUf

Level 31 → 32

This level reverses the flow: a file must be *pushed* to the repository. The README asks for a file `key.txt` containing the line "May I come in?" pushed to master. A `.gitignore` blocks `*.txt`, so the file is force-added. The server's pre-receive hook prints the next password (and then declines the push, which is expected).

```
git clone ssh://bandit31-git@bandit.labs.overthewire.org:2220/home/bandit31-git/repo
cd repo && echo "May I come in?" > key.txt
git add -f key.txt && git commit -m "add key"
git push origin master
```



```
Enjoy your stay!

WELCOME TO THE UPPERCASE SHELL
>> $0
$ whoami
bandit33
$ cat /etc/bandit_pass/bandit33
u4P2CyP0wPGLe94RdD9Uo2FxFwvnFswM
$ ^C
$ exit
>> exit
sh: 1: EXIT: Permission denied
>>
>> ^CConnection to bandit.labs.overthewire.org closed.

AKINLOYE@DESKTOP-9R4NISI MINGW64 ~/Documents/boycode/overthewiregames/repo31 (master)
$ _
```

Password u4P2CyP0wPGLe94RdD9Uo2FxFwvnFswM

Password Summary

Level 0 → 1 6y2kwnwK6grgvwvpvLaa2T1cpFEK0hNR
Level 1 → 2 PK8fYLZg2hnHSz83p1BL1iEPKdD3QToB
Level 2 → 3 7ZZ2LFrykP2zEyvB14m3c1cL7tGYJPME
Level 3 → 4 xzTXq1rDJQVVAzdv5cHq1TQytTWufAMq
Level 4 → 5 6C7h9GD8M6ai5nr7wo1RonrzFjj9yIrG
Level 5 → 6 pXa26xhMWaC2SvDotA4r9EgZku10eSBW
Level 6 → 7 Bmnnvf82KzQ1fxgAI2d1zYbr1u9pr3E3
Level 7 → 8 VR1ljMayciFxbnUokuQmJFw6QC9VKtub
Level 8 → 9 EjmOSvuAu7sGAHqHVcBDPirRe9T03kx1
Level 9 → 10 B0s2khmbT9u0geKu0oVGW3JZKhndE3BG
Level 10 → 11 pYf0Y6HwUsDj5rL9UvyhU7MCmv8vN5Ro
Level 11 → 12 GROozWPO8QyN0mGrjUkID0WCYkZiQxrN
Level 12 → 13 qQYQiHOBPR8zR61qxYqX45quvihF2uzk
Level 13 → 14 aaWecNkG4FhxJQxz07uiwzVP6bJiYS65
Level 14 → 15 pbLYuZtTg4MgaqfJx8jbA9gKKGqM68A7
Level 15 → 16 kS0Hf0u5HiXFwKMKFqXvPd0TNGGa0X8V
Level 16 → 17 (RSA private key → login as bandit17)
Level 17 → 18 OQxXZjELndr90zuh0TDYBEomI0SZITXI
Level 18 → 19 KpsOfPkcp7i1F1IEk2QEjyt6dw8dxZI
Level 19 → 20 4pIjcunZ0fK2vmp3IwfG8Vf7VhxD6p0A
Level 20 → 21 bW9kBv5WC3P4yoDyf12LSdGuNz5ka6hY
Level 21 → 22 RYVux2rHEm9tiXHmLFzuR7Vhx6AZQMEz
Level 22 → 23 gKXDTAXnIz30BxiPjRZ2uqutU1PZrBsw
Level 23 → 24 hVQMk31JNsmQ7VF3ubyrNNBom7B0gVXv
Level 24 → 25 SoHfqMOEqIX2IYKVciZxvgrR9a2Djx4P
Level 25 → 26 jHdv2ELQhT22BkprMNDjybZDAkw1zeBJ
Level 26 → 27 STJLJBRRphMxKB392CT4iOr5CbzPU9ER
Level 27 → 28 y8Yd2ssKcpHpud7UvOS0xwamRMzIGIeQ
Level 28 → 29 Em7eGtqaMySwNFjCpwzzHhLhosp0cdt0
Level 29 → 30 jq9Dfg2rXsfYsWMgFuK1XhphjdH7USgX
Level 30 → 31 82Nkymb1pGBYmIXG6ZQ8YldBYstHpfUf
Level 31 → 32 pWuj5jBQ6IgV0NXwiH6g1pXRF8S1YvbT
Level 32 → 33 u4P2CyPOwPGL94RdD9Uo2FxFwvnFswM

Bandit complete.