

GCAM Training 2 Walkthrough

June 28, 2022



PNNL is operated by Battelle for the U.S. Department of Energy





Contents

- Links & Pre-requisites
- Installation
- Folder structure
- Inputs
- Model run
- Outputs



Links & Pre-requisites

Links

- GCAM Official Documentation: http://jgcri.github.io/gcam-doc/
- GCAM User Guide: http://jgcri.github.io/gcam-doc/user-guide.html
- GCAM github page: https://github.com/JGCRI/gcam-core
- GCAM datasystem R package: https://github.com/JGCRI/gcamdata
- ModelInterface: https://github.com/JGCRI/modelinterface
- Webinar 1 Link: https://register.gotowebinar.com/recording/2893695101765080835


Pre-requisites

- 8 GB RAM
- Install Java 64 https://www.java.com/en/download/windows-64bit.jsp
- Install R https://cran.r-project.org/ and R Studio https://www.rstudio.com
- Install Windows XML Maker http://symbolclick.com/xmlmarker_1_1_1_setup.exe




Installation

- Unzip compiled version provided OR
- Download release version: https://github.com/JGCRI/gcam-core/releases

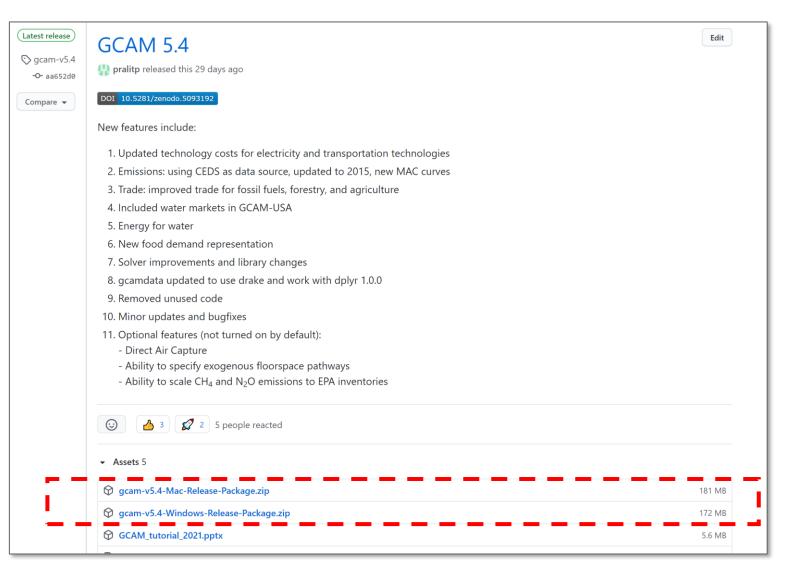





Folder Structure

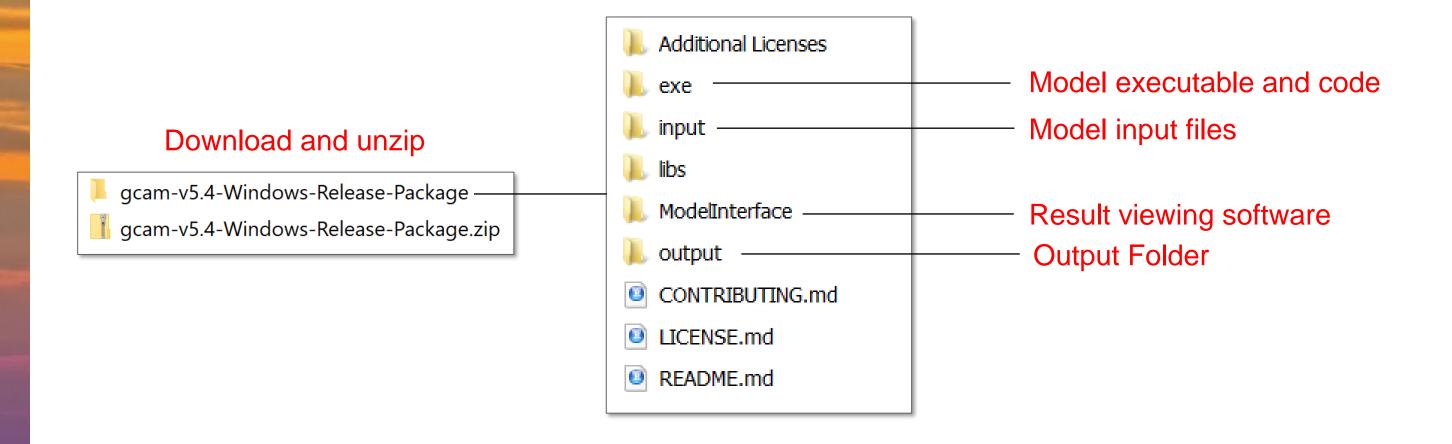



Input Files

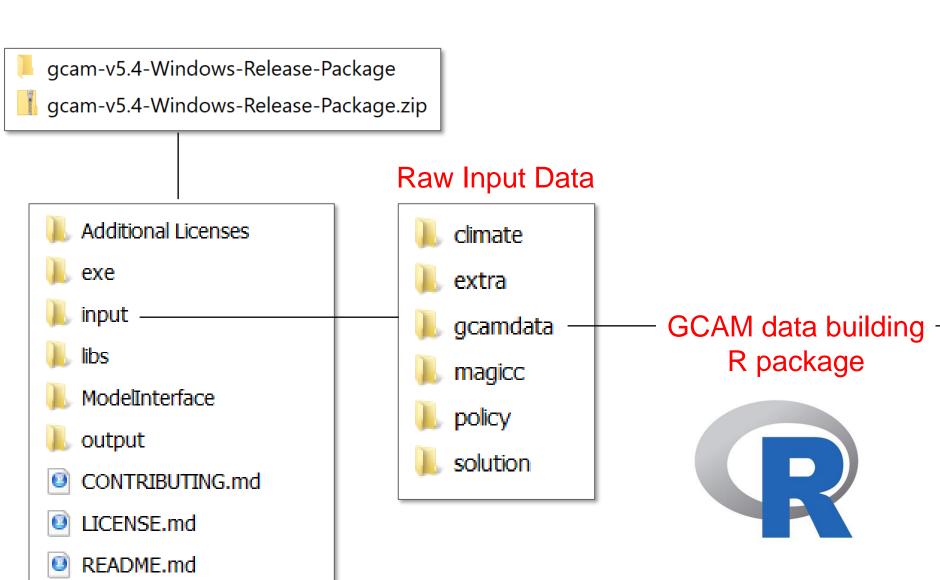

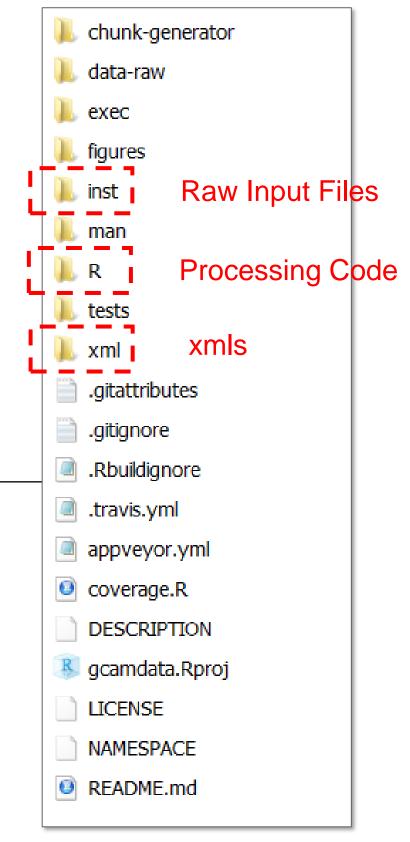






Input Files R data system (Raw Input Data)


./gcamFolder/input/gcamdata

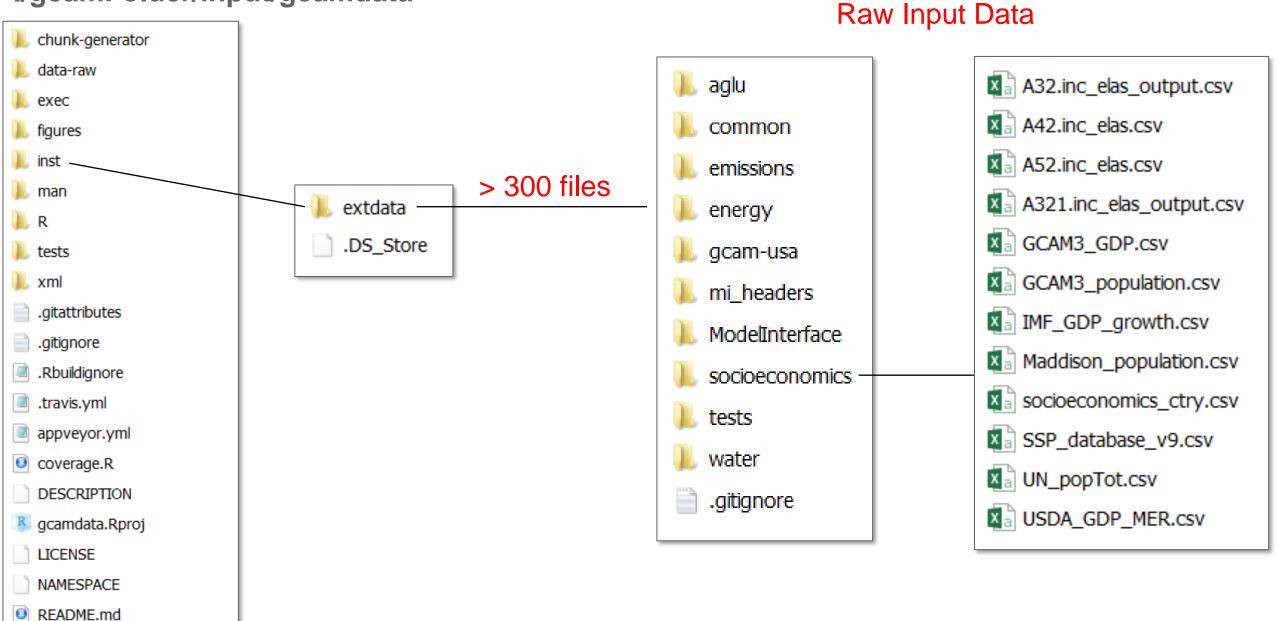



Input Files R data system (Data processing functions)

./gcamFolder/input/gcamdata

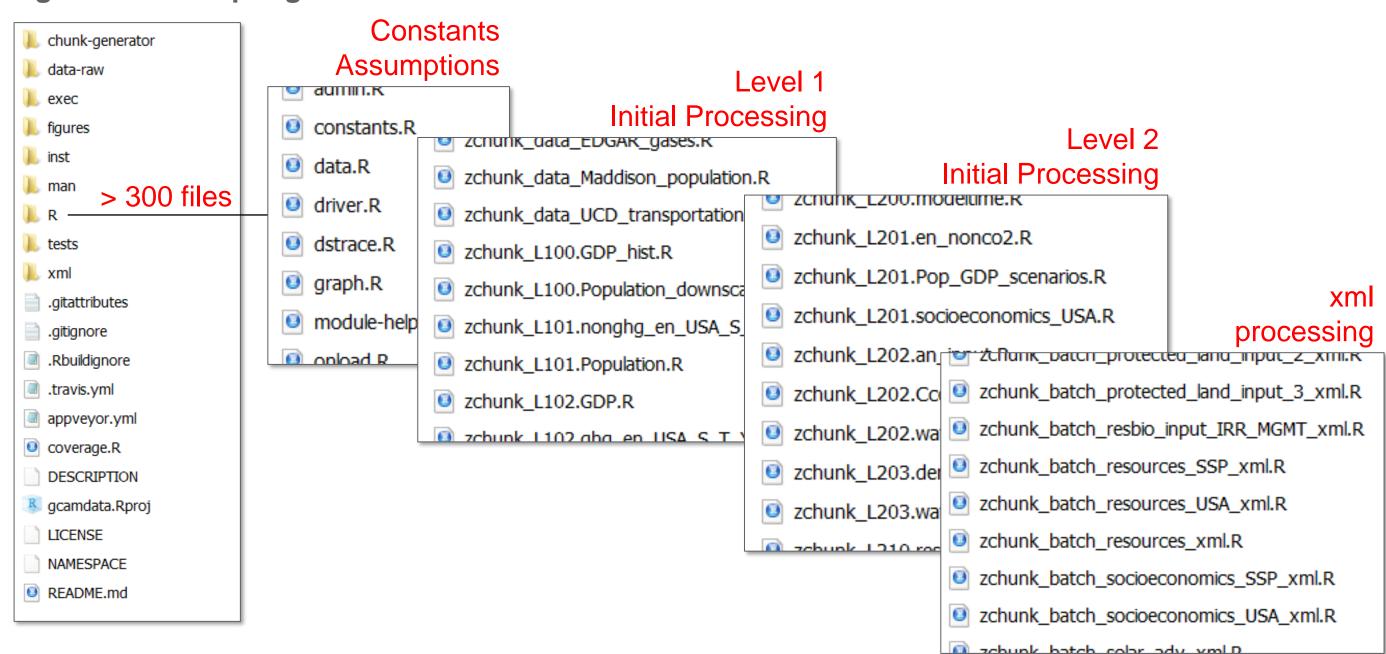




README.md


Input Files R data system (XMLs)

socioeconomics_gSSP2.xml

socioeconomics aSSD3 vml

XML nested structure

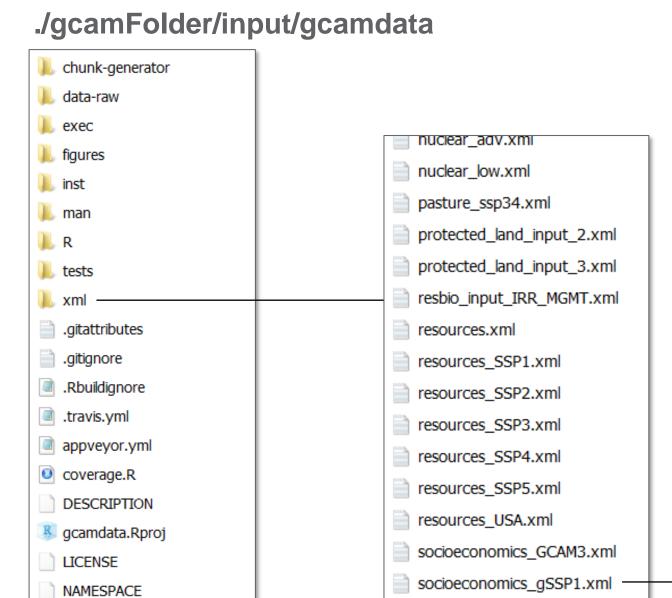


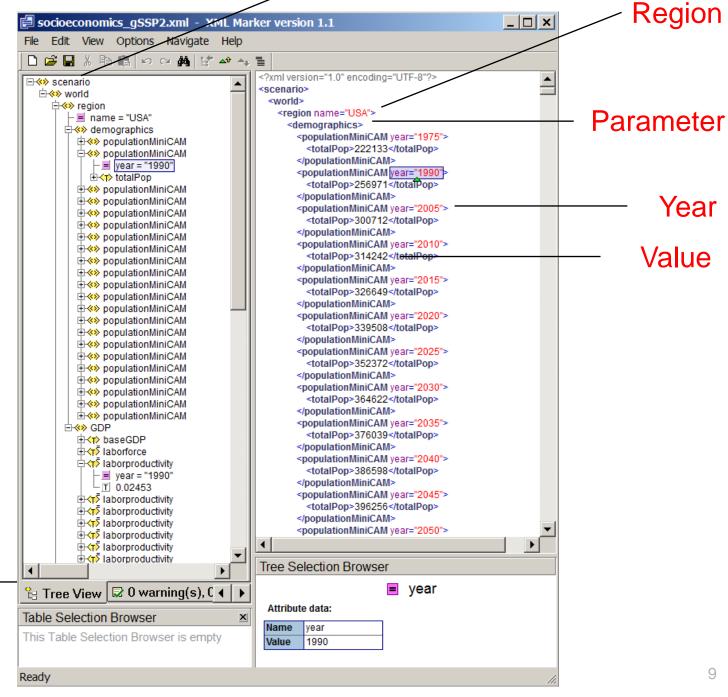



Input Files - Example Raw Data to XML

Raw Input Data




# File: UN_	_popTot.c	SV					
# Title: UN	l population	on 1950-2	010 and proje	ected 2010-	2100		
# Units: th	ousands						
# Descripti	ion: UN p	opulation	data by coun	try—histoı	rical and pro	jected thr	ough 2100
# Source: I	http://esa	.un.org/u	npd/wpp/Exc	el-Data/por	oulation.htr	n	
# —							
# Column	types: ccc	cin					
#							
Country	Region	Sex	Scenario	Year	Value		
AFG	sas	M+F	EST	1950	8151.455		
AFG	sas	M+F	EST	1951	8276.82		
AFG	sas	M+F	EST	1952	8407.148		
AFG	sas	M+F	EST	1953	8542.906		
AFG	sas	M+F	EST	1954	8684.494		
AFG	sas	M+F	EST	1955	8832.253		
AFG	sas	M+F	EST	1956	8986.449		
AFG	sas	M+F	EST	1957	9147.286		
AEG		MIE	ECT	1050	021/ 015		

R processing



XML Generation

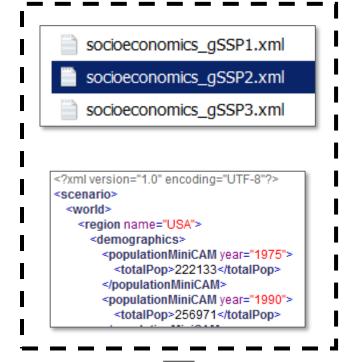




To GCAM configuration.xml



Model Run – exe folder

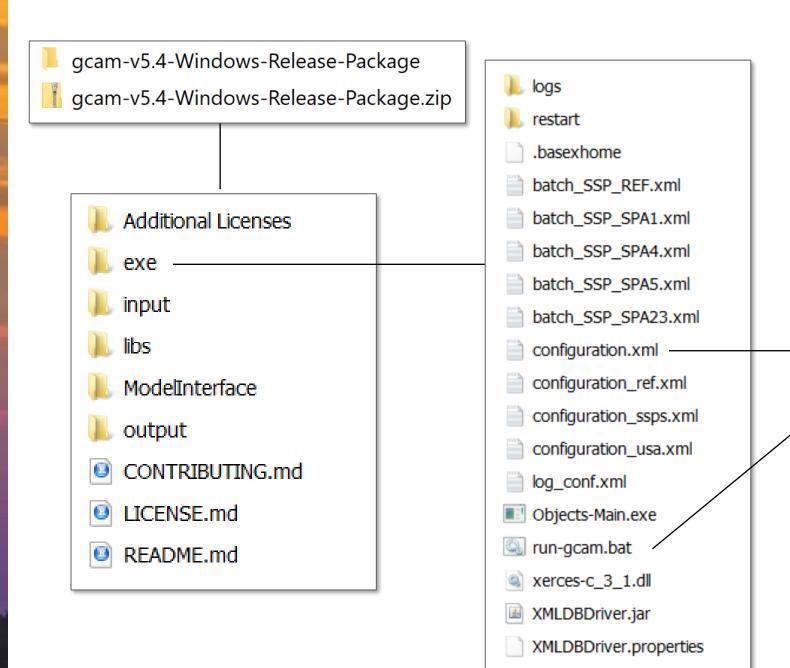

```
<?xml version="1.0" encoding="UTF-8"?>
<Configuration>
 <Files>
   <Value name="xmlInputFileName">../input/gcamdata/xml/modeltime.xml</Value>
   <Value name="BatchFileName">batch_ag.xml</Value>
   <Value name="policy-target-file">../input/policy/forcing_target_4p5.xml</Value>
   <Value name="GHGInputFileName">../input/magicc/inputs/input_gases.emk</Value>
   <Value write-output="1" append-scenario-name="0" name="xmldb-location">../output/database basexdb</Value>
   <Value write-output="1" append-scenario-name="0" name="restart">./restart/restart</Value>
   <Value write-output="1" append-scenario-name="1" name="xmlDebugFileName">debug.xml</Value>
   <Value write-output="1" append-scenario-name="0" name="climatFileName">gas.emk</Value>
   <Value write-output="1" append-scenario-name="1" name="costCurvesOutputFileName">cost_curves.xml</Value>
   <Value write-output="1" append-scenario-name="0" name="batchCSVOutputFile">batch-csv-out.csv</Value>
   <Value write-output="0" append-scenario-name="0" name="supplyDemandOutputFileName">SDCurves.csv</Value>
   <Value write-output="0" append-scenario-name="0" name="flow-graph">gcam-flow-graph.dot</Value>
   <Value write-output="0" append-scenario-name="0" name="dependencyGraphName">DependencyGraph.dot</Value>
   <Value write-output="0" append-scenario-name="0" name="landAllocatorGraphName">LandAllocatorGraph.dot</Value>
  </Files>
  <ScenarioComponents>
   <Value name = "climate">../input/gcamdata/xml/hector.xml</Value>
   <Value name = "interest_rate">../input/gcamdata/xml/interest_rate.xml</Value>
   <Value name = "socioeconomics">../input/gcamdata/xml/socioeconomics_gSSP2.xml</Value>
```

Configuration file

Run GCAM file

```
REM OF It is not 64-bit. In this case an error mess

IF DEFINED JAVA_HOME (

REM Update the PATH to be able to find the Java dlls

SET PATH=%JAVA_HOME%\bin;%JAVA_HOME%\bin\server

REM Run GCAM


Objects-Main.exe -C configuration.xml

pause
```



Model Run – configuration.xml

XML Generation

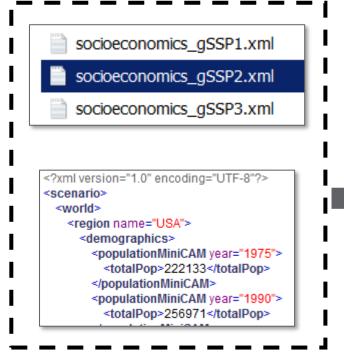

configuration.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<Configuration>
 <Files>
   <Value name="xmllnputFileName">../input/gcamdata/xml/modeltime.xml</Value>
   <Value name="BatchFileName">batch_ag.xml</Value>
   <Value name="policy-target-file">../input/policy/forcing_target_4p5.xml</Value>
   <Value name="GHGInputFileName">../input/magicc/inputs/input_gases.emk</Value>
   <Value write-output="1" append-scenario-name="0" name="xmldb-location">../output/database_basexdb</Value>
   <Value write-output="1" append-scenario-name="0" name="restart">,/restart/restart</Value>
   <Value write-output="1" append-scenario-name="1" name="xmlDebugFileName">debug.xml</Value>
   <Value write-output="1" append-scenario-name="0" name="climatFileName">gas.emk</Value>
   <Value write-output="1" append-scenario-name="1" name="costCurvesOutputFileName">cost_curves.xml</Value>
   <Value write-output="1" append-scenario-name="0" name="batchCSVOutputFile">batch-csv-out.csv</Value>
   <Value write-output="0" append-scenario-name="0" name="supplyDemandOutputFileName">SDCurves.csv</Value>
   <Value write-output="0" append-scenario-name="0" name="flow-graph">gcam-flow-graph.dot</Value>
   <Value write-output="0" append-scenario-name="0" name="dependencyGraphName">DependencyGraph.dot</Value>
   <Value write-output="0" append-scenario-name="0" name="landAllocatorGraphName">LandAllocatorGraph.dot</Value>
 <ScenarioComponents>
   <Value name = "climate">../input/gcamdata/xml/hector.xml</Value>
   --Value-name = "<del>inte</del>rest-rate"-../inpu/gcamdata/xm/<del>/int</del>erest-rate.xml-vvalu
   <Value name = "socioeconomics">../input/gcamdata/xml/socioeconomics_gSSP2.xml</Value</p>
   <Value name = "resources">../input/gcamdata/xml/resources.xml</Value>
   <Value name = "energy_supply">../input/qcamdata/xml/en_supply.xml</Value>
   <Value name = "energy_transformation">../input/gcamdata/xml/en_transformation.xml</Value>
   <!--Value name = "electricity">../input/gcamdata/xml/electricity.xml</Value-->
   <Value name = "elec_water_base">../input/gcamdata/xml/electricity_water.xml</Value>
   <Value name = "heat">../input/gcamdata/xml/heat.xml</Value>
   <Value name = "hydrogen">../input/gcamdata/xml/hydrogen.xml</Value>
   <Value name = "energy_distribution">../input/gcamdata/xml/en_distribution.xml</Value>
   <Value name = "industry">../input/gcamdata/xml/industry.xml</Value>
   <Value name = "industry_income_elas">../input/gcamdata/xml/industry_incelas_gssp2.xml</Value>
   <Value name = "cement">../input/gcamdata/xml/cement.xml</Value>
   <Value name = "cement_income_elas">../input/gcamdata/xml/cement_incelas_gssp2.xml</Value>
   <Value name = "fertilizer_energy">../input/gcamdata/xml/en_Fert.xml</Value>
   <Value name = "hddcdd">../input/gcamdata/xml/HDDCDD constdd no GCM.xml</Value>
   <Value name = "building">../input/gcamdata/xml/building det.xml</Value>
   <Value name = "transportation">../input/gcamdata/xml/transportation UCD CORE.xml</Value>
   <Value name = "carbon_content">../input/gcamdata/xml/Ccoef.xml</Value>
```

Setup Key Model Inputs & Options

- Output database location
- Output database name
- Input xml list
- Scenario Name
- BatchMode
- Number of Periods

http://jgcri.github.io/gcam-doc/user-guide.html



Model Run - Configuration

Output Database Name and Location

```
<'?xml version="1.0" encodina="UTF-8"
<Configuration>
    <Files>
        <Value name="xmllnputFileName">../input/gcamdata/xml/modeltime.xml</Value>
        <Value name="BatchFileName">batch_ag.xml</Value>
        <Value name="policy-target-file">../input/policy/forcing_target_4p5.xml</Value>
      <Value name="GHGInputFileName">../input/magicc/inputs/input_gases.emk</Value>
      <Value write-output="1" append-scenario-name="0" name="xmldb-location">../output/database basexdb</Value
   Value write-output= 1' append-scenario-name= 0' name= restart > /restart/restart > /restart/restart/restart > /restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/restart/res
        <Value write-output="1" append-scenario-name="1" name="xmlDebugFileName">debug.xml</Value>
        <Value write-output="1" append-scenario-name="0" name="climatFileName">gas.emk</Value>
        <Value write-output="1" append-scenario-name="1" name="costCurvesOutputFileName">cost curves.xml</Value>
        <Value write-output="1" append-scenario-name="0" name="batchCSVOutputFile">batch-csv-out.csv</Value>
        <Value write-output="0" append-scenario-name="0" name="supplyDemandOutputFileName">SDCurves.csv</Value>
        <Value write-output="0" append-scenario-name="0" name="flow-graph">gcam-flow-graph.dot</Value>
        <Value write-output="0" append-scenario-name="0" name="dependencyGraphName">DependencyGraph.dot</Value>
       <Value write-output="0" append-scenario-name="0" name="landAllocatorGraphName">LandAllocatorGraph.dot</Value>
    </Files>
```

Reference case .xml input files

```
<Value name = "resources">../input/gcamdata/xml/resources.xml</Value>
<Value name = "energy_supply">../input/gcamdata/xml/en_supply.xml</Value>
<Value name = "energy_transformation">../input/gcamdata/xml/en_transformation.xml</Value>
<!--Value name = "electricity">../input/gcamdata/xml/electricity.xml</Value->
<Value name = "elec_water_base">../input/gcamdata/xml/electricity_water.xml</Value>
<Value name = "heat">../input/gcamdata/xml/heat.xml</Value>
<Value name = "hydrogen">../input/gcamdata/xml/hydrogen.xml</Value>
<Value name = "energy_distribution">../input/gcamdata/xml/en_distribution.xml</Value>
<Value name = "industry">../input/gcamdata/xml/industry.xml</Value>
```


Scenario Options

<strings> <value name="scenarioName">Reference</value> <value name="debug-region">USA</value> <value name="MAGICC-input-dir">/input/magicc/inputs</value> <value name="MAGICC-output-dir">/output</value> </strings> <bools> <value name="CalibrationActive">1</value> <value name="BatchMode">0</value> <value name="find-path">0</value> <value name="find-path">0</value> <value name="createCostCurve">0</value> <value name="debugChecking">0</value> <value name="debugChecking">0</value></bools>	Scenario Name						
<value name="simulActive">1</value> <value name="PrintValuesOnGraphs">1</value> <value name="ShowNullPaths">0</value>	Periods						
<value name="PrintPrices">1</value>		-1	All				
<ints></ints>	-		1				
<value name="numMarketsToFindSD">10</value>		1	1975				
<value name="numPointsForSD">21</value> <value name="numPointsForCO2CostCurve">5</value>		2	1990				
<value name="carbon-output-start-year">1705</value> <value name="climateOutputInterval">5</value>		3	2005				
<value name="parallel-grain-size">50</value>		4	2010				
<value name="stop-period">-1</value> <value name="restart-period">-1</value>		5	2015				
		6	2020				



Model Run - Execution

./gcamFolder/exe/



C:\Windows\system32\cmd.exe This computer software was prepared by Battelle Memorial Institute, hereinafter the Contractor, under Contract No. DE-ACO5-76RL0 1830 with the Department of Energy (DOE). NEITHER THE GOVERNMENT NOR THE CONTRACTOR MAKES ANY WARRANTY, EXPRESS OR IMPLIED, OR ASSUMES ANY LIABILITY FOR THE USE OF THIS SOFTWARE. This notice including this sentence must appear on any copies of this computer software.

User agrees that the Software will not be shipped, transferred or exported into any country or used in any manner prohibited by the United States Export Administration Act or any other applicable export laws. restrictions or regulations (collectively the 'Export Laws'). Export of the Software may require some form of license or other authority from the U.S. Government, and failure to obtain such export control license may result in criminal liability under U.S. laws. In addition, if the Software is identified as export controlled items under the Export Laws, User represents and warrants that User is not a citizen, or otherwise located within, an embargoed nation (including without limitation Iran, Syria, Sudan, Cuba, and North Korea) and that User is not otherwise prohibited under the Export Laws from receiving the Software.

Copyright 2011 Battelle Memorial Institute. All Rights Reserved. Distributed as open-source under the terms of the Educational Community License version 2.0 (ECL 2.0). http://www.opensource.org/licenses/ecl2.php

For further details, see: http://www.globalchange.umd.edu/models/gcam/

Running GCAM model code base version 5.1 revision gcam-v5.1.3

Configuration file: configuration.xml

Parsing input files...

Parsing ../input/gcamdata/xml/hector.xml scenario component.

Parsing ../input/gcamdata/xml/interest_rate.xml scenario component.

Parsing .../input/gcamdata/xml/socioeconomics_q\$\$P2.xml scenario component.

Parsing ../input/gcamdata/xml/resources.xml scenario component.

Parsing ../input/gcamdata/xml/en_supply.xml scenario component.


Parsing ../input/gcamdata/xml/en_transformation.xml scenario component.

Parsing ../input/gcamdata/xml/electricity_water.xml scenario component.

Parsing ../input/gcamdata/xml/heat.xml scenario component.

Parsing ../input/gcamdata/xml/hydrogen.xml scenario component.

Parsing ../input/gcamdata/xml/en distribution.xml scenario component.

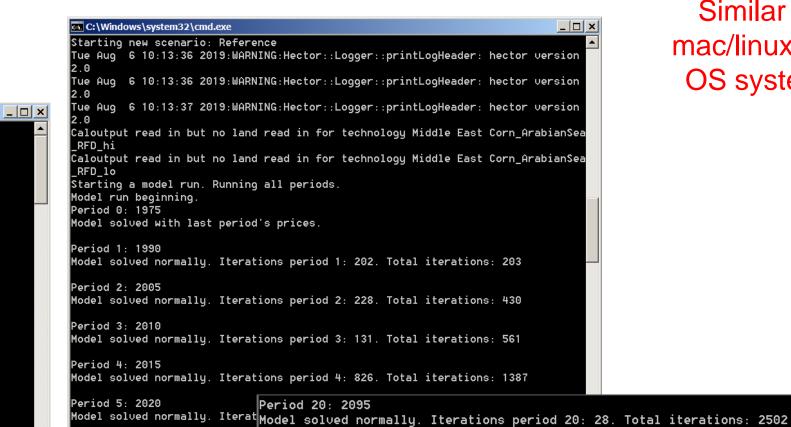

Model solved normally. Iterations period 21: 32. Total iterations: 2534

C:/Z/GCAMWebinar2/gcam-u5.1.3-Windows-Release-Package/exe/.basex: writing new co

Period 6: 2025

Period 7: 2030

Period 8: 2035

Model solved normally. Iterat Period 21: 2100

Model solved normally. Iterat All model periods solved correctly.

Model solved normally. Iterat Starting output to XML Database.

Model run completed.

Printing output

nfiquration file.

Model run completed.


Model exiting successfully.


Press any key to continue . . .

Similar for mac/linux/unix OS systems



Model Run – Logs

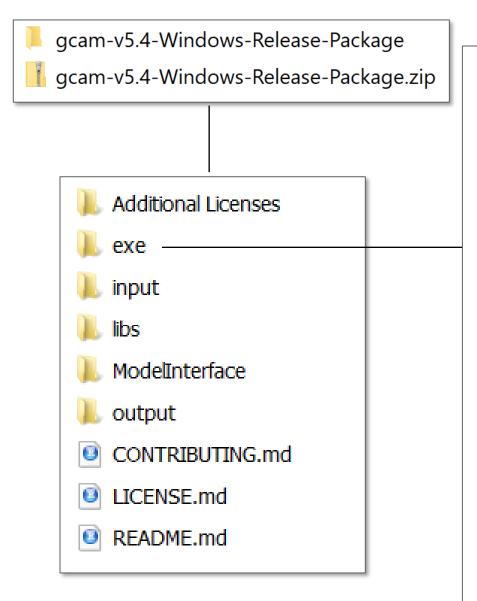

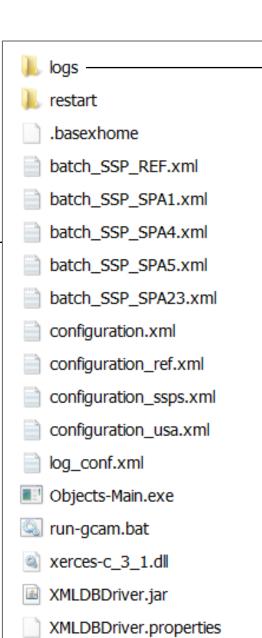


HFC22/ea_naiocarbon.iog HFC245fa_halocarbon.log HFC4310 halocarbon.log main_log.txt \ N2O.loa main_log.txt - Notepad File Edit Format View Help the U.S. Government, and failure to obtain such export control license may result in criminal liability under U.S. laws. In addition, if the Software is identified as export controlled items under the Export Laws, User represents and warrants that User is not a citizen, or otherwise located within, an embargoed nation (including without limitation Iran, Syria, Sudan, Cuba, and North Korea) and that User is not otherwise prohibited under the Export Laws from receiving the Software. Copyright 2011 Battelle Memorial Institute. All Rights Reserved. Distributed as open-source under the terms of the Educational Community License version 2.0 (ECL 2.0). http://www.opensource.org/licenses/ecl2.php For further details, see: http://www.globalchange.umd.edu/models/gcam/ Running GCAM model code base version 5.1 revision gcam-v5.1.3 Configuration file: configuration.xml |Parsing input files... Parsing ../input/gcamdata/xml/hector.xml scenario component. Parsing ../input/gcamdata/xml/interest_rate.xml scenario component. Parsing ../input/gcamdata/xml/socioeconomics_gSSP2.xml scenario component. Parsing ../input/gcamdata/xml/resources.xml scenario component. Parsing ../input/gcamdata/xml/en_supply.xml scenario component. Parsing ../input/gcamdata/xml/en_transformation.xml scenario component.

Parsing ../input/gcamdata/xml/electricity_water.xml scenario component.

Parsing ../input/gcamdata/xml/heat.xml scenario component.




Outputs – Database/Queries

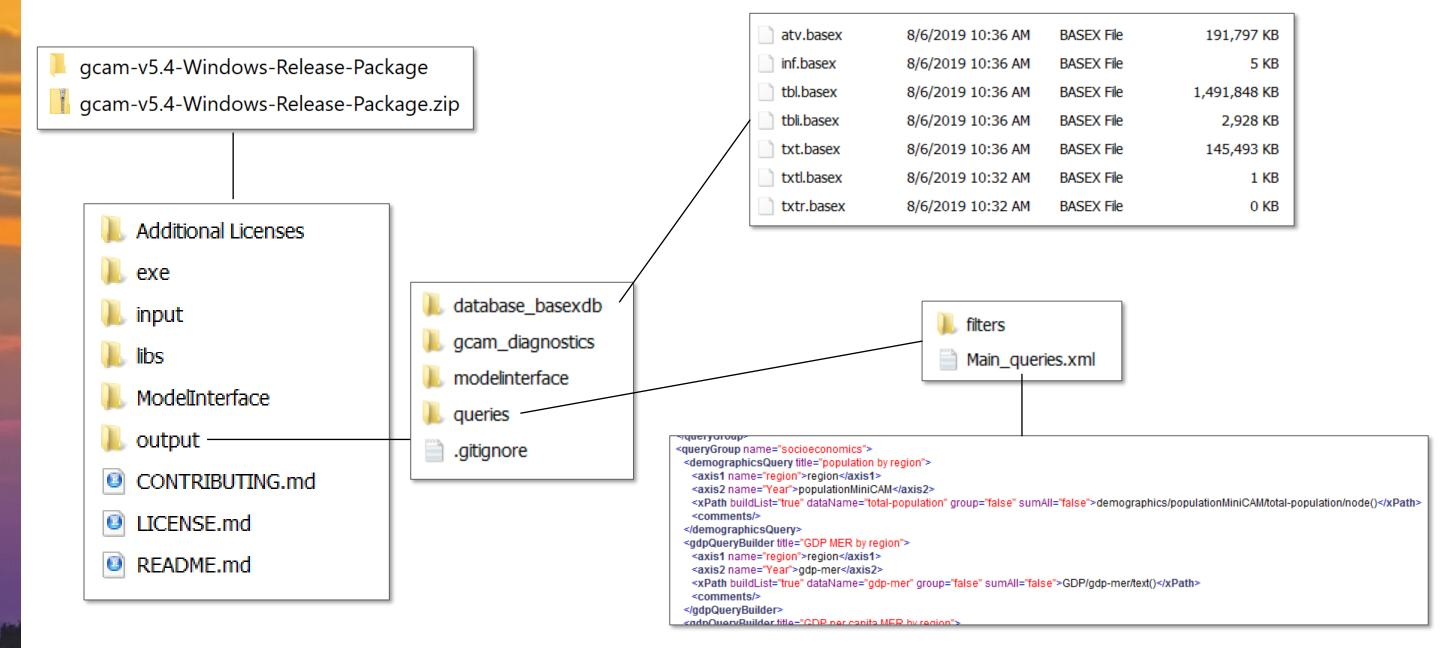




Outputs - Model Interface (View Results)

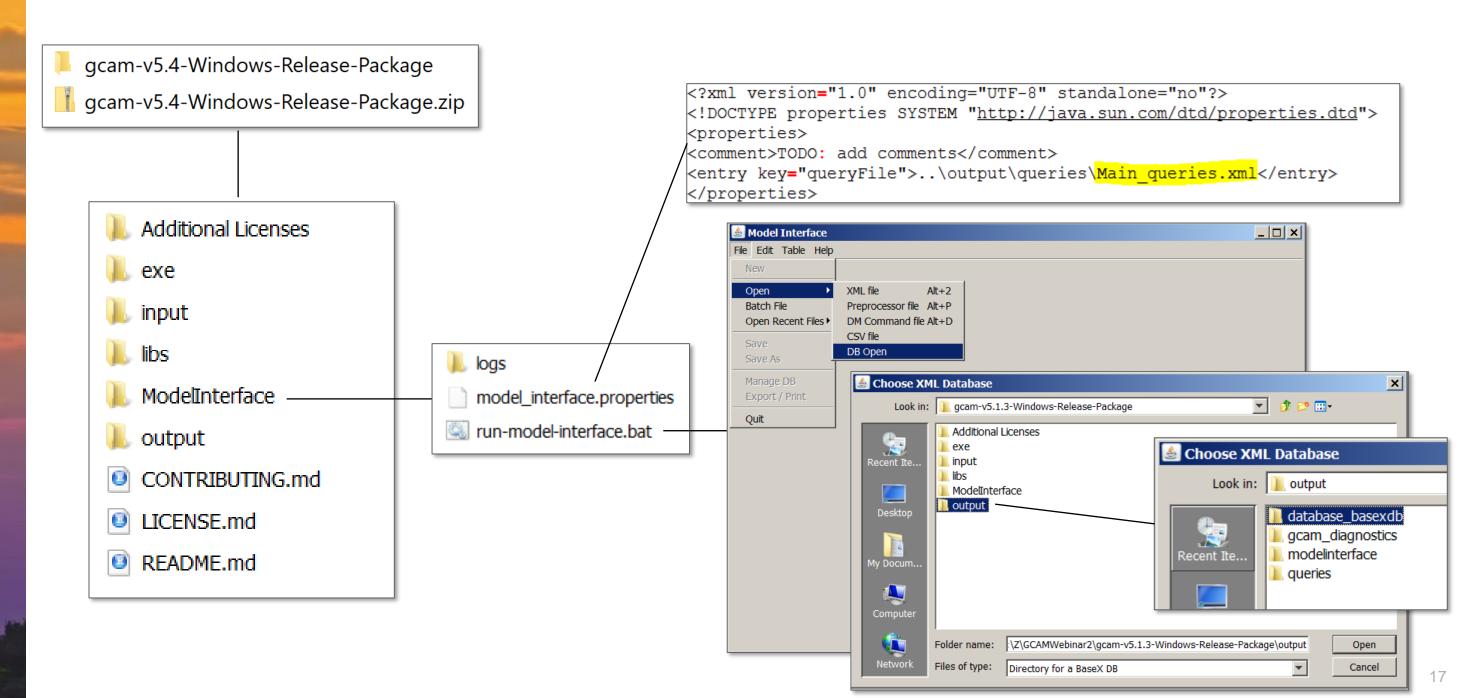




Outputs - Model Interface (View Results)

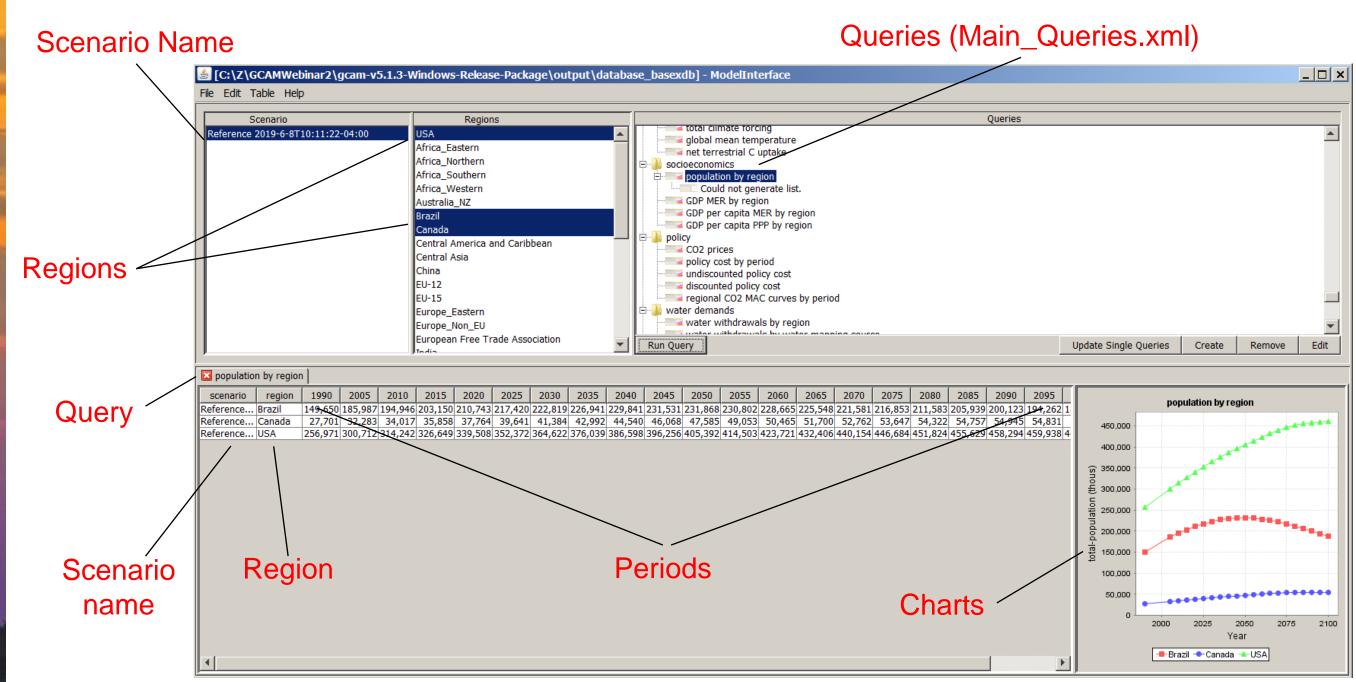




Outputs – Model Interface (View Results)

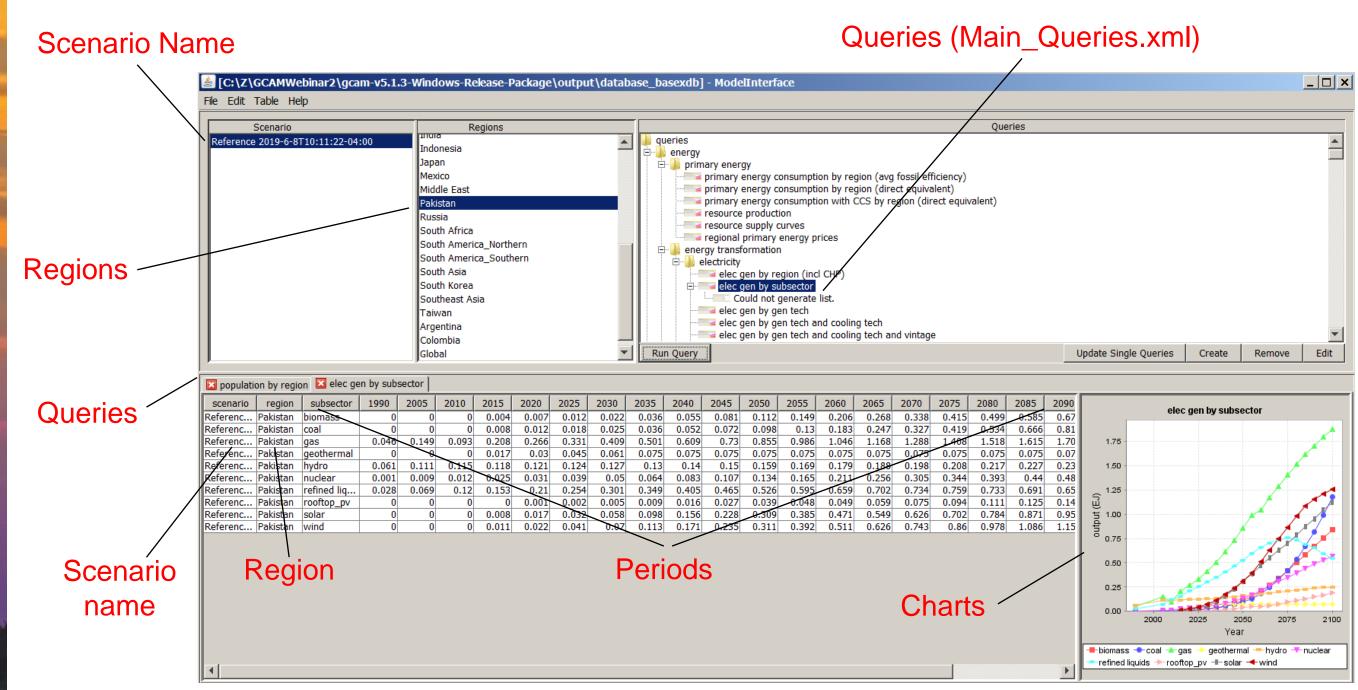




Final Result - Post Processing


⊠ population	population by region elec gen by subsector																				
scenario	region	subsector	1990	2005	2010	2015	2020	2025	2030	2035	2040	2045	2050	2055	2060	2065	2070	2075	2080	2085	2090
Referenc	Pakistan	biomass	0	0	0	0.004	0.007	0.012	0.022	0.036	0.055	0.081	0.112	0.149	0.206	0.268	0.338	0.415	0.499	0.585	0.67
Referenc	Pakistan	coal	0	0	0	0.008	0.012	0.018	0.025	0.036	0.052	0.072	0.098	0.13	0.183	0.247	0.327	0.419	0.534	0.666	0.81
Referenc	Pakistan	gas	0.046	0.149	0.093	0.208	0.266	0.331	0.409	0.501	0.609	0.73	0.855	0.986	1.046	1.168	1.288	1.408	1.518	1.615	1.70
Referenc	Pakistan	geothermal	0	0	0	0.017	0.03	0.045	0.061	0.075	0.075	0.075	0.075	0.075	0.075	0.075	0.075	0.075	0.075	0.075	0.07
Referenc	Pakistan	hydro	0.061	0.111	0.115	0.118	0.121	0.124	0.127	0.13	0.14	0.15	0.159	0.169	0.179	0.188	0.198	0.208	0.217	0.227	0.23
Referenc	Pakistan	nuclear	0.001	0.009	0.012	0.025	0.031	0.039	0.05	0.064	0.083	0.107	0.134	0.165	0.211	0.256	0.305	0.344	0.393	0.44	0.48
Referenc	Pakistan	refined liq	0.028	0.069	0.12	0.153	0.21	0.254	0.301	0.349	0.405	0.465	0.526	0.595	0.659	0.702	0.734	0.759	0.733	0.691	0.65
Referenc	Pakistan	rooftop_pv	0	0	0	0	0.001	0.002	0.005	0.009	0.016	0.027	0.039	0.048	0.049	0.059	0.075	0.094	0.111	0.125	0.14
Referenc	Pakistan	solar	0	0	0	0.008	0.017	0.032	0.058	0.098	0.156	0.228	0.309	0.385	0.471	0.549	0.626	0.702	0.784	0.871	0.95
Referenc	Pakistan	wind	0	0	0	0.011	0.022	0.041	0.07	0.113	0.171	0.235	0.311	0.392	0.511	0.626	0.743	0.86	0.978	1.086	1.15

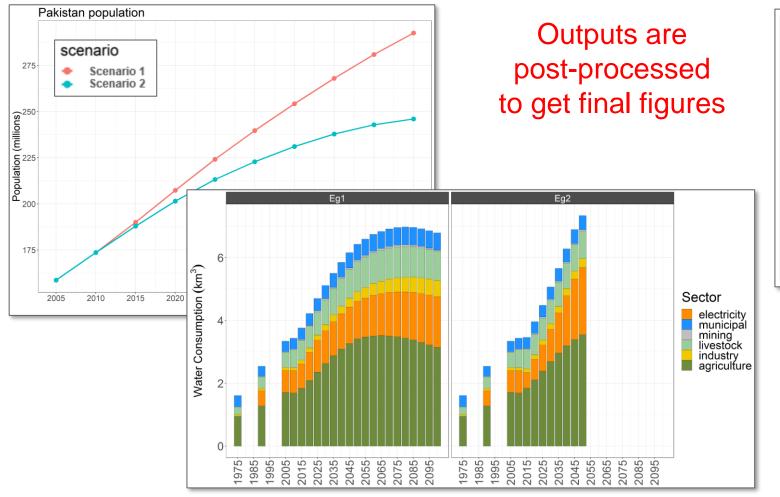

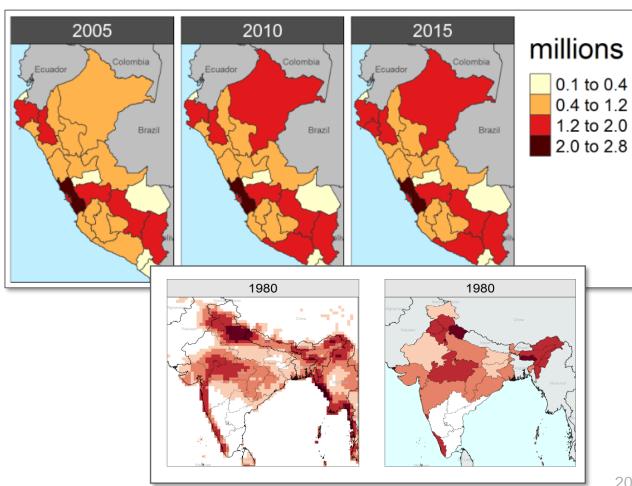



Summary

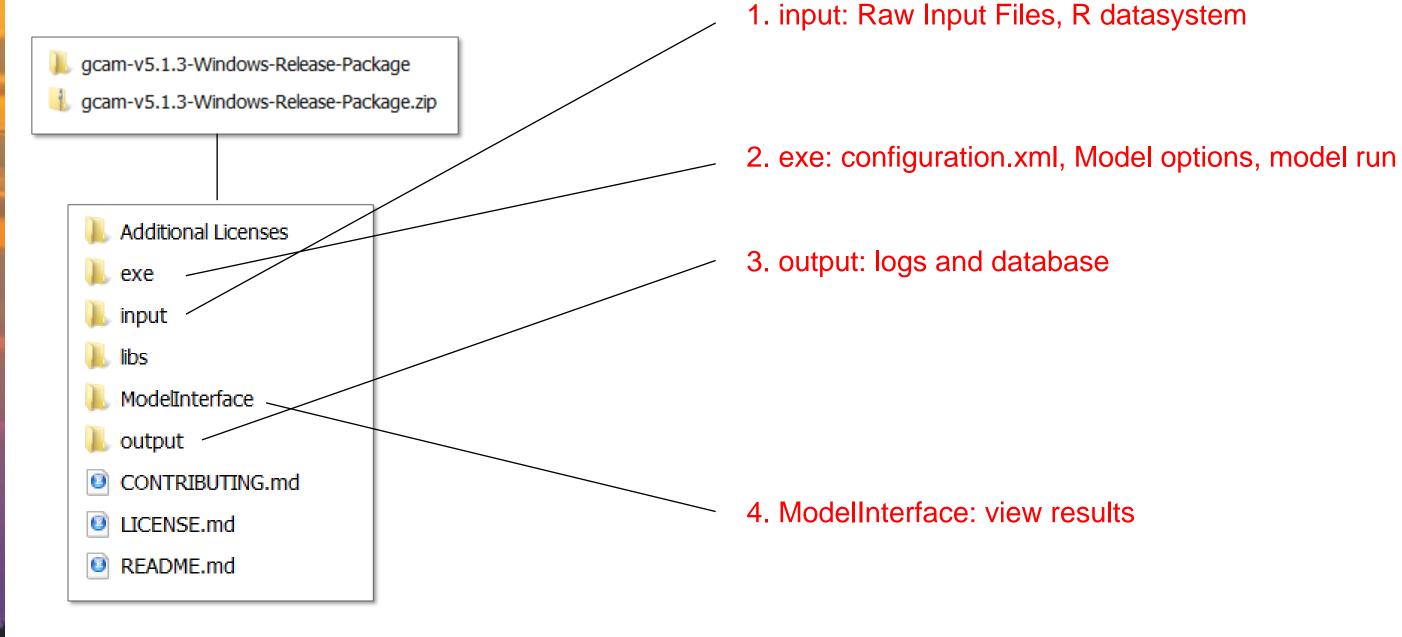



Thank you

