

Lab 01: Workstation (0%)

Assigned on Sep 4, 2025

Due day on **Sep 11, 2025**

Objective

In this lab, you will learn:

1. How to use the workstation.
2. Setup your own station environment.

Environment Setup

1. Copy the default `.tcshrc` into your home directory (Remember the last dot).


```
$ cd ~  
$ cp ~ee4292/iclab2025/iclab_tcshrc.txt .  
$ cat ./iclab_tcshrc.txt >> ~/.tcshrc
```

Note: If you already have a `.tcshrc` file and you do not want to overwrite it, you can add only the CAD tools related lines to your own `.tcshrc` file.

2. Login in `wsXX` (XX for EE workstation numbers, like 34 to 47), for example you will see `@daisy` change to `@ws45` if you type the command:

```
$ ssh -X ws45
```

Note: You don't need to log in `wsXX` if you use `pc407` in CentOS.

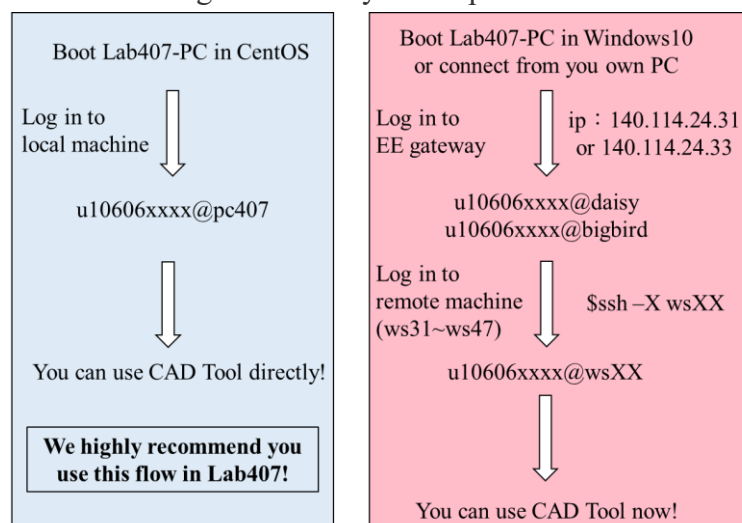

3. Source the default `.tcshrc`.

```
$ source ~/.tcshrc
```

Action Items

1. Create a directory only you can access named **ICLAB**.
\$ mkdir -m 700 ICLAB
\$ cd ICLAB
2. Copy **lab1.zip** file in `~ee4292/` to ICLAB (Remember the last dot).
\$ cp ~ee4292/iclab2025/lab01.zip .
\$ ls lab01.zip
3. Decompress lab1.zip and enter it.
\$ unzip lab01.zip
\$ cd lab01
4. Try to open doc with *gedit* in background.
\$ gedit file_name &
5. List your processes, you may see process information like below.
\$ ps -lfu \$user
6. You can kill *gedit* by *kill PID*, for example
\$ kill [PID]
7. Run following commands to check your library/CAD tool access authority.
\$ sh test_permission.sh
8. Exit workstation.
\$ exit