

Solutions (과제 해답)



작성한 코드와 정답을 비교해 보세요.

Solution: Case Converter

```
#include <stdio.h>
int main() {
    char c;
    scanf("%c", &c);

    if(c >= 'A' && c <= 'Z')
        printf("%c", c + 32); // Upper to Lower
    else if(c >= 'a' && c <= 'z')
        printf("%c", c - 32); // Lower to Upper

    return 0;
}
```


Solution: Pass/Fail Logic

```
#include <stdio.h>
int main() {
    int num;
    scanf("%d", &num);

    switch(num) {
        case 1: printf("Pass\n"); break;
        case 2: printf("Fail\n"); break;
        default: printf("Error\n");
    }
    return 0;
}
```

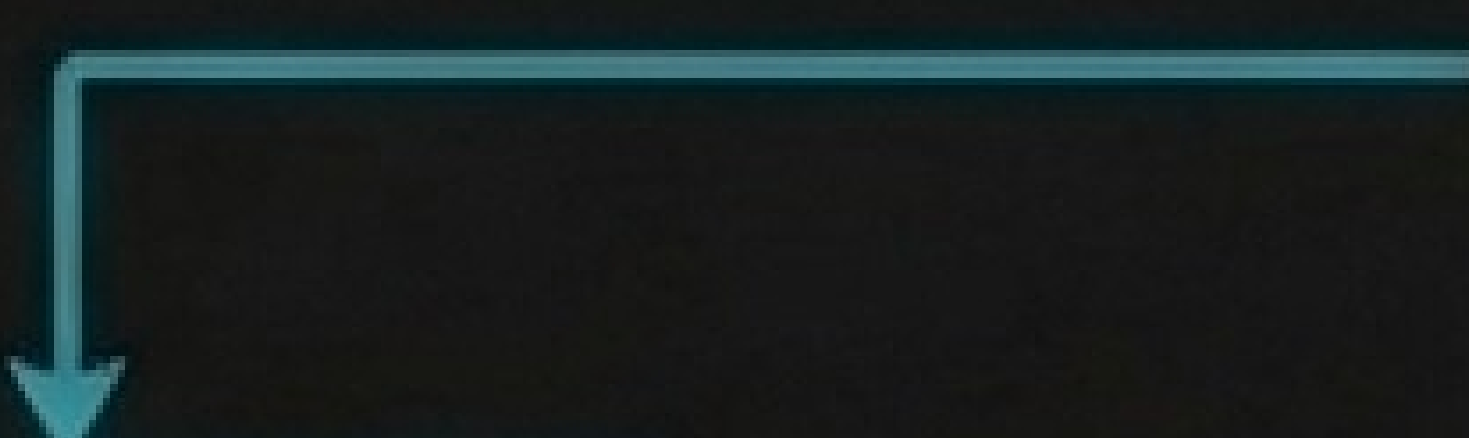

Solution: Bitwise Operations

```
#include <stdio.h>
int main() {
    int num;
    printf("Input number: ");
    scanf("%d", &num);

    printf("x2: %d\n", num << 1);
    printf("x4: %d\n", num << 2);

    return 0;
}
```

Left Shift 1 bit = Multiply by 2



Solution: Output Formatting

```
#include <stdio.h>
int main() {
    float f;
    printf("Input float: ");
    scanf("%f", &f);

    printf("Round: %.2f\n", f);
    printf("Align: %10.2f\n", f);

    return 0;
}
```


실습 9가 완료되었습니다.

Next: 배열과 포인터 기초 (Arrays & Pointers)

C:\Users\Student>_

수고하셨습니다. (Great job!)