

# P5 MODULES AND PERSONAL DIRECTORIES

We'll set a second user's directories as "Mortadelo"

For that we'll need to:

Add the new user and basic folder to the machine

And enable the module userdir

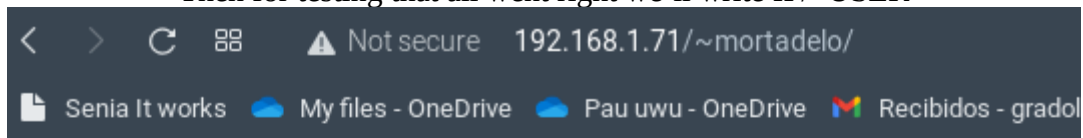
```
root@ZeltonCoul:/home/pau/html# a2enmod userdir
Module userdir already enabled
root@ZeltonCoul:/home/pau/html#
```

Once it's active, restart the service



Then generate basic folder structure for second user

```
root@ZeltonCoul:/home/pau/html# tree /home/mortadelo/
/home/mortadelo/
├── html
├── public_html
│   └── mortadelo.html
```

Then for testing that all went right we'll write IP/~USER



## Index of /~mortadelo

| <a href="#">Name</a>   | <a href="#">Last modified</a> | <a href="#">Size</a> | <a href="#">Description</a> |
|--|-------------------------------|----------------------|-----------------------------|
|  <a href="#">Parent Directory</a> |                               | -                    |                             |
|  <a href="#">mortadelo.html</a>   | 2022-12-01 10:41              | 254                  |                             |

Apache/2.4.52 (Ubuntu) Server at 192.168.1.71 Port 80