TASK. 1.

Assume the following variable are defined


int. age

double. pay.


char. section

write a single can statement that will read input into each of these variable.


HAND WRITTEN CODE **(AGE)**

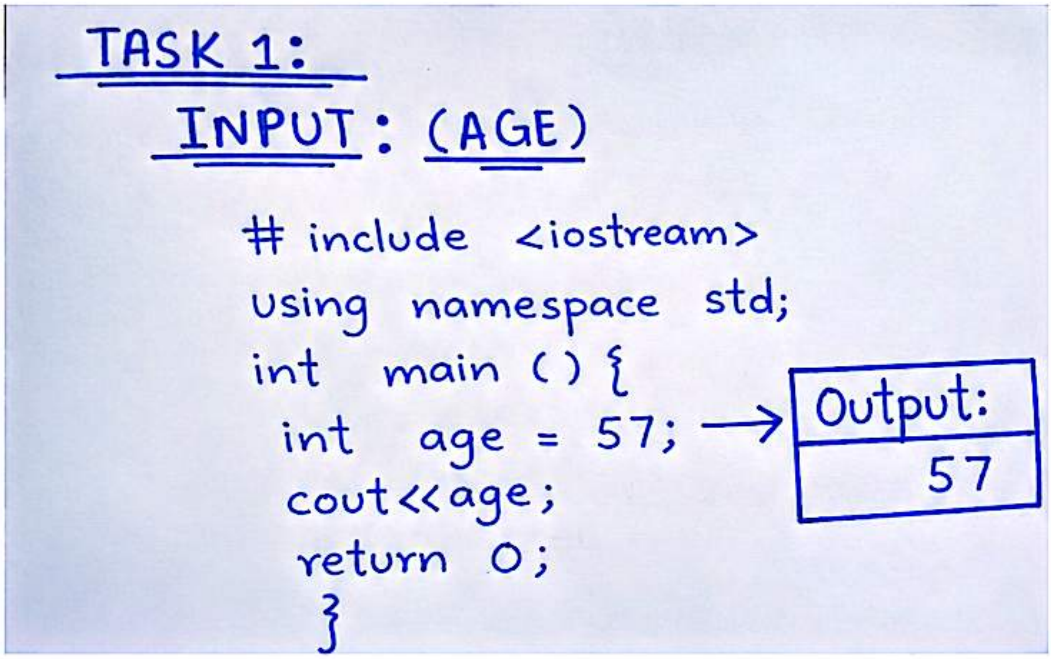

CODE. WRITTEN ON PHONE

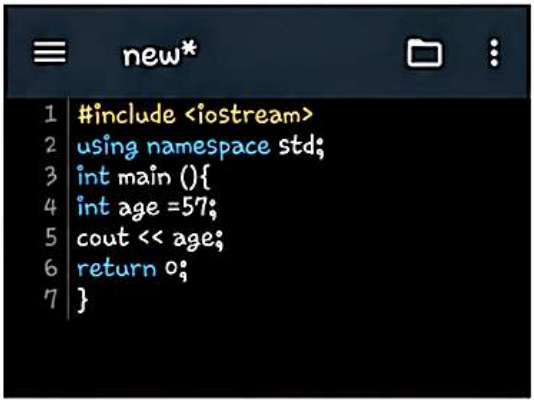

OUTPUT

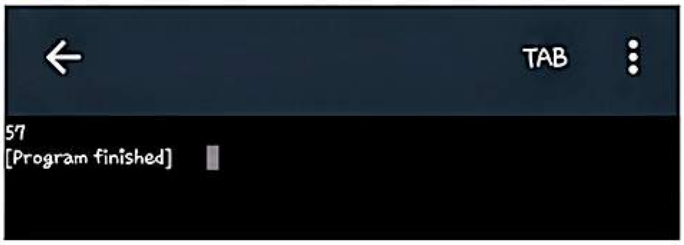


CamScanner

INPUT: (PAY)


```
# include <iostream>
#include <cstdlib>
using namespace std;
int main() {
   double pay = 120;
   cout << pay;
   return 0;
   }
```

Output: 120

CODE. WRITTEN ON PHONE

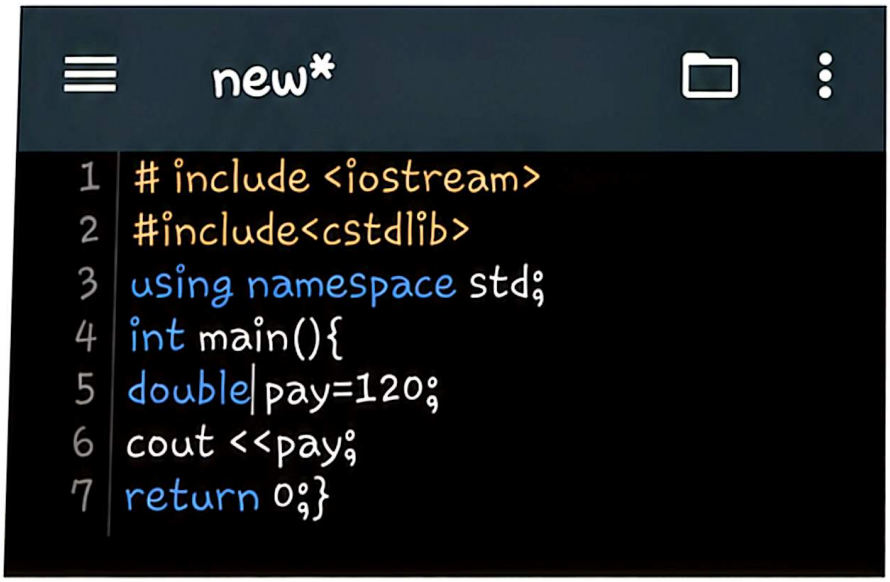

OUTPUT

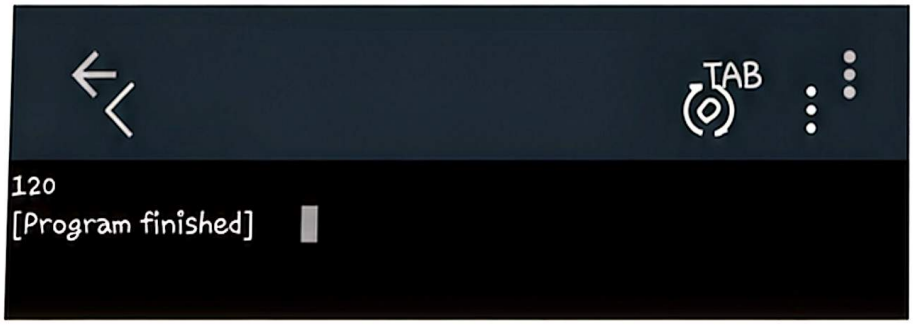

CamScanner


INPUT: (SECTION)

```
# include <iostream>
# include <cstdlib>
using namespace std;
int main (){
char section = 'F';
cout << section;
return 0;}
```

OUTPUT:

F.

ODE WRITTEN ON PHONE

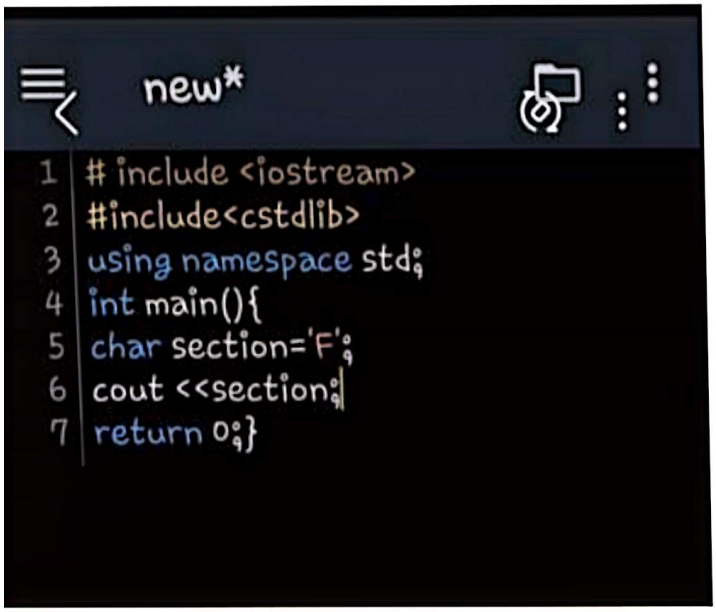

JT



CamScanner

Complete the following by writing the value of each expression in value column according to C++ language.

Expression.	Value
28/4-2.	
6+12*2-8	
4+8*2	
6+17%3-2	
2+22*(9-7)	
(8+7)*2	
(16+7)%2-1	
12/(10-6)	
(19-3)*(2+2)/4	

HAND. WRITTEN CODING

Task 2:

Input:


```
# include <iostream>
# include <cstdlib>
# include <ctime>
using namespace std;
int main () {
Cout << "Expressions 28/4-2" << endl;
Cout << "Value : " << (28/4-3) << endl << endl;
Cout << "Expressions: 6+12*2-8" << endl;
Cout << "Value : " << (6+12*2-8) << endl << endl;
Cout << "Expressions: 4+8*2" << endl;
Cout << "Value : " << (4+8*2) << endl << endl;
Cout << "Expressions: 6+17%3-2" << endl;
Cout << "Value : " << (6+17%3-2) << endl << endl;
Cout << "Expressions: 2+22*(9-7)" << endl;
Cout << "Value : " << (2+22*(9-7)) << endl << endl;
Cout << "Expressions: (8+7)*2" << endl;
Cout << "Value : " << ((8+7)*2) << endl << endl;
Cout << "Expressions: (16+7)%2-1" << endl;
Cout << "Value : " << ((16+7)%2-1) << endl << endl;
Cout << "Expressions: 12/(10-6)" << endl;
Cout << "Value : " << (12/(10-6)) << endl << endl;
Cout << "Expressions: (19-3)*(2+2)/4" << endl;
Cout << "Value : " << ((19-3)*(2+2)/4) << endl;
 return 0;
}
```

OUTPUT:


5
22
20
6
47
30
0
3
16

CamScanner

CODING. ON PHONE

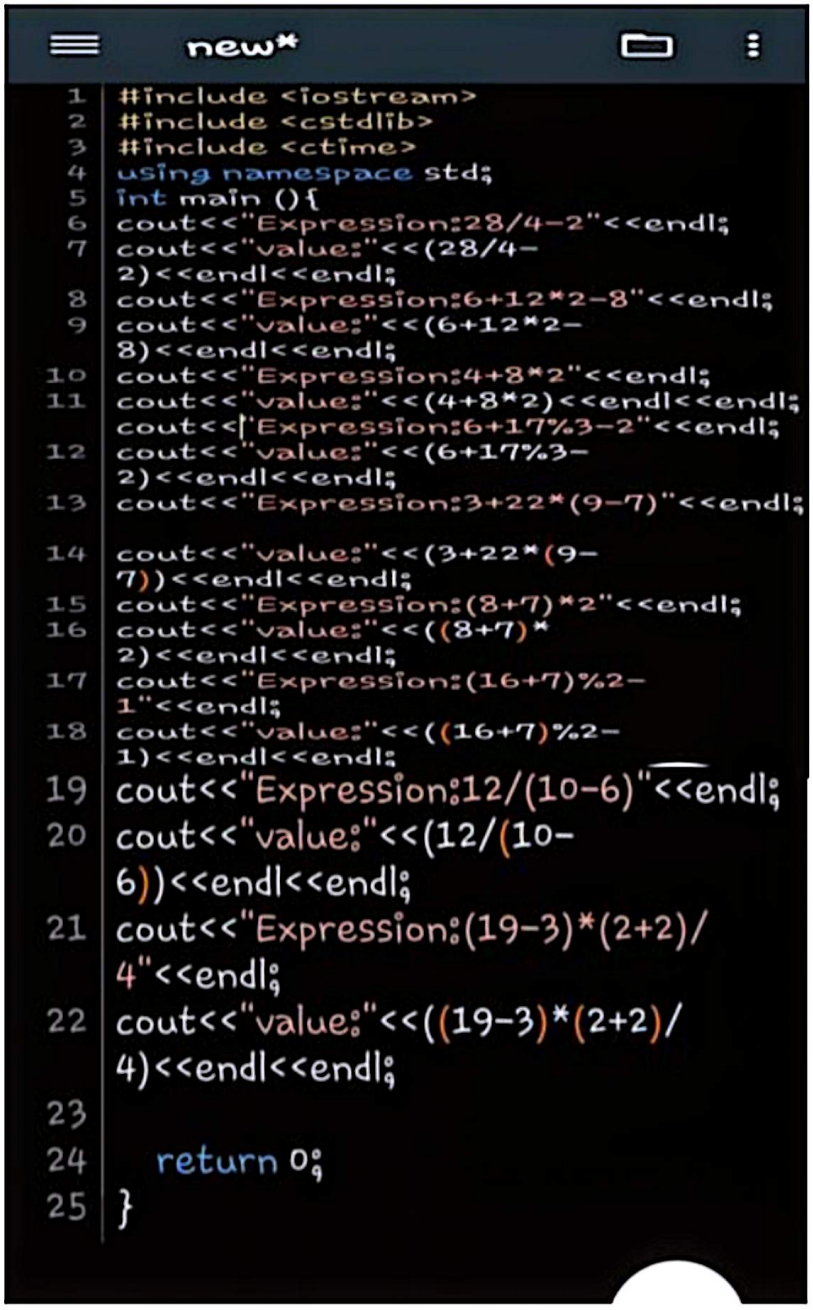

OUTPUT

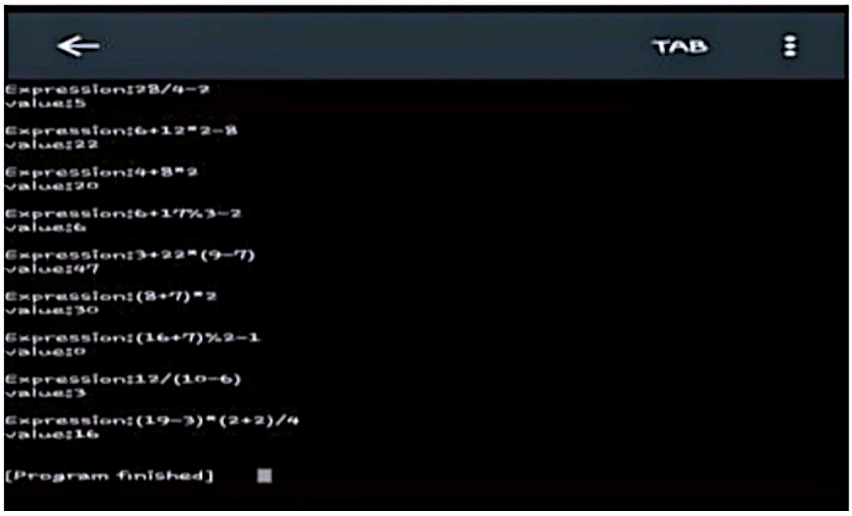

CamScanner

TASK. 3

Assume a program has following variable defined

```
int  unit ;
float mass;
double  weight;
weight= unit* mass;
```

Which automatic data type conversion will take place?

(A) mass is donated to an int,unit remain an int,and result mass*unit is int.

(B) mass is donated to an float,int donated to float and reusult mass*unit is float.

(C) unit is donated to float, mass remain float and then result mass*unit is double.


OUTPUT

B

TASK. 4


Assume a program has following variable definition.
int a,b =2; float c=4.2;
and following statement is a=b*c:
A.8.4. B.8. C.0. D.None of these.

HAND WRITTING CODING.

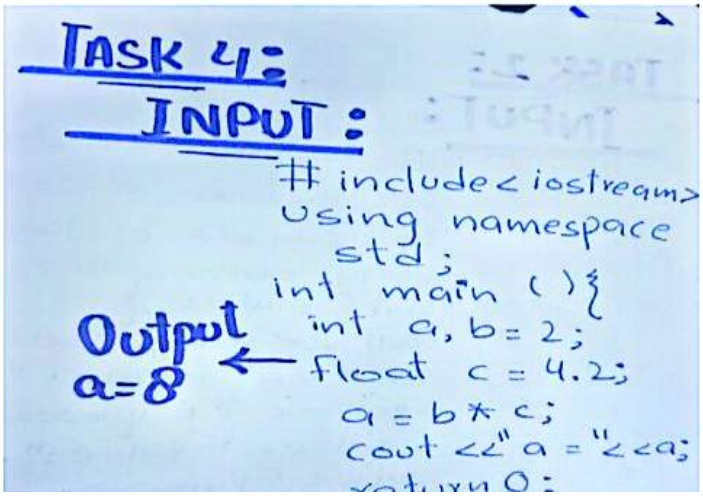


CamScanner

CODE WRITTEN ON PHONE

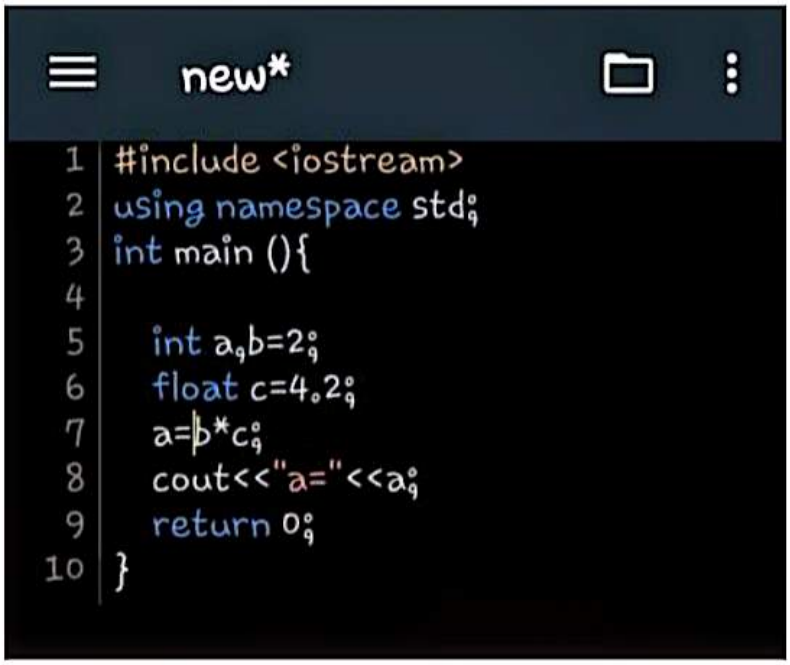

OUTPUT

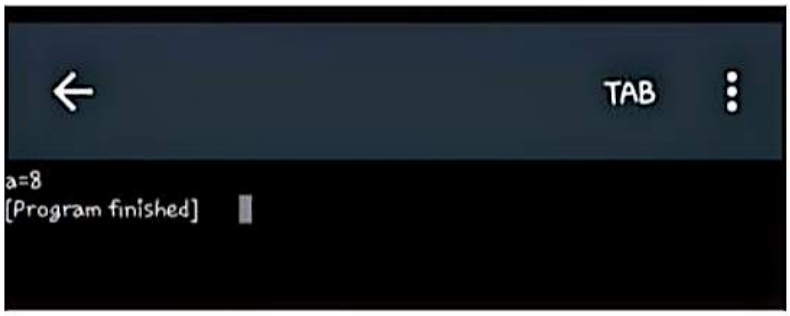

TASK 6

Math tutor (hint:rand())

write a program that can be used as math tutor for young student . The program should display two random number to be added then.

```
   247
 +  129
-------------
```


Ghe program should then pause while student work on problem.When student is ready to check the answer, he or she can press a key then solution will display on screen

CamScanner


247
+ 129

376


HAND WRITTEN CODING

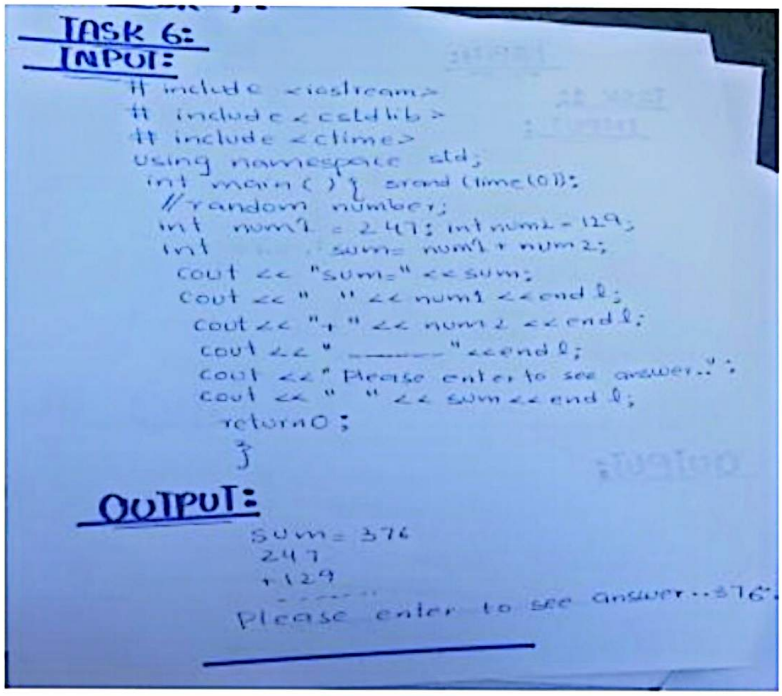

CODING ON PHONE

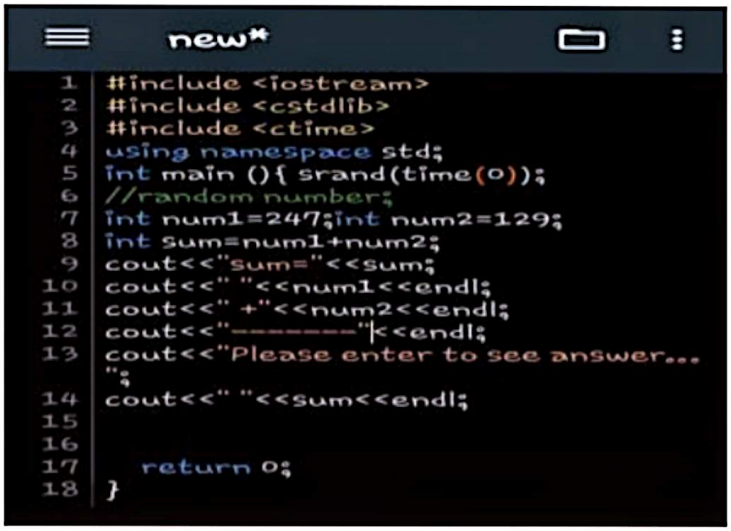

OUTPUT

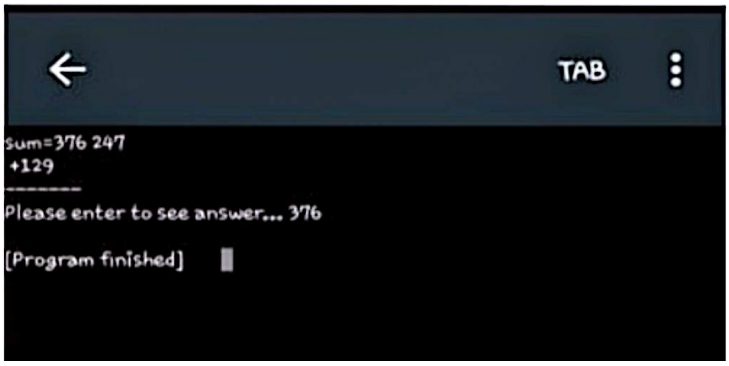


CamScanner

TASK. 1

Write program to print positive entered by user
if user enter negative number print number entered is positive
otherwise print is negative.


HAND WRITTEN CODING

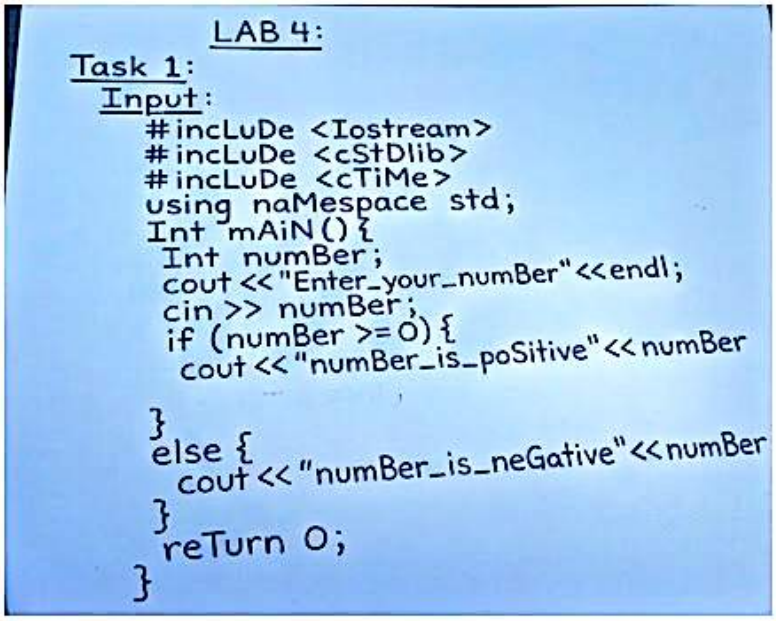

```
LAB 4:
Task 1:
 Input:
#incLuDe <Iostream>
#incLuDe <cStDlib>
#incLuDe <cTiMe>
using naMespace std;
Int mAiN(){
 Int numBer;
 cout<<"Enter_your_numBer"<<endl;
 cin >> numBer;
 if (numBer >=0){
  cout<<"numBer_is_poSitive"<<numBer


 }
 else {
  cout<<"numBer_is_neGative"<<numBer
 }
 reTurn 0;
}
```

CODING ON PHONE

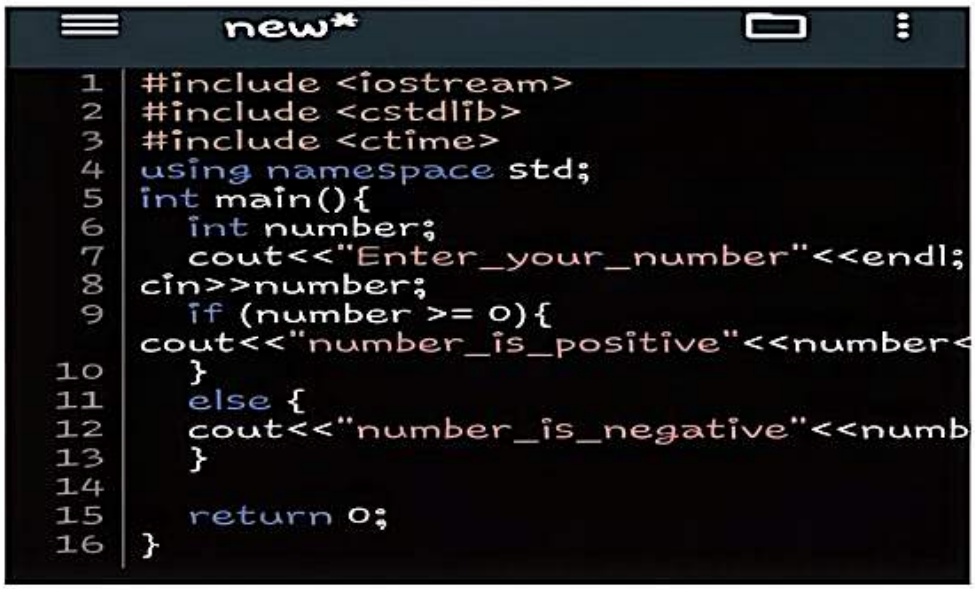

```
new*
1  #include <iostream>
2  #include <cstdlib>
3  #include <ctime>
4  using namespace std;
5  int main(){
6     int number;
7     cout<<"Enter_your_number"<<endl;
8  cin>>number;
9     if (number >= 0){
   cout<<"number_is_positive"<<number<
10    }
11    else {
12    cout<<"number_is_negative"<<numb
13    }
14
15    return 0;
16 }
```

OUTPUT

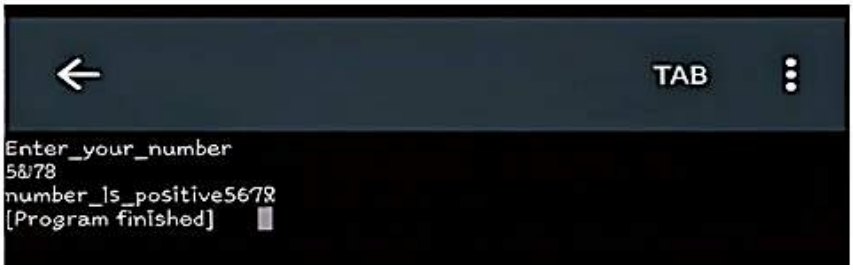


```
TAB
Enter_your_number
5&78
number_is_positive5678
[Program finished]
```

CamScanner


TASK. 2

Progrm check whether int is positive or negative or zero.

HAND WRITTEN CODING

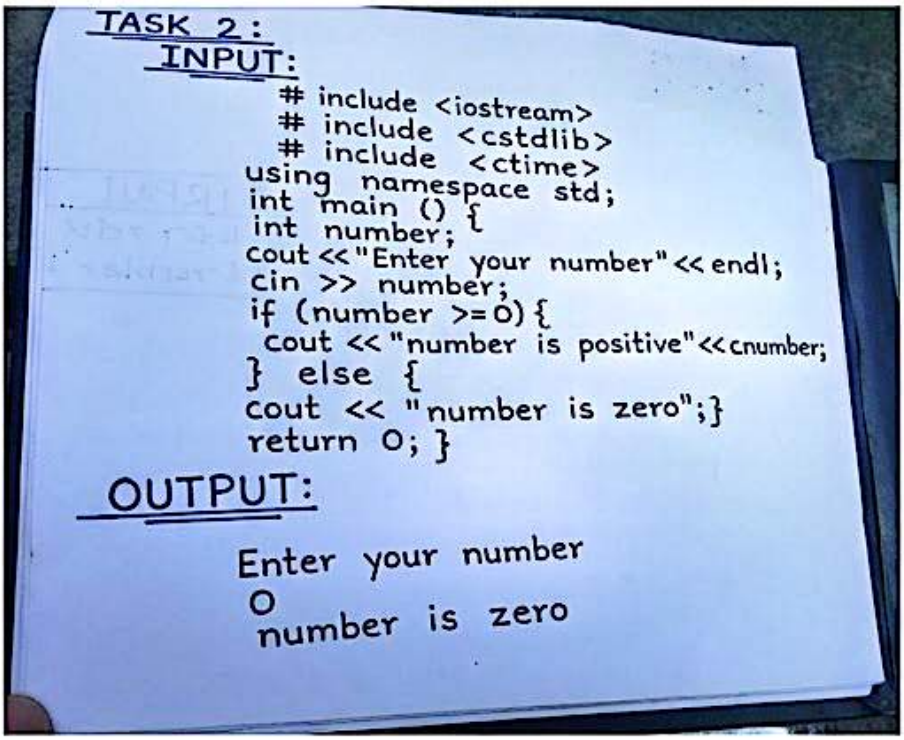

CONDING WRITTEN ON PHONE

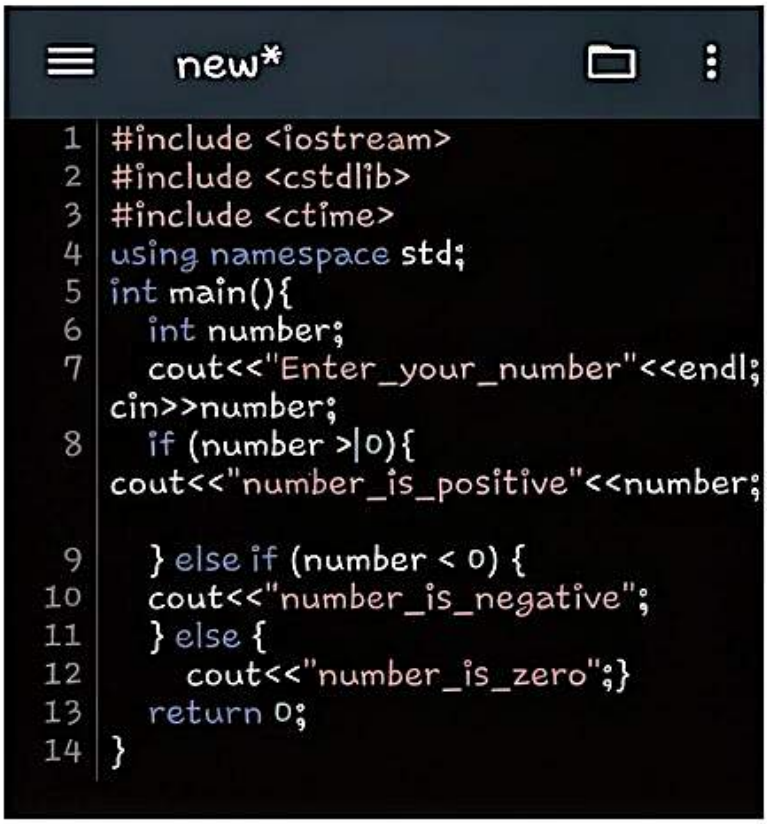

CamScanner


OUTPUT



TASK 3


Int = mark
process:if mark greater than and equal to 75 , score will be A.
if mark less than 75 and greater than and equal to 60 ,score wil be B.
if mark less than 60 and greater than and equal to 45 ,score will be C.
if mark less than 30 , score will be D.
Output :print grade of your score

HAND WRITTEN CODING

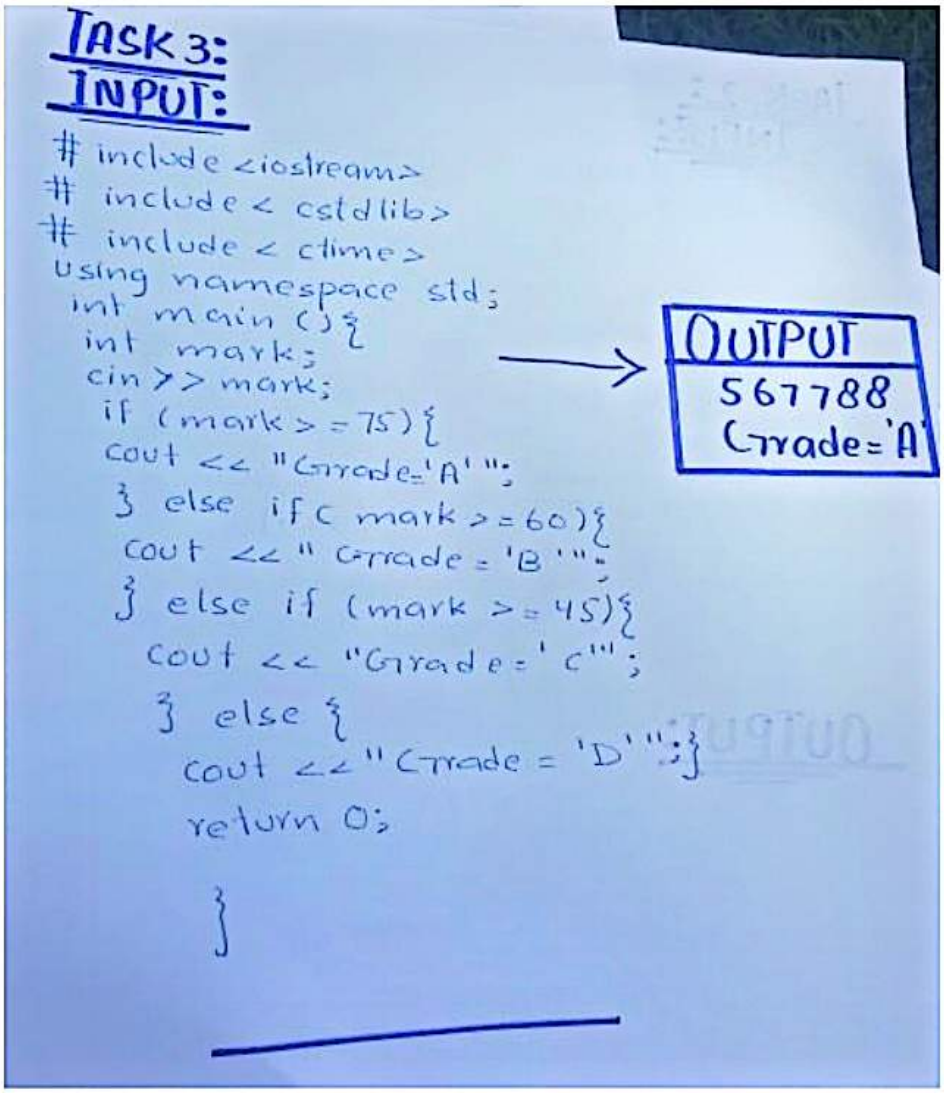


CamScanner

CODING WRITTEN ON PHONE

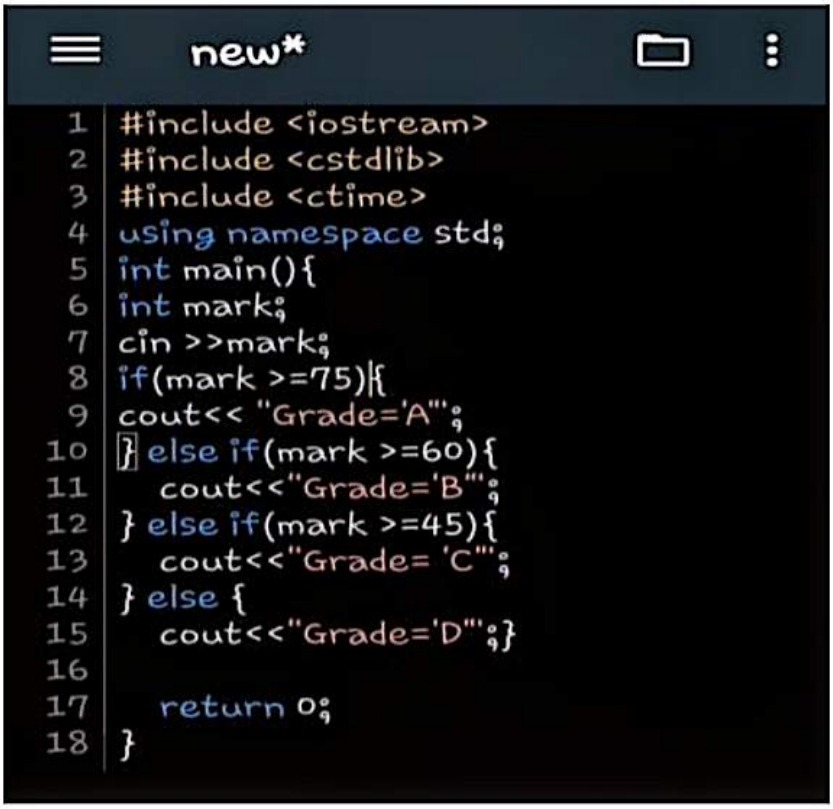

OUTPUT

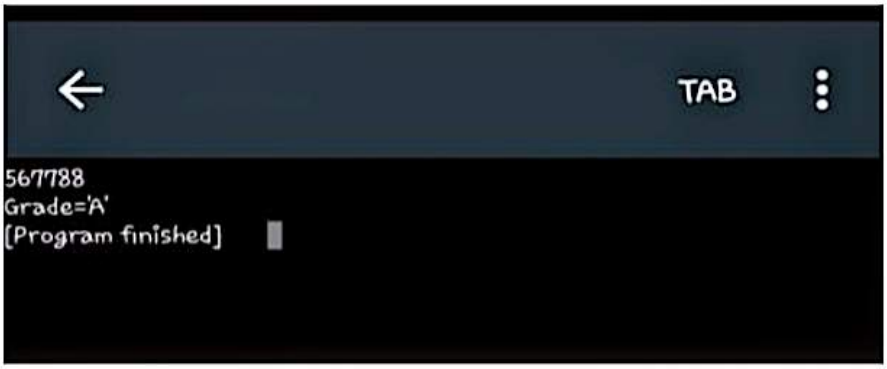

TASK. 4

First largest number using nested ___ if else statement
Check whether number is affected by user is positive or not .
If it is positive then calculate how many digit number have

CamScanner

TASK 4:

INPUT:

```
# include <restroam>
using namespace std;
int main () {
int number;
cout << "Enter number:";
 cin >> number;
 if (number >0) {
 cout << "number is positive";
  }
 if (number < 10) {
cout << "digit" <<endl;
}
  if (number < 100) {
  cout << "digit 2" <<endl;
} felse if (number < 100g) {
 cout << "digit 3"<<endl;
  } else {
    cout << "More than 3 digits";
  }
  cout << "number is not positive";
    return 0; }
```

OUTPUT:

Enter number: 5667888

number is positive more than 3 is not positive.

CODING WRITTEN ON PHONE

```
1  #include <iostream>
2  using namespace std;
3  int main(){
4  int number;
5  cout<<"Enter number:";
6  cin>>number;
7  if(number>0){
8  cout<<"number is positive";
9  }
10 if(number < 10){
11    cout<<"digit1"<<endl;
12 }
13    if(number < 100){
14    cout<<"digit2"<<endl;
15 } else if(number < 1000){
16    cout<<"digit3"<<endl;
17 } else {
18    cout<<"More than 3 digits";
19 }
20    cout<<"number is not positive";
21
22    return 0;
23 }
```


OUTPUT



CamScanner