Network Simplex I: A Pivot on a Graph

A minimum-cost flow problem is an LP. Network simplex performs the familiar simplex steps using a spanning tree.

Ordinary simplex	Network calculation
Choose basic columns	Choose a spanning tree
Solve for basic variables	Use node-balance equations
Compute reduced costs	Use one dual variable per node
Choose direction and ratio	Follow a cycle and find a blocking arc


> We will compute one complete pivot in equations, a graph, and matrix notation.

A shipping problem with four locations

A depot at node 1 has 10 units to ship to a customer at node 4. Nodes 2 and 3 are transfer locations: shipments neither appear nor disappear there.

The flow x_{ij} is the amount sent on the arrow $i \to j$. Its unit cost is c_{ij}. In this first example, arcs have no upper capacity limits.

> Choose nonnegative flows to satisfy the required deliveries at minimum total transportation cost.

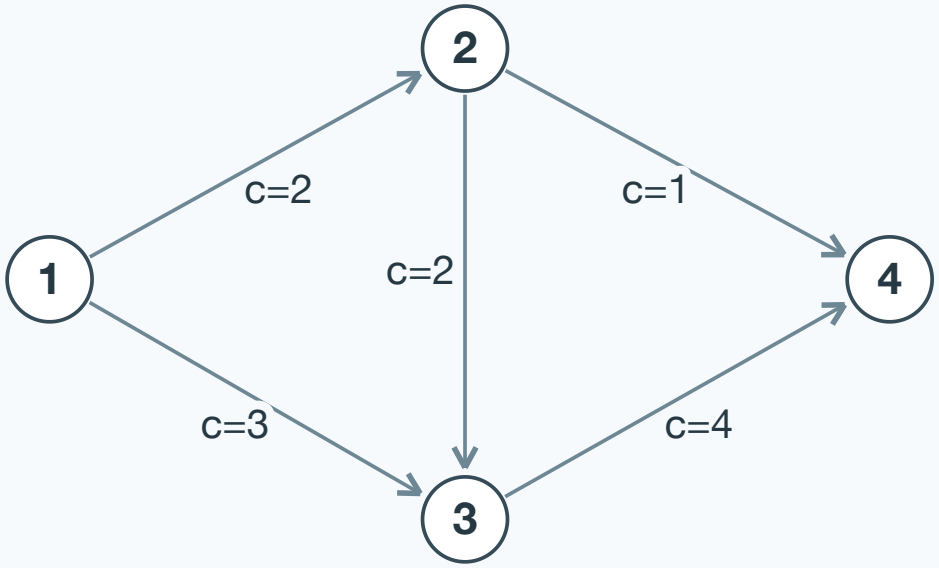


Arrow: original arc direction. Labels: cost per unit. Node balances are stated beside the graph.

Write every node balance before using a matrix

$$
\begin{aligned}
x_{12} + x_{13} &= 10 && \text{(node 1)},\\
-x_{12} + x_{23} + x_{24} &= 0 && \text{(node 2)},\\
-x_{13} - x_{23} + x_{34} &= 0 && \text{(node 3)},\\
-x_{24} - x_{34} &= -10 && \text{(node 4)}.
\end{aligned}
$$

We use outgoing flow minus incoming flow. Positive b means supply; negative b means demand.

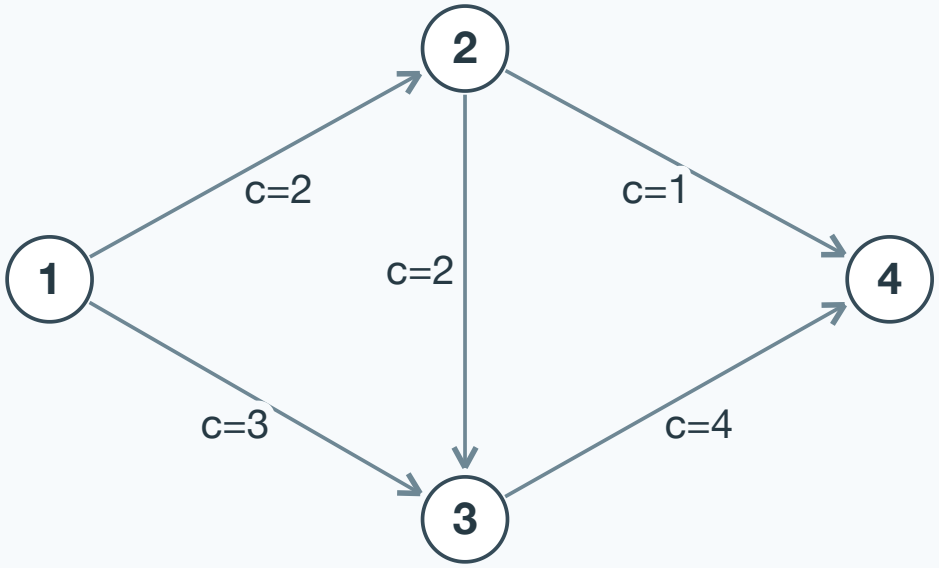

Arrow: original arc direction. Labels: cost per unit. Node balances are stated beside the graph.

$$\min f = 2x_{12} + 3x_{13} + 2x_{23} + x_{24} + 4x_{34}, \qquad x \geq 0.$$

The incidence matrix records those same equations

Use the arc order $(12, 13, 23, 24, 34)$. Each column has +1 at its tail and -1 at its head.

$$A = \begin{pmatrix} 1 & 1 & 0 & 0 & 0 \\ -1 & 0 & 1 & 1 & 0 \\ 0 & -1 & -1 & 0 & 1 \\ 0 & 0 & 0 & -1 & -1 \end{pmatrix}, \quad x = \begin{pmatrix} x_{12} \\ x_{13} \\ x_{23} \\ x_{24} \\ x_{34} \end{pmatrix}, \quad b = \begin{pmatrix} 10 \\ 0 \\ 0 \\ -10 \end{pmatrix}.$$

> This A is the **node–arc incidence matrix**. Multiplying a column by its flow subtracts that amount at the receiving node and adds it at the sending node in the outgoing-minus-incoming convention.

Every column sums to zero, so the four balance rows are dependent.

One balance equation is redundant

Adding all four balances gives 0 = 10 + 0 + 0 - 10. If the first three hold, the fourth holds automatically.

> For a network with n nodes, connected when arrow directions are ignored, the incidence matrix has rank n - 1. Delete one node row to obtain n - 1 independent equalities.

Here delete node 4’s row. A simplex basis contains three independent arc columns.

From now on, matrix B uses this reduced three-row matrix. The graph and node balances still include node 4.


Appendix: why connectedness gives rank n - 1.

A spanning tree supplies exactly the basic columns

A **spanning tree** connects all nodes and contains no cycle when arrow directions are ignored. It has n - 1 arcs.

> Tree-basis theorem: n - 1 arc columns of the reduced incidence matrix are independent exactly when their arcs form a spanning tree.

Choose T = {12, 13, 34}. Set the other flows x_{23} and x_{24} to zero. Then solve the balance equations for the tree flows.

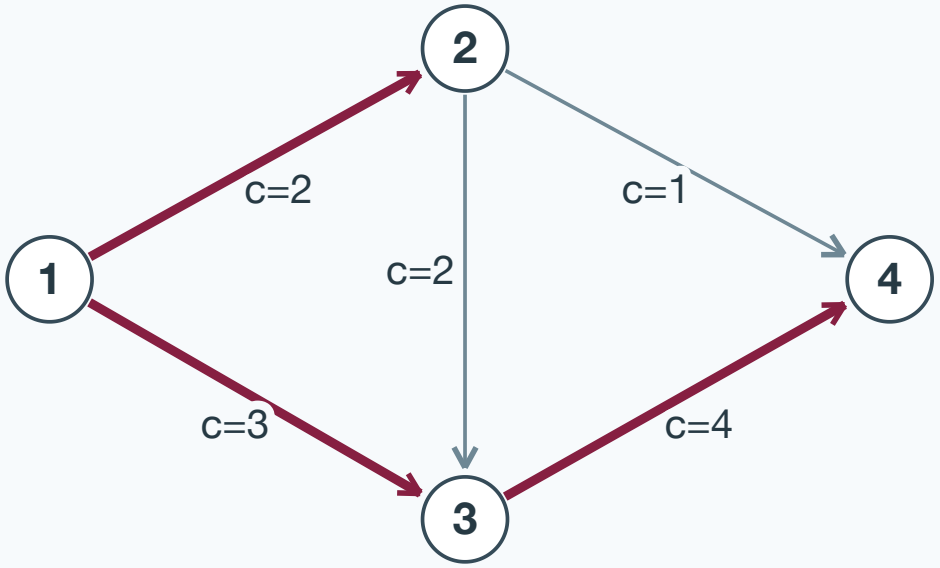


Thick maroon arcs: chosen basic columns. Direction still determines signs in the balance equations.

Solve the initial tree flows at its leaves

The nonbasic flows x_{23} and x_{24} are zero. Use the balances at nodes 2, 1, and 3, in that order.

$$\begin{aligned} -x_{12} &= 0 && \Rightarrow x_{12} = 0, \\ x_{12} + x_{13} &= 10 && \Rightarrow x_{13} = 10, \\ -x_{13} + x_{34} &= 0 && \Rightarrow x_{34} = 10. \end{aligned}$$

All basic flows are nonnegative. The basic flow x_{12} is zero, so this basic feasible solution is degenerate.

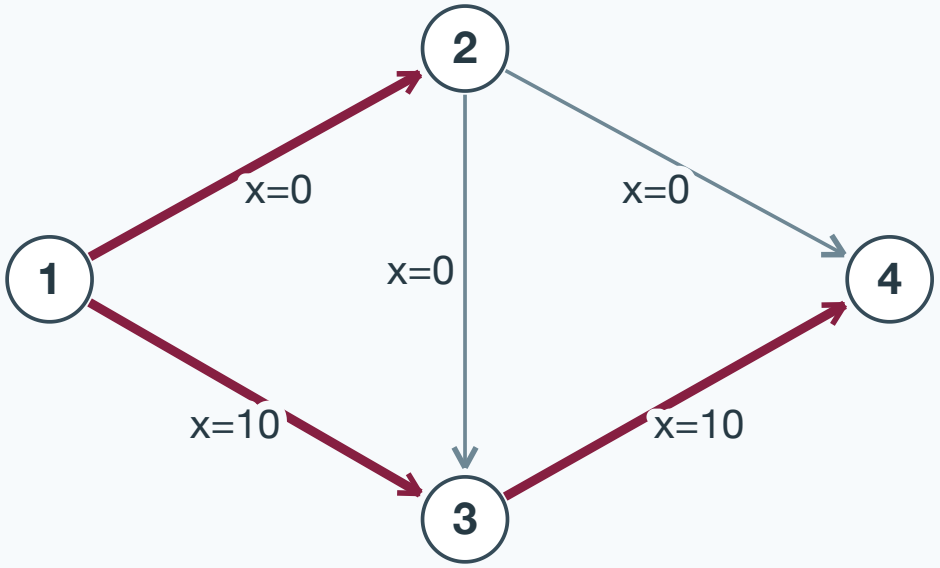

Arc labels are current flows. Thick maroon arcs form the basis tree; thin arcs are nonbasic.

A tree basis is not automatically feasible

A tree guarantees a unique basic solution, not its nonnegativity.

For two nodes with only the arc 1 $\rightarrow$ 2, the tree equation is $x_{12} = b_1$. If b_1 = -1 and b_2 = 1, the unique basic flow is -1 and is infeasible.

Always check the computed flows. Later we will construct an initial feasible tree using artificial arcs.

A zero basic flow is allowed. “Basic” means its column is selected in B; it does not mean its value is strictly positive.

The full initial dictionary comes from substitution

Send 10 units from node 1 to node 4. Minimize $f = 2x_{12} + 3x_{13} + 2x_{23} + x_{24} + 4x_{34}$; all flows are nonnegative.

Keep x_{23} and x_{24} symbolic. Node 2 gives $x_{12} = x_{23} + x_{24}$; substitute into node 1, then use node 4. Substitute the resulting flows into the original objective.

$$\begin{aligned} x_{12} &= x_{23} + x_{24}, \\ x_{13} &= 10 - x_{23} - x_{24}, \\ x_{34} &= 10 - x_{24}, \\ f &= 70 + x_{23} - 4x_{24}. \end{aligned}$$

The constant is $3(10) + 4(10) = 70$. The coefficients are $2 - 3 + 2 = 1$ for x_{23} and $2 - 3 + 1 - 4 = -4$ for x_{24}.

The matrix computation gives exactly the same dictionary

Delete node 4's row: the remaining right-hand side is $b_{\mathrm{red}} = (10, 0, 0)^{\top}$. Order basic variables (x_{12}, x_{13}, x_{34}) and nonbasic variables (x_{23}, x_{24}).

$$B = \begin{pmatrix} 1 & 1 & 0 \\ -1 & 0 & 0 \\ 0 & -1 & 1 \end{pmatrix}, \quad B^{-1} = \begin{pmatrix} 0 & -1 & 0 \\ 1 & 1 & 0 \\ 1 & 1 & 1 \end{pmatrix}, \quad A_N = \begin{pmatrix} 0 & 0 \\ 1 & 1 \\ -1 & 0 \end{pmatrix}.$$

$$B^{-1} b_{\mathrm{red}} = \begin{pmatrix} 0 \\ 10 \\ 10 \end{pmatrix}, \quad B^{-1} A_N = \begin{pmatrix} -1 & -1 \\ 1 & 1 \\ 0 & 1 \end{pmatrix}.$$

$$x_B = B^{-1} b_{\mathrm{red}} - B^{-1} A_N x_N.$$

The two products give the same three basic-variable equations as substitution.

One dual variable per node balance

Here A and b include all four node balances, so p = (p_1, p_2, p_3, p_4). E is the set of original directed arcs.

Primal: minimum-cost flow

$$\min c^\top x \quad \text{s.t. } Ax = b, \quad x \geq 0.$$

Column ij has +1 in row i and -1 in row j.

Dual: all p_i are unrestricted

$$\max b^\top p \quad \text{s.t. } p_i - p_j \leq c_{ij} \quad ((i,j) \in E).$$

Thus $A_{ij}^\top p = p_i - p_j$.

$$\bar{c}_{ij} = c_{ij} - (p_i - p_j) = c_{ij} - p_i + p_j.$$


Adding the same constant to every p_i changes no constraint and no dual value, since the balances sum to zero. We may set $p_1 = 0$.

Compute the basis dual variables on the tree

For a basis, choose p so each basic reduced cost is zero. On every tree arc, solve p_i - p_j = c_{ij}.

$$
\begin{aligned}
p_1 &= 0, \\
p_1 - p_2 = 2 \quad &\Rightarrow p_2 = -2, \\
p_1 - p_3 = 3 \quad &\Rightarrow p_3 = -3, \\
p_3 - p_4 = 4 \quad &\Rightarrow p_4 = -7.
\end{aligned}
$$

These are the basis equalities $A_T^\top p = c_T$. Fixing one node value makes their solution unique. These node dual variables are also called node potentials.

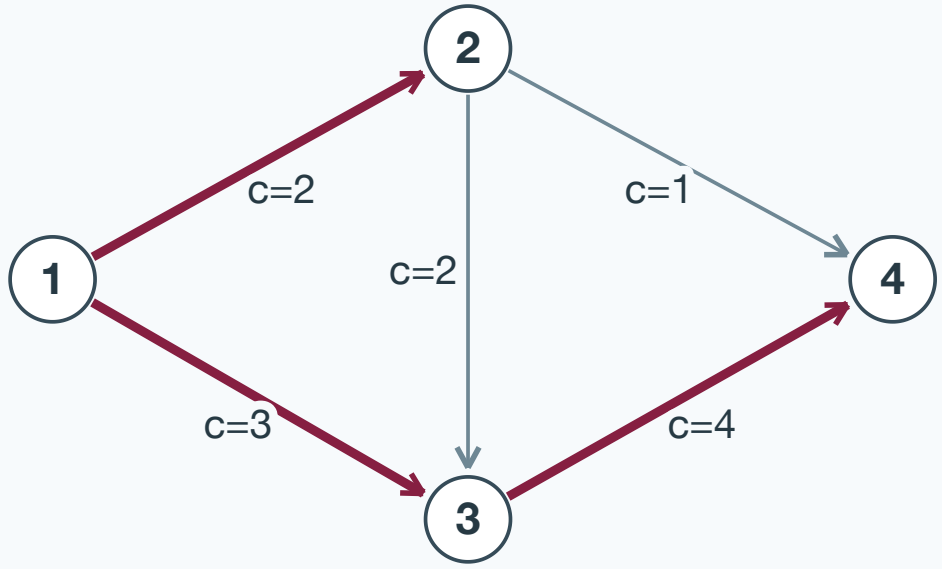

Arrow: original arc direction. Labels: cost per unit. Node balances are stated beside the graph.

This constructs a dual candidate. We must still check the inequalities on nonbasic arcs; complementary slackness alone does not establish feasibility.

Check every nonbasic reduced cost

Send 10 units from node 1 to node 4. Minimize $f = 2x_{12} + 3x_{13} + 2x_{23} + x_{24} + 4x_{34}$; all flows are nonnegative.

For the initial tree, $p = (0, -2, -3, -7)$. The nonbasic arcs are 23 and 24.

Arc	Calculation	Reduced cost
2 → 3	$2 - (-2) + (-3)$	1
2 → 4	$1 - (-2) + (-7)$	-4

Arc 24 violates its dual inequality. Its reduced cost -4 matches the coefficient of x_{24} in f = 70 + x_{23} - $4x_{24}$. Choose arc 24 to enter.

Basic arcs have zero reduced cost, including arc 12 whose basic flow is zero.


Adding one nonbasic arc creates one cycle

Add arc $2 \to 4$ to the tree. Start by following that entering arrow; return from 4 to 2 along the unique tree path.

$$2 \to 4 \to 3 \to 1 \to 2.$$

> Increase an original arc's flow when its arrow agrees with the traversal. Decrease its flow when its arrow opposes the traversal.

The increases and decreases need not alternate.

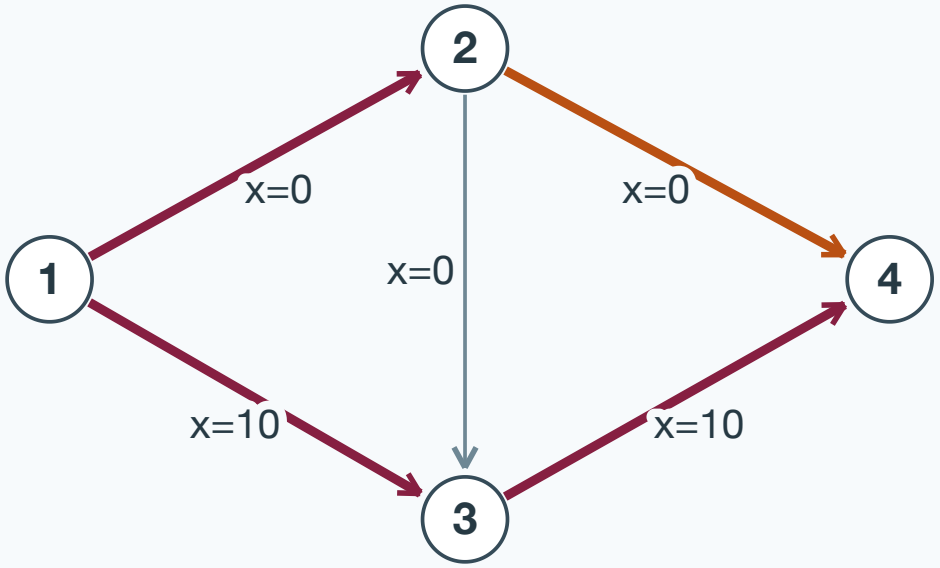

Orange: entering arc 24. Return along 34 backward, 13 backward, then 12 forward.

Write all flow changes before taking a ratio

Send 10 units from node 1 to node 4. Minimize $f = 2x_{12} + 3x_{13} + 2x_{23} + x_{24} + 4x_{34}$; all flows are nonnegative.

Arc	Direction on the cycle	New flow
24	Same as arrow	θ
34	Opposite arrow	$10 - \theta$
13	Opposite arrow	$10 - \theta$
12	Same as arrow	θ
23	Not on cycle	0

At every node, the changes preserve outgoing minus incoming flow. Arc 12 starts at zero but increases, so it cannot block this move.

Your turn: how far can we send flow around the cycle?

$$
\begin{aligned}
x_{12} &= x_{23} + x_{24},\\
x_{13} &= 10 - x_{23} - x_{24},\\
x_{34} &= 10 - x_{24},\\
f &= 70 + x_{23} - 4x_{24}.
\end{aligned}
$$

Work for about 5 minutes. Hold $x_{23} = 0$ and set $x_{24} = \theta \geq 0$.

1. Which basic flows decrease?
2. What is the largest feasible θ?
3. Which arc can leave? Compute the new total cost.

Use the full flow-change table, not only the entering arc.

Both decreasing flows reach zero at θ = 10

$$10 - \theta \geq 0 \quad \Rightarrow \quad \theta^* = 10.$$

Arcs 13 and 34 reach zero together. Break the tie by choosing arc 13 to leave.

New flows, in arc order (12, 13, 23, 24, 34): $x = (10, 0, 0, 10, 0)$.


Cycle cost per unit: $1 + 2 - 4 - 3 = -4$, the entering reduced cost.

$$f_{\text{new}} = 70 - 4(10) = 30.$$

The new tree is {12, 24, 34}, with arc 34 basic at zero. Both bases are degenerate, yet this pivot made a positive move.

Check the new flows and write the entire dictionary

$$
\begin{aligned}
x_{12} &= 10 - x_{13}, \\
x_{24} &= 10 - x_{13} - x_{23}, \\
x_{34} &= x_{13} + x_{23}, \\
f &= 30 + 4x_{13} + 5x_{23}.
\end{aligned}
$$

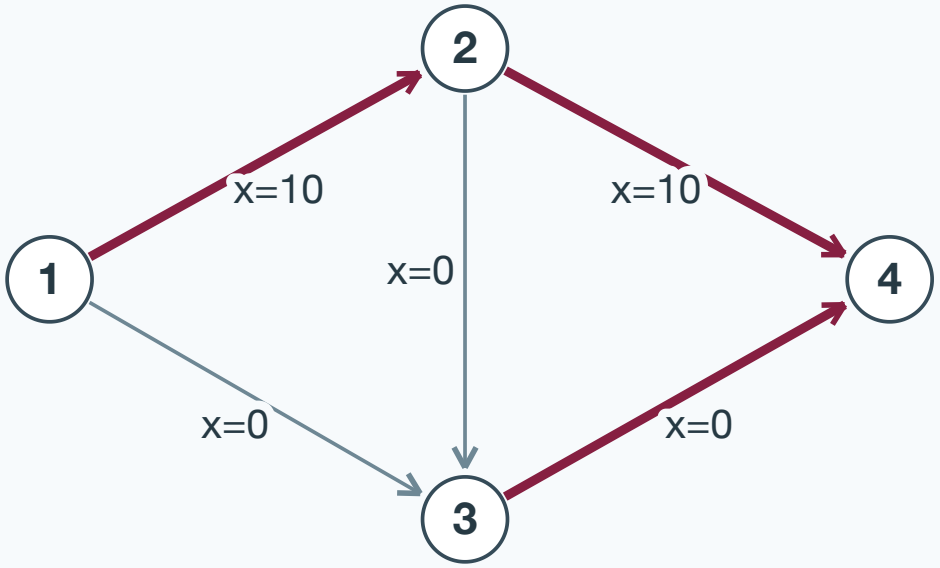

Arc labels are current flows. Thick maroon arcs form the basis tree; thin arcs are nonbasic.


Solve the old x_{13} equation for x_{24}: x_{24} = 10 - x_{13} - x_{23}. Substitute it into the other rows and the objective. Both nonbasic objective coefficients are nonnegative.

The new tree gives a feasible dual

Tree T = {12, 24, 34}; set $p_1 = 0$.

$$
\begin{aligned}
p_1 - p_2 &= 2 && \Rightarrow p_2 = -2,\\
p_2 - p_4 &= 1 && \Rightarrow p_4 = -3,\\
p_3 - p_4 &= 4 && \Rightarrow p_3 = 1.
\end{aligned}
$$

$$
\begin{aligned}
\bar{c}_{13} &= 3 - 0 + 1 = 4,\\
\bar{c}_{23} &= 2 - (-2) + 1 = 5.
\end{aligned}
$$

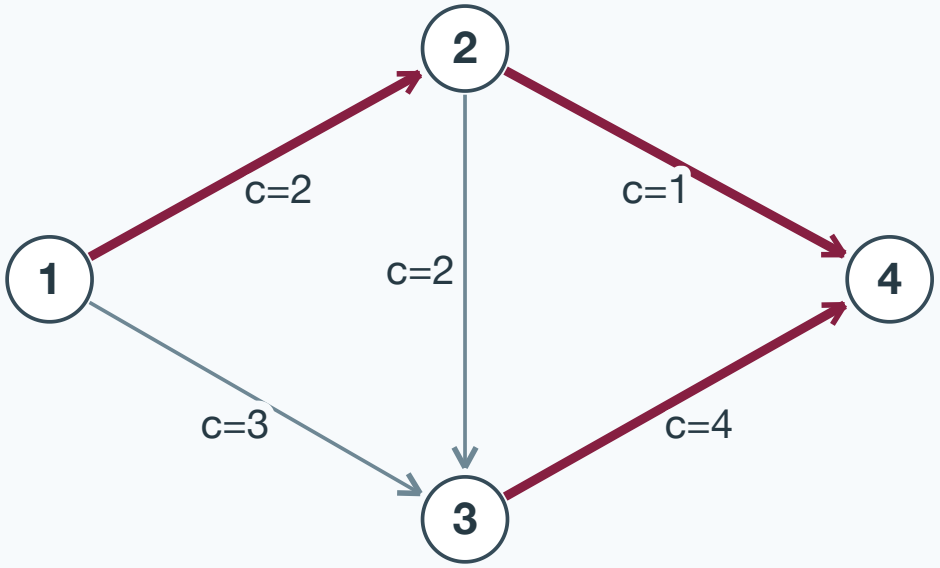

Arrow: original arc direction. Labels: cost per unit. Node balances are stated beside the graph.

Tree reduced costs are zero; the two other reduced costs are positive. Every dual inequality now holds.

The final certificate is an arithmetic equality

Send 10 units from node 1 to node 4. Minimize $f = 2x_{12} + 3x_{13} + 2x_{23} + x_{24} + 4x_{34}$; all flows are nonnegative.

Flows: arc order (12, 13, 23, 24, 34)	Dual variables: node order (1, 2, 3, 4)
$x = (10, 0, 0, 10, 0)$	$p = (0, -2, 1, -3)$

$$c^\top x = 2(10) + 1(10) = 30, \qquad b^\top p = 10(0) - 10(-3) = 30.$$

No feasible flow can cost less than the feasible dual value 30. The displayed flow attains 30, so it is optimal. This completes the shipping example.

Network simplex: the familiar five steps

Step	Uncapacitated minimum-cost flow
1. Current basis	A spanning tree with nonnegative flows
2. Dual calculation	Set one p value; solve $p_i - p_j = c_{ij}$ on tree arcs
3. Entering arc	A nonbasic arc with reduced cost $c_{ij} - p_i + p_j < 0$
4. Leaving arc	Follow its cycle until a decreasing flow reaches zero; if none decrease, the LP is unbounded
5. Update	Exchange arcs, update flows, and recompute p

> If all reduced costs are nonnegative, stop: the current basic feasible solution is optimal.

What if no cycle arc needs to decrease?

If every cycle arrow agrees with the traversal, all cycle flows increase. With no upper capacities, no nonnegativity constraint limits θ.

$$f(\theta) = f(0) + \theta \bar{c}_{\text{enter}}, \quad \bar{c}_{\text{enter}} < 0, \quad \theta \geq 0.$$

> The cost tends to -∞: the minimum-cost flow LP is unbounded below. The improving directed cycle is a certificate.


Example: b = 0, arcs 1 → 2 of cost -2, 2 → 3 of cost 0, and 3 → 1 of cost 1. Sending θ around this cycle costs -θ and changes no node balance.

Practice: choose the right arc to enter

Return to the initial tree {12, 13, 34}, but change only the cost of arc 23 from 2 to -1. In arc order (12, 13, 23, 24, 34), the costs are (2, 3, -1, 1, 4).

In that arc order, initial flows remain (0, 10, 0, 0, 10), cost 70. Basic costs did not change, so p = (0, -2, -3, -7), in node order 1–4.

> Work for about 5 minutes: compute both nonbasic reduced costs. Use the most-negative rule, perform one pivot, and decide whether to stop.

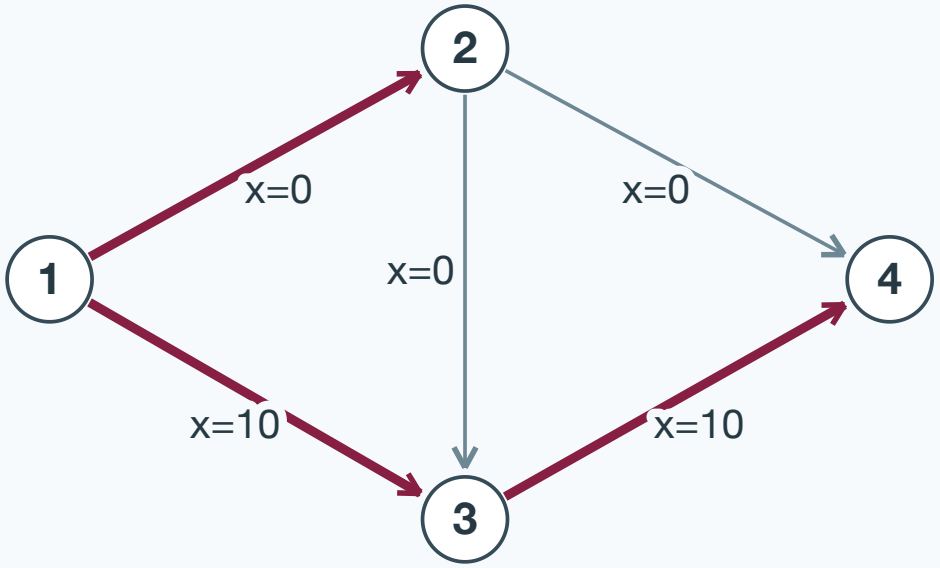

Arc labels are current flows. Thick maroon arcs form the basis tree; thin arcs are nonbasic.

The first pivot is the same; the final test still matters

The new reduced costs are $\bar{c}_{23} = -1 - (-2) - 3 = -2$ and $\bar{c}_{24} = -4$. The most-negative rule still chooses arc 24.

The cycle and ratio test are unchanged: θ = 10, arc 13 leaves, flows become (10, 0, 0, 10, 0).

$$p = (0, -2, 1, -3), \qquad \bar{c}_{13} = 4, \quad \bar{c}_{23} = -1 + 2 + 1 = 2.$$

Both nonbasic reduced costs are nonnegative; the cost is still 30 and the same dual value proves optimality. A negative original arc cost alone does not imply unboundedness.

Why use the graph instead of a dense inverse?

Calculation	Tree-based work
Basic flows	Remove leaves and solve one balance at a time
Basis dual variables	Traverse tree; one new p value per arc
Entering arc	Scan nonbasic reduced costs
Direction and ratio	Find the unique cycle and inspect its arcs

A simple implementation uses O(n + m) work per iteration: n nodes, m arcs. Specialized tree data structures can improve update costs.

> This is a bound on one iteration. It does not give a polynomial bound on the total number of simplex pivots.

A graph pivot and a dictionary pivot are the same operation

> The tree identifies B. The cycle gives a direction satisfying Ad = 0. The ratio test preserves nonnegativity. Reduced costs predict the objective change.

Next: arc capacities can stop an increasing flow. We will also study zero-length pivots and how to obtain a starting feasible tree.

Appendix: complete structural proofs and an additional two-pivot example.

Appendix: proofs and additional calculations

Why tree columns form a basis

Why cycle directions preserve balances

Why reduced cost equals cycle cost

Primal–dual optimality identity

A complete example with negative arc costs

Tree columns are independent; cycle columns are dependent

On a tree, suppose a linear combination of incidence columns is zero. A leaf row involves exactly one tree column, whose coefficient must be zero. Remove that leaf and repeat. All coefficients are zero.

This remains true after one row is removed: the missing row is the negative sum of the others. Thus n - 1 tree columns form an invertible square reduced matrix.

Conversely, columns on any undirected cycle have a nonzero signed combination equal to zero. Follow the cycle, using +1 for agreeing arrows and -1 for opposing arrows.

> A set of n - 1 arcs with no cycle is a spanning tree. A connected graph has such a tree, so its incidence rank is n - 1.

A cycle direction solves the same basis equations

Give the entering arc direction +1. Each cycle node receives and sends the same change; all other nodes are unchanged. Therefore Ad = 0.

$$Bd_B + A_{\text{enter}} = 0 \quad \Rightarrow \quad d_B = -B^{-1}A_{\text{enter}}.$$

Because B is invertible, the graph direction and the algebraic direction are identical. The cycle entries are +1 or -1, and arcs outside the cycle have direction 0.

> For uncapacitated flows, θ is limited only by $d_e = -1$. If no such arc exists, every θ ≥ 0 remains feasible.

The cycle cost is the entering reduced cost

On the tree, $c_e = p^\top A_e$. For a cycle direction d with entering component 1 and $Ad = 0$,

$$\begin{aligned} c^\top d &= c_{\text{enter}} + \sum_{e \in T} c_e d_e \\ &= c_{\text{enter}} + p^\top \sum_{e \in T} A_e d_e \\ &= c_{\text{enter}} - p^\top A_{\text{enter}} = \bar{c}_{\text{enter}}. \end{aligned}$$

Hence f(x + θd) = f(x) + θ times the entering reduced cost. The signed sum of cycle costs and the dictionary objective coefficient agree.

Nonnegative reduced costs prove optimality

For any feasible flow y, $Ay = b$. With $\bar{c} = c - A^\top p$,

$$c^\top y = p^\top A y + \bar{c}^\top y = p^\top b + \bar{c}^\top y.$$

If all reduced costs are nonnegative and y ≥ 0, every feasible objective is at least $p^\top b$. The current tree solution has zero nonbasic flows and zero basic reduced costs, so it attains $p^\top b$.

> This uses basis equalities and feasibility. A zero basic flow creates no exception to the proof.

Additional example: negative costs, two pivots

Four nodes have balances b = (4, 2, -1, -5), in node order 1–4. All flows are nonnegative with no upper bounds.

Arc order	12	13	14	23	24	32	34
Cost	2	-5	7	6	4	-1	3

Initial tree: {12, 23, 24}. The balances give $x_{12} = 4$, $x_{23} = 1$, $x_{24} = 5$; all other flows are zero. For this example, fix $p_4 = 0$ and solve the tree equalities.

$$f = 2(4) + 6(1) + 4(5) = 34, \qquad p = (6, 4, -2, 0).$$

The nonbasic reduced costs in order (13, 14, 32, 34) are (-13, 1, 5, 5). Enter 13.

Pivot 1: enter 13, leave 23

Follow 1 → 3 → 2 → 1. Increase x_{13}; decrease x_{23} and x_{12}.

$$\theta = \min\{x_{23}, x_{12}\} = \min\{1, 4\} = 1.$$

Flow order	12	13	14	23	24	32	34
After pivot 1	3	1	0	0	5	0	0

$$f = 34 - 13 = 21, \qquad p = (6, 4, 11, 0).$$

Tree {12, 13, 24}. Nonbasic reduced costs (14, 23, 32, 34) = (1, 13, -8, -8). Break the tie by choosing arc 32.

Pivot 2: enter 32, leave 12

Follow 3 → 2 → 1 → 3. Increase x_{32} and x_{13}; decrease x_{12}. The step is θ = 3.

Flow order	12	13	14	23	24	32	34
Final flow	0	4	0	0	5	3	0

$$f = 21 - 8(3) = -3, \qquad p = (-2, 4, 3, 0).$$

Tree {13, 24, 32}. Nonbasic reduced costs (12, 14, 23, 34) = (8, 9, 5, 0), all nonnegative.

$$b^{\top} p = 4(-2) + 2(4) - 1(3) - 5(0) = -3.$$

The final flow is optimal. The zero reduced cost of arc 34 permits an alternative optimal flow if its cycle admits a positive step.