EXPERIMENT – 9

TITLE: To understand the operation of TELNET by accessing the router in server room from a PC in IT office

AIM: To understand and demonstrate the operation of TELNET

TOPOLOGY:

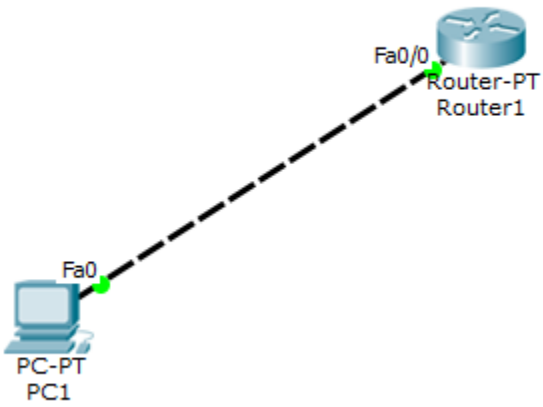

CLI Configuration:

```
Router>
Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 10.0.0.2 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#enable secret pass1
Router(config)#interface fastethernet0/0
Router(config-if)#line vty 0 5
Router(config-line)#login
% Login disabled on line 132, until 'password' is set
% Login disabled on line 133, until 'password' is set
% Login disabled on line 134, until 'password' is set
% Login disabled on line 135, until 'password' is set
% Login disabled on line 136, until 'password' is set
% Login disabled on line 137, until 'password' is set
Router(config-line)#password pass0
Router(config-line)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#wr
Building configuration...
[OK]
```

Ping Results (in CMD):

```
Packet Tracer PC Command Line 1.0
PC>ping 10.0.0.2

Pinging 10.0.0.2 with 32 bytes of data:

Reply from 10.0.0.2: bytes=32 time=0ms TTL=255
Reply from 10.0.0.2: bytes=32 time=0ms TTL=255
Reply from 10.0.0.2: bytes=32 time=0ms TTL=255
Reply from 10.0.0.2: bytes=32 time=0ms TTL=255

Ping statistics for 10.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

PC>telnet 10.0.0.2
Trying 10.0.0.2 ...Open


User Access Verification

Password:
```

```
[Connection to 10.0.0.2 closed by foreign host]
PC>telnet 10.0.0.2
Trying 10.0.0.2 ...Open


User Access Verification

Password:
Router>enable
Password:
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

C    10.0.0.0/8 is directly connected, FastEthernet0/0
```