

Systems of Linear Equations

Instructor: Asst. Prof. Dr. Praphan Pavarangkoon

Office: Room no. 418-5, 4th Floor

Email: praphan@it.kmitl.ac.th

Office hours: Wednesday at 13:00 – 16:00
or as an advance appointment



Outline

- Introduction to Systems of Linear Equations
- Systems of Linear Equations
- Solving a System of Linear Equations
 - Using an Inverse Matrix
 - Cramer's Rule
 - Gaussian Elimination and Gauss-Jordan Elimination
 - The LU-*Factorization*

Introduction to Systems of Linear Equations

- Linear algebra is a branch of mathematics rich in theory and applications.
- Because linear algebra arose from the study of systems of linear equations, you shall begin with linear equations.

Linear Equations in n Variables

A **linear equation in n variables** $x_1, x_2, x_3, \dots, x_n$ has the form

$$a_1x_1 + a_2x_2 + a_3x_3 + \dots + a_nx_n = b.$$

The **coefficients** $a_1, a_2, a_3, \dots, a_n$ are real numbers, and the **constant term** b is a real number. The number a_1 is the **leading coefficient**, and x_1 is the **leading variable**.

Examples of Linear Equations and Nonlinear Equations

Each equation is linear.

(a) $3x + 2y = 7$

(b) $\frac{1}{2}x + y - \pi z = \sqrt{2}$

(c) $x_1 - 2x_2 + 10x_3 + x_4 = 0$

(d) $\left(\sin \frac{\pi}{2}\right)x_1 - 4x_2 = e^2$

Each equation is not linear.

(a) $xy + z = 2$

(b) $e^x - 2y = 4$

(c) $\sin x_1 + 2x_2 - 3x_3 = 0$

(d) $\frac{1}{x} + \frac{1}{y} = 4$

Systems of Linear Equations

A **system of m linear equations in n variables** is a set of m equations, each of which is linear in the same n variables:

$$\begin{aligned}a_{11}x_1 + a_{12}x_2 + a_{13}x_3 + \cdots + a_{1n}x_n &= b_1 \\a_{21}x_1 + a_{22}x_2 + a_{23}x_3 + \cdots + a_{2n}x_n &= b_2 \\a_{31}x_1 + a_{32}x_2 + a_{33}x_3 + \cdots + a_{3n}x_n &= b_3 \\&\vdots \\a_{m1}x_1 + a_{m2}x_2 + a_{m3}x_3 + \cdots + a_{mn}x_n &= b_m.\end{aligned}$$

Systems of Two Equations in Two Variables

Solve each system of linear equations, and graph each system as a pair of straight lines.

$$\begin{array}{lll} \text{(a)} & x + y = 3 & \text{(b)} & x + y = 3 & \text{(c)} & x + y = 3 \\ & x - y = -1 & & 2x + 2y = 6 & & x + y = 1 \end{array}$$

SOLUTION


(a) This system has exactly one solution, $x = 1$ and $y = 2$. The solution can be obtained by adding the two equations to give $2x = 2$, which implies $x = 1$ and so $y = 2$. The graph of this system is represented by two *intersecting* lines, as shown in Figure 1.1(a).

(b) This system has an infinite number of solutions because the second equation is the result of multiplying both sides of the first equation by 2. A parametric representation of the solution set is shown as


$$x = 3 - t, \quad y = t, \quad t \text{ is any real number.}$$

The graph of this system is represented by two *coincident* lines, as shown in Figure 1.1(b).


(c) This system has no solution because it is impossible for the sum of two numbers to be 3 and 1 simultaneously. The graph of this system is represented by two *parallel* lines, as shown in Figure 1.1(c).



(a) Two intersecting lines:
 $x + y = 3$
 $x - y = -1$



(b) Two coincident lines:
 $x + y = 3$
 $2x + 2y = 6$



(c) Two parallel lines:
 $x + y = 3$
 $x + y = 1$

Figure 1.1

Number of Solutions of a System of Linear Equations

For a system of linear equations in n variables, precisely one of the following is true.

1. The system has exactly one solution (consistent system).
2. The system has an infinite number of solutions (consistent system).
3. The system has no solution (inconsistent system).

Solving a System of Linear Equations

Which system is easier to solve algebraically?

$$\begin{array}{rcl} x - 2y + 3z & = & 9 \\ -x + 3y & = & -4 \\ 2x - 5y + 5z & = & 17 \end{array} \qquad \begin{array}{rcl} x - 2y + 3z & = & 9 \\ y + 3z & = & 5 \\ z & = & 2 \end{array}$$

The system on the right is clearly easier to solve. This system is in **row-echelon form**, which means that it follows a stair-step pattern and has leading coefficients of 1. To solve such a system, use a procedure called **back-substitution**.

Systems of Equations

If A is an invertible matrix, then the system of linear equations $A\mathbf{x} = \mathbf{b}$ has a unique solution given by

$$\mathbf{x} = A^{-1}\mathbf{b}.$$

PROOF Because A is nonsingular, the steps shown below are valid.

$$\begin{aligned} A\mathbf{x} &= \mathbf{b} \\ A^{-1}A\mathbf{x} &= A^{-1}\mathbf{b} \\ I\mathbf{x} &= A^{-1}\mathbf{b} \\ \mathbf{x} &= A^{-1}\mathbf{b} \end{aligned}$$

This solution is unique because if $\mathbf{x}_1$ and $\mathbf{x}_2$ were two solutions, you could apply the cancellation property to the equation $A\mathbf{x}_1 = \mathbf{b} = A\mathbf{x}_2$ to conclude that $\mathbf{x}_1 = \mathbf{x}_2$.

If C is an invertible matrix, then the following properties hold.

1. If $AC = BC$, then $A = B$. Right cancellation property
2. If $CA = CB$, then $A = B$. Left cancellation property

Solving a System of Equations Using an Inverse Matrix

Use an inverse matrix to solve each system.

$$\begin{aligned} \text{(a)} \quad 2x + 3y + z &= -1 \\ 3x + 3y + z &= 1 \\ 2x + 4y + z &= -2 \end{aligned}$$

$$\begin{aligned} \text{(b)} \quad 2x + 3y + z &= 4 \\ 3x + 3y + z &= 8 \\ 2x + 4y + z &= 5 \end{aligned}$$

$$\begin{aligned} \text{(c)} \quad 2x + 3y + z &= 0 \\ 3x + 3y + z &= 0 \\ 2x + 4y + z &= 0 \end{aligned}$$

SOLUTION First note that the coefficient matrix for each system is

$$A = \begin{bmatrix} 2 & 3 & 1 \\ 3 & 3 & 1 \\ 2 & 4 & 1 \end{bmatrix}.$$

Using Gauss-Jordan elimination, you can find A^{-1} to be

$$A^{-1} = \begin{bmatrix} -1 & 1 & 0 \\ -1 & 0 & 1 \\ 6 & -2 & -3 \end{bmatrix}.$$

To solve each system, use matrix multiplication, as follows.

$$\text{(a)} \quad \mathbf{x} = A^{-1}\mathbf{b} = \begin{bmatrix} -1 & 1 & 0 \\ -1 & 0 & 1 \\ 6 & -2 & -3 \end{bmatrix} \begin{bmatrix} -1 \\ 1 \\ -2 \end{bmatrix} = \begin{bmatrix} 2 \\ -1 \\ -2 \end{bmatrix}$$

The solution is $x = 2$, $y = -1$, and $z = -2$.

$$\text{(b)} \quad \mathbf{x} = A^{-1}\mathbf{b} = \begin{bmatrix} -1 & 1 & 0 \\ -1 & 0 & 1 \\ 6 & -2 & -3 \end{bmatrix} \begin{bmatrix} 4 \\ 8 \\ 5 \end{bmatrix} = \begin{bmatrix} 4 \\ 1 \\ -7 \end{bmatrix}$$

The solution is $x = 4$, $y = 1$, and $z = -7$.

$$\text{(c)} \quad \mathbf{x} = A^{-1}\mathbf{b} = \begin{bmatrix} -1 & 1 & 0 \\ -1 & 0 & 1 \\ 6 & -2 & -3 \end{bmatrix} \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}$$

The solution is trivial: $x = 0$, $y = 0$, and $z = 0$.

Cramer's Rule

Cramer's Rule, named after Gabriel Cramer (1704–1752), is a formula that uses determinants to solve a system of n linear equations in n variables. This rule can be applied only to systems of linear equations that have unique solutions.

To see how Cramer's Rule arises, look at the solution of a general system involving two linear equations in two variables.

$$a_{11}x_1 + a_{12}x_2 = b_1$$

$$a_{21}x_1 + a_{22}x_2 = b_2$$

Multiplying the first equation by $-a_{21}$ and the second by a_{11} and adding the results produces

$$-a_{21}a_{11}x_1 - a_{21}a_{12}x_2 = -a_{21}b_1$$

$$a_{11}a_{21}x_1 + a_{11}a_{22}x_2 = a_{11}b_2$$

$$(a_{11}a_{22} - a_{21}a_{12})x_2 = a_{11}b_2 - a_{21}b_1.$$

Solving for x_2 (provided that $a_{11}a_{22} - a_{21}a_{12} \neq 0$) produces

$$x_2 = \frac{a_{11}b_2 - a_{21}b_1}{a_{11}a_{22} - a_{21}a_{12}}.$$

In a similar way, you can solve for x_1 to obtain

$$x_1 = \frac{a_{22}b_1 - a_{12}b_2}{a_{11}a_{22} - a_{21}a_{12}}.$$

Cramer's Rule (cont.)

Finally, recognizing that the numerators and denominators of both x_1 and x_2 can be represented as determinants, you have

$$x_1 = \frac{\begin{vmatrix} b_1 & a_{12} \\ b_2 & a_{22} \end{vmatrix}}{\begin{vmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{vmatrix}}, \quad x_2 = \frac{\begin{vmatrix} a_{11} & b_1 \\ a_{21} & b_2 \end{vmatrix}}{\begin{vmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{vmatrix}}, \quad a_{11}a_{22} - a_{21}a_{12} \neq 0.$$

The denominator for both x_1 and x_2 is simply the determinant of the coefficient matrix A . The determinant forming the numerator of x_1 can be obtained from A by replacing its first column by the column representing the constants of the system. The determinant forming the numerator of x_2 can be obtained in a similar way. These two determinants are denoted by $|A_1|$ and $|A_2|$, as follows.

$$|A_1| = \begin{vmatrix} b_1 & a_{12} \\ b_2 & a_{22} \end{vmatrix} \quad \text{and} \quad |A_2| = \begin{vmatrix} a_{11} & b_1 \\ a_{21} & b_2 \end{vmatrix}$$

You have $x_1 = \frac{|A_1|}{|A|}$ and $x_2 = \frac{|A_2|}{|A|}$. This determinant form of the solution is called **Cramer's Rule**.

Using Cramer's Rule

Use Cramer's Rule to solve the system of linear equations.

$$4x_1 - 2x_2 = 10$$

$$3x_1 - 5x_2 = 11$$

SOLUTION First find the determinant of the coefficient matrix.

$$|A| = \begin{vmatrix} 4 & -2 \\ 3 & -5 \end{vmatrix} = -14$$

Because $|A| \neq 0$, you know the system has a unique solution, and applying Cramer's Rule produces

$$x_1 = \frac{|A_1|}{|A|} = \frac{\begin{vmatrix} 10 & -2 \\ 11 & -5 \end{vmatrix}}{-14} = \frac{-28}{-14} = 2$$

$$x_2 = \frac{|A_2|}{|A|} = \frac{\begin{vmatrix} 4 & 10 \\ 3 & 11 \end{vmatrix}}{-14} = \frac{14}{-14} = -1.$$

The solution is $x_1 = 2$ and $x_2 = -1$.

Cramer's Rule (cont.)

If a system of n linear equations in n variables has a coefficient matrix with a nonzero determinant $|A|$, then the solution of the system is given by

$$x_1 = \frac{\det(A_1)}{\det(A)}, \quad x_2 = \frac{\det(A_2)}{\det(A)}, \quad \dots, \quad x_n = \frac{\det(A_n)}{\det(A)},$$

where the i th column of A_i is the column of constants in the system of equations.

PROOF Let the system be represented by $AX = B$. Because $|A|$ is nonzero, you can write

$$X = A^{-1}B = \frac{1}{|A|} \operatorname{adj}(A)B = \begin{bmatrix} x_1 \\ x_2 \\ \vdots \\ x_n \end{bmatrix}.$$

If the entries of B are $b_1, b_2, \dots, b_n$, then x_i is

$$x_i = \frac{1}{|A|} (b_1 C_{1i} + b_2 C_{2i} + \dots + b_n C_{ni}),$$

but the sum (in parentheses) is precisely the cofactor expansion of A_i , which means that $x_i = |A_i|/|A|$, and the proof is complete.

Using Cramer's Rule

Use Cramer's Rule to solve the system of linear equations for x .

$$\begin{array}{rcl} -x + 2y - 3z & = & 1 \\ 2x & + & z = 0 \\ 3x - 4y + 4z & = & 2 \end{array}$$

SOLUTION The determinant of the coefficient matrix is

$$|A| = \begin{vmatrix} -1 & 2 & -3 \\ 2 & 0 & 1 \\ 3 & -4 & 4 \end{vmatrix} = 10.$$

Because $|A| \neq 0$, you know the solution is unique, and Cramer's Rule can be applied to solve for x , as follows.

$$x = \frac{\begin{vmatrix} 1 & 2 & -3 \\ 0 & 0 & 1 \\ 2 & -4 & 4 \end{vmatrix}}{10} = \frac{(1)(-1)^5 \begin{vmatrix} 1 & 2 \\ 2 & -4 \end{vmatrix}}{10} = \frac{(1)(-1)(-8)}{10} = \frac{4}{5}$$

Gaussian Elimination and Gauss-Jordan Elimination

- Gaussian elimination was introduced as a procedure for solving a system of linear equations.

Elementary Row Operations

1. Interchange two rows.
2. Multiply a row by a nonzero constant.
3. Add a multiple of a row to another row.

- Rewriting a system of linear equations in row-echelon form usually involves a chain of equivalent systems, each of which is obtained by using one of the three basic operations. This process is called **Gaussian elimination**, after the German mathematician Carl Friedrich Gauss (1777–1855).

Elementary Row Operations (cont.)

(a) Interchange the first and second rows.

<i>Original Matrix</i>	<i>New Row-Equivalent Matrix</i>	<i>Notation</i>
$\begin{bmatrix} 0 & 1 & 3 & 4 \\ -1 & 2 & 0 & 3 \\ 2 & -3 & 4 & 1 \end{bmatrix}$	$\begin{bmatrix} -1 & 2 & 0 & 3 \\ 0 & 1 & 3 & 4 \\ 2 & -3 & 4 & 1 \end{bmatrix}$	$R_1 \leftrightarrow R_2$

(b) Multiply the first row by $\frac{1}{2}$ to produce a new first row.

<i>Original Matrix</i>	<i>New Row-Equivalent Matrix</i>	<i>Notation</i>
$\begin{bmatrix} 2 & -4 & 6 & -2 \\ 1 & 3 & -3 & 0 \\ 5 & -2 & 1 & 2 \end{bmatrix}$	$\begin{bmatrix} 1 & -2 & 3 & -1 \\ 1 & 3 & -3 & 0 \\ 5 & -2 & 1 & 2 \end{bmatrix}$	$\left(\frac{1}{2}\right)R_1 \rightarrow R_1$

(c) Add -2 times the first row to the third row to produce a new third row.

<i>Original Matrix</i>	<i>New Row-Equivalent Matrix</i>	<i>Notation</i>
$\begin{bmatrix} 1 & 2 & -4 & 3 \\ 0 & 3 & -2 & -1 \\ 2 & 1 & 5 & -2 \end{bmatrix}$	$\begin{bmatrix} 1 & 2 & -4 & 3 \\ 0 & 3 & -2 & -1 \\ 0 & -3 & 13 & -8 \end{bmatrix}$	$R_3 + (-2)R_1 \rightarrow R_3$

Using Elementary Row Operations to Solve a System

Linear System

$$\begin{aligned}x - 2y + 3z &= 9 \\ -x + 3y &= -4 \\ 2x - 5y + 5z &= 17\end{aligned}$$

Add the first equation to the second equation.

$$\begin{aligned}x - 2y + 3z &= 9 \\ y + 3z &= 5 \\ 2x - 5y + 5z &= 17\end{aligned}$$

Add -2 times the first equation to the third equation.

$$\begin{aligned}x - 2y + 3z &= 9 \\ y + 3z &= 5 \\ -y - z &= -1\end{aligned}$$

Add the second equation to the third equation.

$$\begin{aligned}x - 2y + 3z &= 9 \\ y + 3z &= 5 \\ 2z &= 4\end{aligned}$$

Multiply the third equation by $\frac{1}{2}$.

$$\begin{aligned}x - 2y + 3z &= 9 \\ y + 3z &= 5 \\ z &= 2\end{aligned}$$

Now you can use back-substitution to find the solution, as in the previous. The solution is $x = 1$, $y = -1$, and $z = 2$.

Associated Augmented Matrix

$$\left[\begin{array}{cccc} 1 & -2 & 3 & 9 \\ -1 & 3 & 0 & -4 \\ 2 & -5 & 5 & 17 \end{array} \right]$$

Add the first row to the second row to produce a new second row.

$$\left[\begin{array}{cccc} 1 & -2 & 3 & 9 \\ 0 & 1 & 3 & 5 \\ 2 & -5 & 5 & 17 \end{array} \right] \quad R_2 + R_1 \rightarrow R_2$$

Add -2 times the first row to the third row to produce a new third row.

$$\left[\begin{array}{cccc} 1 & -2 & 3 & 9 \\ 0 & 1 & 3 & 5 \\ 0 & -1 & -1 & -1 \end{array} \right] \quad R_3 + (-2)R_1 \rightarrow R_3$$

Add the second row to the third row to produce a new third row.

$$\left[\begin{array}{cccc} 1 & -2 & 3 & 9 \\ 0 & 1 & 3 & 5 \\ 0 & 0 & 2 & 4 \end{array} \right] \quad R_3 + R_2 \rightarrow R_3$$

Multiply the third row by $\frac{1}{2}$ to produce a new third row.

$$\left[\begin{array}{cccc} 1 & -2 & 3 & 9 \\ 0 & 1 & 3 & 5 \\ 0 & 0 & 1 & 2 \end{array} \right] \quad \left(\frac{1}{2}\right)R_3 \rightarrow R_3$$

Row-Echelon Form of a Matrix

A matrix in **row-echelon form** has the following properties.

1. All rows consisting entirely of zeros occur at the bottom of the matrix.
2. For each row that does not consist entirely of zeros, the first nonzero entry is 1 (called a **leading 1**).
3. For two successive (nonzero) rows, the leading 1 in the higher row is farther to the left than the leading 1 in the lower row.

REMARK: A matrix in row-echelon form is in **reduced row-echelon form** if every column that has a leading 1 has zeros in every position above and below its leading 1.

Row-Echelon Form

The matrices below are in row-echelon form.

(a)
$$\begin{bmatrix} 1 & 2 & -1 & 4 \\ 0 & 1 & 0 & 3 \\ 0 & 0 & 1 & -2 \end{bmatrix}$$

(b)
$$\begin{bmatrix} 0 & 1 & 0 & 5 \\ 0 & 0 & 1 & 3 \\ 0 & 0 & 0 & 0 \end{bmatrix}$$

(c)
$$\begin{bmatrix} 1 & -5 & 2 & -1 & 3 \\ 0 & 0 & 1 & 3 & -2 \\ 0 & 0 & 0 & 1 & 4 \\ 0 & 0 & 0 & 0 & 1 \end{bmatrix}$$

(d)
$$\begin{bmatrix} 1 & 0 & 0 & -1 \\ 0 & 1 & 0 & 2 \\ 0 & 0 & 1 & 3 \\ 0 & 0 & 0 & 0 \end{bmatrix}$$

The matrices shown in parts (b) and (d) are in *reduced* row-echelon form. The matrices listed below are not in row-echelon form.

(e)
$$\begin{bmatrix} 1 & 2 & -3 & 4 \\ 0 & 2 & 1 & -1 \\ 0 & 0 & 1 & -3 \end{bmatrix}$$

(f)
$$\begin{bmatrix} 1 & 2 & -1 & 2 \\ 0 & 0 & 0 & 0 \\ 0 & 1 & 2 & -4 \end{bmatrix}$$

Gaussian Elimination with Back-Substitution

1. Write the augmented matrix of the system of linear equations.
2. Use elementary row operations to rewrite the augmented matrix in row-echelon form.
3. Write the system of linear equations corresponding to the matrix in row-echelon form, and use back-substitution to find the solution.

Gaussian elimination with back-substitution works well as an algorithmic method for solving systems of linear equations. For this algorithm, the order in which the elementary row operations are performed is important. Move from *left to right by columns*, changing all entries directly below the leading 1's to zeros.

Gaussian Elimination with Back-Substitution (cont.)

Solve the system.

$$\begin{array}{rclcl} x_2 + x_3 - 2x_4 & = & -3 \\ x_1 + 2x_2 - x_3 & = & 2 \\ 2x_1 + 4x_2 + x_3 - 3x_4 & = & -2 \\ x_1 - 4x_2 - 7x_3 - x_4 & = & -19 \end{array}$$

SOLUTION The augmented matrix for this system is

$$\begin{bmatrix} 0 & 1 & 1 & -2 & -3 \\ 1 & 2 & -1 & 0 & 2 \\ 2 & 4 & 1 & -3 & -2 \\ 1 & -4 & -7 & -1 & -19 \end{bmatrix}.$$

Obtain a leading 1 in the upper left corner and zeros elsewhere in the first column.

$$\begin{bmatrix} 1 & 2 & -1 & 0 & 2 \\ 0 & 1 & 1 & -2 & -3 \\ 2 & 4 & 1 & -3 & -2 \\ 1 & -4 & -7 & -1 & -19 \end{bmatrix}$$

← The first two rows are interchanged. $R_1 \leftrightarrow R_2$

$$\begin{bmatrix} 1 & 2 & -1 & 0 & 2 \\ 0 & 1 & 1 & -2 & -3 \\ 0 & 0 & 3 & -3 & -6 \\ 1 & -4 & -7 & -1 & -19 \end{bmatrix}$$

← Adding -2 times the first row to the third row produces a new third row. $R_3 + (-2)R_1 \rightarrow R_3$

Gaussian Elimination with Back-Substitution (cont.)

$$\begin{bmatrix} 1 & 2 & -1 & 0 & 2 \\ 0 & 1 & 1 & -2 & -3 \\ 0 & 0 & 3 & -3 & -6 \\ 0 & -6 & -6 & -1 & -21 \end{bmatrix}$$

Adding -1 times the first row to the fourth row

← produces a new fourth row. $R_4 + (-1)R_1 \rightarrow R_4$

Now that the first column is in the desired form, you should change the second column as shown below.

$$\begin{bmatrix} 1 & 2 & -1 & 0 & 2 \\ 0 & 1 & 1 & -2 & -3 \\ 0 & 0 & 3 & -3 & -6 \\ 0 & 0 & 0 & -13 & -39 \end{bmatrix}$$

Adding 6 times the second row to the fourth row

← produces a new fourth row. $R_4 + (6)R_2 \rightarrow R_4$

To write the third column in proper form, multiply the third row by $\frac{1}{3}$.

$$\begin{bmatrix} 1 & 2 & -1 & 0 & 2 \\ 0 & 1 & 1 & -2 & -3 \\ 0 & 0 & 1 & -1 & -2 \\ 0 & 0 & 0 & -13 & -39 \end{bmatrix}$$

Multiplying the third row by $\frac{1}{3}$ produces a new third row.

$$\left(\frac{1}{3}\right)R_3 \rightarrow R_3$$

Similarly, to write the fourth column in proper form, you should multiply the fourth row by $-\frac{1}{13}$.

$$\begin{bmatrix} 1 & 2 & -1 & 0 & 2 \\ 0 & 1 & 1 & -2 & -3 \\ 0 & 0 & 1 & -1 & -2 \\ 0 & 0 & 0 & 1 & 3 \end{bmatrix}$$

Multiplying the fourth row by $-\frac{1}{13}$ produces a new fourth row.

$$\left(-\frac{1}{13}\right)R_4 \rightarrow R_4$$

The matrix is now in row-echelon form, and the corresponding system of linear equations is as shown below.

$$\begin{aligned} x_1 + 2x_2 - x_3 &= 2 \\ x_2 + x_3 - 2x_4 &= -3 \\ x_3 - x_4 &= -2 \\ x_4 &= 3 \end{aligned}$$

Using back-substitution, you can determine that the solution is

$$x_1 = -1, \quad x_2 = 2, \quad x_3 = 1, \quad x_4 = 3.$$

Gauss-Jordan Elimination

With Gaussian elimination, you apply elementary row operations to a matrix to obtain a (row-equivalent) row-echelon form. A second method of elimination, called **Gauss-Jordan elimination** after Carl Gauss and Wilhelm Jordan (1842–1899), continues the reduction process until a *reduced* row-echelon form is obtained. This procedure is demonstrated in the next example.

Gauss-Jordan Elimination (cont.)

Use Gauss-Jordan elimination to solve the system.

$$\begin{aligned}x - 2y + 3z &= 9 \\ -x + 3y &= -4 \\ 2x - 5y + 5z &= 17\end{aligned}$$

SOLUTION In Example 3, Gaussian elimination was used to obtain the row-echelon form

$$\begin{bmatrix} 1 & -2 & 3 & 9 \\ 0 & 1 & 3 & 5 \\ 0 & 0 & 1 & 2 \end{bmatrix}.$$

Now, rather than using back-substitution, apply elementary row operations until you obtain a matrix in reduced row-echelon form. To do this, you must produce zeros above each of the leading 1's, as follows.

$$\begin{bmatrix} 1 & 0 & 9 & 19 \\ 0 & 1 & 3 & 5 \\ 0 & 0 & 1 & 2 \end{bmatrix} \quad R_1 + (2)R_2 \rightarrow R_1$$

$$\begin{bmatrix} 1 & 0 & 9 & 19 \\ 0 & 1 & 0 & -1 \\ 0 & 0 & 1 & 2 \end{bmatrix} \quad R_2 + (-3)R_3 \rightarrow R_2$$

$$\begin{bmatrix} 1 & 0 & 0 & 1 \\ 0 & 1 & 0 & -1 \\ 0 & 0 & 1 & 2 \end{bmatrix} \quad R_1 + (-9)R_3 \rightarrow R_1$$

Now, converting back to a system of linear equations, you have

$$\begin{aligned}x &= 1 \\ y &= -1 \\ z &= 2.\end{aligned}$$

Applications of Systems of Linear Equations

- Systems of linear equations arise in a wide variety of applications and are one of the central themes in linear algebra.

Polynomial Curve Fitting

Suppose a collection of data is represented by n points in the xy -plane,

$$(x_1, y_1), (x_2, y_2), \dots, (x_n, y_n)$$

and you are asked to find a polynomial function of degree $n - 1$

$$p(x) = a_0 + a_1x + a_2x^2 + \dots + a_{n-1}x^{n-1}$$

whose graph passes through the specified points. This procedure is called **polynomial curve fitting**. If all x -coordinates of the points are distinct, then there is precisely one polynomial function of degree $n - 1$ (or less) that fits the n points, as shown in Figure 1.4.


To solve for the n coefficients of $p(x)$, substitute each of the n points into the polynomial function and obtain n linear equations in n variables $a_0, a_1, a_2, \dots, a_{n-1}$.

$$a_0 + a_1x_1 + a_2x_1^2 + \dots + a_{n-1}x_1^{n-1} = y_1$$

$$a_0 + a_1x_2 + a_2x_2^2 + \dots + a_{n-1}x_2^{n-1} = y_2$$

$$\vdots$$

$$a_0 + a_1x_n + a_2x_n^2 + \dots + a_{n-1}x_n^{n-1} = y_n$$

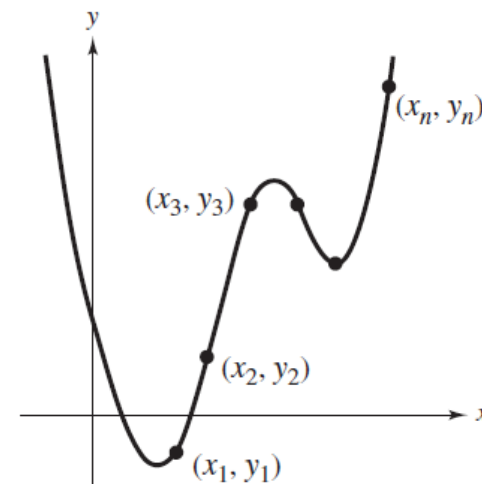

Polynomial Curve Fitting

Polynomial Curve Fitting (cont.)

Determine the polynomial $p(x) = a_0 + a_1x + a_2x^2$ whose graph passes through the points $(1, 4)$, $(2, 0)$, and $(3, 12)$.

SOLUTION

Substituting $x = 1, 2$, and 3 into $p(x)$ and equating the results to the respective y -values produces the system of linear equations in the variables a_0, a_1 , and a_2 shown below.


$$p(1) = a_0 + a_1(1) + a_2(1)^2 = a_0 + a_1 + a_2 = 4$$

$$p(2) = a_0 + a_1(2) + a_2(2)^2 = a_0 + 2a_1 + 4a_2 = 0$$

$$p(3) = a_0 + a_1(3) + a_2(3)^2 = a_0 + 3a_1 + 9a_2 = 12$$

The solution of this system is $a_0 = 24$, $a_1 = -28$, and $a_2 = 8$, so the polynomial function is

$$p(x) = 24 - 28x + 8x^2.$$

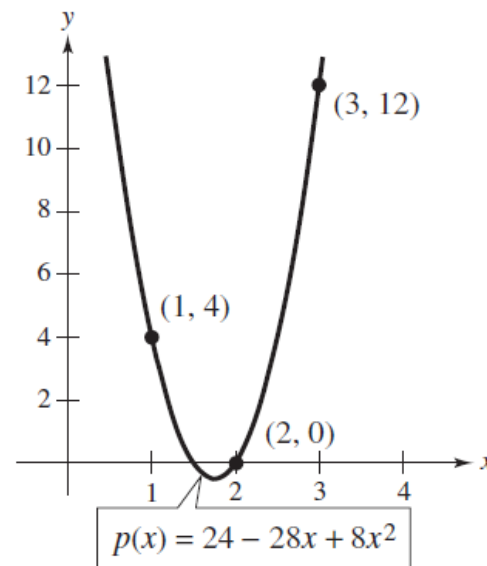

Polynomial Curve Fitting (cont.)

Find a polynomial that fits the points $(-2, 3)$, $(-1, 5)$, $(0, 1)$, $(1, 4)$, and $(2, 10)$.

SOLUTION Because you are provided with five points, choose a fourth-degree polynomial function

$$p(x) = a_0 + a_1x + a_2x^2 + a_3x^3 + a_4x^4.$$

Substituting the given points into $p(x)$ produces the system of linear equations listed below.

$$a_0 - 2a_1 + 4a_2 - 8a_3 + 16a_4 = 3$$

$$a_0 - a_1 + a_2 - a_3 + a_4 = 5$$

$$a_0 = 1$$

$$a_0 + a_1 + a_2 + a_3 + a_4 = 4$$


$$a_0 + 2a_1 + 4a_2 + 8a_3 + 16a_4 = 10$$

The solution of these equations is

$$a_0 = 1, \quad a_1 = -\frac{30}{24}, \quad a_2 = \frac{101}{24}, \quad a_3 = \frac{18}{24}, \quad a_4 = -\frac{17}{24}$$

which means the polynomial function is

$$\begin{aligned} p(x) &= 1 - \frac{30}{24}x + \frac{101}{24}x^2 + \frac{18}{24}x^3 - \frac{17}{24}x^4 \\ &= \frac{1}{24}(24 - 30x + 101x^2 + 18x^3 - 17x^4). \end{aligned}$$

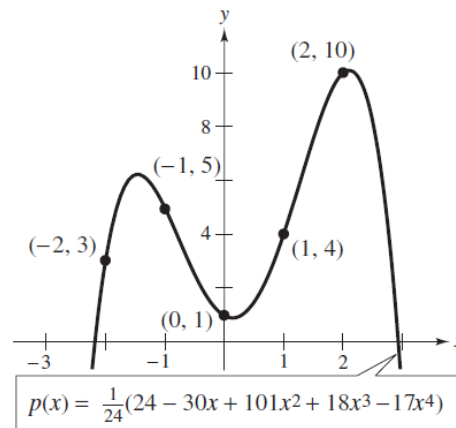

An Application of Curve Fitting

Find a polynomial that relates the periods of the first three planets to their mean distances from the sun, as shown in Table 1.1. Then test the accuracy of the fit by using the polynomial to calculate the period of Mars. (Distance is measured in astronomical units, and period is measured in years.) (Source: *CRC Handbook of Chemistry and Physics*)

TABLE 1.1

Planet	Mercury	Venus	Earth	Mars	Jupiter	Saturn
Mean Distance	0.387	0.723	1.0	1.523	5.203	9.541
Period	0.241	0.615	1.0	1.881	11.861	29.457

SOLUTION

Begin by fitting a quadratic polynomial function

$$p(x) = a_0 + a_1x + a_2x^2$$

to the points (0.387, 0.241), (0.723, 0.615), and (1, 1). The system of linear equations obtained by substituting these points into $p(x)$ is

$$a_0 + 0.387a_1 + (0.387)^2a_2 = 0.241$$

$$a_0 + 0.723a_1 + (0.723)^2a_2 = 0.615$$

$$a_0 + a_1 + a_2 = 1.$$

The approximate solution of the system is

$$a_0 \approx -0.0634, \quad a_1 \approx 0.6119, \quad a_2 \approx 0.4515$$

which means that the polynomial function can be approximated by

$$p(x) = -0.0634 + 0.6119x + 0.4515x^2.$$

Using $p(x)$ to evaluate the period of Mars produces

$$p(1.523) \approx 1.916 \text{ years.}$$

This estimate is compared graphically with the actual period of Mars in Figure 1.7. Note that the actual period (from Table 1.1) is 1.881 years.

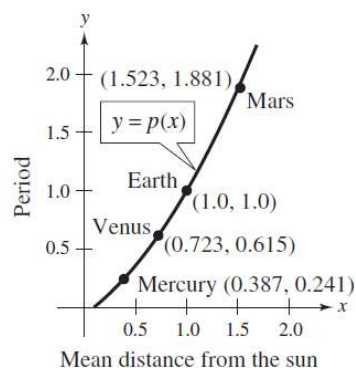


Figure 1.7

The *LU*-Factorization

Solving systems of linear equations is the most important application of linear algebra. At the heart of the most efficient and modern algorithms for solving linear systems, $A\mathbf{x} = \mathbf{b}$ is the so-called *LU*-factorization, in which the square matrix A is expressed as a product, $A = LU$. In this product, the square matrix L is **lower triangular**, which means all the entries above the main diagonal are zero. The square matrix U is **upper triangular**, which means all the entries below the main diagonal are zero.

$$\begin{bmatrix} a_{11} & 0 & 0 \\ a_{21} & a_{22} & 0 \\ a_{31} & a_{32} & a_{33} \end{bmatrix}$$

3×3 lower triangular matrix

$$\begin{bmatrix} a_{11} & a_{12} & a_{13} \\ 0 & a_{22} & a_{23} \\ 0 & 0 & a_{33} \end{bmatrix}$$

3×3 upper triangular matrix

By writing $A\mathbf{x} = LU\mathbf{x}$ and letting $U\mathbf{x} = \mathbf{y}$, you can solve for $\mathbf{x}$ in two stages. First solve $L\mathbf{y} = \mathbf{b}$ for $\mathbf{y}$; then solve $U\mathbf{x} = \mathbf{y}$ for $\mathbf{x}$. Each system is easy to solve because the coefficient matrices are triangular. In particular, neither system requires any row operations.

If the $n \times n$ matrix A can be written as the product of a lower triangular matrix L and an upper triangular matrix U , then $A = LU$ is an ***LU*-factorization** of A .

LU-Factorizations

$$(a) \begin{bmatrix} 1 & 2 \\ 1 & 0 \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ 1 & 1 \end{bmatrix} \begin{bmatrix} 1 & 2 \\ 0 & -2 \end{bmatrix} = LU$$

is an LU -factorization of the matrix $A = \begin{bmatrix} 1 & 2 \\ 1 & 0 \end{bmatrix}$ as the product of the lower

triangular matrix $L = \begin{bmatrix} 1 & 0 \\ 1 & 1 \end{bmatrix}$ and the upper triangular matrix $U = \begin{bmatrix} 1 & 2 \\ 0 & -2 \end{bmatrix}$.

$$(b) A = \begin{bmatrix} 1 & -3 & 0 \\ 0 & 1 & 3 \\ 2 & -10 & 2 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 2 & -4 & 1 \end{bmatrix} \begin{bmatrix} 1 & -3 & 0 \\ 0 & 1 & 3 \\ 0 & 0 & 14 \end{bmatrix} = LU$$

is an LU -factorization of the matrix A .

Finding the LU -Factorizations of a Matrix

Find the LU -factorization of the matrix $A = \begin{bmatrix} 1 & -3 & 0 \\ 0 & 1 & 3 \\ 2 & -10 & 2 \end{bmatrix}$.

SOLUTION Begin by row reducing A to upper triangular form while keeping track of the elementary matrices used for each row operation.

Matrix	Elementary Row Operation	Elementary Matrix
$\begin{bmatrix} 1 & -3 & 0 \\ 0 & 1 & 3 \\ 0 & -4 & 2 \end{bmatrix}$	$R_3 + (-2)R_1 \rightarrow R_3$	$E_1 = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ -2 & 0 & 1 \end{bmatrix}$
$\begin{bmatrix} 1 & -3 & 0 \\ 0 & 1 & 3 \\ 0 & 0 & 14 \end{bmatrix}$	$R_3 + (4)R_2 \rightarrow R_3$	$E_2 = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 4 & 1 \end{bmatrix}$

The matrix U on the left is upper triangular, and it follows that $E_2 E_1 A = U$, or $A = E_1^{-1} E_2^{-1} U$. Because the product of the lower triangular matrices

$$E_1^{-1} E_2^{-1} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 2 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & -4 & 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 2 & -4 & 1 \end{bmatrix}$$

is again a lower triangular matrix L , the factorization $A = LU$ is complete. Notice that this is the same LU -factorization that is shown in Example 5(b) at the top of this page.

The LU -Factorization (cont.)

In general, if A can be row reduced to an upper triangular matrix U using only the row operation of adding a multiple of one row to another row, then A has an LU -factorization.

$$E_k \cdots E_2 E_1 A = U$$

$$A = E_1^{-1} E_2^{-1} \cdots E_k^{-1} U$$

$$A = LU$$

Here L is the product of the inverses of the elementary matrices used in the row reduction.

Note that the multipliers in Example 6 are -2 and 4 , which are the negatives of the corresponding entries in L . This is true in general. If U can be obtained from A using only the row operation of adding a multiple of one row to another row below, then the matrix L is lower triangular with 1 's along the diagonal. Furthermore, the negative of each multiplier is in the same position as that of the corresponding zero in U .

Once you have obtained an LU -factorization of a matrix A , you can then solve the system of n linear equations in n variables $A\mathbf{x} = \mathbf{b}$ very efficiently in two steps.

1. Write $\mathbf{y} = U\mathbf{x}$ and solve $L\mathbf{y} = \mathbf{b}$ for $\mathbf{y}$.
2. Solve $U\mathbf{x} = \mathbf{y}$ for $\mathbf{x}$.

The column matrix $\mathbf{x}$ is the solution of the original system because

$$A\mathbf{x} = LU\mathbf{x} = L\mathbf{y} = \mathbf{b}.$$

The second step in this algorithm is just back-substitution, because the matrix U is upper triangular. The first step is similar, except that it starts at the top of the matrix, because L is lower triangular. For this reason, the first step is often called **forward substitution**.

Solving a Linear System Using LU -Factorization

Solve the linear system.

$$\begin{aligned}x_1 - 3x_2 &= -5 \\x_2 + 3x_3 &= -1 \\2x_1 - 10x_2 + 2x_3 &= -20\end{aligned}$$

SOLUTION You obtained the LU -factorization of the coefficient matrix A in Example 6.

$$A = \begin{bmatrix} 1 & -3 & 0 \\ 0 & 1 & 3 \\ 2 & -10 & 2 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 2 & -4 & 1 \end{bmatrix} \begin{bmatrix} 1 & -3 & 0 \\ 0 & 1 & 3 \\ 0 & 0 & 14 \end{bmatrix}$$

First, let $\mathbf{y} = U\mathbf{x}$ and solve the system $L\mathbf{y} = \mathbf{b}$ for $\mathbf{y}$.

$$\begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 2 & -4 & 1 \end{bmatrix} \begin{bmatrix} y_1 \\ y_2 \\ y_3 \end{bmatrix} = \begin{bmatrix} -5 \\ -1 \\ -20 \end{bmatrix}$$

This system is easy to solve using forward substitution. Starting with the first equation, you have $y_1 = -5$. The second equation gives $y_2 = -1$. Finally, from the third equation,

$$\begin{aligned}2y_1 - 4y_2 + y_3 &= -20 \\y_3 &= -20 - 2y_1 + 4y_2 \\y_3 &= -20 - 2(-5) + 4(-1) \\y_3 &= -14.\end{aligned}$$

Solving a Linear System Using LU -Factorization (cont.)

The solution of $Ly = \mathbf{b}$ is

$$\mathbf{y} = \begin{bmatrix} -5 \\ -1 \\ -14 \end{bmatrix}.$$

Now solve the system $U\mathbf{x} = \mathbf{y}$ for $\mathbf{x}$ using back-substitution.

$$\begin{bmatrix} 1 & -3 & 0 \\ 0 & 1 & 3 \\ 0 & 0 & 14 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = \begin{bmatrix} -5 \\ -1 \\ -14 \end{bmatrix}$$

From the bottom equation, $x_3 = -1$. Then, the second equation gives $x_2 + 3(-1) = -1$, or $x_2 = 2$. Finally, the first equation is $x_1 - 3(2) = -5$, or $x_1 = 1$. So, the solution of the original system of equations is

$$\mathbf{x} = \begin{bmatrix} 1 \\ 2 \\ -1 \end{bmatrix}.$$

Q & A

Evaluating a Determinant

Evaluate the determinant of

$$A = \begin{bmatrix} 2 & 0 & 1 & 3 & -2 \\ -2 & 1 & 3 & 2 & -1 \\ 1 & 0 & -1 & 2 & 3 \\ 3 & -1 & 2 & 4 & -3 \\ 1 & 1 & 3 & 2 & 0 \end{bmatrix}.$$

SOLUTION Because the second column of this matrix already has two zeros, choose it for cofactor expansion. Two additional zeros can be created in the second column by adding the second row to the fourth row, and then adding -1 times the second row to the fifth row.

$$|A| = \begin{vmatrix} 2 & 0 & 1 & 3 & -2 \\ -2 & 1 & 3 & 2 & -1 \\ 1 & 0 & -1 & 2 & 3 \\ 3 & -1 & 2 & 4 & -3 \\ 1 & 1 & 3 & 2 & 0 \end{vmatrix}$$

$$= \begin{vmatrix} 2 & 0 & 1 & 3 & -2 \\ -2 & 1 & 3 & 2 & -1 \\ 1 & 0 & -1 & 2 & 3 \\ 1 & 0 & 5 & 6 & -4 \\ 3 & 0 & 0 & 0 & 1 \end{vmatrix}$$

$$= (1)(-1)^4 \begin{vmatrix} 2 & 1 & 3 & -2 \\ 1 & -1 & 2 & 3 \\ 1 & 5 & 6 & -4 \\ 3 & 0 & 0 & 1 \end{vmatrix}$$

Evaluating a Determinant (cont.)

(You have now reduced the problem of finding the determinant of a 5×5 matrix to finding the determinant of a 4×4 matrix.) Because you already have two zeros in the fourth row, it is chosen for the next cofactor expansion. Add -3 times the fourth column to the first column to produce the following.

$$|A| = \begin{vmatrix} 2 & 1 & 3 & -2 \\ 1 & -1 & 2 & 3 \\ 1 & 5 & 6 & -4 \\ 3 & 0 & 0 & 1 \end{vmatrix} = \begin{vmatrix} 8 & 1 & 3 & -2 \\ -8 & -1 & 2 & 3 \\ 13 & 5 & 6 & -4 \\ -0 & 0 & 0 & 1 \end{vmatrix}$$

$$= (1)(-1)^4 \begin{vmatrix} 8 & 1 & 3 \\ -8 & -1 & 2 \\ 13 & 5 & 6 \end{vmatrix}$$

Add the second row to the first row and then expand by cofactors along the first row.

$$|A| = \begin{vmatrix} 8 & 1 & 3 \\ -8 & -1 & 2 \\ 13 & 5 & 6 \end{vmatrix} = \begin{vmatrix} -0 & 0 & 5 \\ -8 & -1 & 2 \\ 13 & 5 & 6 \end{vmatrix}$$

$$= 5(-1)^4 \begin{vmatrix} -8 & -1 \\ 13 & 5 \end{vmatrix} = 5(1)(-27) = -135$$