

FEDERAL INSTITUTE OF SCIENCE AND TECHNOLOGY

(FISAT)TM

HORMIS NAGAR, MOOKKANNOOR

ANGAMALY-683577



'FOCUS ON EXCELLENCE'

LABORATORY RECORD

Name : Jincy Jose

Branch : MCA

Batch : B

Semester : 2

Roll No : 3

FEDERAL INSTITUTE OF SCIENCE AND TECHNOLOGY

(FISAT)TM

HORMIS NAGAR, MOOKKANNOOR

ANGAMALY-683577



'FOCUS ON EXCELLENCE'

Name : Jincy Jose

Branch : COMPUTER APPLICATIONS

Semester : 2 Roll No: 3

University Exam.Reg. No:

CERTIFICATE

Certified that this is the Bonafide record of the Practical work done by

Mr/Ms in the

..... Laboratory of the Federal Institute of

Science and Technology during the academic year

Signature of Staff in Charge

Signature of H.O.D

Name :

Name:

Date :

Date of University practical examination

Signature of

Signature of

Internal Examiner

External Examiner


EXPERIMENT -1

1.BASIC INTRODUCTORY CONCEPT OF COMPUTER HARDWARE

1.1 What is Computer?

A computer is a programmable electronic device that accepts raw data as input and processes it with a set of instructions (a program) to produce the result as output. It renders output just after performing mathematical and logical operations and can save the output for future use. It can process numerical as well as non-numerical calculations.

1.2 History of Computers

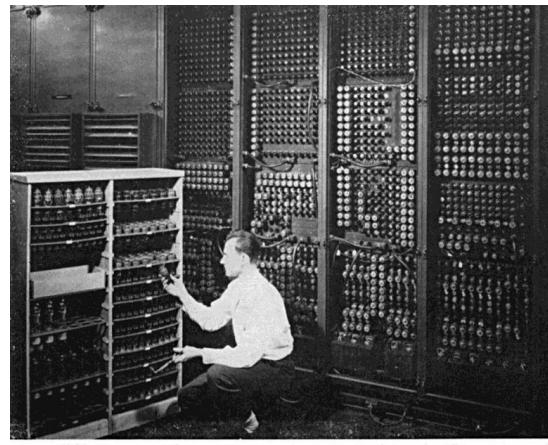


Replacing a bad tube meant checking among ENIAC's 19,000 possibilities.

Since the evolution of humans, devices have been used for calculations for thousands of years. One of the earliest and well-known devices was an abacus. Then in 1822, the father of computers, **Charles Babbage** began developing the first mechanical computer.

1.3 Computer Hardware

Computer hardware includes the physical parts of a computer, such as the case, central processing unit (CPU), monitor, mouse, keyboard, computer data storage, graphics card, sound card, speakers and motherboard. Hardware is typically directed by the software to execute any command or instruction. A combination of hardware and

software forms a usable computing system, although other systems exist with only hardware.

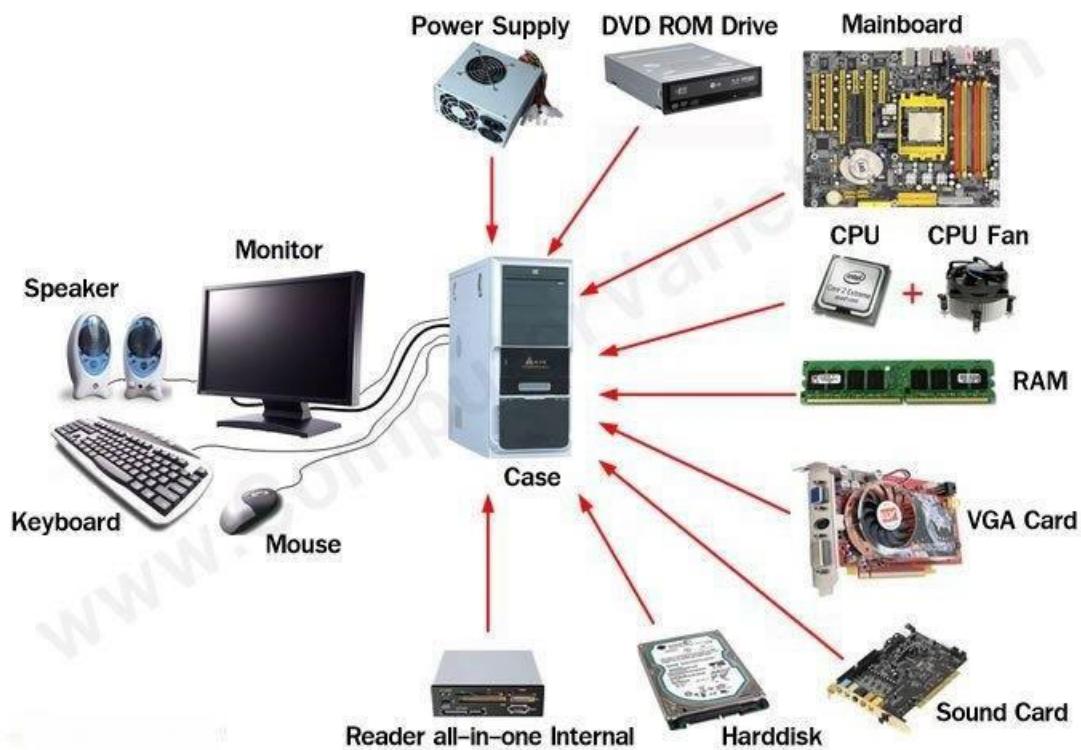

1.4 The following are the basic components that will be detailed :-

1.4.1 Motherboard

1.4.2. RAM Modules

1.4.3. Daughter cards

1.4.4 Bus slots

1.4.5. SMPS

1.4.6. Internal Storage Devices

1.4.7. Interfacing Ports

1.4.1 MOTHERBOARD

A motherboard (also called mainboard, main circuit board, system board, baseboard, planar board ,logic board or mobo) is the main printed circuit board (PCB) in general-purpose computers and other expandable systems. It holds and allows communication between many of the crucial electronic components of a system, such as the central processing unit (CPU) and memory, and provides connectors for other peripherals. Unlike a backplane, a motherboard usually contains significant sub-systems, such as the central processor, the chipset's input/output and memory controllers, interface connectors, and other components integrated for general use.



Motherboard means specifically a PCB with expansion capabilities. As the name suggests, this board is often referred to as the "mother" of all components attached to it, which often include peripherals, interface cards, and daughter cards: soundcards, video

cards, network cards, host bus adapters, TV tuner cards, IEEE 1394 cards; and a variety of other custom components.


1.4.1.1 FEATURES OF MOTHERBOARD

- Motherboard varies greatly in supporting various types of components.
- Motherboard supports a single type of CPU and few types of memories.
- Video cards, hard disks, sound cards have to be compatible with the motherboard to function properly.
- Motherboards, cases, and power supplies must be compatible to work properly together.

1.4.1.2 TYPES OF MOTHERBOARD

1.4.1.2.1 AT Motherboard

These motherboards have bigger physical dimensions of hundreds of millimetres and hence they are not the right fit for the mini desktop category of computers.

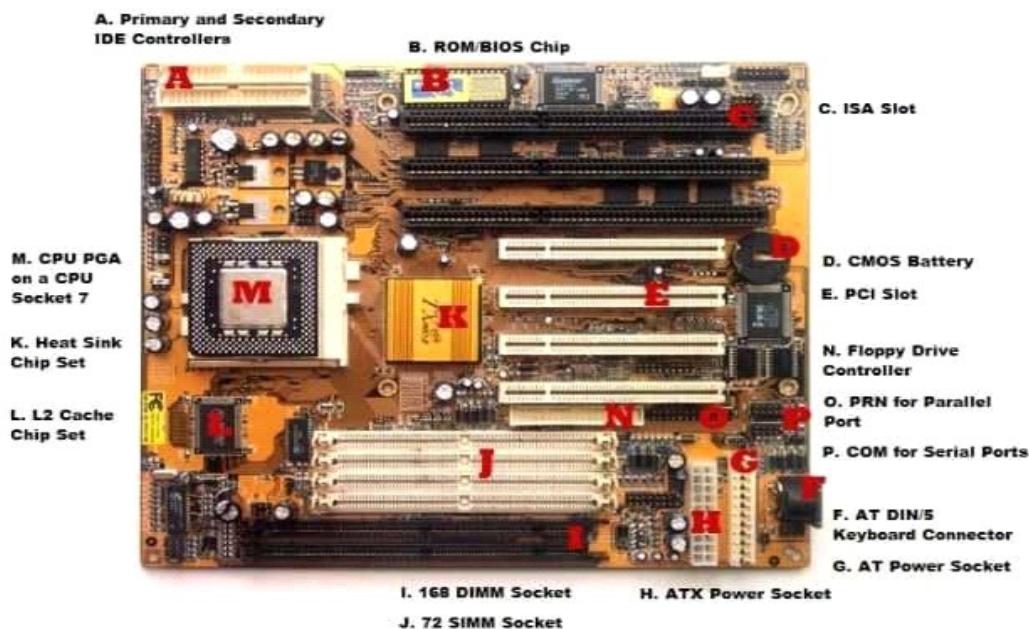

1.4.1.2.2 ATX Motherboards

ATX denotes Advanced technology extended, It was developed by Intel during the 1990s and it was an improved version over an earlier version of AT motherboard. It is smaller in size when compared to AT and it provides interchangeability of the connected components.

1.4.1.2.3 BTX Motherboard

BTX denotes Balanced Technology Extended, intended to manage demands of new technologies in terms of more power requirements hence generation of more heat.

1.4.1.2.4 Pico BTX Motherboard

These boards are smaller in size and hence the word Pico. Two expansion slots are supported in spite of being sharing the top half of BTX. Half-height or riser cards are its unique features and it supports the demands of digital applications.

1.4.1.2.5 Mini ITX Motherboard

It's a miniature version of motherboard. Designed in the early 2000s and its dimension is 17 x 17 cm. Mainly used in small form factor (SFF) computer due to its lower power consumption and faster cooling ability.

1.4.1.3 MAIN COMPONENTS OF MOTHERBOARD

1.4.1.3.1 FLOPPY DISC CONTROLLER

A floppy disk controller (FDC) is an electronic chip controller used as an interface between a computer and a floppy disk drive. Modern computers have this chip embedded in the motherboard, whereas they were a separate component when they were originally introduced.

A floppy disk controller (FDC) is a specially designed chip that controls the reading and writing functionality of a floppy drive. An FDC can support up to four floppy disk drives at a time. The controller is connected to the system bus of the CPU and appears as a set of I/O ports to the computer. It is usually also linked to a serial bus of the direct memory access (DMA) controller. In an x86 computer, the floppy disk controller uses IRQ6, whereas interrupt schemes are used on other systems. Data transmission is often done by FDC while in DMA mode.



Floppy disk controller functions (FDC)

- Translate data bits into FM, MFM, M²FM, or GCR format to be able to record them
- Interpret and execute commands such as seek, read, write, format, etc.
- Error detection with check sums generation and verification, like CRC
- Synchronize data with phase-locked loop(PLL)

1.4.1.3.2 Serial Ports



Serial Ports provide an interface to connect serial lines to prepare a serial communication. Serial ports are typically used in modem, mouse, security cameras etc. A Serial port uses DB-9 connector, a 9 pin D-Shaped Connector which connects to the transmission line. A serial port provides a serial communication using one line and thus


have no dependency on other wire's speed and its length can be extended as per the need.

1.4.1.3.3 Parallel Ports



Parallel ports provide an interface to connect multiple lines to prepare a parallel communication to send large data at a time. Parallel ports are used in connecting printers, hard-drives, CD-drives etc. All lines speed should be same to avoid error and cross-talk issues. To avoid such issues, the wires are kept small in length. A parallel port uses D-25 connector, a 25 pin D- Shaped connector which connects to the transmission wires.

1.4.1.3.4 The Expansion Buses

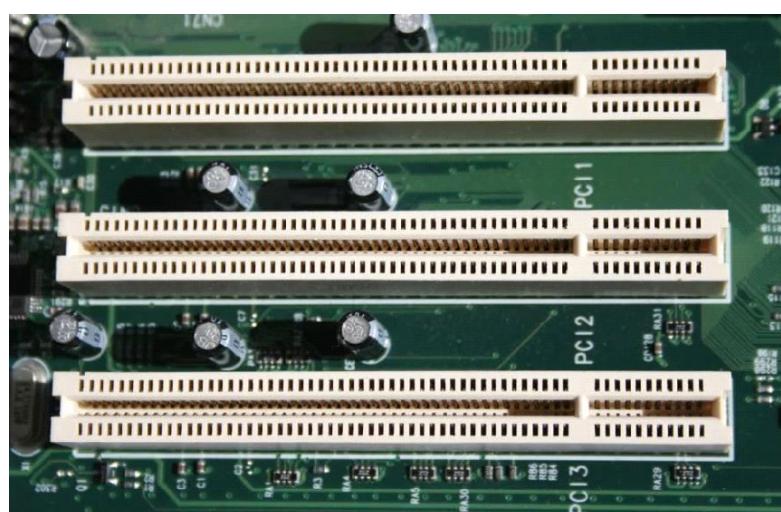

An expansion bus is an input/output pathway from the CPU to peripheral devices and it is typically made up of a series of slots on the motherboard. Expansion boards(cards) plug into the bus. PCI is the most common expansion bus in a PC and other hardware

platforms. PCI stands for Peripheral Component Interface; PCI slot allows you to insert expansion cards into your computer. Buses carry signals such as data, memory addresses, power, and control signals from component to component. Other types of buses include ISA and EISA. Expansion buses enhance the PCs capabilities by allowing users to add missing features in their computers by slotting adapter cards into expansion slots.

1.4.1.3.5 The Computer Chip-sets



A chipset is a group of small circuits that coordinate the flow of data to and from a PC's key components. These key components include the CPU itself, the main memory, the secondary cache, and any devices situated on the buses. A chip set also controls data flow to and from hard disks and other devices connected to the IDE channels.

A computer has got two main chipsets:

- The North Bridge (also called the memory controller) is in charge of controlling transfers between the processor and the RAM, which is why it is located physically near the processor. It is sometimes called the GMCH, for Graphic and Memory Controller Hub.
- The South Bridge (also called the input/output controller or expansion controller) handles communications between slower peripheral devices. It is also called the ICH


(I/O Controller Hub). The term "bridge" is generally used to designate a component which connects two buses.

Chipset manufacturers include SIS, VIA, ALI, and OPTI.

1.4.2. RANDOM ACCESS MEMORY

1.4.2.1. Introduction

RAM, which stands for Random Access Memory, is a hardware device generally located on the motherboard of a computer and acts as an internal memory of the CPU. It allows CPU store data, program, and program results when you switch on the computer. It is the read and write memory of a computer, which means the information can be written to it as well as read from it.

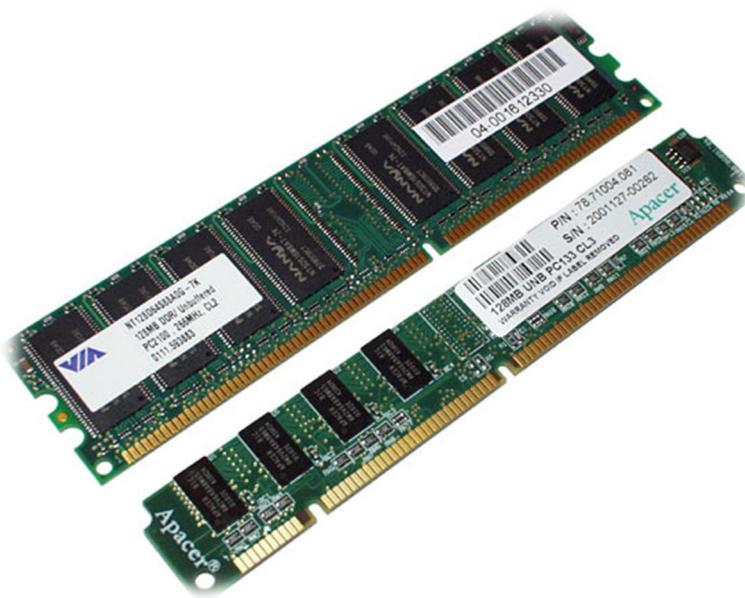

RAM comes in the form of a chip that is individually mounted on the motherboard or in the form of several chips on a small board connected to the motherboard. It is the main memory of a computer. It is faster to write to and read from as compared to other memories such as a hard disk drive (HDD), solid-state drive (SSD), optical drive, etc.

A computer's performance mainly depends on the size or storage capacity of the RAM. If it does not have sufficient RAM (random access memory) to run the OS and software

programs, it will result in slower performance. So, the more RAM a computer has, the faster it will work. Information stored in RAM is accessed randomly, not in a sequence as on a CD or hard drive. So, its access time is much faster.

1.4.2.2. CHARACTERISTICS OF RAM

1.4.2.2.1. SDRAM AND DDR

Memory modules are labelled with either SDRAM (Synchronous Dynamic Random-Access Memory) or DDR (Double Data Rate). DDR RAM, as the "double data rate" name suggests, offers much faster speeds than SDRAM. Each generation of DDR, such as DDR2 and DDR3, offers performance improvements over the one preceding it.

1.4.2.2.2. SPEED

The two numbers often quoted first on memory module specifications -- for example, "DDRxxx/PCxxxx" -- indicate the maximum clock speed and maximum transfer rate the device can operate at -- and the higher the better. The stated clock speed is actually double the real figure, so a stick of RAM labelled DDR3-1333 PC3200 offers a clock speed of 666 MHz and a transfer rate of 3,200 MB/s.

1.4.2.2.3 PINS

Essentially, the number of pins a memory module has indicates the number of connections it has to the motherboard -- and thus which motherboards it's compatible with. More pins mean more data can be transferred at once, for faster operation overall, though performance is based on a variety of different factors, including CPU speed and the motherboard configuration.

1.4.2.2.4 VOLTS

The voltage rating associated with a memory module -- for example, 2.5 V -- indicates how much power it draws from the motherboard in order to operate properly. RAM sticks that can work at lower voltages use up less power and give off less heat, and are therefore more suitable for smaller systems such as laptops.

1.4.2.2.5 CAS LATENCY


CAS (Column Address Strobe) Latency, sometimes abbreviated to just "CL," indicates the time it takes for a memory module to return data to the CPU. A lower CAS Latency indicates RAM that performs faster.

1.4.2.2.6 TIMING

Memory modules feature other timings besides CAS Latency, usually listed as a series of numbers after the other specifications. In order after CAS Latency, they are RAS (Row Address Strobe) to CAS delay, RAS Precharge, Active to Precharge delay and, optionally, command rate. These timings are only really of interest to advanced technical users, as the impact they have on performance is very small.

1.4.2.2.7 REDUNDANCY

The redundancy built into a memory module indicates its ability to recover from errors and to alert the operating system to a problem, rather than just allowing it to crash and lose your data. More expensive and critical server memory uses Error Checking and Correcting Redundancy, or ECC, in order to detect and correct errors wherever possible.

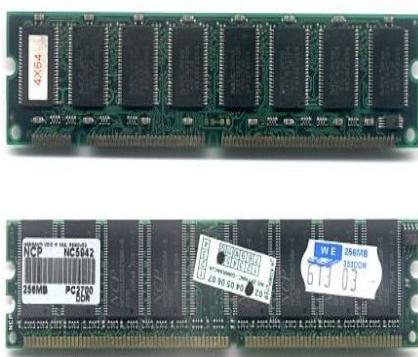


1.4.2.3. Different Types of RAM

RAM(Random Access Memory) is a part of computer's Main Memory which is directly accessible by CPU. RAM is used to Read and Write data into it which is accessed by CPU randomly. RAM is volatile in nature, it means if the power goes off,

the stored information is lost. RAM is used to store the data that is currently processed by the CPU. Most of the programs and data that are modifiable are stored in RAM.

Integrated RAM chips are available in two form:

1. SRAM(Static RAM)
2. DRAM(Dynamic RAM)

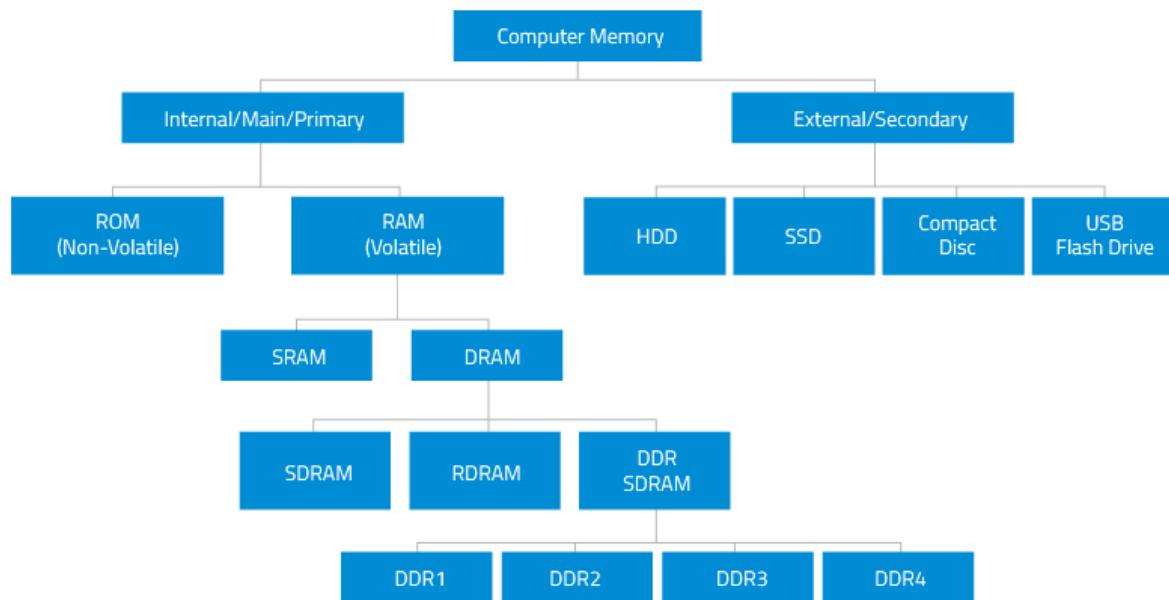

1.4.2.3.1 SRAM

The SRAM memories consist of circuits capable of retaining the stored information as long as the power is applied. That means this type of memory requires constant power. SRAM memories are used to build Cache Memory.

1.4.2.3.2 DRAM

DRAM stores the binary information in the form of electric charges that applied to capacitors. The stored information on the capacitors tend to lose over a period of time and thus the capacitors must be periodically recharged to retain their usage. The main memory is generally made up of DRAM chips.

1.4.2.4. Functions

1.4.2.4.1. Reading Files

Hard drives can store vast numbers of files, but compared to other computer components, drives run very slowly. Accessing hard drive files -- especially when those files are scattered across the drive due to fragmentation -- requires the drive to move its mechanical read/write head back and forth and to wait for the spinning platters to spin into the correct position. Even though drives spin at thousands of rotations per minute, this process causes a noticeable delay when reading files. To lessen the slowdown, computers store files in RAM after the files are first read from the drive. RAM has no moving parts, so the files can load very quickly during subsequent uses.

1.4.2.4.2 Temporary Storage


In addition to storing files read from the hard drive, RAM also stores data that programs are actively using but that doesn't need to be saved permanently. By keeping this data in RAM, programs can work with it quickly, improving speed and responsiveness.

1.4.2.4.3 RAM Size

If RAM works so much faster than the hard drive, why not load all of the computer's data into RAM? One major reason: computers have far less RAM than drive space. As of publication, hard drive sizes range from a few hundred gigabytes in laptops to 10TB in high-end enterprise systems. Most home computers have between 1 and 4TB of drive space.

1.4.3 DAUGHTER CARD

Referred to as a piggyback board and **daughter card**, a daughterboard is an expansion board that connects directly to the motherboard and gives added functionality.

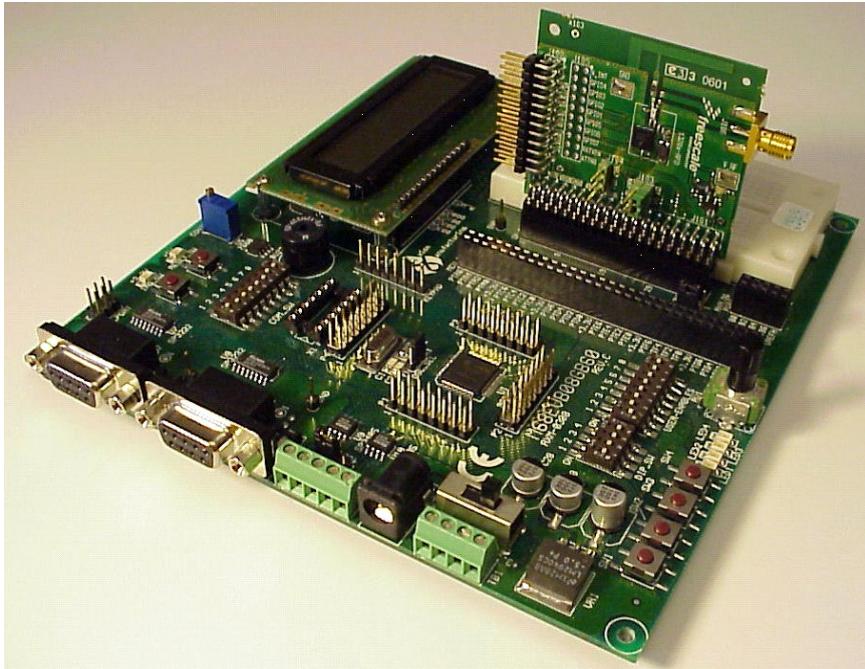

Motherboard with daughter card

To disable a daughter board, the user must physically remove it from the motherboard. Daughter boards do not provide new functions to the circuit like an expansion but they extend the circuitry of the circuit in which they are plugged into.

1.4.3.1 Functionalities of daughter board:

- It is known as the piggyback board, riser card, daughtercard etcetera.
- A daughter board is smaller than a motherboard and may have some slots like the motherboard.
- A daughter board is a printed circuit board which is connected to the motherboard or expansion card.
- Unlike expansion card, daughter boards are directly connected to the motherboard by soldering.


- Daughter boards do not provide new functions to the circuit like an expansion but they extend the circuitry of the circuit in which they are plugged into.
- Daughter boards are released by the vendors as an update of motherboard or expansion card.

1.4.3.2 List of daughter cards


- Video Card: This is also referred to as the graphics adapter, display adapter or video adapter.
- Sound Card: To handle sound, to insert a microphone or connect a speaker this sound card is used.
- Network Interface Card: This is also referred as NIC. The computer can be connected to a network only with the use of this network interface card.
- Ethernet Card: Ethernet card is used to connect computers to computers. A cable is used to connect the Ethernet cards in each computer to make a network.

1.4.4. SWITCHED- MODE POWER SUPPLY

Switched-mode power supply Introduction A switched-mode power supply (switching-mode power supply, switch-mode power supply, switched power supply, SMPS, or switcher) is an electronic power supply that incorporates a switching regulator to convert electrical power efficiently. Its function is to convert a level of voltage to the voltage or current required by the client through different forms of architecture.

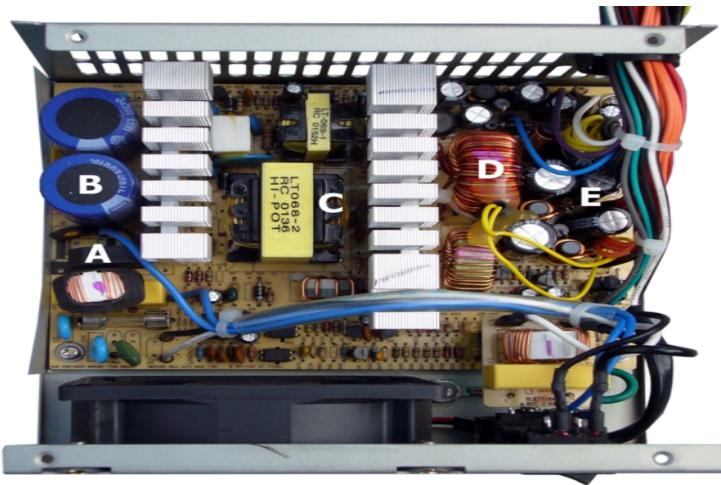

WORKING

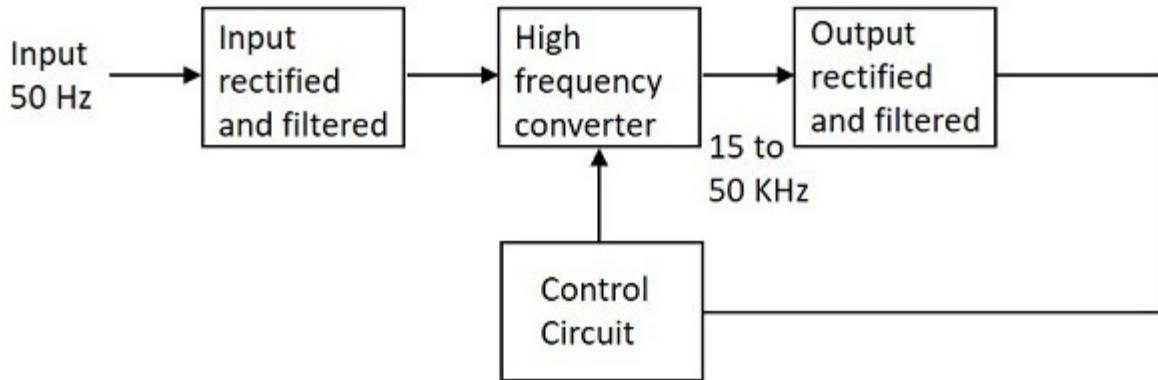

The working of SMPS is simply understood by knowing that the transistor used in LPS is used to control the voltage drop while the transistor in SMPS is used as a controlled switch. The AC input supply signal 50 Hz is given directly to the rectifier and filter circuit combination without using any transformer. A fast switching device such as a Power transistor is employed in this section, which switches ON and OFF according to the variations and this output is given to the primary of the transformer. This is a

regulated output voltage which is then given to the control circuit, which is a feedback circuit

1.4.5. INTERNAL STORAGE DEVICES

A storage device is any type of computing hardware that is used for storing, porting or extracting data files and objects. Storage devices can hold and store information both temporarily and permanently. They may be internal or external to a computer.

Some storage devices are classed as 'internal' which means they are inside the computer case. At the most basic level, internal storage is needed to hold the operating system so that the computer is able to access the input and output devices. It will also be used to store the applications software that you use and more than likely, the original copies of your data files.

Internal storage allows the data and applications to be loaded very rapidly into memory, ready for use. The data can be accessed much faster than data which is stored on an external storage device. This is because internal storage devices are connected directly to the motherboard and its data bus whereas external devices are connected through a hardware interface such as USB, which means they are considerably slower to access.

The main disadvantage of internal storage is that when the hard disk fails (and it will), all the data and applications may be lost. This can be avoided to some extent by using more than one hard disk within the machine. Each hard disk has a copy of all the data, so if one fails the other can carry on. This is called a RAID array. An alternative is to use external drives for backup

1.4.5.1. Examples of Internal storage devices

- Hard Disk
- SSD
- RAM

1.4.5.1.1. HARD DISK

A **hard disk drive** (sometimes abbreviated as a **hard drive**, **HD**, or **HDD**) is a non-volatile data storage device. It is usually installed internally in a computer, attached directly to the disk controller of the computer's motherboard. It contains one or more platters, housed inside of an air-sealed casing. Data is written to the platters using a magnetic head, which moves rapidly over them as they spin.

Internal hard disks reside in a drive bay, connected to the motherboard using an ATA, SCSI, or SATA cable. They are powered by a connection to the computer's PSU (power supply unit).

Hard disk, Magnetic storage medium for a microcomputer. Hard disks are flat, circular plates made of aluminum or glass and coated with a magnetic material. Hard disks for personal computers can store up to several gigabytes (billions of bytes) of information. Data are stored on their surfaces in concentric tracks. A small electromagnet, called a magnetic head, writes a binary digit (1 or 0) by magnetizing tiny spots on the spinning disk in different directions and reads digits by detecting the magnetization direction of the spots. A computer's hard drive is a device consisting of several hard disks, read/write heads, a drive motor to spin the disks, and a small amount of circuitry, all sealed in a metal case to protect the disks from dust. In addition to referring to the disks themselves, the term hard disk is also used to refer to the whole hard drive.

Computers rely on hard disk drives (HDDs) to store data permanently. They are storage devices used to save and retrieve digital information that will be required for future reference.

Hard drives are non-volatile, meaning that they retain data even when they do not have power. The information stored remains safe and intact unless the hard drive is destroyed or interfered with. The information is stored or retrieved in a random-access manner as opposed to sequential access. This implies that blocks of data can be accessed at any time they are required without going through other data blocks.



1.4.5.1.2. SOLID STATE DRIVE

A solid-state drive (SSD) is a solid-state storage device that uses integrated circuit assemblies to store data persistently, typically using flash memory, and functioning as secondary storage in the hierarchy of computer storage. It is also sometimes called a **solid-state device** or a **solid-state disk**, even though SSDs lack the physical spinning disks and movable read–write heads used in hard disk drives (HDDs) and floppy disks.

Compared with electromechanical drives, SSDs are typically more resistant to physical shock, run silently, and have quicker access time and lower latency. SSDs store data in semiconductor cells. SSDs have a limited number of writes, and slow as they reach storage capacity.



1.4.5.1.3. RAM

RAM (Random Access Memory) is the internal memory of the CPU for storing data, program, and program result. It is a read/write memory which stores data until the machine is working. As soon as the machine is switched off, data is erased.

RAM is volatile, i.e. data stored in it is lost when we switch off the computer or if there is a power failure. RAM is small, both in terms of its physical size and in the amount of data it can hold.



RAM is of two types –

- Static RAM (SRAM)
- Dynamic RAM (DRAM)

1.4.5.2. Static RAM (SRAM)

The word **static** indicates that the memory retains its contents as long as power is being supplied. However, data is lost when the power gets down due to volatile nature. SRAM chips use a matrix of 6-transistors and no capacitors. Transistors do not require power to prevent leakage, so SRAM need not be refreshed on a regular basis.

1.4.5.3. Dynamic RAM (DRAM)

DRAM, unlike SRAM, must be continually **refreshed** in order to maintain the data. This is done by placing the memory on a refresh circuit that rewrites the data several

hundred times per second. DRAM is used for most system memory as it is cheap and small

1.4.5.4 SOME OTHER STORAGE DEVICES

- Magnetic Storage Device
- Optical Storage Device
- Flash Memory Device
- Online and Cloud
- Paper Storage



1.4.6 . COMPUTER PORTS

1.4.6.1 WHAT IS MEANT BY A PORT?

A port in a computer network is a communication endpoint whereas, in an operating system, it is a logical construct, recognizes precise method otherwise a network service type. These endpoints recognize the combination of every protocol and its address through 16-bit unsigned numbers, called the port number. The protocols that use port numbers are the TCP (Transmission Control Protocol) and UDP (User Datagram Protocol). The port number in every computer networking uses an IP address of the type of protocol & the host

1.4.6.2 What is Port in Computer/Computer Port?

A computer port or a communication port is a connection point used as an interface between the computer & the peripherals like keyboard, mouse, printer, display unit, monitor, flash drive and speaker. The computer port transmits the data from any peripheral to the computer. In general, the communication ports are available in two type like Serial Ports as well as Parallel Ports.



1.4.6.3 Characteristics of Computer Ports

The characteristics of the computer port include the following.

- It is an interface between external devices as well as a computer.
- Ports on the motherboard can be connected using an external device cable by plugging in.


- The external devices which are connected through ports are the keyboard, mouse, microphone, monitor, speakers, etc.

1.4.6.4 Types of Computer Ports

There are different types of ports available in a computer network. Some of them are:

- PS/02
- Serial Port
- Parallel Port
- Ethernet
- VGA Port
- USB Port
- DVI Port
- HDMI Port
- Display Port

1.4.6.4.1 PS/2 PORTS: PS/2 is a type of port used by older computers for connecting input devices such as keyboards and mice. The port was introduced with IBM's Personal System/2 computer in 1987 (which was abbreviated "PS/2"). The PS/2 port has six pins and is roughly circular in shape

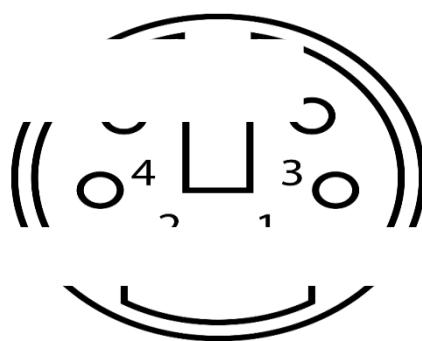

1.4.6.4.2

SERIAL PORT: A serial port is an interface that allows a PC to transmit or receive data one bit at a time. It is one of the oldest types of interfaces commonly used to connect printers and external modems to a PC. Compared

to a parallel port, the data transfer rate of a serial port is slower. Normally, a serial port is a male port, while a parallel port is a female port. The serial port standard is RS-232. This standard is used for transmitting serial communication between devices,



1.4.6.4.3 PARALLEL PORT: Parallel port is a type of interface found on computers (personal and otherwise) for connecting peripherals. Parallel ports send multiple bits of data at once (parallel communication), as opposed to serial communication, in which bits are sent one at a time. Parallel port is an interface between computer and peripheral devices like printers with parallel communication




1.4.6.4.4 ETHERNET: A Ethernet port is a jack or socket on a computer that allows the use of an Ethernet connector. These ports are essential in allowing the creation of local area networks (LANs). An Ethernet port is usually found on networking devices, including computers, routers, video game consoles, modems, and televisions. Ethernet is a communication system that allows multiple local devices to share information and work together.



1.4.6.4.5

VGA

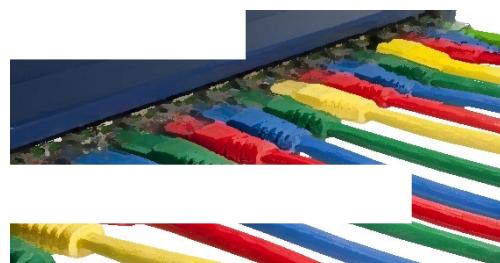


PORt: Abbreviated VGA, Video Graphics Array is a standard type of connection for

video devices such as monitors and projectors. Generally, VGA refers to the types of cables, ports, and connectors used to connect monitors to video cards.



1.4.6.4.6 USB PORT: A **USB port** is a standard cable connection interface for personal computers and consumer electronics devices. USB stands for Universal Serial Bus, USB ports allow USB devices to be connected to each other with and transfer digital data over USB cables

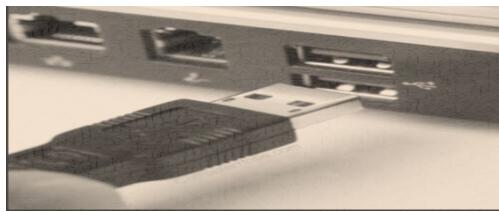

1.4.6.4.7 HDMI PORT: Full form of HDMI is **High-Definition Multimedia Interface.**

HDMI is a proprietary audio/video interface for transmitting uncompressed video data and compressed or uncompressed digital audio data from an HDMI-compliant source device, such as a display controller, to a compatible computer monitor, video projector, digital television, or digital audio device..




1.4.6.4.8 DISPLAY PORT: DisplayPort is a digital display interface developed by a consortium of PC and chip manufacturers and standardized by the Video Electronics Standards Association. Display Port is a digital display interface with optional multiple

channel audio and other forms of data. Display Port is developed with an aim of replacing VGA and DVI ports as the main interface between a computer and monitor.



EXPERIMENT -2

2.1. Linux commands

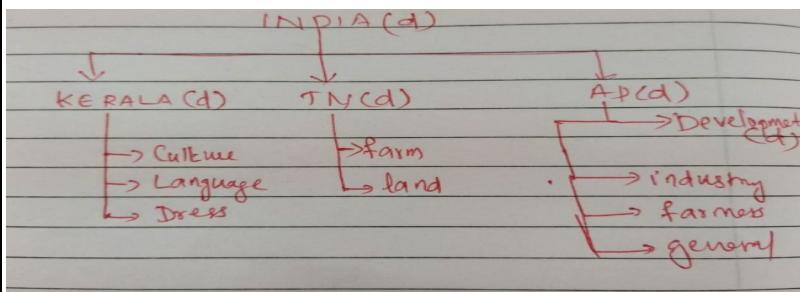

Q1. Create the directories and files as given in the above directory structure. Directories are mentioned as (d). Files should be filled with necessary text data

```
mac@mac-Aspire-A715-75G:~$ mkdir INDIA
mac@mac-Aspire-A715-75G:~$ cd INDIA
mac@mac-Aspire-A715-75G:~/INDIA$ mkdir KERALA TN AP
mac@mac-Aspire-A715-75G:~/INDIA$ ls
AP KERALA TN
mac@mac-Aspire-A715-75G:~/INDIA$ cd KERALA
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ touch Culture.txt Language.txt Dress.txt
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ ls
Culture.txt Dress.txt Language.txt
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ cd ..
mac@mac-Aspire-A715-75G:~/INDIA$ ls
AP KERALA TN
mac@mac-Aspire-A715-75G:~/INDIA$ cd TN
mac@mac-Aspire-A715-75G:~/INDIA/TN$ touch Fam.txt Land.txt
mac@mac-Aspire-A715-75G:~/INDIA/TN$ ls
Fam.txt Land.txt
mac@mac-Aspire-A715-75G:~/INDIA/TN$ cd ..
mac@mac-Aspire-A715-75G:~/INDIA$ cd AP
mac@mac-Aspire-A715-75G:~/INDIA/AP$ touch Industry.txt Farmers.txt General.txt
mac@mac-Aspire-A715-75G:~/INDIA/AP$ ls
Farmers.txt General.txt Industry.txt
```

```
mac@mac-Aspire-A715-75G:~$ cd INDIA/AP
mac@mac-Aspire-A715-75G:~/INDIA/AP$ mkdir Development
```

Q2. List your present working directory

```
mac@mac-Aspire-A715-75G:~/INDIA/AP$ cd ~
mac@mac-Aspire-A715-75G:~$ pwd
/home/mac
```

Q3. Move to the root directory.

```
mac@mac-Aspire-A715-75G:~$ cd /
```

Q4. Copy the file ‘Culture’ to the folder AP

```
mac@mac-Aspire-A715-75G:~$ cd INDIA/KERALA
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ ls
culture.txt Dress.txt Language.txt
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ cp Culture.txt ~/INDIA/AP
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ ls
culture.txt Dress.txt Language.txt
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ cd ~/INDIA/AP
mac@mac-Aspire-A715-75G:~/INDIA/AP$ ls
Culture.txt Development Farmers.txt General.txt Industry.txt
```

Q5. Display the content of the file ‘general’

```
mac@mac-Aspire-A715-75G:~/INDIA/AP$ cat > General.txt
This is general file
mac@mac-Aspire-A715-75G:~/INDIA/AP$ cat General.txt
This is general file
```

Q6. Move the file ‘language’ to the directory AP/Development

```
mac@mac-Aspire-A715-75G:~/INDIA/AP$ cd ~/INDIA/KERALA
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ ls
Culture.txt Dress.txt Language.txt
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ mv Language.txt ~/INDIA/AP/Development
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ ls
Culture.txt Dress.txt
```

Q7. List all the files in the folder AP

```
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ cd ~/INDIA/AP
mac@mac-Aspire-A715-75G:~/INDIA/AP$ LS
LS: command not found
mac@mac-Aspire-A715-75G:~/INDIA/AP$ ls
Culture.txt Development Farmers.txt General.txt Industry.txt
```

Q8. List first 10 lines of the file ‘Dress’

```
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ head -10 Dress.txt
Line 1
Line 1
Line 3
Line 4
Line 5
Line 6
Line 7
Line 8
Line 9
Line 10
```

Q9. List the last 10 lines of the file ‘Dress’

```
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ tail -10 Dress.txt
Line 4
Line 5
Line 6
Line 7
Line 8
Line 9
Line 10
Line 11
Line 12
Line 13
```

Q10. List all the files in AP in long listing format

```
mac@mac-Aspire-A715-75G:~/INDIA/AP$ ls -l
total 8
-rw-rw-r-- 1 mac mac 0 Jun 17 15:04 Culture.txt
drwxrwxr-x 2 mac mac 4096 Jun 17 15:18 Development
-rw-rw-r-- 1 mac mac 0 Jun 17 14:59 Farmers.txt
-rw-rw-r-- 1 mac mac 21 Jun 17 15:16 General.txt
-rw-rw-r-- 1 mac mac 0 Jun 17 14:59 Industry.txt
```

Q11. List the files in AP which begin with the character ‘f’

```
mac@mac-Aspire-A715-75G:~/INDIA/AP$ ls F*
Farmers.txt
```

Q12. List the files page by page

```
mac@mac-Aspire-A715-75G:~/INDIA/AP$ ls -la |more
total 16
drwxrwxr-x 3 mac mac 4096 Jun 17 15:04 .
drwxrwxr-x 5 mac mac 4096 Jun 17 14:54 ..
-rw-rw-r-- 1 mac mac 0 Jun 17 15:04 Culture.txt
drwxrwxr-x 2 mac mac 4096 Jun 17 15:18 Development
-rw-rw-r-- 1 mac mac 0 Jun 17 14:59 Farmers.txt
-rw-rw-r-- 1 mac mac 21 Jun 17 15:16 General.txt
-rw-rw-r-- 1 mac mac 0 Jun 17 14:59 Industry.txt
```

Q13. Remove the file ‘general’

```
mac@mac-Aspire-A715-75G:~/INDIA/AP$ rm General.txt
```

Q14. Change the permission of the file ‘Culture’ as only read permission to all

```
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ chmod g-wx Culture.txt
```

Q15. List the lines of the file which contains a string ‘Saree’

```
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ cat > Dress.txt
Shirt
Saree
Shorts
Pants
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ grep 'Saree' Dress.txt
Saree
```

Q16. Use man command to get the syntax of *wc* command

```
WC(1)                               User Commands                               WC(1)

NAME
    wc - print newline, word, and byte counts for each file

SYNOPSIS
    wc [OPTION]... [FILE]...
    wc [OPTION]... --files0-from=F

DESCRIPTION
    Print newline, word, and byte counts for each FILE, and a total line if more than one FILE is specified. A word is a non-zero-length sequence of characters delimited by white space.

    With no FILE, or when FILE is -, read standard input.

    The options below may be used to select which counts are printed, always in the following order: newline, word, character, byte, maximum line length.

    -c, --bytes
        print the byte counts

    -n, --chars
        print the character counts

    -l, --lines
        print the newline counts

    --files0-from=F
        read input from the files specified by NUL-terminated names in file F; If F is - then read names from standard input

    -L, --max-line-length
        print the maximum display width

    -w, --words
        print the word counts

    --help
        display this help and exit

    --version
        output version information and exit

AUTHOR
    Written by Paul Rubin and David MacKenzie.

REPORTING BUGS
    GNU coreutils online help: <https://www.gnu.org/software/coreutils/>
    Report wc translation bugs to <https://translationproject.org/team/>

COPYRIGHT
    Copyright © 2018 Free Software Foundation, Inc. License GPLv3+: GNU GPL version 3 or later <https://gnu.org/licenses/gpl.html>.
    This is free software: you are free to change and redistribute it. There is NO WARRANTY, to the extent permitted by law.

SEE ALSO
    Full documentation at: <https://www.gnu.org/software/coreutils/wc>
    or available locally via: info '(coreutils) wc invocation'
```

GNU coreutils 8.30 September 2019 WC(1)
 Manual page **wc(1)** line 1/55 (END) (press h for help or q to quit)

Q17. Count the number of characters, words, lines in the directory listing

```
mac@mac-Aspire-A715-75G:~/INDIA/KERALA$ wc -mwl ~/INDIA/KERALA/Dress.txt
4 4 25 /home/mac/INDIA/KERALA/Dress.txt
```

Q18. Put a listing of the files in your directory into a file called **filelist**.

```
mac@mac-Aspire-A715-75G:~$ ls -l >> filelist.txt
mac@mac-Aspire-A715-75G:~$ cat filelist.txt
total 56
drwxrwxr-x 7 mac mac 4096 Jun 16 10:25 1. Dennis
drwxrwxr-x 4 mac mac 4096 May 25 09:15 BigdataTools
drwxr-xr-x 2 mac mac 4096 Jun 17 22:07 Desktop
drwxr-xr-x 2 mac mac 4096 Jun 7 15:57 Documents
drwxr-xr-x 7 mac mac 4096 Jun 17 22:22 Downloads
-rw-rw-r-- 1 mac mac 0 Jun 18 20:27 filelist.txt
drwxrwxr-x 5 mac mac 4096 Jun 17 14:54 INDIA
drwxr-xr-x 2 mac mac 4096 May 8 00:04 Music
-rw-rw-r-- 1 mac mac 0 Jun 7 22:51 new.py
drwxr-xr-x 2 mac mac 4096 Jun 17 16:59 Pictures
drwxrwxr-x 3 mac mac 4096 May 9 20:45 Postman
drwxr-xr-x 2 mac mac 4096 May 8 00:04 Public
drwxr-xr-x 9 mac mac 4096 May 25 10:07 snap
drwxr-xr-x 2 mac mac 4096 May 8 00:04 Templates
drwxrwxr-x 2 mac mac 4096 Jun 17 15:10 test
drwxr-xr-x 2 mac mac 4096 Jun 3 11:43 Videos
```

Q19. List the status of all process running in your system

USER	PID	%CPU	%MEM	VSZ	RSS	TTY	STAT	START	TIME	COMMAND
root	1	0.0	0.1	169172	13160	?	Ss	09:29	0:02	/sbin/init
root	2	0.0	0.0	0	0	?	S	09:29	0:00	[kthreadd]
root	3	0.0	0.0	0	0	?	I<	09:29	0:00	[rcu_gp]
root	4	0.0	0.0	0	0	?	I<	09:29	0:00	[rcu_par_gp]
root	6	0.0	0.0	0	0	?	I<	09:29	0:00	[kworker/0:0]
root	9	0.0	0.0	0	0	?	I<	09:29	0:00	[mm_percpu]
root	10	0.0	0.0	0	0	?	S	09:29	0:00	[ksoftirqd/0]
root	11	0.1	0.0	0	0	?	I	09:29	0:37	[rcu_sched]
root	12	0.0	0.0	0	0	?	S	09:29	0:00	[migration/0]
root	13	0.0	0.0	0	0	?	S	09:29	0:00	[idle_injec]
root	14	0.0	0.0	0	0	?	S	09:29	0:00	[cpuhp/0]
root	15	0.0	0.0	0	0	?	S	09:29	0:00	[cpuhp/1]
root	16	0.0	0.0	0	0	?	S	09:29	0:00	[idle_injec]
root	17	0.0	0.0	0	0	?	S	09:29	0:00	[migration/1]
root	18	0.0	0.0	0	0	?	S	09:29	0:00	[ksoftirqd/1]
root	20	0.0	0.0	0	0	?	I<	09:29	0:00	[kworker/1:0]
root	21	0.0	0.0	0	0	?	S	09:29	0:00	[cpuhp/2]
root	22	0.0	0.0	0	0	?	S	09:29	0:00	[idle_injec]
root	23	0.0	0.0	0	0	?	S	09:29	0:00	[migration/2]
root	24	0.0	0.0	0	0	?	S	09:29	0:00	[ksoftirqd/2]
root	26	0.0	0.0	0	0	?	I<	09:29	0:00	[kworker/2:0]
root	27	0.0	0.0	0	0	?	S	09:29	0:00	[cpuhp/3]
root	28	0.0	0.0	0	0	?	S	09:29	0:00	[idle_injec]
root	29	0.0	0.0	0	0	?	S	09:29	0:00	[migration/3]
root	30	0.0	0.0	0	0	?	S	09:29	0:00	[ksoftirqd/3]
root	32	0.0	0.0	0	0	?	I<	09:29	0:00	[kworker/3:0]
root	33	0.0	0.0	0	0	?	S	09:29	0:00	[cpuhp/4]
root	34	0.0	0.0	0	0	?	S	09:29	0:00	[idle_injec]
root	35	0.0	0.0	0	0	?	S	09:29	0:00	[migration/4]
root	36	0.0	0.0	0	0	?	S	09:29	0:00	[ksoftirqd/4]
root	38	0.0	0.0	0	0	?	I<	09:29	0:00	[kworker/4:0]
root	39	0.0	0.0	0	0	?	S	09:29	0:00	[cpuhp/5]
root	40	0.0	0.0	0	0	?	S	09:29	0:00	[idle_injec]

Q20. List the disk partitions in your harddisk.

NAME	MAJ:MIN	RM	SIZE	RO	TYPE	MOUNTPOINT
loop0	7:0	0	207M	1	loop	/snap/code/65
loop1	7:1	0	207.2M	1	loop	/snap/code/66
loop2	7:2	0	55.4M	1	loop	/snap/core18/2066
loop3	7:3	0	99.4M	1	loop	/snap/core/11187
loop4	7:4	0	77.2M	1	loop	/snap/discord/128
loop5	7:5	0	219M	1	loop	/snap/gnome-3-34-1804/66
loop6	7:6	0	219M	1	loop	/snap/gnome-3-34-1804/72
loop7	7:7	0	65.1M	1	loop	/snap/gtk-common-themes/1515
loop8	7:8	0	175.4M	1	loop	/snap/postman/133
loop9	7:9	0	51M	1	loop	/snap/snap-store/542
loop10	7:10	0	26.1M	1	loop	/snap/heroku/4048
loop11	7:11	0	51M	1	loop	/snap/snap-store/547
loop12	7:12	0	32.1M	1	loop	/snap/snapd/12057
loop13	7:13	0	32.3M	1	loop	/snap/snapd/12159
loop14	7:14	0	301.1M	1	loop	/snap/telegram-desktop/2637
loop15	7:15	0	589.2M	1	loop	/snap/supertuxkart/556
loop16	7:16	0	64.8M	1	loop	/snap/gtk-common-themes/1514
loop17	7:17	0	61.7M	1	loop	/snap/core20/1026
loop18	7:18	0	162.9M	1	loop	/snap/gnome-3-28-1804/145
loop19	7:19	0	99.2M	1	loop	/snap/core/11167
loop20	7:20	0	61.7M	1	loop	/snap/core20/975
loop21	7:21	0	55.5M	1	loop	/snap/core18/1997
loop22	7:22	0	76.7M	1	loop	/snap/discord/122
nvme0n1	259:0	0	477G	0	disk	
---nvme0n1p1	259:1	0	100M	0	part	/boot/efi
---nvme0n1p2	259:2	0	16M	0	part	
---nvme0n1p3	259:3	0	175.8G	0	part	/home
---nvme0n1p4	259:4	0	85.9G	0	part	/
---nvme0n1p5	259:5	0	200G	0	part	
---nvme0n1p6	259:6	0	14.2G	0	part	
---nvme0n1p7	259:7	0	1G	0	part	

Q21. Redirect the output of the **top** program to a file called 'errors'.


```
mac@mac-Aspire-A715-75G:~$ top >> error.txt
mac@mac-Aspire-A715-75G:~$ cat error.txt

top - 20:28:49 up 2 min,  1 user,  load average: 0.28, 0.21, 0.09
Tasks: 297 total,  2 running, 295 sleeping,   0 stopped,   0 zombie
%Cpu(s):  0.2 us,  0.2 sy,  0.1 ni, 99.4 id,  0.0 wa,  0.0 hi,  0.0 si,  0.0 st
MiB Mem : 7796.7 total, 4840.6 free, 1411.8 used, 1544.2 buff/cache
MiB Swap: 2048.0 total, 2048.0 free,    0.0 used. 5937.5 avail Mem

 PID USER      PR  NI    VIRT    RES    SHR S %CPU %MEM     TIME+ COMMAND
 3189 mac      20   0 443612 28560 15184 S  1.0  0.4  0:00.18 tracker-store
 1590 mac      39  19 520192 24540 16424 S  0.7  0.3  0:00.20 tracker-miner-f
1826 mac      20   0 5358596 299292 106852 S  0.7  3.7  0:05.70 gnome-shell
 733 root      20   0 345116 20280 16804 S  0.3  0.3  0:00.67 NetworkManager
1283 root      20   0 367492 23708 15088 S  0.3  0.3  0:02.26 packagekitd
1679 mac      20   0 866900 74300 48008 S  0.3  0.9  0:01.68 Xorg
 3196 mac      39  19 1288820 35872 24180 S  0.3  0.4  0:00.15 tracker-extract
 1 root       20   0 167980 11836  8364 S  0.0  0.1  0:01.34 systemd
 2 root       20   0      0    0      0 S  0.0  0.0  0:00.00 kthreadd
 3 root       0 -20      0    0      0 I  0.0  0.0  0:00.00 rcu_gp
 4 root       0 -20      0    0      0 I  0.0  0.0  0:00.00 rcu_par_gp
 5 root       20   0      0    0      0 I  0.0  0.0  0:00.00 kworker/0:0-events
 6 root       0 -20      0    0      0 I  0.0  0.0  0:00.00 kworker/0:0H-kblockd
 7 root       20   0      0    0      0 I  0.0  0.0  0:00.03 kworker/0:1-events
 8 root       20   0      0    0      0 I  0.0  0.0  0:00.38 kworker/u16:0-efi_rts_wq
 9 root       0 -20      0    0      0 I  0.0  0.0  0:00.00 mm_percpu_wq
10 root      20   0      0    0      0 S  0.0  0.0  0:00.01 ksoftirqd/0
11 root      20   0      0    0      0 I  0.0  0.0  0:00.16 rcu_sched
12 root      rt   0      0    0      0 S  0.0  0.0  0:00.00 migration/0
```

Experiment 3

3.1. Linux File System Hierarchy Structure:

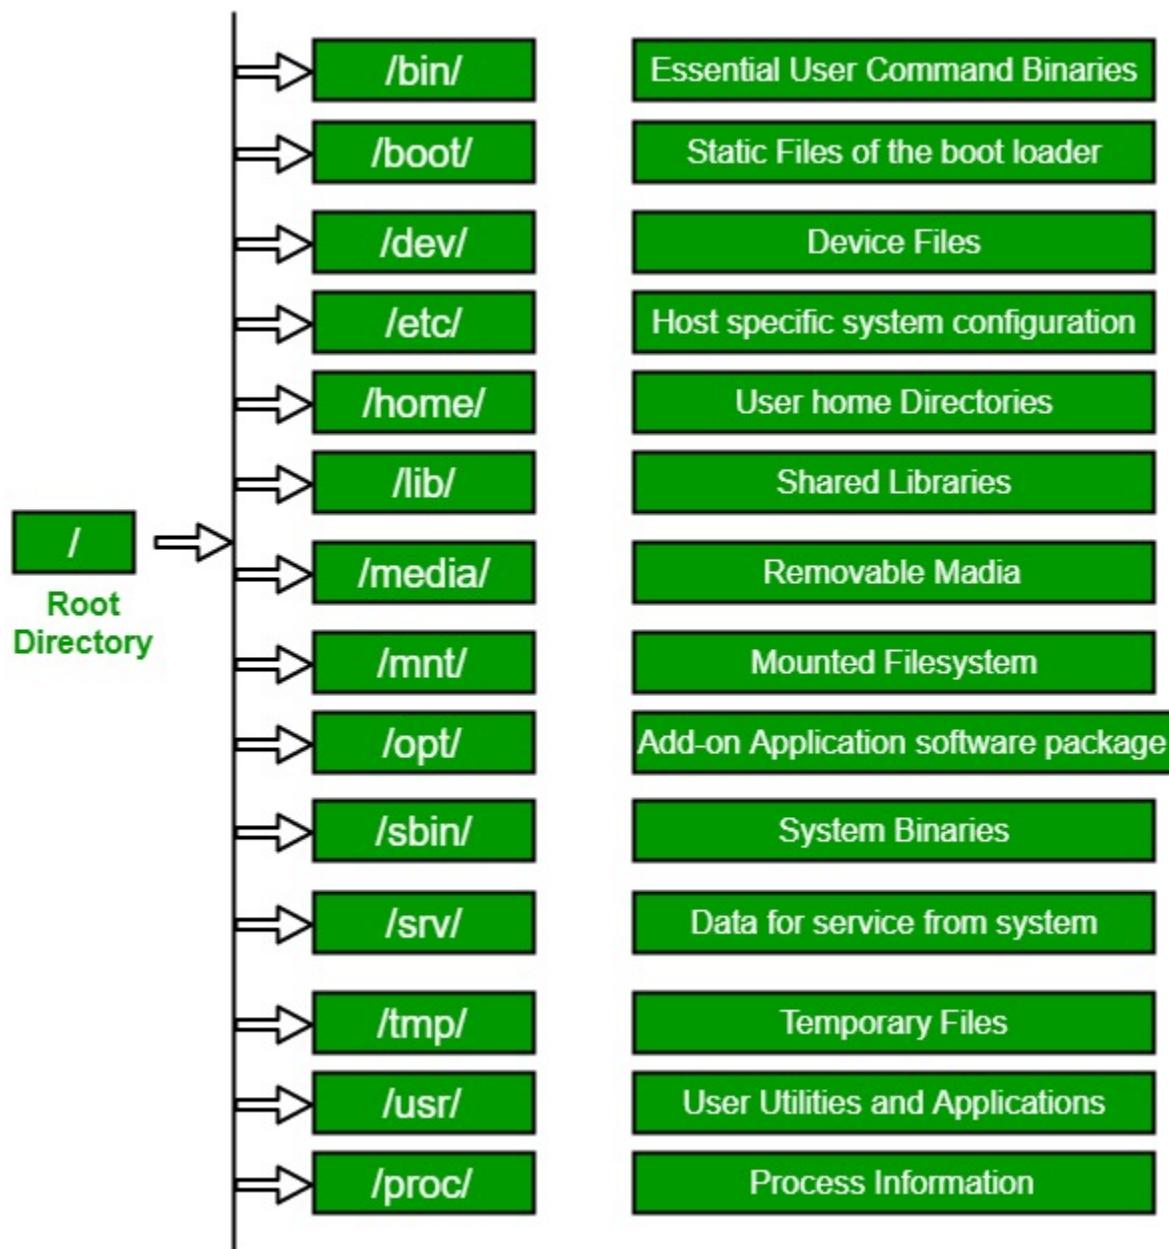

The Linux File System Hierarchy defines the directory structure and directory contents in Unix-like operating systems. It is maintained by the Linux Foundation.

- The all files and directories appear under the root directory /, even if they are stored on different physical or virtual devices.
- Most of these directories exist in all UNIX operating systems and are generally used in much the same way; however, the descriptions here are those used specifically for the FHS and are not considered authoritative for platforms other than Linux.

- Most Linux distributions follow the Filesystem Hierarchy Standard and declare it their own policy to maintain FHS compliance.
 - Some distributions generally follow the standard but deviate from it in some areas. The FHS is a "trailing standard", and so documents common practices at a point in time.

3.2. The tree intallation process:

- Install tree using the following command:
\$ sudo apt install tree

```
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo apt install tree
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  aci apt colorldm data enchant geopip-database gnome-control-center-faces gnome-online-accounts gsfonts hplip-data libbind9-161 libboost-filesystem0
  libcolorhug2 libdns-export1107 libdns1109 libenchant1c2a libexiv2-14 libfpprint0 libgeoip1 libgsound0 libgspell-1-1 libgssdp-1.2-0
  libgutenprint-common libgutenprint9 libieee1284-3 libimagequant0 libiptc0 libirs161 libisc-export1104 libisc1104 libisc1105 libisccc161 libiscc
  librygel-core-2.6-2 librygel-db-2.6-2 librygel-renderer-2.6-2 librygel-server-2.6-2 libsane-common libsnmp-base libwebpnu3 mobile-broadband-
  printer-driver-gutenprint printer-driver-postscript-hp python3-asn1crypto python3-macaroonbakery python3-olefile python3-pil python3-protobuf
  python3-reportlab-accel python3-rfc3339 python3-tz rygel shim ubuntu-software ubuntu-system-service
Use 'sudo apt autoremove' to remove them.
The following NEW packages will be installed:
  tree
0 upgraded, 1 newly installed, 0 to remove and 81 not upgraded.
Need to get 43.0 kB of archives.
After this operation, 115 kB of additional disk space will be used.
Get:1 http://in.archive.ubuntu.com/ubuntu focal/universe amd64 tree amd64 1.8.0-1 [43.0 kB]
Fetched 43.0 kB in 10s (4,119 B/s)
Selecting previously unselected package tree.
(Reading database ... 192362 files and directories currently installed.)
Preparing to unpack .../tree_1.8.0-1_amd64.deb ...
Unpacking tree (1.8.0-1) ...
Setting up tree (1.8.0-1) ...
Processing triggers for man-db (2.9.1-1) ...
hp@hp-HP-Laptop-15s-du0xxx:~$
```

```
hp@hp-HP-Laptop-15s-du0xxx:~$ tree -L 1 /
/
bin  -> usr/bin
boot
cdrom
dev
etc
home
lib  -> usr/lib
lib32 -> usr/lib32
lib64 -> usr/lib64
libx32 -> usr/libx32
lost+found
media
mnt
opt
proc
root
run
sbin  -> usr/sbin
snap
srv
swapfile
sys
tmp
usr
var

24 directories, 1 file
hp@hp-HP-Laptop-15s-du0xxx:~$
```

- Explore various directories and files using the command cd, ls etc in linux and provide its screenshots

```

Activities Terminal Sep 30 18:25
hp@hp-HP-Laptop-15s-du0xxx:/bin$ cd ..
hp@hp-HP-Laptop-15s-du0xxx:$ ls
config-5.4.0-86-generic efi initrd.img initrd.img-5.4.0-9-generic memtest86+.bin memtest86+_multiboot.bin System.map-5.4.0-9-generic vmlinuz vmlinuz-5.4.0-86-generic vmlinuz.old
config-5.4.0-9-generic grub initrd.img.old memtest86+.elf System.map-5.4.0-86-generic vmlinuz vmlinuz-5.4.0-9-generic
hp@hp-HP-Laptop-15s-du0xxx:/boot$ cd ..
hp@hp-HP-Laptop-15s-du0xxx:$ cd /bin
hp@hp-HP-Laptop-15s-du0xxx:/bin$ ls
'[' dvipdf      gst-device-monitor-1.0    mkfontscale   ps2pdf14        tracker
aa-enabled    dpi          gst-discoverer-1.0  mklsofs       ps2pdfwr        transicc
aa-exec      echo         gst-inspect-1.0   mksnfest      ps2ps          transmission-gtk
ab          ed          gst-launch-1.0    nk_nodnap    ps2ps2         transset
aconnect     edit         gst-play-1.0    nknode       ps2txt         tree
acpi_listen   editor       gst-rtelement-codec-install nksquashfs  psafddable      troff
add-apt-repository editres      gst-typefind-1.0 nktemp      psfgettable      true
addapt      efibootdmp  gtf          nkzfreetree  psfscriptable  truncate
addr2line    grep         gtk-builder-tool  mlabel       psfxtable       trust
alsabat      grep         gtk-encode-symbolic-svg  mnc1l      psiccc          tset
alsaloop     eject        gtk-launch      mnd          pslog          tsort
alsixer      elfeedit    gtk-query-settings  mmount      pstrtree       ttflread
alsatplig    enc2xs      gtk-update-icon-cache  mmove       pstrtree.x11    tty
alsaucm     enqueues   gnutar       mokutil      ptar          tzselect
amidi        enchant     gunzip      monitor-sensor  ptardiff      ua
amixer      enchant-2   gvfs-cat      more        ptargrep      ubuntu-advantage
anuformat.sh enchant-lsmod  gvfs-copy     mount       pulseaudio    ubuntu-bug
ap           enchant-lsmod-2  gvfs-distro   mountpoint  pulseaudio    ubuntu-launcher
apdbfn      env         gvfs-foreground  mspoint     pulseaudio    ubuntu-astro-info
aplay       egrep        gvfs-foreground  mspointwks  pulseaudio    ubuntu-drivers
aplaymidl    eog          gvfs-nfs      partition   pulseaudio    ubuntu-report
aport-bug    eps2eps    gvfs-nime      mrd          pulseaudio    ubuntu-security-status
aport-clli    epn          gvfs-nkdir    py3clean    pulseaudio    ucf
aport-collect  esc-n      gvfs-monitor-dir  mren        pulseaudio    ucfq
aport-unpack  eutp        gvfs-mount    py3compile  pulseaudio    ucr
apres       evince      gvfs-move     mtools      pulseaudio    ucs2any
appstreamcli  evince-previewer  gvfs-open     py3compress  pulseaudio    udevadm
apropos     evince-thumbnailer  gvfs-rename   py3decompress  pulseaudio    udisksctl
apt         expand      gvfs-rm      mtooltest   py3decompress  ul
apt-add-repository  expandv     gvfs-save     pyjwt3      pulseaudio    unlockngr_server
apt-cache    expr        gvfs-set-attribute  python3     pulseaudio    umount
apt-cdrom   factor      gvfs-trash    mtrace      python3.7     uname
apt-cfg      factor      gvfs-tree     mtracket   python3.7m     unattended-upgrade
apt-config   failfd      gzip        mtype      python3.8     unattended-upgrades
apt-extracttemplates  faked-sysv  gzip        mutter     python3-futurize  uncompress
apt-ftparchive  faked-tcp   h2ph       nv      python3m     unexpand
apt-get      fakeroot   h2ph       nv      python3m     uncode_start
apt-key      fakeroot-sysv  h2ph       nv      python3m     uncode_stop
apt-mark     fakeroot-tcp  hcitattach  ncrypt      python3m     uniq
apt-sortpkgs  falllocate  hciconfig  ncrypt      python3m     unity-scope-loader
apturl      fc-cache    hd          mysql      rctest      unlink
apturl-gtk   fc-cat      head        mysql      rdffdr      unlz4
ar           fc-conflict  HEAD        mysqladmin  rdma      unlzma
arch        fc-glistarter  helpztags  mysqlanalyze  readline      umkntinramfs
arecord     fc-list      hexahcd   mysqlbinlog  readline      unopkg
arecordmtd  fc-match    hexdump    mysqlcheck   readline      unshare
arnzhndl    fc-pattern   hperdecodc  mysql_config_editor  readline      unsquashfs
as          fc-pattern   hperdecodc  mysql_config_editor  readline      unxz

```

```

hp@hp-HP-Laptop-15s-du0xxx:/bin$ cd ..
hp@hp-HP-Laptop-15s-du0xxx:$ cd /dev
hp@hp-HP-Laptop-15s-du0xxx:$ ls
autofs      hugepages kvm      loop8      nvme0      ptmx      snd      tty12  tty22  tty32  tty42  tty52  tty62  ttyS13  ttyS23  ttyS5  vcs  vcs4  vga_arbiter
autofs      hugepages kvm      loop8      nvme0      ptmx      snd      tty13  tty23  tty33  tty43  tty53  tty63  ttyS14  ttyS24  ttyS6  vcs1  vcs4  vhci
block      disk      hwring  lightnvm loop9      nvme0n1  pts      stderr  tty14  tty24  tty34  tty44  tty54  tty64  ttyS15  ttyS25  ttyS7  vcs2  vcs4  vhost-net
block      disk      hwring  lightnvm loop9      nvme0n1  pts      stderr  tty14  tty24  tty34  tty44  tty54  tty64  ttyS15  ttyS25  ttyS7  vcs2  vcs4  vhost-vsock
bus        drm_dp_aux0  l2c-0  log      loop-control  nvme0n1p1  random  stdIn  tty15  tty25  tty35  tty45  tty55  tty65  ttyS16  ttyS26  ttyS8  vcs3  vcs4  vhost-vsock
bus        drm_dp_aux0  l2c-1  log      loop0      mapper  nvme0n1p2  rfkill  stdOut  tty16  tty26  tty36  tty46  tty56  tty66  ttyS17  ttyS27  ttyS9  vcs4  vcs5  vhost-vsock
btrfs-control  encryptfs  l2c-2  loop1  nvme0n1p1  rtc      tpm0  stdOut  tty17  tty27  tty37  tty47  tty57  tty67  ttyS18  ttyS28  ttyS10  vcs5  vcs6  vhost-vsock
bus        fbd      l2c-3  loop2  nvme0n1p2  media0  nvme0n1p4  tpmr0  stdOut  tty18  tty28  tty38  tty48  tty58  tty68  ttyS19  ttyS29  ttyS11  vcs5  vcs6  vhost-vsock
char      fd      l2c-4  loop3  nvme0n1p5  nvme0n1p5  sda      tpy0  stdOut  tty19  tty29  tty39  tty49  tty59  tty69  ttyS20  ttyS30  ttyS12  vcs5  vcs6  vhost-vsock
console    full      l2c-5  loop4  nvme0n1p5  nvme0n1p5  sda1     tpy1  stdOut  tty20  tty30  tty40  tty50  tty60  tty70  ttyS21  ttyS31  ttyS13  vcs5  vcs6  vhost-vsock
core      fuse      lntctl  loop5  nvme0n1p5  nvme0n1p5  sda2     tpy2  stdOut  tty21  tty31  tpy41  tpy51  tpy61  tpy71  ttyS22  ttyS42  vcs5  vcs6  vhost-vsock
cpu        hidraw0  input   loop6  net      nvme0n1p5  nvme0n1p5  sda3     tpy3  stdOut  tpy22  tpy32  tpy42  tpy52  tpy62  tpy72  tpyS23  tpyS43  vcs5  vcs6  vhost-vsock
cpu_dma_latency  hpet      knsg    loop7  null    nvme0n1p5  nvme0n1p5  sda4     tpy4  stdOut  tpy23  tpy33  tpy43  tpy53  tpy63  tpy73  tpyS24  tpyS44  vcs5  vcs6  vhost-vsock
hp@hp-HP-Laptop-15s-du0xxx:$ dev$ cd ..
hp@hp-HP-Laptop-15s-du0xxx:$ cd /usr
hp@hp-HP-Laptop-15s-du0xxx:$ ls
bin games  include lib lib32 lib64 libexec libx32 local sbtn share src
hp@hp-HP-Laptop-15s-du0xxx:$ us$ cd ..
hp@hp-HP-Laptop-15s-du0xxx:$ cd /tmp
hp@hp-HP-Laptop-15s-du0xxx:$ tm$ ls
config-err-EA0r1
ssh-MOKn1N1cv1hv
systemd-private-284f5823d9eb479cb12d40fc04a6ebai-systemd-logind.service-bQmkzg
systemd-private-284f5823d9eb479cb12d40fc04a6ebai-systemd-resolved.service-Q4vXAf
systemd-private-284f5823d9eb479cb12d40fc04a6ebai-wlWrf
systemd-private-284f5823d9eb479cb12d40fc04a6ebai-ModemManager.service-UmWGF
systemd-private-284f5823d9eb479cb12d40fc04a6ebai-swwitcheroo-control.service-LHobsg
tracker-extract-files.1000
hp@hp-HP-Laptop-15s-du0xxx:$ tm$ cd ..
hp@hp-HP-Laptop-15s-du0xxx:$ cd /var
hp@hp-HP-Laptop-15s-du0xxx:$ var$ ls
backups cache crash lib local lock log mail metrics opt run snap spool tmp www

```

3.3. The detailed explanation of directories in Linux

- 1. / (Root):** Primary hierarchy root and root directory of the entire file system hierarchy.
- Every single file and directory starts from the root directory
 - The only root user has the right to write under this directory

- /root is the root user's home directory, which is not the same as /

2. /bin : Essential command binaries that need to be available in single-user mode; for all users, e.g., cat, ls, cp.

- Contains binary executables
- Common linux commands you need to use in single-user modes are located under this directory.
- Commands used by all the users of the system are located here e.g. ps, ls, ping, grep, cp

3. /boot : Boot loader files, e.g., kernels, initrd.

- Kernel initrd, vmlinuz, grub files are located under /boot
- Example: initrd.img-2.6.32-24-generic, vmlinuz-2.6.32-24-generic

4. /dev : Essential device files, e.g., /dev/null.

- These include terminal devices, usb, or any device attached to the system.
- And also know the connected devices.

5. /etc : Host-specific system-wide configuration files.

- Contains configuration files required by all programs.
- This also contains startup and shutdown shell scripts used to start/stop individual programs.
- Example: /etc/resolv.conf, /etc/logrotate.conf.
- The old format is et cetera

6. /home : Users' home directories, containing saved files, personal settings, etc.

- Home directories for all users to store their personal files.

7. /lib : Libraries essential for the binaries in /bin/ and /sbin/.

- Library filenames are either ld* or lib*.so.*
- Eg wifi,printer etc

8. /media : Mount points for removable media such as CD-ROMs (appeared in FHS-2.3).

- Temporary mount directory for removable devices.
- Examples, /media/cdrom for CD-ROM; /media/floppy for floppy drives; /media/cdrecorder for CD writer

9. /mnt : Temporarily mounted filesystems.

- Temporary mount directory where sysadmins can mount filesystems.

10. /opt : Optional application software packages.

- Contains add-on applications from individual vendors.
- Add-on applications should be installed under either /opt/ or /opt/ sub-directory.

11. /sbin : Essential system binaries, e.g., fsck, init, route.

- Just like /bin, /sbin also contains binary executables.
- The linux commands located under this directory are used typically by system administrator, for system maintenance purpose.
- Example: iptables, reboot, fdisk, ifconfig, swapon

12. /srv : Site-specific data served by this system, such as data and scripts for web servers, data offered by FTP servers, and repositories for version control systems.

- srv stands for service.
- Contains server specific services related data.
- Example, /srv/cvs contains CVS related data.

13. /tmp : Temporary files. Often not preserved between system reboots, and may be severely size restricted.

- Directory that contains temporary files created by system and users.
- Files under this directory

14. /usr : Secondary hierarchy for read-only user data; contains the majority of (multi-)user utilities and applications.

- Contains binaries, libraries, documentation, and source-code for second level programs.
- /usr/bin contains binary files for user programs. If you can't find a user binary under /bin, look under /usr/bin. For example: at, awk, cc, less, scp
- /usr/sbin contains binary files for system administrators. If you can't find a system binary under /sbin, look under /usr/sbin. For example: atd, cron, sshd, useradd, userdel
- /usr/lib contains libraries for /usr/bin and /usr/sbin
- /usr/local contains users programs that you install from source. For example, when you install apache from source, it goes under /usr/local/apache2
- /usr/src holds the Linux kernel sources, header-files and documentation.

15. /proc : Virtual filesystem providing process and kernel information as files. In Linux, corresponds to a procfs mount. Generally automatically generated and populated by the system, on the fly.

- Contains information about system process.
- This is a pseudo filesystem contains information about running process. For example: /proc/{pid} directory contains information about the process with that particular pid.
- This is a virtual filesystem with text information about system resources. For example: /proc/uptime

16. /var — Variable Data Files

The /var directory is the writable counterpart to the /usr directory, which must be read-only in normal operation. Log files and everything else that would normally be written to /usr during normal operation are written to the /var directory. For example, you'll find log files in /var/log.

17./srv — Service Data

The /srv directory contains “data for services provided by the system.” If you were using the Apache HTTP server to serve a website, you’d likely store your website’s files in a directory inside the /srv directory.

18./run — Application State Files

The /run directory is fairly new, and gives applications a standard place to store transient files they require like sockets and process IDs. These files can’t be stored in /tmp because files in /tmp may be deleted.

EXPERIMENT-04

4.1. Shell Script

1. Write a Shell program to display a given message

Shell code:

```
echo "Enter a message"
read msg
echo "The given message is :$msg"
```

Output :

```
hp@hp-HP-Laptop-15s-du0xxx:~$ vi s1.sh
hp@hp-HP-Laptop-15s-du0xxx:~$ chmod +x s1.sh
hp@hp-HP-Laptop-15s-du0xxx:~$ ./s1.sh
enter a message
hello
The given message is : hello
hp@hp-HP-Laptop-15s-du0xxx:~$ █
```

Result:

The program execute successfully

2. Write a shell script to evaluate arithmetic operations.

Shell code:

```
echo "enter two integer number"
read a
read b
c=`expr $a + $b`
echo "sum of two numbers=$c"
c=`expr $a - $b`
echo "Differents of two numbers=$c"
c=`expr $a / $b`
echo "division of two numbers=$c"
c=`expr $a \* $b`
echo "multiplication of two numbers=$c"
c=`expr $a % $b`
echo "remainder=$c"
```

Output:

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano exp1.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x exp1.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./exp1.sh
enter two integer number
5
3
sum=8
sub=2
div=1
multiplication=15
remainder=2
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$
```

Result:

The program execute successfully

3. Write a shell Script to determine largest among three integer number

Shell code:

```
echo "enter three integer number"
read a
read b
read c
if [ $a -gt $b ] && [ $a -gt $c ]
then
echo "$a is largest number"
elif [ $b -gt $a ] && [ $b -gt $c ]
then
echo "$b is largest number"
else
echo "$c is largest number"
fi
```

Output:

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano 3.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x 3.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./3.sh
./3.sh: line 1: ech: command not found
2
3
4
4 is largest number
```

Result:

The program execute successfully

4. Write a shell script to compare two string

Shell code:

```
echo "enter two string"
read a
```

```
read b
if [ -z $a ]
then
echo " First String is empty: Null String"
fi
if [ -z $b ]
then
echo " First String is empty: Null String"
fi
if [ $a = $b ]
then
echo "Strings are equal: strings Matched"
else
echo "Strings are not equal: Strings not match"
fi
```

Output:

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano 4.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x 4.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./4.sh
enter two strings
world
hello
strings are not equal:strings not match    I
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$
```

Result:

The program execute successfully

5. Write a shell script to read and check the directory exists or not, if not make directory

Shell code:

```
echo "enter name of directory"
read dir
if [ -d $dir ]
then
echo "Directory $dir Exists!"
else
mkdir $dir
fi
```

Output:

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano 5.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x 5.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./5.sh
enter name of directory
abc
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ cd abc
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~/abc$
```

Result:

The program execute successfully

6. Write a shell script to read and check the file exists or not, if not make file.

Shell code:

```
echo "enter name of file"
read filename
if [ -f $filename ]
then
echo "File $filename Exists!"
else
touch $filename
fi
```

Output:

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~/abc$ nano 6.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~/abc$ chmod +x 6.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~/abc$ ./6.sh
enter name of file
hello
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~/abc$ cat hello
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~/abc$ ./6.sh
enter name of file
hello
file hello exists
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~/abc$
```

Result:

The program execute successfully

7. Write a shell script to implement menu driven program to perform all arithmetic operation using case statement.

Shell code:

```
echo "enter two integer values"
read a
read b
echo " Menu"
echo "1->Addition"
echo "2->Subtraction"
echo "3->Multiplication"
echo "4->Division"
echo "5->Remainder "
echo "enter choice"
read ch
case $ch in
1) echo "Sum=$(expr $a + $b)";;
2) echo "Substration=$(expr $a - $b)";;
3) echo "Multiplication=$(expr $a \* $b)";;
4) echo "Division=$(expr $a / $b)";;
5) echo "Remainder=$(expr $a % $b)";;
6) echo "invalid Choice:Try Again!"
esac
```

Output:

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano 7.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x 7.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./7.sh
enter two integer values
3
4
menu
1: Addition
2: Subtraction
3: Multiplication
4: Division
5: Remainder
enter choice
1
sum=7
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ █
```

Result:

The program execute successfully

8. Write a shell script to do:

- a. display list of directory contents
- b. Name of current directory
- c. Who is logged on
- d. Long listing of directory contents according to choose of user.

Shell code:

```
echo " Menu"
echo " 1-> listing directory content"
echo " 2-> print name of current directory"
echo " 3-> Show who is logged on "
echo " 4-> Show directory content using long listing format "
echo "enter your choice "
read ch
case $ch in
1) ls;;
2) pwd;;
3) who;;
4) ls -l;;
*) echo "Invalid Choice: Try Again!!"
esac
```

Output:

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano 8.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x 8.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./8.sh
menu
1 for listing directory content
2 for print name of current directory

3 for show who is logged on
4 show directory content using long listing format
enter your choice
1
7.sh Desktop Downloads Pictures snap Videos
8.sh Documents Music Public Templates
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ █
```

Result:

The program execute successfully

9. Write a shell script to getting input details like name, roll number and marks and print them using command line arguments.cat

shell code:

```
echo "Name of the student: $1"
echo "Roll Number of the student: $2"
echo "Marks of the student: $3"
```

Output:

```
onworks@onworks-Standard-PC-1440FX-PIIX-1996:~$ cat>Studentdetail
echo "Name of the student:$1"
echo "Roll number of the student:$2"
echo "Marks of the student:$3"
onworks@onworks-Standard-PC-1440FX-PIIX-1996:~$ chmod +x Studentdetail
onworks@onworks-Standard-PC-1440FX-PIIX-1996:~$ ./Studentdetail anu 2 0
Name of the student:anu
Roll number of the student:2
Marks of the student:0
onworks@onworks-Standard-PC-1440FX-PIIX-1996:~$ █
```

Result:

The program execute successfully

10. Understand the differences between Echo statement using single quote , double quote and without quotes.

Shell code:

```
a=12
echo $a
echo "$a"
echo '$a'
```

Output:

```
onworks@onworks-Standard-PC-1440FX-PIIX-1996:~$ nano exp13.sh
onworks@onworks-Standard-PC-1440FX-PIIX-1996:~$ chmod +x exp13.sh
onworks@onworks-Standard-PC-1440FX-PIIX-1996:~$ ./exp13.sh
./exp13.sh: line 1: file1.sh: No such file or directory
12
12
$a
onworks@onworks-Standard-PC-1440FX-PIIX-1996:~$ █
```

Result:

The program execute successfully

11. To check whether there is any entry in the month of May in the system log.

Shell code:

```
if [[ -e /var/log/syslog ]]
then
cat /var/log/syslog | grep "May"
else
echo "File not found"
fi
```

Output:

```
ubundu@ubundu-VirtualBox:~$ chmod +x l11
ubundu@ubundu-VirtualBox:~$ ./l11
file not found
ubundu@ubundu-VirtualBox:~$ █
```

Result:

The program execute successfully

12. Implement arithmetic calculator using Functions

Shell code:

```
add()
{
i=$1
j=$2
k=$((i+j))
echo "Sum is $k"
}
sub()
{
i=$1
j=$2
((k=i-j))
echo "difference is $k"
}
mul()
{
i=$1
j=$2
((k=i*j))
echo "product is $k"
}
echo "Enter your option: 1: Add, 2:Subtract, 3: Multiply"
read i
case $i in
1) add 11 2;;
2) sub 11 2;;
3) mul 11 2;;
esac
```

```
2) sub 10 5;;
3) mul 1 2;;
esac
```

Output:

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano 12.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x 12.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./12.sh
Enter your option: 1: Add, 2:Subtract, 3: Multiply
1
sum is 3
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./12.sh
Enter your option: 1: Add, 2:Subtract, 3: Multiply
2
difference is -1
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./12.sh
Enter your option: 1: Add, 2:Subtract, 3: Multiply
3
product is 2
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$
```

Result:

The program execute successfully

13. To find the sum of n natural numbers.

a. Using for loop

shell code:

```
sum=0
for ((i=0;i<10;i++))
do
((sum=sum+i))
done
echo $sum
```

Output

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano exp13.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x exp13.sh
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./exp13.sh
45
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ █
```

b. Using While loop

shell code:

```
i=0
sum=0
while ((i<10));do
((sum=sum+i))
((i=i+1))
```

```
done  
echo $sum
```

Output:

```
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ nano exp13.sh  
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ chmod +x exp13.sh  
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ ./exp13.sh  
45  
onworks@onworks-Standard-PC-i440FX-PIIX-1996:~$ █
```

Result:

The program execute successfully

EXPERIMENT-05

5.1 Installing LAMP on Ubuntu

Step 1: Update Package Repository Cache

Before you begin:

1. Open the terminal either by using the **CTRL+ALT+T** keyboard shortcut or by searching for the word **terminal** in Ubuntu
2. Make sure to update the package repository cache to ensure it installs the latest versions of the software. To do so, type in the following command:

```
sudo apt-get update
```

```
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo apt-get update
Get:1 http://in.archive.ubuntu.com/ubuntu focal InRelease [265 kB]
Hit:2 https://screenrec.com/download/ubuntu stable InRelease
Get:3 http://security.ubuntu.com/ubuntu focal-security InRelease [114 kB]
Get:4 http://security.ubuntu.com/ubuntu focal-security/main amd64 DEP-11 Metadata [27 .6 kB]
Get:5 http://security.ubuntu.com/ubuntu focal-security/universe amd64 DEP-11 Metadata
[61.0 kB]
Get:6 http://security.ubuntu.com/ubuntu focal-security/multiverse amd64 DEP-11 Metada
ta [2,464 B]
Get:1 http://in.archive.ubuntu.com/ubuntu focal InRelease [265 kB]
Get:1 http://in.archive.ubuntu.com/ubuntu focal InRelease [265 kB]
Get:1 http://in.archive.ubuntu.com/ubuntu focal InRelease [265 kB]
Hit:7 http://in.archive.ubuntu.com/ubuntu focal-updates InRelease
Hit:8 http://in.archive.ubuntu.com/ubuntu focal-backports InRelease
Fetched 463 kB in 2min 36s (2,977 B/s)
Reading package lists... Done
hp@hp-HP-Laptop-15s-du0xxx:~$
```

Step 2: Install Apache

1. To install Apache, run the following command in the terminal:


```
sudo apt-get install apache2
```

```
Reading package lists... Done
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo apt-get install apache2
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  enchant geoip-database libbind9-161 libboost-filesystem1.67.0
  libboost-iostreams1.67.0 libdns-export1107 libdns1107 libdns1109 libenchant1c2a
  libexiv2-14 libfprint0 libgeoip1 libgsspell-1-1 libgutenprint-common
  libgutenprint9 libiptc0 libirs161 liblsc-export1104 liblsc1104 libisc1105
  libisccc161 libisccfg163 libllvm9 liblwres161 libnfs12 liboauth0
  printer-driver-gutenprint python3-asn1crypto shim ubuntu-software
  ubuntu-system-service
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  apache2-bin apache2-data apache2-utils libapr1 libaprutil1
  libaprutil1-dbd-sqlite3 libaprutil1-ldap liblua5.2-0
Suggested packages:
  apache2-doc apache2-suexec-pristine | apache2-suexec-custom
The following NEW packages will be installed:
  apache2 apache2-bin apache2-data apache2-utils libapr1 libaprutil1
  libaprutil1-dbd-sqlite3 libaprutil1-ldap liblua5.2-0
0 upgraded, 9 newly installed, 0 to remove and 66 not upgraded.
Need to get 1,819 kB of archives.
After this operation, 7,938 kB of additional disk space will be used.
Do you want to continue? [Y/n] 
```

Press **y** (yes) and hit **ENTER** to permit the installation.

2. To ensure Apache is running, enter the Localhost of your server in the address bar and press **ENTER**.

The test Apache web server page should display as below.

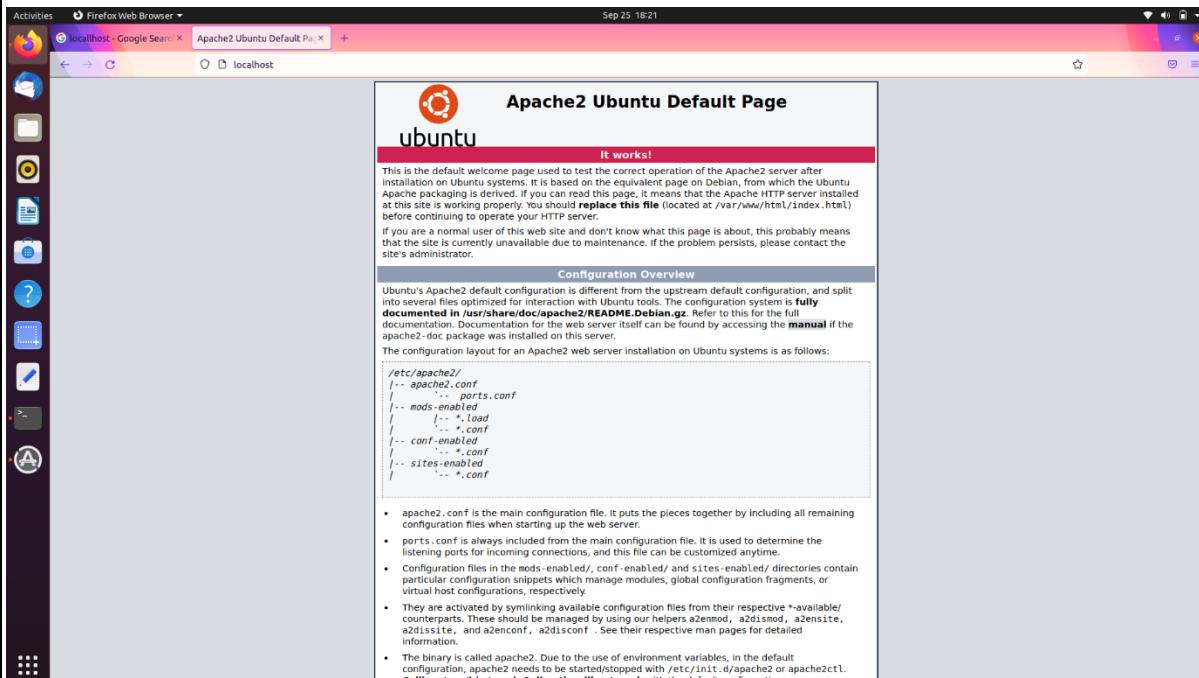

Step 3: Install PHP

1. To install PHP, run the following command:

```
$ sudo apt-get install php7.4
```

```
hp@hp-HP-Laptop-i5s-du0xxx:~$ sudo apt-get install php7.4
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  enchant geoip-database libbind9-161 libboost-filesystem1.67.0 libboost-iostreams1.67.0 libdns-export1107 libdns1107 libdns1109 libenchant1c2a libexiv2-14 libfprint0 libgeoip1 libgsspell-1-1
  libgutenprint-common libgutenprint9 libiptc0 libirs161 libisc-export1104 libisc1104 libisccc161 libisccfg163 libl10n9 liblwres161 libnfs12 liboauth0 printer-driver-gutenprint
  python3-asn1crypto shim ubuntu-software ubuntu-system-service
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  libapache2-mod-php7.4 php-common php7.4-cli php7.4-common php7.4-json php7.4-opcache php7.4-readline
Suggested packages:
  php-pear
The following NEW packages will be installed:
  libapache2-mod-php7.4 php-common php7.4-cli php7.4-common php7.4-json php7.4-opcache php7.4-readline
0 upgraded, 8 newly installed, 0 to remove and 66 not upgraded.
Need to get 4,015 kB of archives.
After this operation, 18.0 MB of additional disk space will be used.
Do you want to continue? [Y/n] ■
```

Press **y** and **ENTER** to allow the installation.

Step 4: Restart Apache

After the php installation you must restart the Apache service.

Enter the command:

```
$ sudo /etc/init.d/apache2 restart
```

Step 5: Test PHP Processing on Web Server

1. Create a basic PHP script and save it to the “web root” directory. This is necessary for Apache to find and serve the file correctly. This directory is located at `/var/www/html/`.

To create a file in that directory, type in the following command:


```
sudo nano /var/www/html/test.php
```

```
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo nano /var/www/html/test.php
[sudo] password for hp:
hp@hp-HP-Laptop-15s-du0xxx:~$
```

This command opens the bank file.

2. Inside the file, type in the valid PHP code:


```
<?php
    Echo " test php ";
?>
```

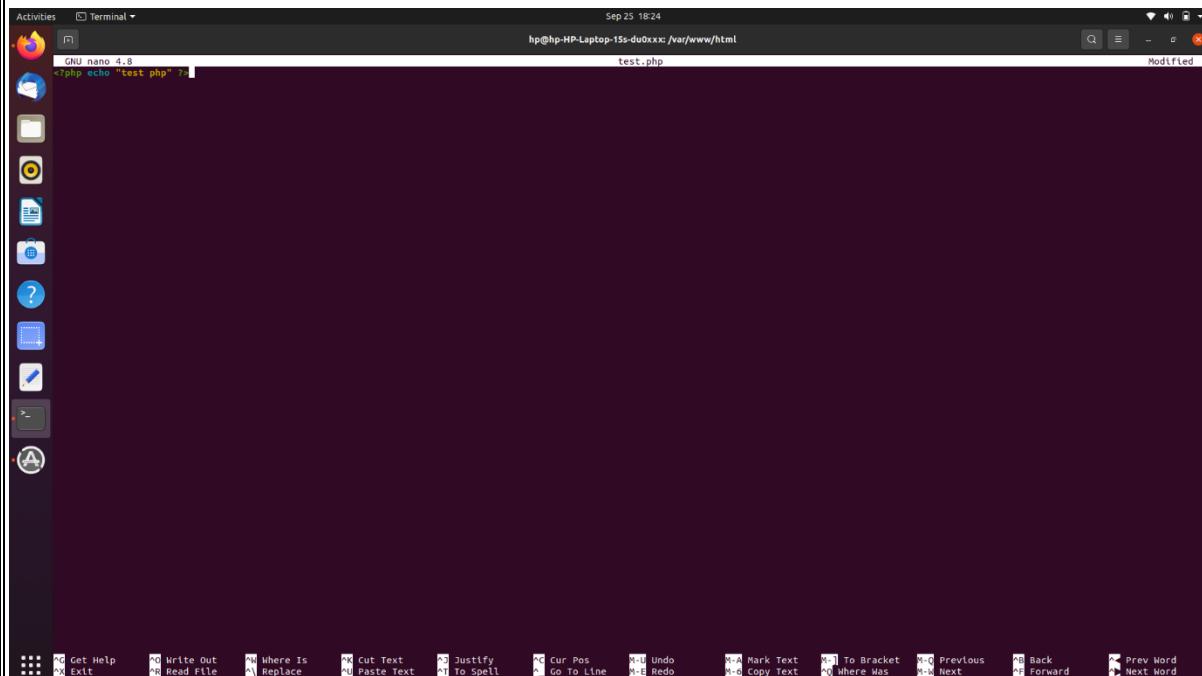

3. Press **CTRL + X** to save and close the file. Press **y** and **ENTER** to confirm.

4. Then check the code are run correctly in php.open the browser enter the ip address (localhost/test.php).

It show the below image

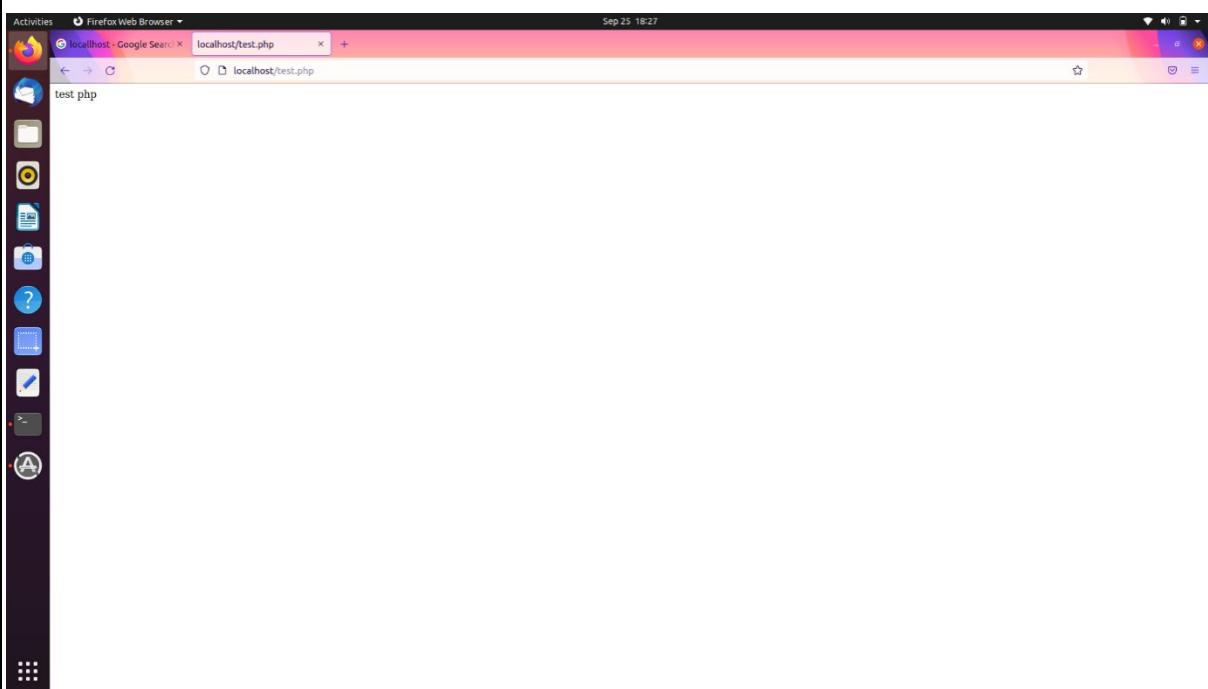

Step 6: Install Mysql server

1. To install Mysql server, run the following command:

```
$ sudo apt-get install mysql-server
```

```
other options.
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo apt-get install mysql-server
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  enchant geoip-database libbind9-161 libboost filesystem1.67.0
  libboost iostreams1.67.0 libdns-export1107 libdns1107 libdns1109
  libenchant1c2a libexiv2-14 libfprint0 libgeoip1 libgspell-1-1
  libgutenprint-common libgutenprint9 libiptc0 libirs161 libisc-export1104
  libisc1104 libisc1105 libisccc161 libisccfg163 liblvm9 liblwres161 libnfs12
  liboauth0 printer-driver-gutenprint python3-asn1crypto shim ubuntu-software
  ubuntu-system-service
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  libaio1 libcgi-fast-perl libcgi-pm-perl libevent-core-2.1-7
  libevent-pthreads-2.1-7 libfcgi-perl libhtml-template-perl libmecab2
  mecab-ipadic mecab-ipadic-utf8 mecab-utils mysql-client-8.0
  mysql-client-core-8.0 mysql-server-8.0 mysql-server-core-8.0
Suggested packages:
```

2. Then it's asking us for a root password . enter the password . Again we get to repeat it

Step 7: Check the Mysql server

1. To check Mysql server, run the following command

```
$ mysql -u root -p
```

- Enter the root password and press enter

```
hp@hp-HP-Laptop-15s-du0xxx:~$ mysql -u root -p
Enter password:
ERROR 1045 (28000): Access denied for user 'root'@'localhost' (using password: YES)
hp@hp-HP-Laptop-15s-du0xxx:~$ mysql -u root -p
Enter password:
Welcome to the MySQL monitor. Commands end with ; or \g.
Your MySQL connection id is 19
Server version: 8.0.26-0ubuntu0.20.04.2 (Ubuntu)

Copyright (c) 2000, 2021, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> create database testdb;
Query OK, 1 row affected (0.01 sec)

mysql> show databases;
+-----+
| Database      |
+-----+
| information_schema |
| mysql          |
| performance_schema |
| sys            |
| testdb         |
+-----+
5 rows in set (0.00 sec)

mysql> █
```

- 2 . Create a database testdb and show it

- Enter the command
 - Create database testdb;
 - Show databases;
- So mysql is working then exit the mysql prompt just enter **exit;**

Step 8: Install PHP Myadmin

1. To install PHP Myadmin, run the following command:

```
$ sudo apt-get install phpmyadmin
```

```
[y]
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo apt-get install phpmyadmin
[sudo] password for hp:
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  acf apg colord-data enchant geopq-database gnome-control-center-faces gnome-online-accounts gsfonts hplib-data libbind9-161 libboost-filesystem1.67.0 libboost-iostreams1.67.0 libcolorl-gtk1
  libcolorhug2 libdns-export107 libdns1109 libenchant1c2a libexiv2-14 libfprint0 libgeoip1 libgsound0 libgspell-1-1 libgsyncd-1.2-0 libgupnp-1.2-0 libgupnp-av-1.0-2 libgupnp-dlna-2.0-3
  libgutenprint-common libgutenprint9 libieee1284-3 libimagequanto libiptc0 libirs161 libisc-export104 libisc1104 libisccfg161 libisccfg163 liblvm9 liblws161 libnfs12 libauth0
  librygel-core-2.6-2 librygel-db-2.6-2 librygel-renderer-2.6-2 libsane-common libswmp-base libwebpnu3 mobile-broadband-provider-info network-manager-gnome
  printer-driver-gutenprint printer-driver-postscript-hp python3-asn1crypto python3-macaroonbakery python3-olefile python3-pil python3-protobuf python3-pymacaroons python3-renderpm python3-reportlab
  python3-reportlab-accel python3-fc3339 python3-tz rygel shin ubuntu-software ubuntu-system-service
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  dbconfig-common dbconfig-mysql libcurl3 libcurl3-nss libjs-jquery libjs-openlayers libjs-sphinxdoc libjs-underscore libonig5 libzip5 php-bz2 php-curl php-gd php-google-recaptcha
  php-mbstring php-mysql php-phpmyadmin-notranslator php-phpmyadmin-shapefile php-phpmyadmin-sql-parser php-pharseclib php-psr-cache php-psr-container php-psr-log php-symfony-cache
  php-symfony-cache-contracts php-symfony-expression-language php-symfony-service-contracts php-symfony-var-exporter php-tcpdf php-twigi php-twigi-extensions php-xml php-zip php7.4-bz2 php7.4-curl
  php7.4-gd php7.4-mbstring php7.4-mysql php7.4-xml php7.4-zip phpmyadmin
0 upgraded, 41 newly installed, 0 to remove and 61 not upgraded.
Need to get 16.0 MB of archives.
After this operation, 71.8 MB of additional disk space will be used.
Do you want to continue? [Y/n] 
```

Press **y** and **ENTER** to allow the installation

2. Then its ask what type of server, we have Apache2 is set by default that's what we want then press ok
 3. Then a configuration prompt are open . here we're going to just choose yes and then it ask the input password for phpmyadmin
 4. Then check it correct . go to the localhost/phpmyadmin. Here we can not found it so We have to actually edit the file php is located in Apache2 folder.
 5. Enter the following command to edit the file
`$ sudo nano/etc/php7.4/apache2.php.ini`
 6. Then we need to uncomment an `extension=mysql.so`. find it the file just remove the Semicolon.
7. Then enter `ctrl+x` to save

Step 9: Restart Apache

After the php installation you must restart the Apache service.

Enter the command:

```
$ sudo /etc/init.d/apache2 restart
```

Step 9.1:Include phpmyadmin in apache configuration

1. Enter the command:


```
$ sudo nano/etc/apache2/apache2.conf
```

2. Type the following command to the nano editor

```
Include /etc/phpmyadmin/apache.conf
```

3. Then enter *ctrl+x* to save

4. Then again restart the apache

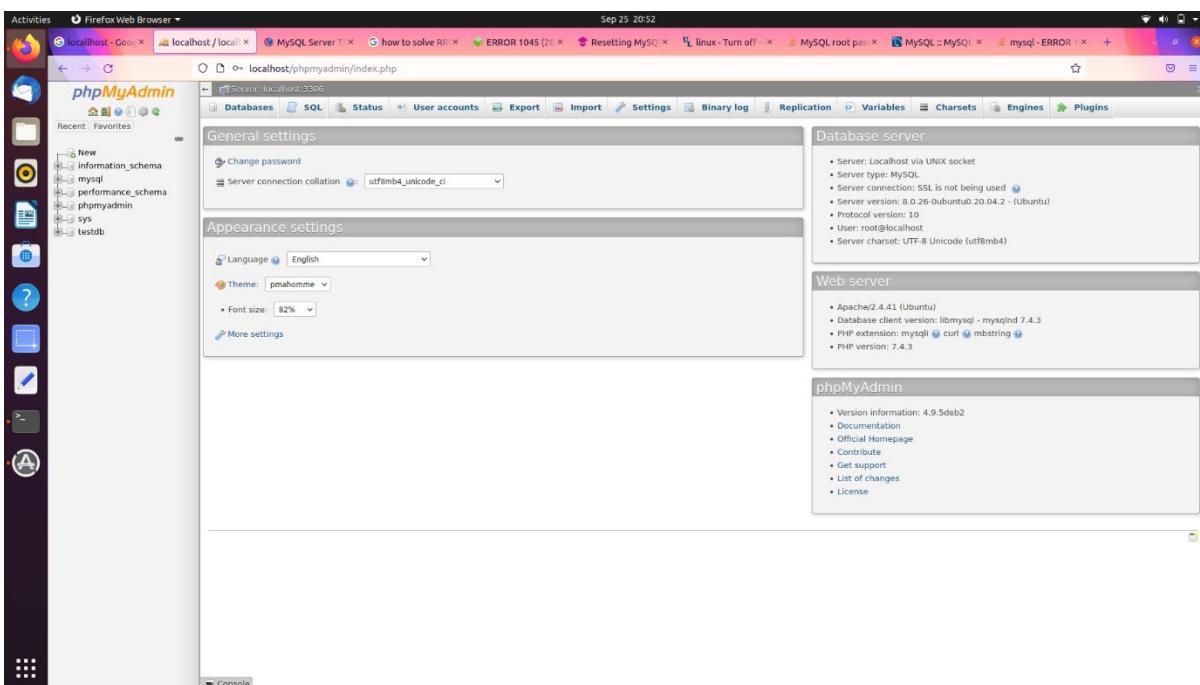

EXPERIMENT-06

6.1.Laravel installation On Ubuntu with Apache

Step 1: Update Package Repository Cache

Before you begin:

1. Open the terminal either by using the **CTRL+ALT+T** keyboard shortcut or by searching for the word **terminal** in Ubuntu
2. Make sure to update the package repository cache to ensure it installs the latest versions of the software. To do so, type in the following command:

```
sudo apt-get update
```

```
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo apt-get update
[sudo] password for hp:
Get:1 http://in.archive.ubuntu.com/ubuntu focal InRelease [265 kB]
Hit:2 https://screenrec.com/download/ubuntu stable InRelease
Hit:3 http://security.ubuntu.com/ubuntu focal-security InRelease
Hit:4 http://in.archive.ubuntu.com/ubuntu focal-updates InRelease
Hit:5 http://in.archive.ubuntu.com/ubuntu focal-backports InRelease
Fetched 265 kB in 1s (225 kB/s)
Reading package lists... Done
hp@hp-HP-Laptop-15s-du0xxx:~$
```

Step 2: Install Apache


1. To install Apache, run the following command in the terminal:

```
sudo apt-get install apache2
```

```
Reading package lists... Done
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo apt-get install apache2
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  enchant geoip-database libbind9-161 libboost-filesystem1.67.0
  libboost-iostreams1.67.0 libdns-export1107 libdns1107 libdns1109 libenchant1c2a
  libexecv2-14 libfprint0 libgeoip1 libgspell-1-1 libgutenprint-common
  libgutenprint9 libiptc0 libirs161 liblsc-export1104 libisc1104 libisc1105
  libisccc161 libisccfg163 liblvm9 liblwres161 libnfs12 liboauth0
  printer-driver-gutenprint python3-asn1crypto shim ubuntu-software
  ubuntu-system-service
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  apache2-bin apache2-data apache2-utils libapr1 libaprutil1
  libaprutil1-dbd-sqlite3 libaprutil1-ldap liblua5.2-0
Suggested packages:
  apache2-doc apache2-suexec-pristine | apache2-suexec-custom
The following NEW packages will be installed:
  apache2 apache2-bin apache2-data apache2-utils libapr1 libaprutil1
  libaprutil1-dbd-sqlite3 libaprutil1-ldap liblua5.2-0
0 upgraded, 9 newly installed, 0 to remove and 66 not upgraded.
Need to get 1,819 kB of archives.
After this operation, 7,938 kB of additional disk space will be used.
Do you want to continue? [Y/n] 
```

2. To ensure Apache is running, enter the Localhost of your server in the address bar and press ENTER.

The test Apache web server page should display as below.

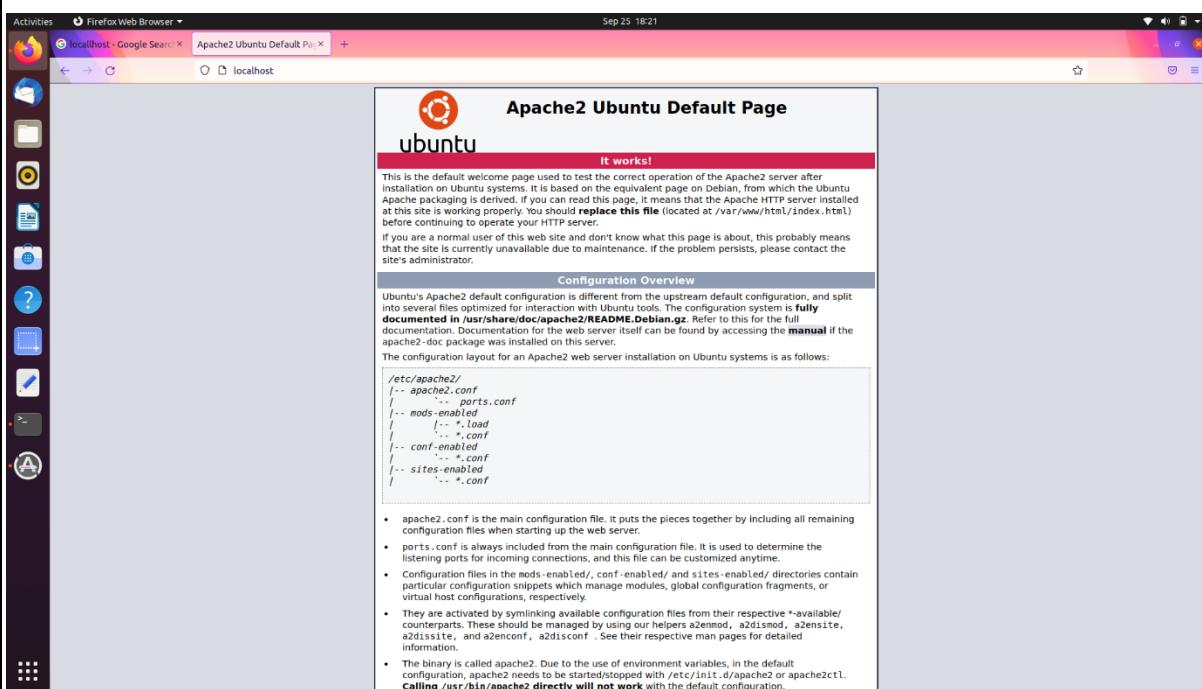

Step 3: Install PHP

2. To install PHP, run the following command:

```
$ sudo apt-get install php7.4
```

```
NogHP-HP-Laptop-15s-dw0xxx:~$ sudo apt-get install php7.4
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  enchant geopg-database libbind9-161 libboost filesystem1.67.0 libboost-iostreams1.67.0 libdns-export1107 libdns1107 libdns1109 libenchantic2a libhexiv2-14 libfprint0 libgeoip1 libgspell-1-1
  libgutenprint-common libgutenprint9 libiptc0 libirs161 libisc-export1104 libisc1104 libisccc161 libisccfg163 liblprm9 liblwres161 libnfs12 liboauth0 printer-driver-gutenprint
  python3-asnircrypto shin ubuntu-software ubuntu-system-service
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  libapache2-mod-php7.4 php-common php7.4-cli php7.4-common php7.4-json php7.4-opcache php7.4-readline
Suggested packages:
  php-pear
The following NEW packages will be installed:
  libapache2-mod-php7.4 php-common php7.4-cli php7.4-common php7.4-json php7.4-opcache php7.4-readline
0 upgraded, 8 newly installed, 0 to remove and 66 not upgraded.
Need to get 4,015 kB of archives.
After this operation, 18.0 MB of additional disk space will be used.
Do you want to continue? [Y/n] 
```

Press **y** and **ENTER** to allow the installation

3. Then make a change in php init file . set `cgi.fix_pathinfo` set to be 0. Do it using the following commands.

- `cd /etc/php/ 7.4/apache2/`
- `Sudo nano php.ini`
- It open the `php.ini` file ,then uncomment the line and it set to be 0

```

hp@hp-HP-Laptop-15s-du0xxx: /etc/php/7.4/apache2
Memory: 20.1M
CGroup: /system.slice/apache2.service
└─919 /usr/sbin/apache2 -k start
   ├─943 /usr/sbin/apache2 -k start
   ├─944 /usr/sbin/apache2 -k start
   ├─945 /usr/sbin/apache2 -k start
   ├─946 /usr/sbin/apache2 -k start
   └─948 /usr/sbin/apache2 -k start

Sep 28 23:49:08 hp-HP-Laptop-15s-du0xxx systemd[1]: Starting The Apache HTTP Server...
Sep 28 23:49:08 hp-HP-Laptop-15s-du0xxx apachectl[865]: AH00558: apache2: Could not open error log file: /var/log/apache2/error.log, errno 2
Sep 28 23:49:08 hp-HP-Laptop-15s-du0xxx systemd[1]: Started The Apache HTTP Server...
hp@hp-HP-Laptop-15s-du0xxx:~$ cd /etc/php
hp@hp-HP-Laptop-15s-du0xxx:/etc/php$ ls
7.4
hp@hp-HP-Laptop-15s-du0xxx:/etc/php$ cd 7.4/
hp@hp-HP-Laptop-15s-du0xxx:/etc/php/7.4$ ls
apache2 cli mods-available
hp@hp-HP-Laptop-15s-du0xxx:/etc/php/7.4$ cd apache2
hp@hp-HP-Laptop-15s-du0xxx:/etc/php/7.4/apache2$ ls
conf.d php.ini
hp@hp-HP-Laptop-15s-du0xxx:/etc/php/7.4/apache2$ sudo nano php.ini

```

```

GNU nano 4.8          php.ini          Modified
; every request. PHP's default behavior is to disable this feature.
;cgi.nph = 1

; if cgi.force_redirect is turned on, and you are not running under Apache or N>
; (iPlanet) web servers, you MAY need to set an environment variable name that >
; will look for to know it is OK to continue execution. Setting this variable >
; cause security issues, KNOW WHAT YOU ARE DOING FIRST.
; http://php.net/cgi.redirect-status-env
;cgi.redirect_status_env =

; cgi.fix_pathinfo provides *real* PATH_INFO/PATH_TRANSLATED support for CGI. >
; previous behaviour was to set PATH_TRANSLATED to SCRIPT_FILENAME, and to not >
; what PATH_INFO is. For more information on PATH_INFO, see the cgi specs. Se>
; this to 1 will cause PHP CGI to fix its paths to conform to the spec. A sett>
; of zero causes PHP to behave as before. Default is 1. You should fix your s>
; to use SCRIPT_FILENAME rather than PATH_TRANSLATED.
; http://php.net/cgi.fix-pathinfo
cgi.fix_pathinfo=0

; if cgi.discard_path is enabled, the PHP CGI binary can safely be placed outsi>

^G Get Help  ^O Write Out  ^W Where Is  ^K Cut Text  ^J Justify  ^C Cur Pos
^X Exit      ^R Read File  ^Y Replace   ^U Paste Text ^T To Spell  ^_ Go To Line

```

- Then restart the apache server using the following command

`$ systemctl restart apache`

4. Install Composer

Composer is a PHP dependency manager that facilitates the download of PHP libraries in our projects. Composer both works great with and makes it much easier to install Laravel.

1. Install composer using the following command

```
$ curl -sS https://getcomposer.org/installer | php
```

2. In this time your system not installed the curl file .then install it using the following command

```
$ sudo apt install curl
```

```
ip@hp-HP-Laptop-15s-du0xxx:/etc/php/7.4/apache2$ sudo nano php.ini
ip@hp-HP-Laptop-15s-du0xxx:/etc/php/7.4/apache2$ systemctl restart apache2
ip@hp-HP-Laptop-15s-du0xxx:/etc/php/7.4/apache2$ curl -sS http://getcomposer.org/installer | php

Command 'curl' not found, but can be installed with:

sudo snap install curl # version 7.78.0, or
sudo apt install curl # version 7.68.0-1ubuntu2.7

See 'snap info curl' for additional versions.

ip@hp-HP-Laptop-15s-du0xxx:/etc/php/7.4/apache2$ sudo apt install curl
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  acl apt color-data enchant geoip-database gnome-control-center-faces
  gnome-online-accounts gsfonts hplib-data libbind9-161
  libboost-filesystem1.67.0 libboost-iostreams1.67.0 libcolorord-gtk1
  libcolorhug2 libdns-export1107 libdns1107 libdns1109 libenchantic2a
  libexiv2-14 libfprintf1 libgeoip1 libgsound0 libgsspell1-1 libgssdp-1.2-0
  libgupnp-1.2-0 libgupnp-av-1.0-2 libgupnp-dlna-2.0-3 libgutenprint-common
  libgutenprint9 libieee1284-3 libimagequant0 libiptc0 libirs161
  libisc-export104 libisc104 libisc1105 libisccci61 libisccfg163 liblvm9
  liblwres161 libnfs12 liboauth0 librygel-core-2.6-2 librygel-db-2.6-2
  librygel-renderer-2.6-2 librygel-server-2.6-2 libsane-common libsnmp-base
  libwpbmu3 mobile-broadband-provider-info network-manager-gnome
  printer-driver-gutenprint printer-driver-postscript-hp python3-asn1crypto
  python3-macaroonbakery python3-olefile python3-pil python3-protobuf
  python3-pymacaroons python3-renderpm python3-reportlab
  python3-reportlab-accel python3-rfc3339 python3-tz rygel shim
  ubuntu-software ubuntu-system-service
Use 'sudo apt autoremove' to remove them.
The following NEW packages will be installed:
  curl
0 upgraded, 1 newly installed, 0 to remove and 91 not upgraded.
Need to get 161 kB of archives.
After this operation, 412 kB of additional disk space will be used.
Get:1 http://in.archive.ubuntu.com/ubuntu focal-updates/main amd64 curl amd64 7.68.0-1ubuntu2.7 [161 kB]
Fetched 161 kB in 11s (14.8 kB/s)
Selecting previously unselected package curl.
(Reading database ... 192305 files and directories currently installed.)
Preparing to unpack .../curl_7.68.0-1ubuntu2.7_amd64.deb ...
Unpacking curl (7.68.0-1ubuntu2.7) ...
Setting up curl (7.68.0-1ubuntu2.7) ...
Processing triggers for man-db (2.9.1-1) ...
ip@hp-HP-Laptop-15s-du0xxx:/etc/php/7.4/apache2$
```

3. Move the file using the following command

```
$ sudo mv composer.phar /usr/local/bin/composer
```

```
Use it: php composer.phar

hp@hp-HP-Laptop-15s-du0xxx:~$ sudo mv composer.phar /usr/local/bin/composer
hp@hp-HP-Laptop-15s-du0xxx:~$ composer --version
Composer version 2.1.8 2021-09-15 13:55:14
hp@hp-HP-Laptop-15s-du0xxx:~$ composer global require laravel/installer
Changed current directory to /home/hp/.config/composer

Runtime exception
```

Step 5 – Install Laravel 8.x on Ubuntu 20.04

Now install Laravel Framework using composer, just type composer global require Laravel/installer
It will take a while to complete download its dependencies

1. Lavaral install with following command

\$ composer global require laravel/installer

```
hp@hp-HP-Laptop-15s-du0xxx:~$ composer global require laravel/installer
Changed current directory to /home/hp/.config/composer
https://repo.packagist.org could not be fully loaded (curl error 28 while downloading https://repo.packagist.org/pa
d from the local cache and may be out of date
Using version ^4.2 for laravel/installer
./composer.json has been updated
Running composer update laravel/installer
Loading composer repositories with package information
Updating dependencies
Lock file operations: 13 installs, 0 updates, 0 removals
- Locking laravel/installer (v4.2.8)
- Locking psr/container (1.1.1)
- Locking symfony/console (v5.3.7)
- Locking symfony/deprecation-contracts (v2.4.0)
- Locking symfony/polyfill-ctype (v1.23.0)
- Locking symfony/polyfill-intl-grapheme (v1.23.1)
- Locking symfony/polyfill-intl-normalizer (v1.23.0)
- Locking symfony/polyfill-mbstring (v1.23.1)
- Locking symfony/polyfill-php73 (v1.23.0)
- Locking symfony/polyfill-php80 (v1.23.1)
- Locking symfony/process (v5.3.7)
- Locking symfony/service-contracts (v2.4.0)
- Locking symfony/string (v5.3.7)
```

Next add bin directory to path environment through the `~/.bashrc` configuration .so edit the `~/.bashrc` configuration using nano command. The command are follow

\$ nano ~/.bashrc

2.It open the file and add the following line at the end of the file.

export PATH="\$HOME/.config/composer/vendor/bin:\$PATH"

```
# Add an "alert" alias for long running commands. Use like so:
# sleep 10; alert
alias alert='notify-send --urgency=low -i "$( [ $? = 0 ] && echo terminal ||

# Alias definitions.
# You may want to put all your additions into a separate file like
# ~/.bash_aliases, instead of adding them here directly.
# See /usr/share/doc/bash-doc/examples in the bash-doc package.

if [ -f ~/.bash_aliases ]; then
  . ~/.bash_aliases
fi

# enable programmable completion features (you don't need to enable
# this, if it's already enabled in /etc/bash.bashrc and /etc/profile
# sources /etc/bash.bashrc).
if ! shopt -oq posix; then
  if [ -f /usr/share/bash-completion/bash_completion ]; then
    . /usr/share/bash-completion/bash_completion
  elif [ -f /etc/bash_completion ]; then
    . /etc/bash_completion
  fi
fi
export PATH="$HOME/.config/composer/vendor/bin:$PATH"
```

^G Get Help	^O Write Out	^W Where Is	^K Cut Text	^J Justify
^X Exit	^R Read File	^V Replace	^U Paste Text	^T To Spell

3. Then reload your bashrc configuration using the source command.

```
$ source ~/.bashrc
```

4. Then echo \$PATH. It will return your “Bin” directory path for the Composer package.

```
$ echo $PATH
```

```
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo nano ~/.bashrc
[sudo] password for hp:
hp@hp-HP-Laptop-15s-du0xxx:~$ source ~/.bashrc
hp@hp-HP-Laptop-15s-du0xxx:~$ echo $PATH
/home/hp/.config/composer/vendor/bin:/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin:/usr/games:/usr/local/games:/snap/bin
hp@hp-HP-Laptop-15s-du0xxx:~$
```

5. then create a new project in laravel with the following command



```
$ laravel new myapp1
```

```
/home/hp/.composer/composer/vendor/bin:/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin:/usr/games:/usr/local/games:/snap/bin
hp@hp-HP-Laptop-15s-du0xxx:~$ laravel new myapp1

[laravel]

Creating a "laravel/laravel" project at "./myapp1"
Installing laravel/laravel (v8.6.2)
- Downloading laravel/laravel (v8.6.2)
- Installing laravel/laravel (v8.6.2): Extracting archive
Created project in /home/hp/myapp1
> @php -r "file_exists('.env') || copy('.env.example', '.env');"
Loading composer repositories with package information
Updating dependencies
Lock file operations: 111 installs, 0 updates, 0 removals
- Locking asm89/stack-cors (v2.0.3)
- Locking brick/math (0.9.3)
- Locking dflydev/dot-access-data (v3.0.1)
- Locking doctrine/inflector (2.0.3)
- Locking doctrine/instantiator (1.4.0)
- Locking doctrine/lexer (1.2.1)
- Locking dragonmantank/cron-expression (v3.1.0)
- Locking egulias/email-validator (2.1.25)
- Locking facade/flare-client-php (1.9.1)
- Locking facade/ignition (2.13.1)
- Locking facade/ignition-contracts (1.0.2)
```

Here you can see the installation of my new project myapp1 finished. You can also see inside my home directory a new directory has been created with my project name.

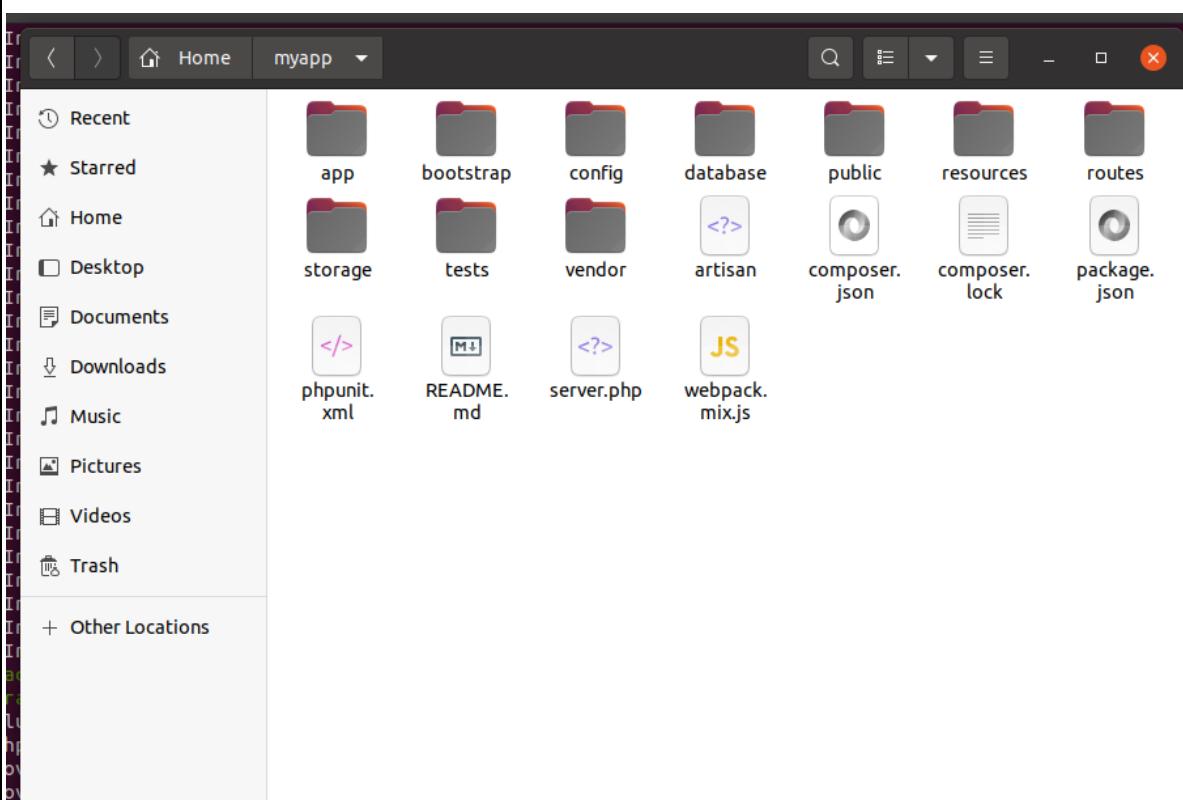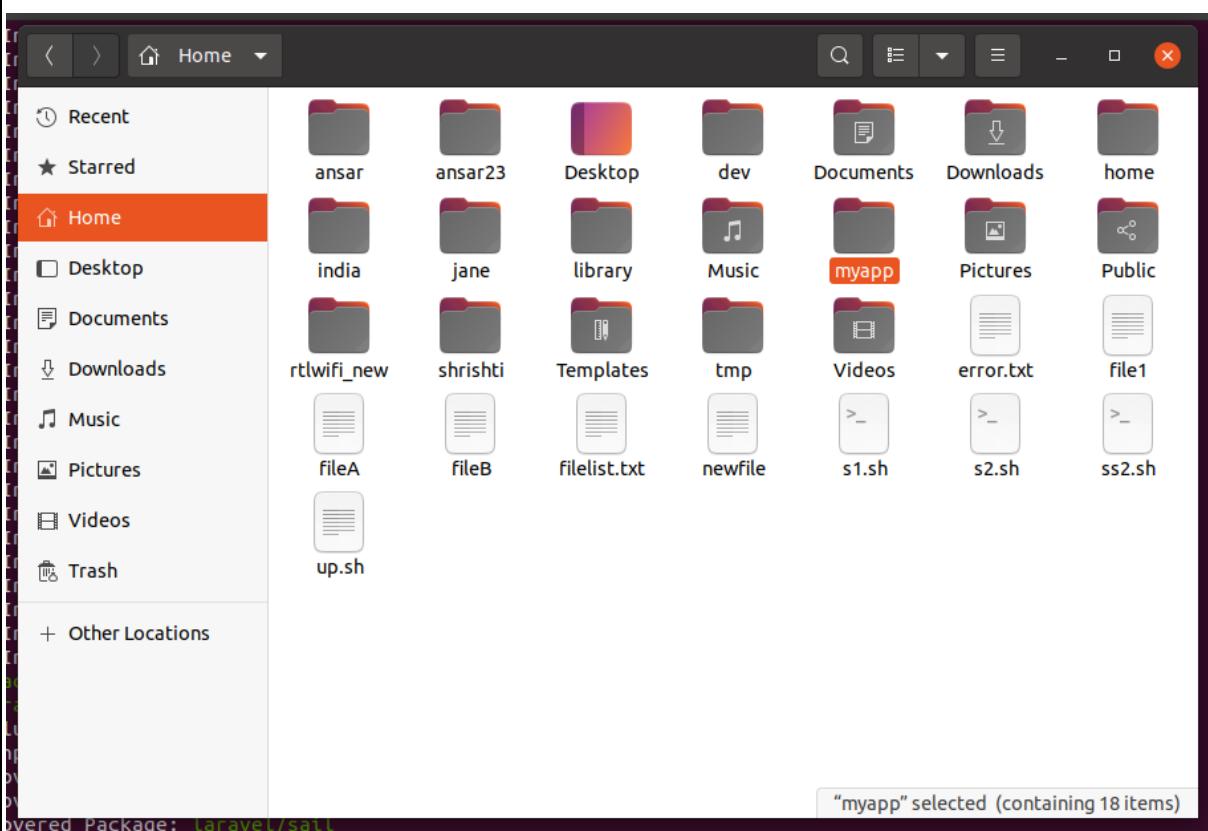

Step 6– Finally Configure Apache for Laravel and test it

- First, add your project directory to www-data group use the following command

```
$ sudo chgrp -R www-data /home/hp/myapp
```

- Then you need to change access permission 775 of the storage directory under your project. use the following command.

```
$ sudo chmod -R 775 /home/hp/myapp/storage
chgrp: cannot access '/home/myapp': No such file or directory
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo chgrp -R www-data /home/hp/myapp
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo chmod -R 775 /home/hp/myapp/storage
hp@hp-HP-Laptop-15s-du0xxx:~$ cd /etc/apache2/sites-available/
hp@hp-HP-Laptop-15s-du0xxx:/etc/apache2/sites-available$ ls
000-default.conf  default-ssl.conf
hp@hp-HP-Laptop-15s-du0xxx:/etc/apache2/sites-available$
```

6.Then create an apache vhost configuration go to the following directory and create a vhost config file using nano file editor.

```
$ cd /etc/apache2/sites-available/
$ sudo nano myapp1.com.conf
```

And paste the following line inside the file.

```
<VirtualHost *:80>
    ServerName myapp.com

    ServerAdmin admin@myapp.com
    DocumentRoot /home/hp/myapp/public

    <Directory /home/hp/myapp>
        Options Indexes Multiviews
        AllowOverride None
        Require all granted
    </Directory>

    ErrorLog ${APACHE_LOG_DIR}/error.log
    CustomLog ${APACHE_LOG_DIR}/access.log combined
</VirtualHost>
```

```
chgrp: cannot access '/home/myapp': No such file or directory
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo chgrp -R www-data /home/hp/myapp
hp@hp-HP-Laptop-15s-du0xxx:~$ sudo chmod -R 775 /home/hp/myapp/storage
hp@hp-HP-Laptop-15s-du0xxx:~$ cd /etc/apache2/sites-available/
hp@hp-HP-Laptop-15s-du0xxx:/etc/apache2/sites-available$ ls
000-default.conf  default-ssl.conf
hp@hp-HP-Laptop-15s-du0xxx:/etc/apache2/sites-available$ sudo nano myapp.com.conf
hp@hp-HP-Laptop-15s-du0xxx:/etc/apache2/sites-available$ sudo nano myapp.com.conf
hp@hp-HP-Laptop-15s-du0xxx:/etc/apache2/sites-available$ sudo a2enmod rewrite
Enabling module rewrite.
To activate the new configuration, you need to run:
    systemctl restart apache2
hp@hp-HP-Laptop-15s-du0xxx:/etc/apache2/sites-available$ sudo a2ensite myapp.com.conf
sudo: a2ensite myapp.com.conf: command not found
hp@hp-HP-Laptop-15s-du0xxx:/etc/apache2/sites-available$ sudo a2ensite myapp.com.conf
Enabling site myapp.com.
To activate the new configuration, you need to run:
    systemctl reload apache2
```

7. Now enable mod rewrite for apache2 just type

```
$ sudo a2enmod rewrite
```

Then enable your site, just type

```
$ sudo a2ensite myapp1.com.conf
```

Finally, Restart the apache service, type


```
$ systemctl restart apache2
```

8. As you are in a local environment you need a local dns resolver for your site. Go ahead and edit /etc/hosts file, add a dns record for your site then save the file.

```
$ sudo nano /etc/hosts
```

Inside the file add the below line

```
127.0.0.1    myapp.com
```

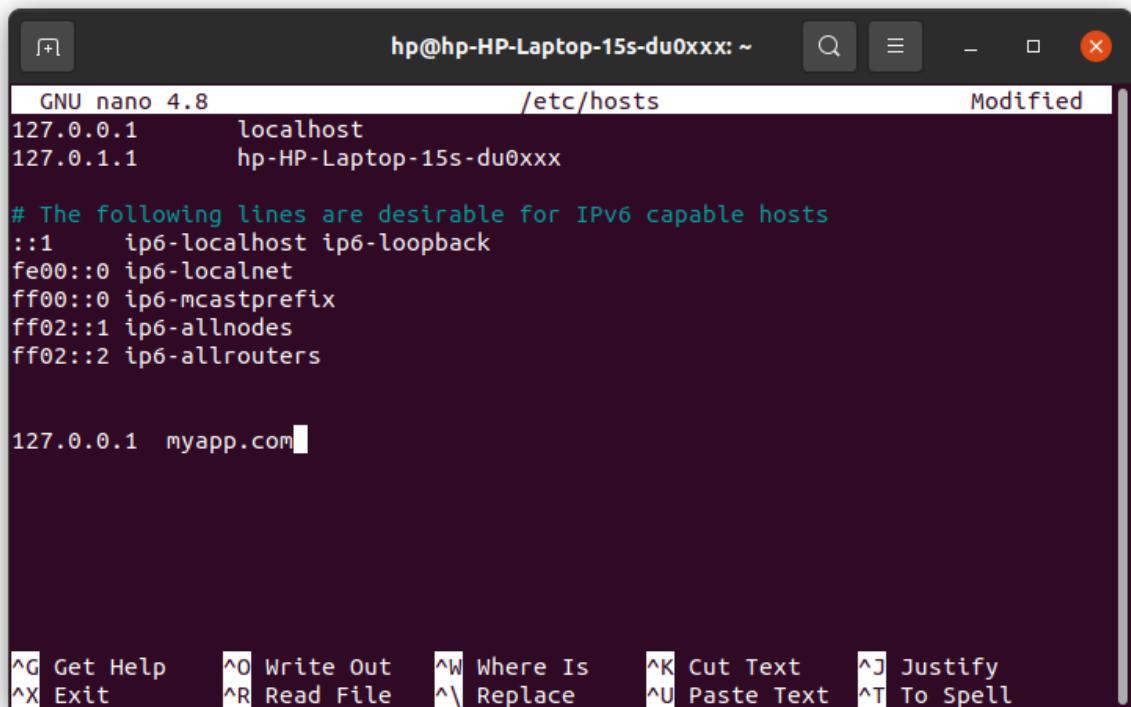


```
GNU nano 4.8          /etc/hosts          Modified
127.0.0.1      localhost
127.0.1.1      hp-HP-Laptop-15s-du0xxx

# The following lines are desirable for IPv6 capable hosts
::1      ip6-localhost ip6-loopback
fe00::0 ip6-localnet
ff00::0 ip6-mcastprefix
ff02::1 ip6-allnodes
ff02::2 ip6-allrouters

127.0.0.1  myapp.com

^G Get Help  ^O Write Out  ^W Where Is  ^K Cut Text  ^J Justify
^X Exit     ^R Read File  ^\ Replace   ^U Paste Text  ^T To Spell
```

Now get back to the web browser and open a tab then type your project hostname.

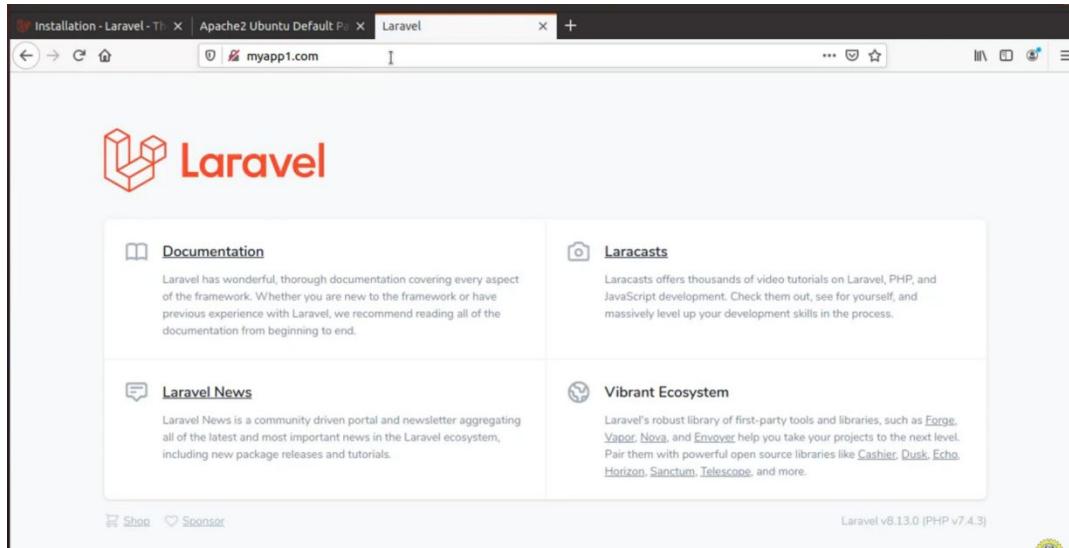

And here it is it's working. Here you can see the Laravel version and PHP version.

EXPERIMENT-07

7.1. Networking commands

7.1.1. PING COMMAND

PING (Packet Internet Groper) command is used to check the network connectivity between host and server/host. This command takes as input the IP address or the URL and sends a data packet to the specified address with the message “PING” and get a response from the server/host this time is recorded which is called latency. Fast ping low latency means faster connection. Ping uses **ICMP(Internet Control Message Protocol)** to send an **ICMP echo message** to the specified host if that host is available then it sends **ICMP reply message**. Ping is generally measured in millisecond every modern operating system has this ping pre-installed.

Syntax: ping [OPTIONS] DESTINATION

```
hp@hp-HP-Laptop-15s-du0xxx:~$ ping google.com
PING google.com (142.250.193.110) 56(84) bytes of data.
64 bytes from maa05s24-in-f14.1e100.net (142.250.193.110): icmp_seq=1 ttl=119 time=266 ms
64 bytes from maa05s24-in-f14.1e100.net (142.250.193.110): icmp_seq=2 ttl=119 time=132 ms
64 bytes from maa05s24-in-f14.1e100.net (142.250.193.110): icmp_seq=3 ttl=119 time=1034 ms
64 bytes from maa05s24-in-f14.1e100.net (142.250.193.110): icmp_seq=4 ttl=119 time=612 ms
64 bytes from maa05s24-in-f14.1e100.net (142.250.193.110): icmp_seq=5 ttl=119 time=669 ms
64 bytes from maa05s24-in-f14.1e100.net (142.250.193.110): icmp_seq=7 ttl=119 time=116 ms
64 bytes from maa05s24-in-f14.1e100.net (142.250.193.110): icmp_seq=8 ttl=119 time=26.6 ms
64 bytes from maa05s24-in-f14.1e100.net (142.250.193.110): icmp_seq=9 ttl=119 time=229 ms
64 bytes from maa05s24-in-f14.1e100.net (142.250.193.110): icmp_seq=10 ttl=119 time=49.4 ms
64 bytes from maa05s24-in-f14.1e100.net (142.250.193.110): icmp_seq=11 ttl=119 time=73.7 ms
64 bytes from maa05s24-in-f14.1e100.net (142.250.193.110): icmp_seq=12 ttl=119 time=98.5 ms
```

7.1.2.TRACEROUTE COMMAND

Traceroute command in Linux prints the route that a packet takes to reach the host. This command is useful when you want to know about the route and about all the hops that a packet takes. Below image depicts how traceroute command is used to reach the Google (172.217.26.206) host from the local machine and it also prints detail about all the hops that it visits in between.

Syntax: traceroute [options] host_Address [pathlength]

```
processing triggers for man-db (2.9.1-1) ...
hp@hp-HP-Laptop-15s-du0xxx:~$ traceroute google.com
traceroute to google.com (142.250.183.238), 30 hops max, 60 byte packets
 1 _gateway (10.10.10.101)  6.253 ms  6.221 ms  6.188 ms
 2 * * *
 3 130.230.88.202.asianet.co.in (202.88.230.130)  28.619 ms  28.577 ms  30.782 ms
 4 77.252.88.202.asianet.co.in (202.88.252.77)  24.119 ms  30.677 ms  24.078 ms
 5 * * *
 6 108.170.253.97 (108.170.253.97)  28.104 ms  21.323 ms  142.251.55.236 (142.251.55.236)  21.177 ms
 7 209.85.253.85 (209.85.253.85)  19.985 ms  108.170.253.122 (108.170.253.122)  19.868 ms
 8 108.170.253.121 (108.170.253.121)  20.976 ms
 9 maa05s23-in-f14.1e100.net (142.250.183.238)  20.919 ms  74.125.242.129 (74.125.242.129)  20.905 ms
10 20.871 ms
```

7.1.3.ROUTE COMMAND

route command in Linux is used when you want to work with the IP/kernel routing table. It is mainly used to set up static routes to specific hosts or networks via an interface. It is used for showing or update the IP/kernel routing table.

Syntax: route

```
Processing triggers for man-db (2.7.1-1) ...
hp@hp-HP-Laptop-15s-du0xxx:~$ route
Kernel IP routing table
Destination      Gateway          Genmask        Flags Metric Ref    Use Iface
default         _gateway        0.0.0.0       UG    600    0        0 wlo1
10.0.0.0        0.0.0.0        255.0.0.0     U     600    0        0 wlo1
link-local      0.0.0.0        255.255.0.0   U     1000   0        0 wlo1
hp@hp-HP-Laptop-15s-du0xxx:~$
```

7.1.4.NSLOOKUP COMMAND

nslookup (stands for “Name Server Lookup”) is a useful command for getting information from DNS server. It is a network administration tool for querying the Domain Name System (DNS) to obtain domain name or IP address mapping or any other specific DNS record. It is also used to troubleshoot DNS related problems.

Syntax: nslookup [option]

```
hp@hp-HP-Laptop-15s-du0xxx:~$ nslookup google.com
Server:           127.0.0.53
Address:          127.0.0.53#53

Non-authoritative answer:
Name:  google.com
Address: 142.250.193.110
Name:  google.com
Address: 2404:6800:4007:814::200e
```

7.1.5. IFCONFIG COMMAND

ifconfig(interface configuration) command is used to configure the kernel-resident network interfaces. It is used at the boot time to set up the interfaces as necessary. After that, it is usually used when needed during debugging or when you need system tuning. Also, this command is used to assign the IP address and netmask to an interface or to enable or disable a given interface.

Syntax: ifconfig [...OPTIONS] [INTERFACE]

```
hp@hp-HP-Laptop-15s-du0xxx:~$ ifconfig
eno1: flags=4099<UP,BROADCAST,MULTICAST> mtu 1500
      ether 04:0e:3c:55:83:79 txqueuelen 1000 (Ethernet)
      RX packets 0 bytes 0 (0.0 B)
      RX errors 0 dropped 0 overruns 0 frame 0
      TX packets 0 bytes 0 (0.0 B)
      TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
      inet 127.0.0.1 netmask 255.0.0.0
      inet6 ::1 prefixlen 128 scopeid 0x10<host>
          loop txqueuelen 1000 (Local Loopback)
          RX packets 336 bytes 30114 (30.1 KB)
          RX errors 0 dropped 0 overruns 0 frame 0
          TX packets 336 bytes 30114 (30.1 KB)
          TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

wlo1: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
      inet 10.100.14.89 netmask 255.0.0.0 broadcast 10.255.255.255
      inet6 fe80::31ac:769e:94b8:b395 prefixlen 64 scopeid 0x20<link>
          ether 80:91:33:c5:85:37 txqueuelen 1000 (Ethernet)
          RX packets 44379 bytes 40810941 (40.8 MB)
          RX errors 0 dropped 3308 overruns 0 frame 0
          TX packets 14891 bytes 1567676 (1.5 MB)
          TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

EXPERIMENT-08

8.1 WIRESHARK installation

Wireshark is a free and open source packet analyser used for network troubleshooting and analysis.

8.1.2. Downloading steps

1. Open a web browser.
2. Navigate to <http://www.wireshark.org>.
3. Select Download Wireshark.
4. Select the Wireshark Windows Installer matching your system type. Save the program in the Downloads folder.
5. Close the web browser.

8.1.3. Installation process

1. Double-click on the file to open it.
2. If you see a User Account Control dialog box, select Yes to allow the program to make changes to this computer.
3. Select Next > to start the Setup Wizard.
4. Review the license agreement. If you agree, select I Agree to continue.
5. Select Next > to accept the default components.
6. Select the shortcuts you would like to have created. Leave the file extensions selected. Select Next > to continue.
7. Select Next > to accept the default install location.
8. Select Install to begin installation.
9. Select Next > to install WinPcap.
10. Select Next > to start the Setup Wizard.
11. Review the license agreement. If you agree, select I Agree to continue.

12. Select Install to begin installation.
13. Select Finish to complete the installation of WinPcap.
14. Select Next > to continue with the installation of Wireshark.
15. Select Finish to complete the installation of Wireshark.

1.8.4. Demonstrate the process to filtering SMTP packets.

1)) Capturing SMTP packets

1. Start a Wireshark capture.
2. Open a command prompt.
3. Type telnet gmail-smtp-in.l.google.com 25 and press Enter. If this does not work, your ISP may be blocking outbound traffic on port 25. You can try telnet smtp.gmail.com 587 instead to generate SMTP traffic and then filter on port 587 in the next activity.
4. Observe the server response.
5. Type helo and press Enter.
6. Observe the server response. Note that at this point you could enter mail, rcpt and data to send an SMTP message, but this only works on servers configured to allow clear text relay without authentication.
7. Type quit and press Enter to close the connection.
8. Observe the server response.
9. Close the command prompt.
10. Stop the Wireshark capture.

9. 2))Select destination Traffic

1. Observe the traffic captured in the top Wireshark packet list pane. To view only SMTP traffic, type smtp (lower case) in the Filter box and press Enter.
2. Select the first SMTP packet labelled 220
3. Observe the destination IP address.
4. To view all related traffic for this connection, change the filter to ip.addr

`= <destination>`, where `<destination>` is the destination address of the SMTP packet.

10. 3))Analysing TCP connection traffic

1. Observe the traffic captured in the top Wireshark packet list pane. The first three packets (TCP SYN, TCP SYN/ACK, TCP ACK) are the TCP three way handshake. Select the first packet.
2. Observe the packet details in the middle Wireshark packet details pane. Notice that it is an Ethernet II / Internet Protocol Version 4 / Transmission Control Protocol frame.
3. Expand Ethernet II to view Ethernet details.
4. Observe the Destination and Source fields. The destination should be your default gateway's MAC address and the source should be your MAC address. You can use ipconfig /all and arp -a to confirm.
5. Expand Internet Protocol Version 4 to view IP details.
6. Observe the Source address. Notice that the source address is your IP address.
7. Observe the Destination address. Notice that the destination address is the IP address of the SMTP server.
8. Expand Transmission Control Protocol to view TCP details.
9. Observe the Source port. Notice that it is a dynamic port selected for this HTTP connection.
10. Observe the Destination port. Notice that it is smtp (25). Note that all of the packets for this connection will have matching MAC addresses, IP addresses, and port numbers.

11.))Analyse SMTP Service Ready Traffic

1. Observe the traffic captured in the top Wireshark packet list pane.
2. Select the fourth packet, which is the first SMTP packet and labeled 220
3. Observe the packet details in the middle Wireshark packet details pane. Notice that it is an Ethernet II / Internet Protocol Version 4 / Transmission Control Protocol / Hypertext Transfer Protocol frame. Also notice that the Ethernet II, Internet Protocol Version 4, and Transmission Control Protocol values are consistent with the TCP connection analysed in Activity 3.
4. Expand Simple Mail Transfer Protocol and Response to view SMTP details.

5. Observe the Response code and Response parameter.
6. Observe the traffic captured in the top Wireshark packet list pane.
7. Select the fifth packet, labelled TCP ACK. This is the client TCP acknowledgement of receiving the Service Ready message.

12. 5))Analyse SMTP HELO Traffic

1. Observe the traffic captured in the top Wireshark packet list pane.
2. Select the following TCP segments and acknowledgements. If you observe the packet details in the bottom Wireshark packet bytes pane carefully, you will see that the segments spell out the helo message. The sequence ends with a Wireshark-combined SMTP client helo message, followed by a server TCP acknowledgement.

13. 6)) Analyse SMTP Completed Traffic

1. Observe the traffic captured in the top Wireshark packet list pane.
2. Select the following SMTP packet, labeled 250 ...
3. Observe the packet details in the middle Wireshark packet details pane.
4. Expand Simple Mail Transfer Protocol and Response to view SMTP details.
5. Observe the Response code and Response parameter.

14. 7))Analyse SMTP QUIT Traffic

1. Observe the traffic captured in the top Wireshark packet list pane.
2. Select the following TCP segments and acknowledgements. If you observe the packet details in the bottom Wireshark packet bytes pane carefully, you will see that the segments spell out the quit message. The sequence ends with a Wireshark-combined SMTP client quit message, followed by a server TCP acknowledgement.




15. 8))Analyse SMTP Closing Traffic




1. Observe the traffic captured in the top Wireshark packet list pane.
2. Select the following SMTP packet, labelled 221 ...
3. Observe the packet details in the middle Wireshark packet details pane.
4. Expand Simple Mail Transfer Protocol and Response to view SMTP details.




5. Observe the Response code and Response parameter.




6. Close Wireshark to complete this activity. Quit without Saving to discard the captured traffic.

8.1.5. SMTP Process

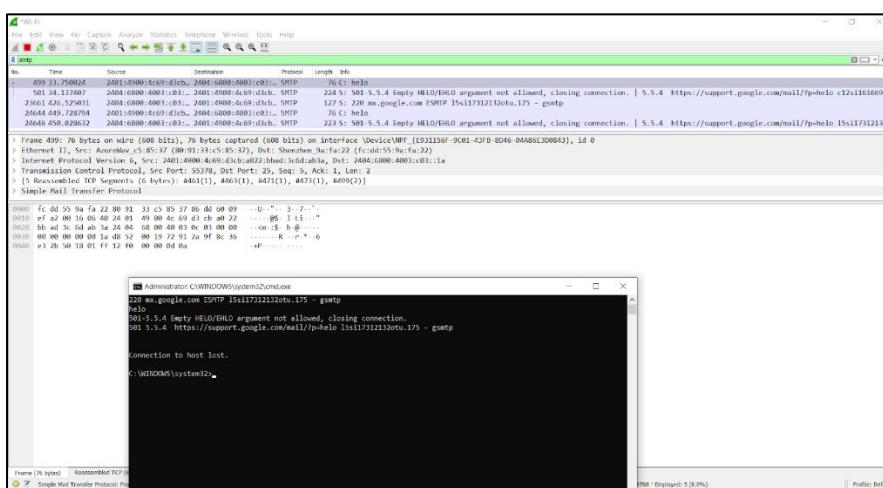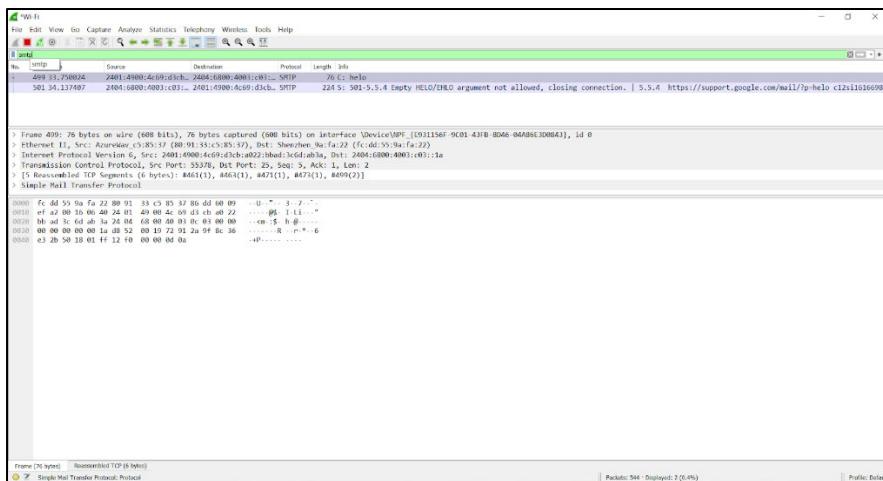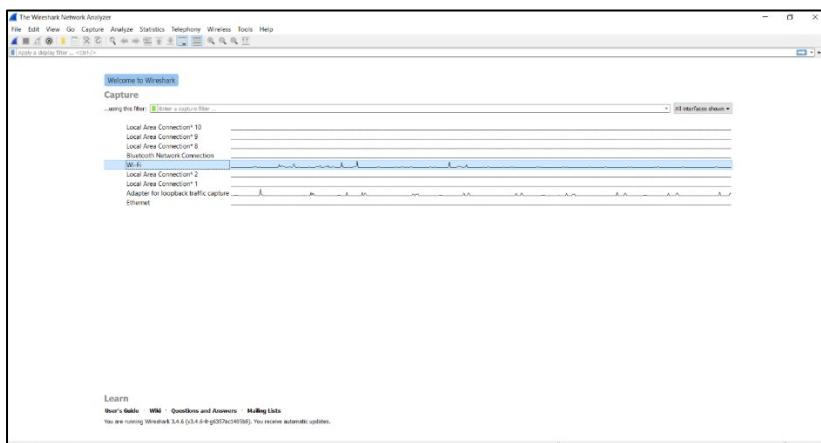

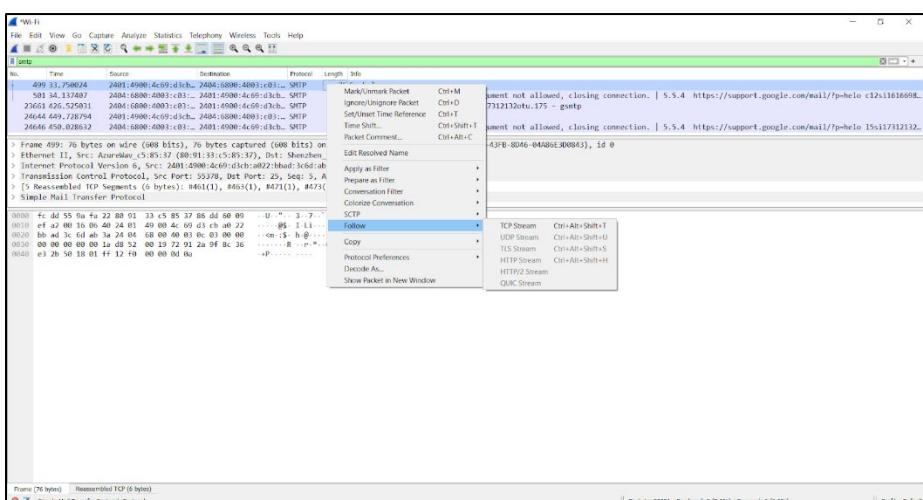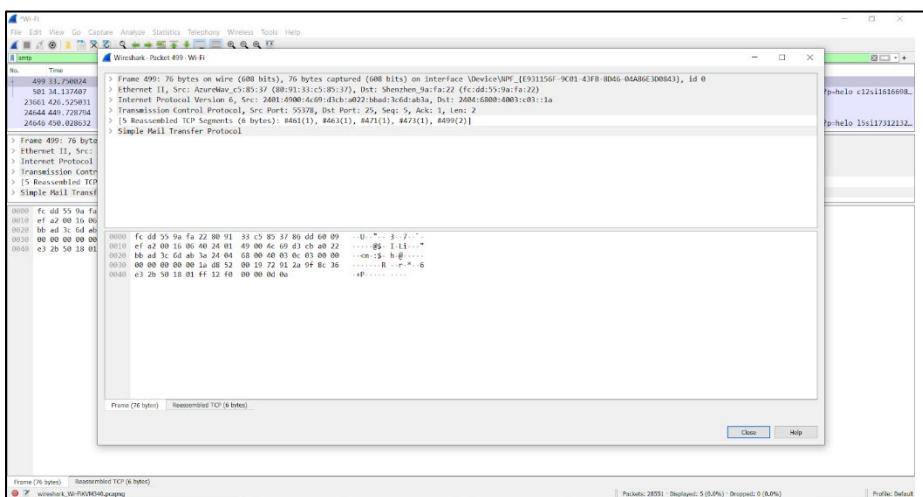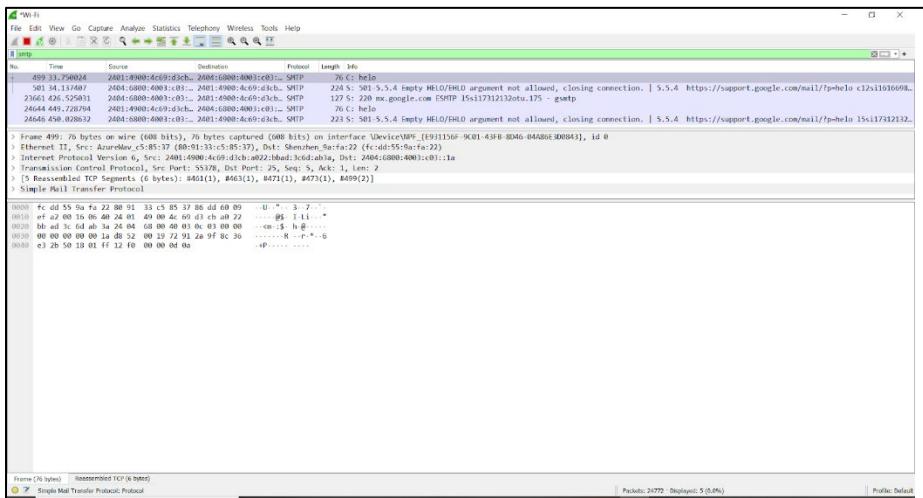

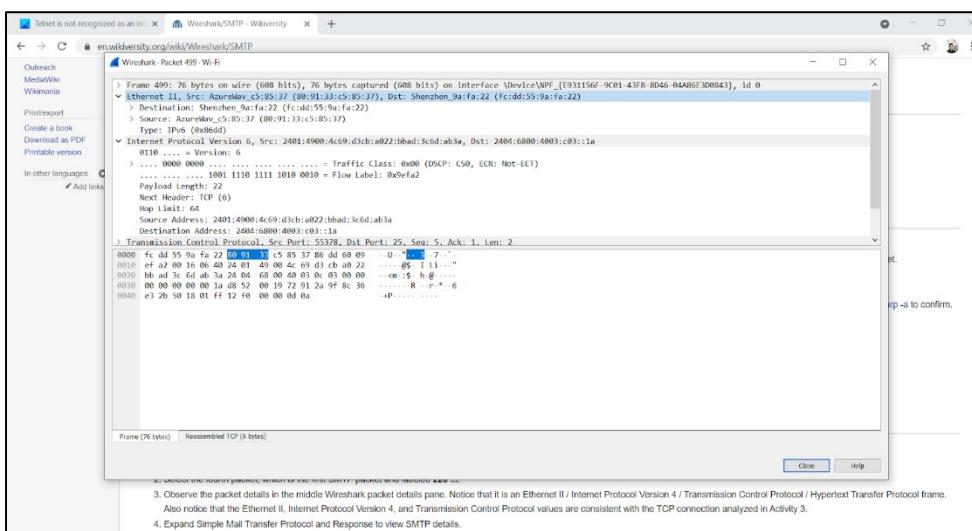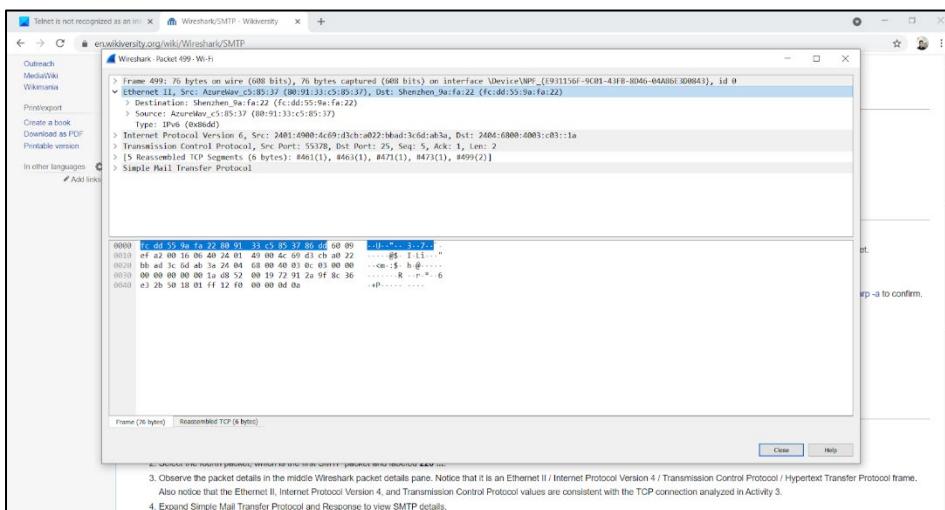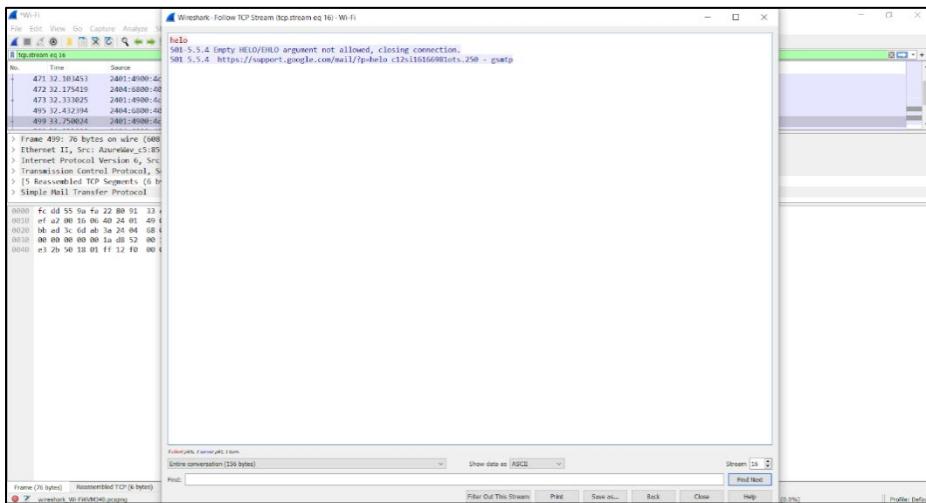

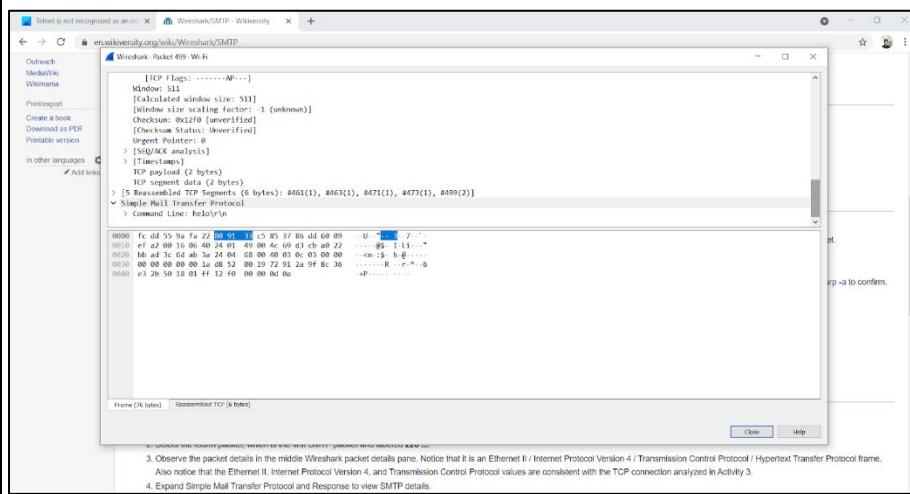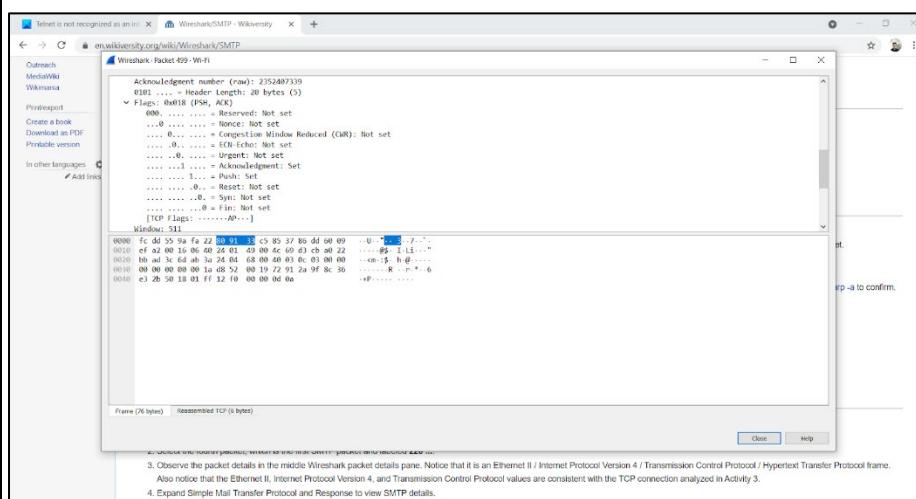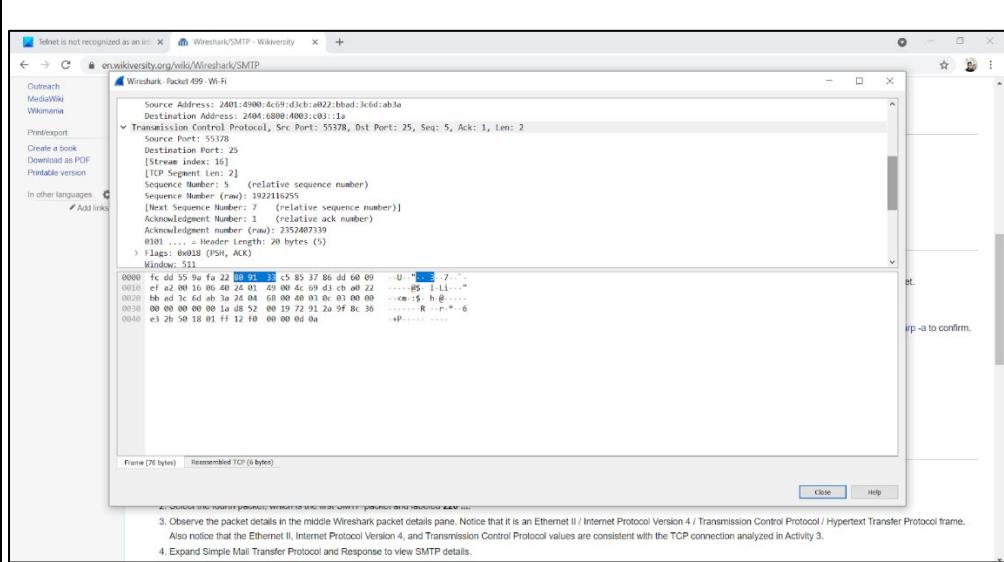

EXPERIMENT-09

9.1. Introduction to Virtual Machine and installation

9.1.2. Creating a Virtual Machine


9.1.2.1 Install VirtualBox .

If you don't already have VirtualBox installed on your Windows or Mac computer, you'll need to install it before proceeding.

Following are the steps required to install VirtualBox(Oracle VM VirtualBox):


You can download the latest version of VirtualBox from the Virtual Box website: <https://www.virtualbox.org/wiki/Downloads> according to the version of your operating system Windows, Mac or Linux.

- Click Next

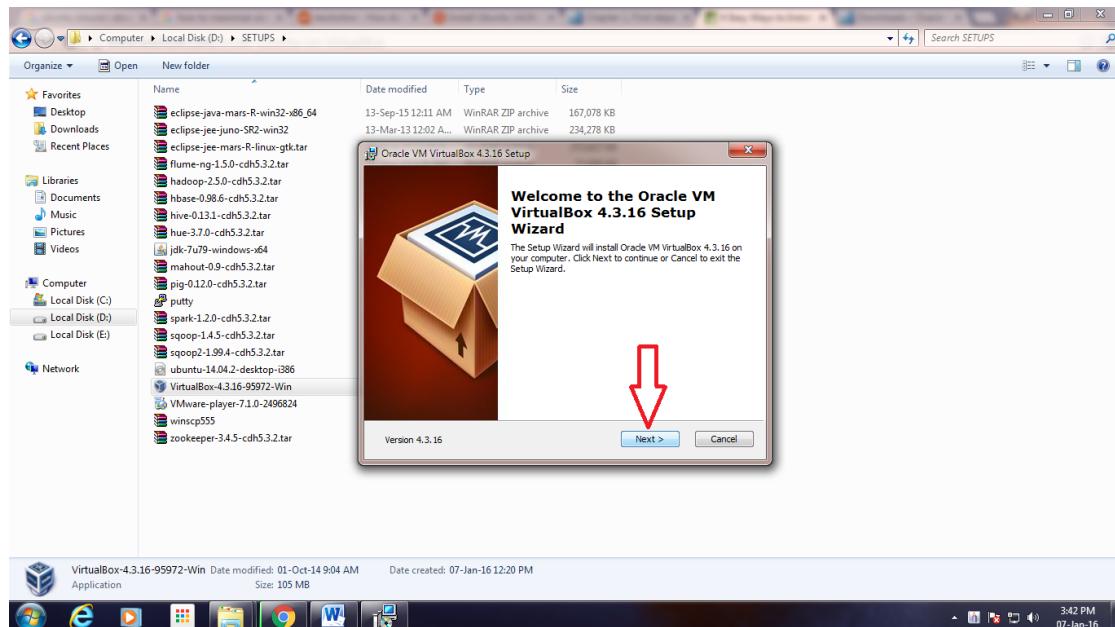


To Install VirtualBox – Setup Wizard

- Click Next

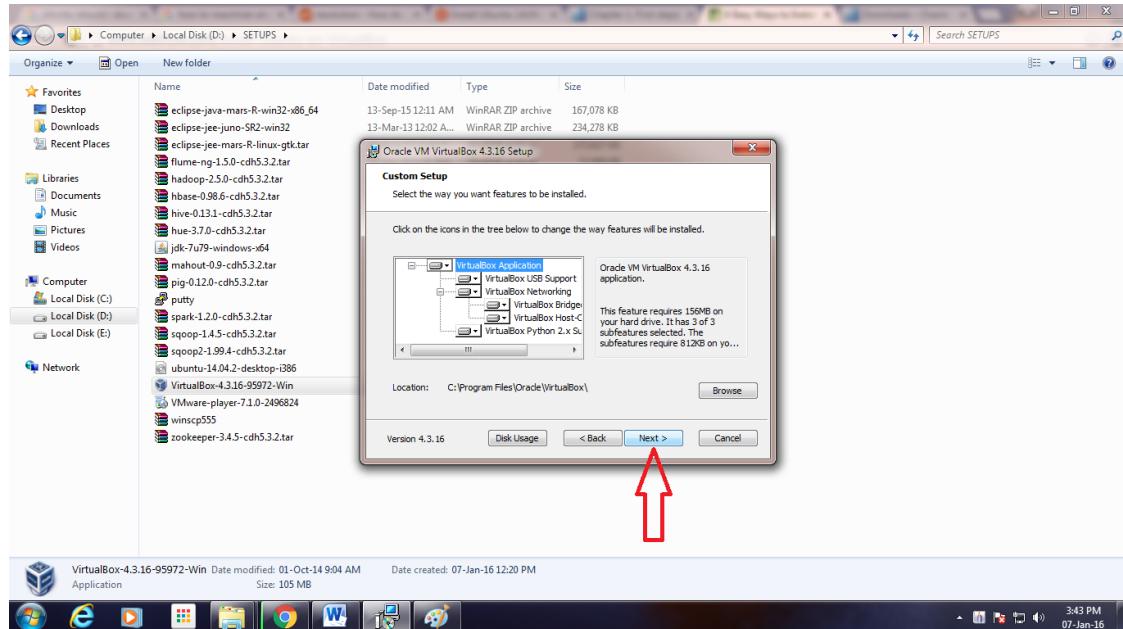


To Install VirtualBox – Custom Setup

- Uncheck “Create a shortcut in the Quick Launch Bar” and click “Next”

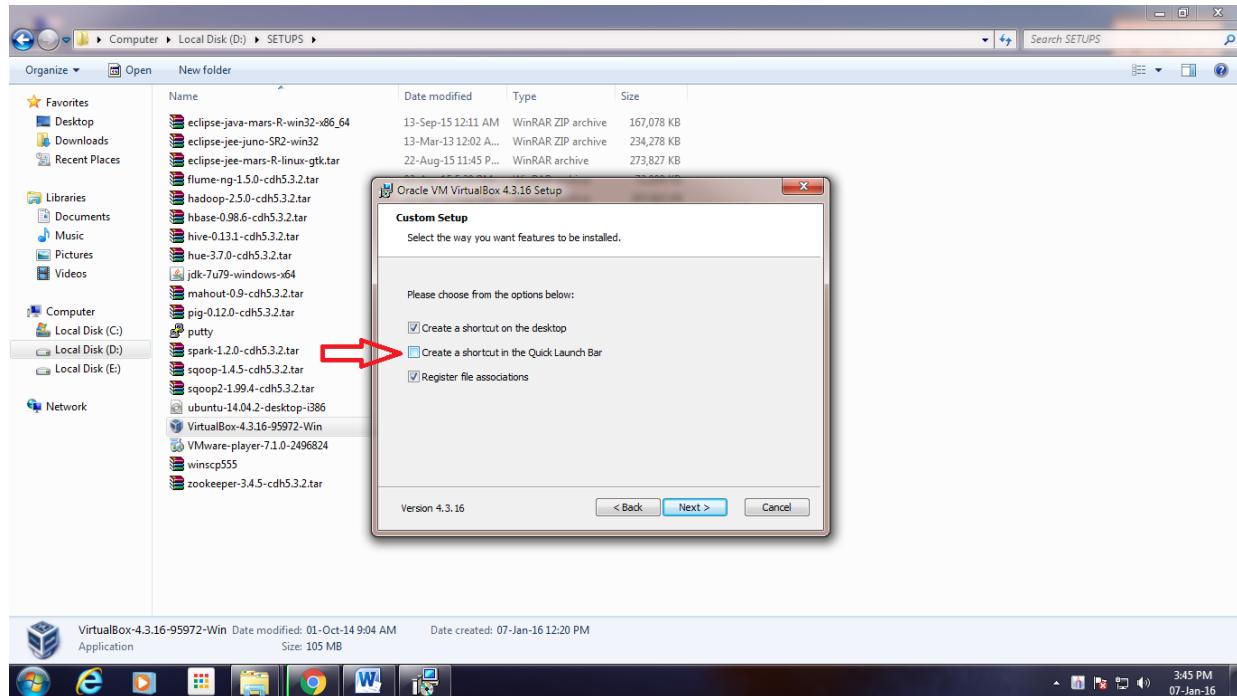


To Install VirtualBox – Features Selection

- Click “Yes”

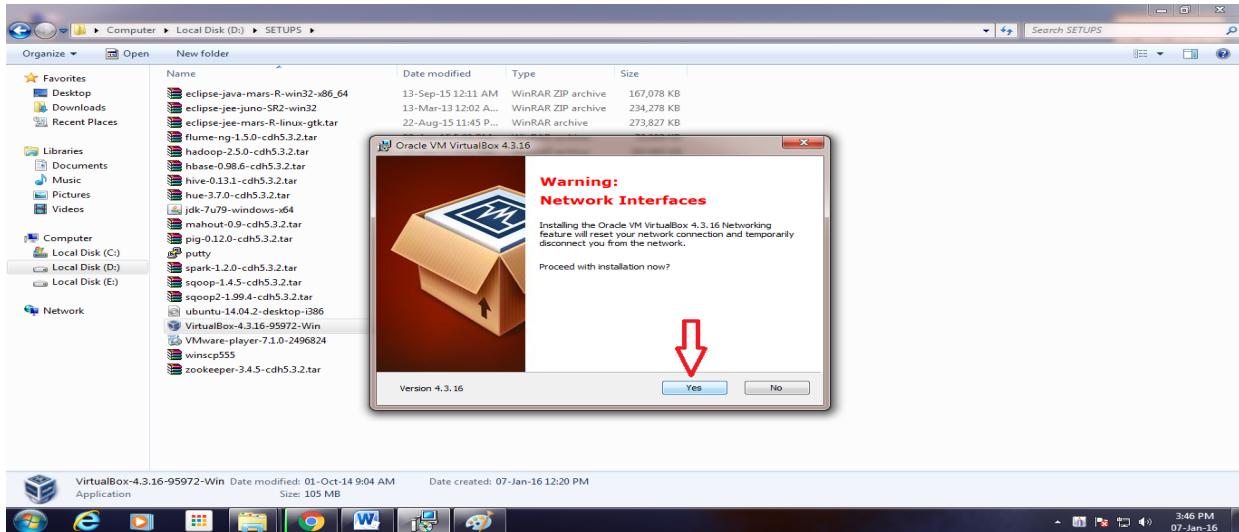


To Install VirtualBox – Network Interfaces Warning

- Click “Install”

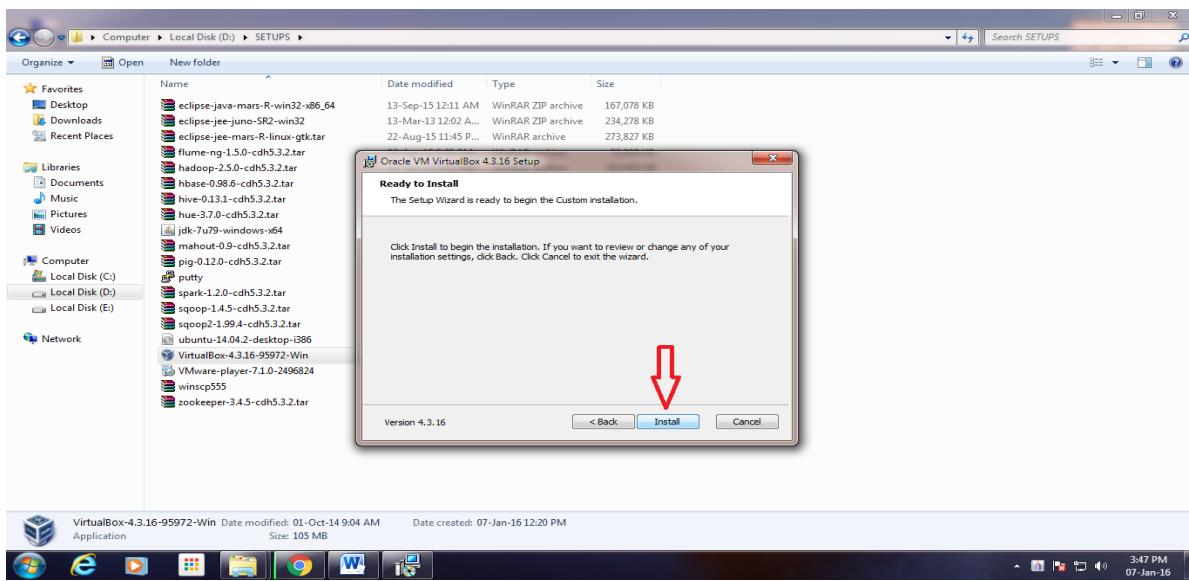


Installation of Oracle VM VirtualBox – Ready to Install

- Click “Install”

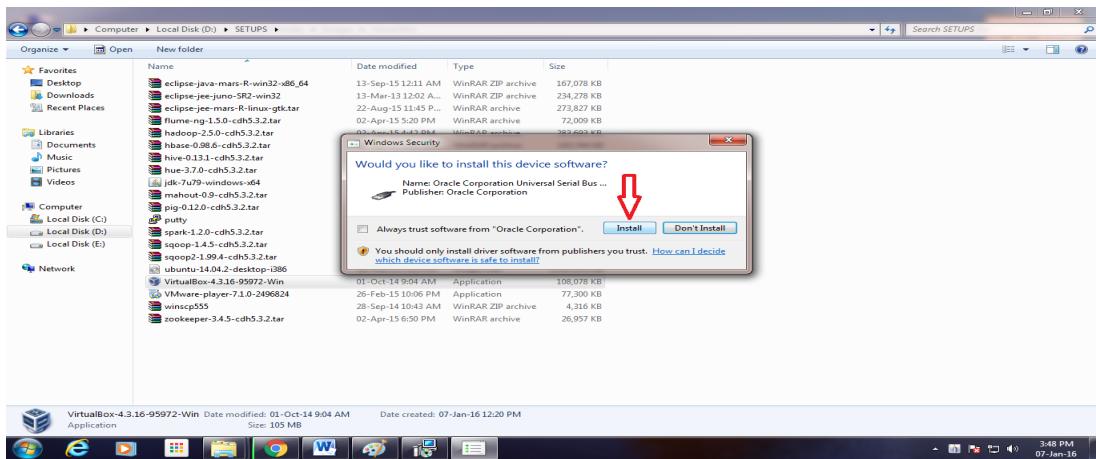


Installation of Oracle VM VirtualBox- Serial Bus Software Installation

- Click “Install”

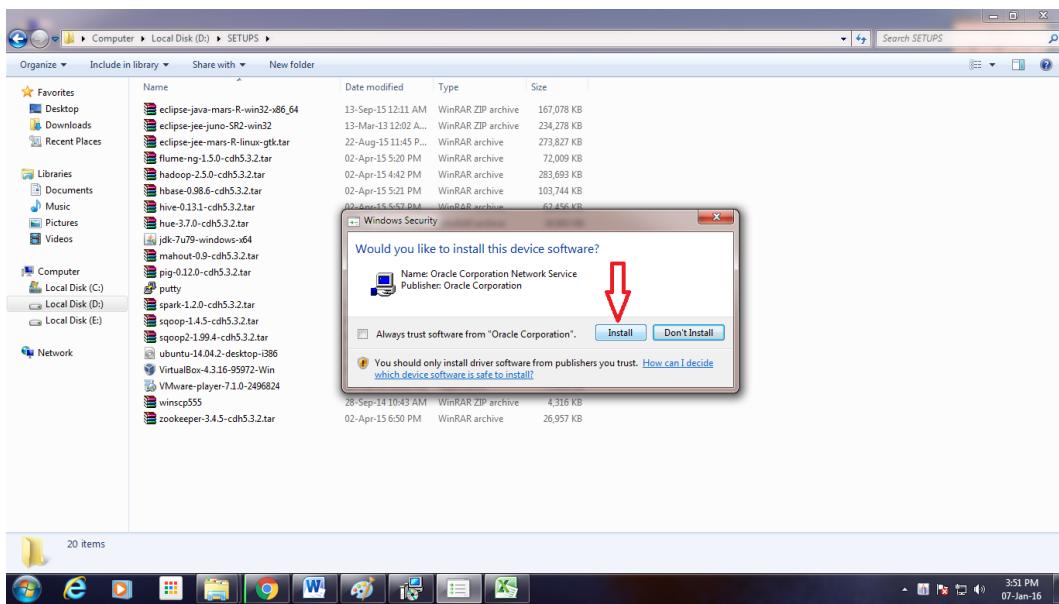


Installation of Oracle VM VirtualBox – Network Service Installation

- Click “Install”

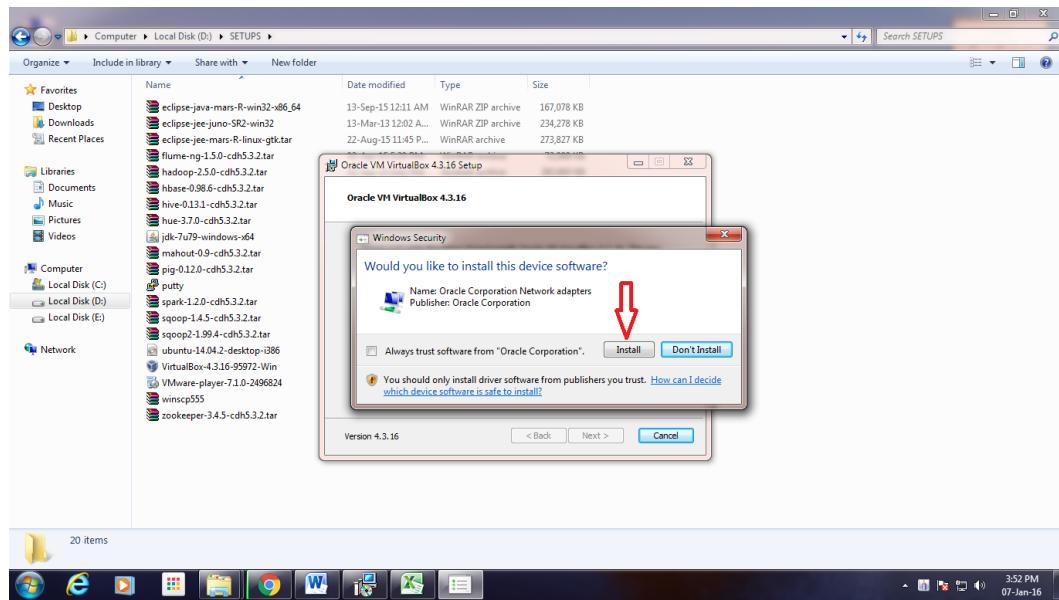


Installation of Oracle VM VirtualBox – Network Adapters Installation

- Click “Finish”

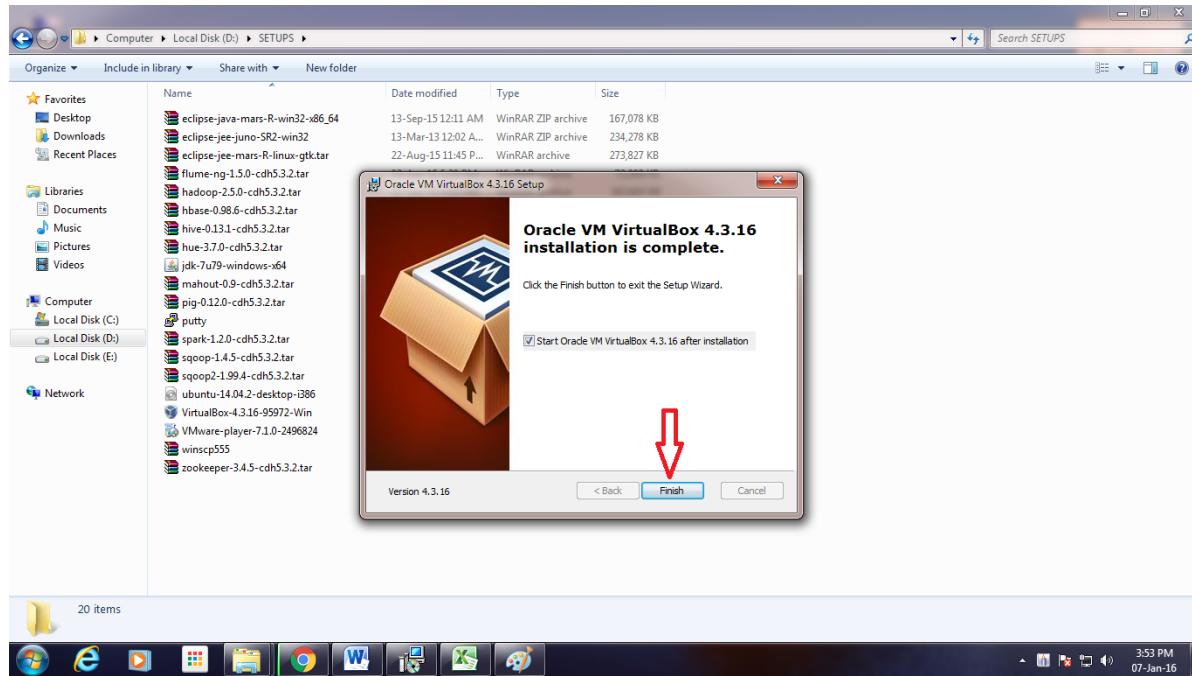


9.1.2.2. Open VirtualBox. Double-click (or click once on a Mac) the VirtualBox app icon.

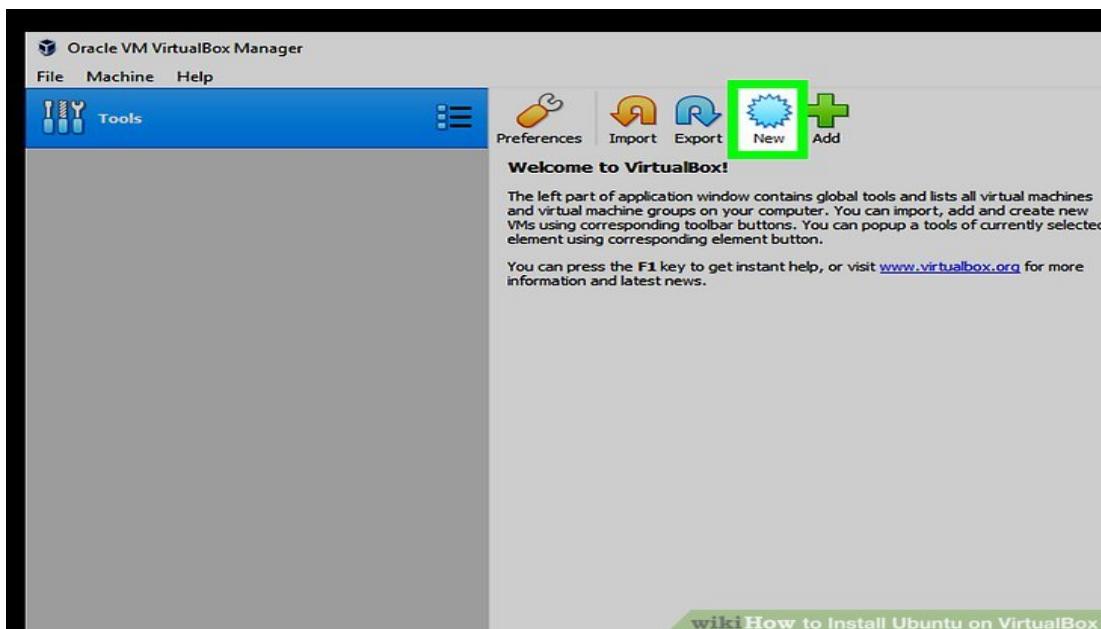


Click New. It's a blue badge in the upper-left corner of the VirtualBox window. Doing so opens a pop-up menu.




Enter a name for your virtual machine. Type whatever you want to name your virtual machine (e.g., Ubuntu) into the "Name" text field that's near the top of the pop-up menu.

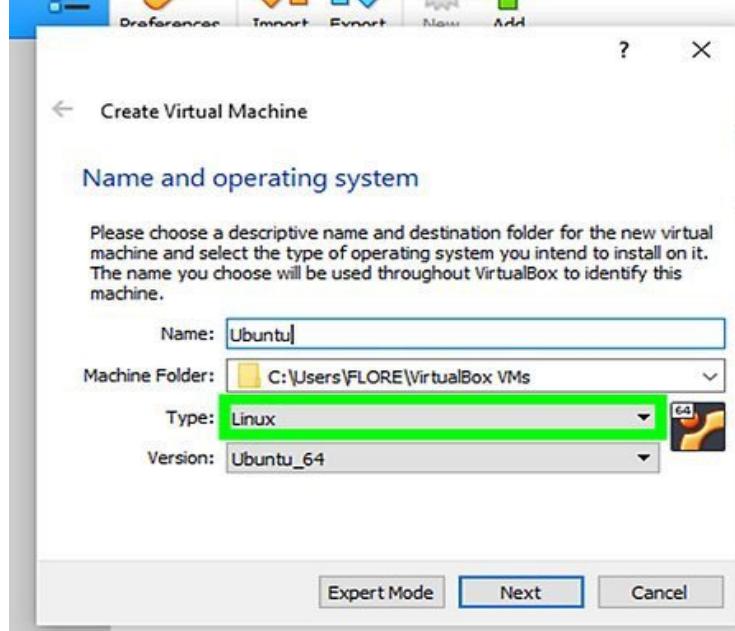


For **Operating System Type**, select the OS that you want to install.

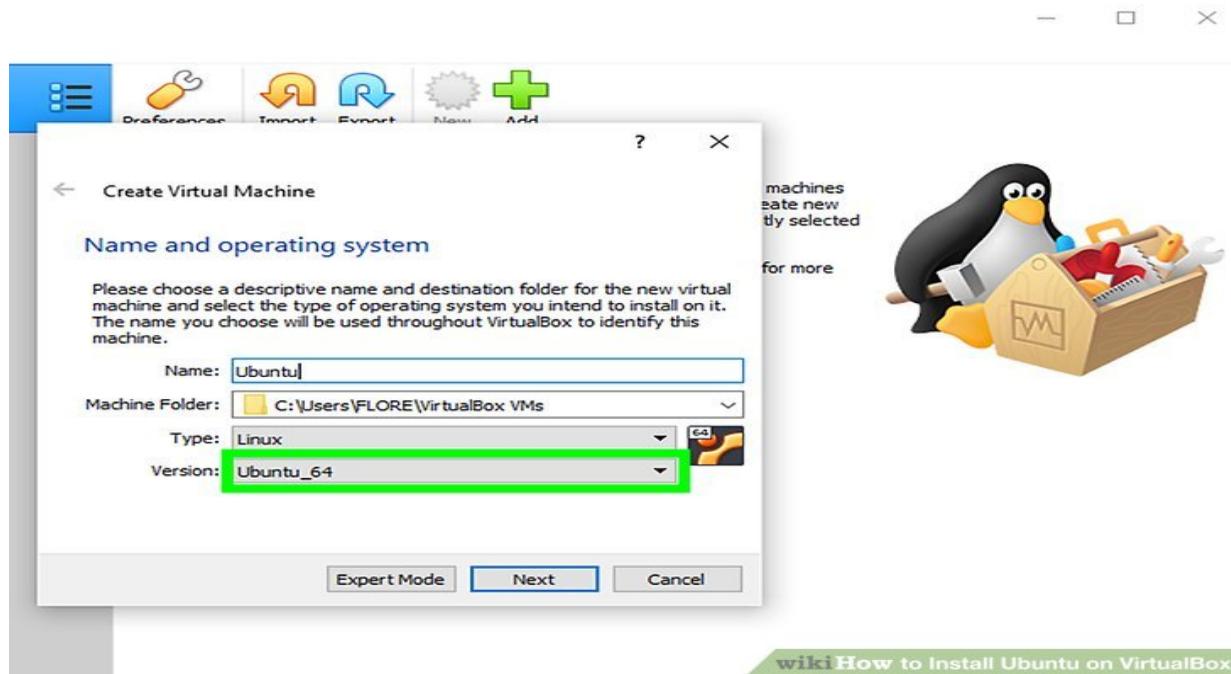

Select the **version** of the operating system.

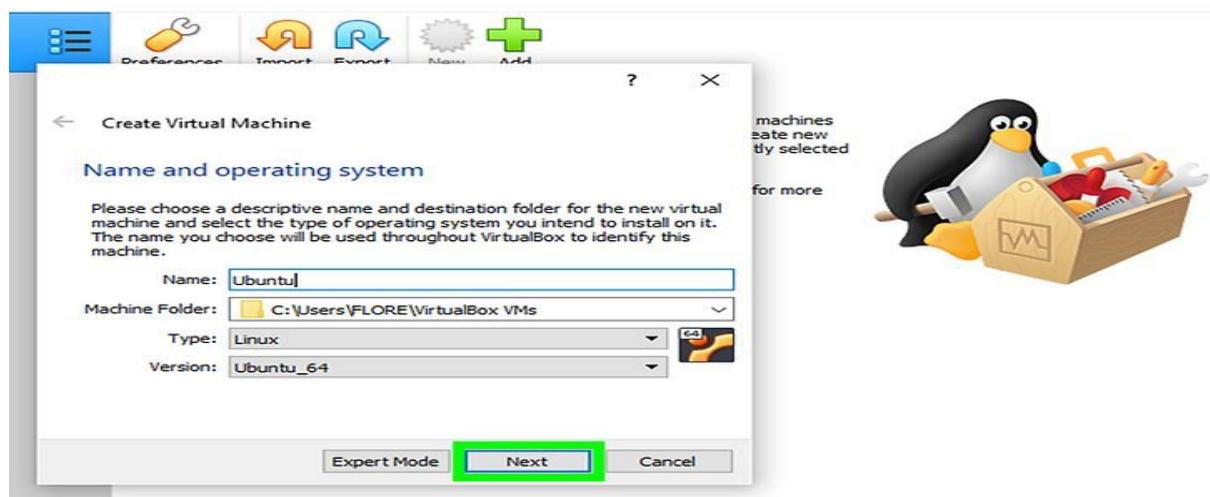


Click Next. It's at the bottom of the menu.

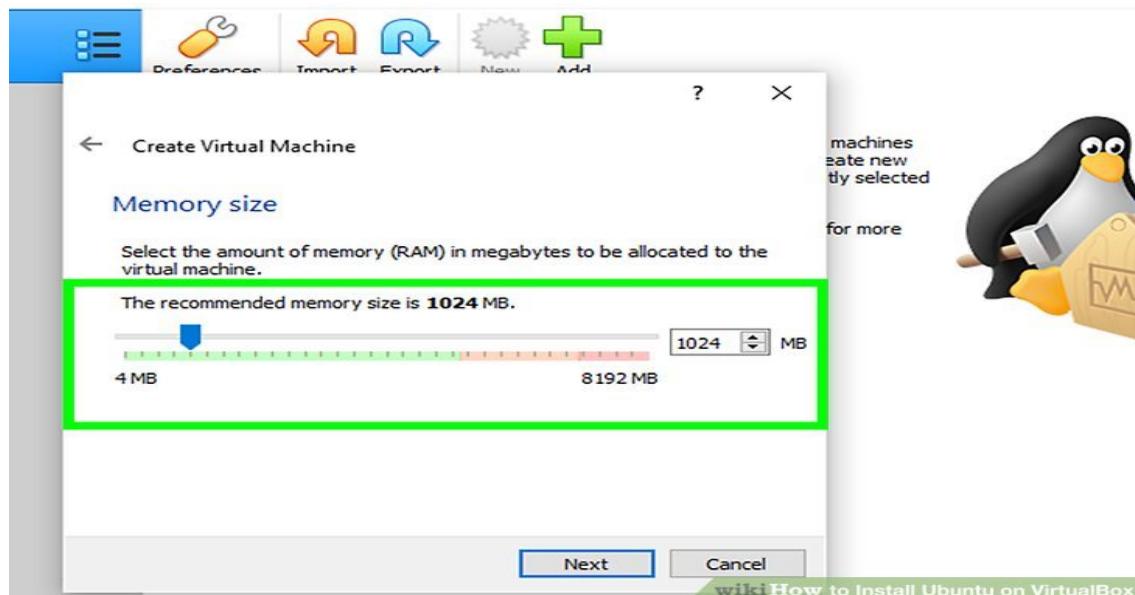

Select an amount of RAM to use. Click and drag the slider left or right to decrease or increase the amount of RAM that VirtualBox will have available for your virtual machine.

The ideal amount of RAM will automatically be selected when you get to this page.


Make sure not to increase the RAM into the red section of the slider; try to keep the slider in the green.

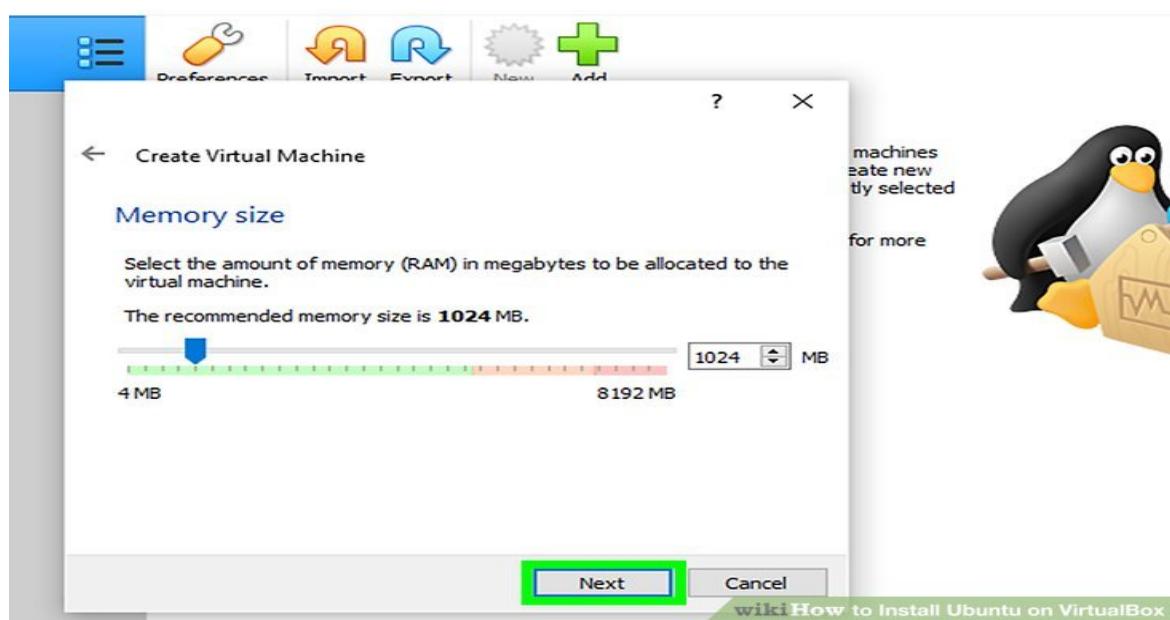


Click Next. It's at the bottom of the menu.



Create your virtual machine's virtual hard drive. The virtual hard drive is a section of your computer's hard drive space which will be used to store your virtual machine's files and programs:

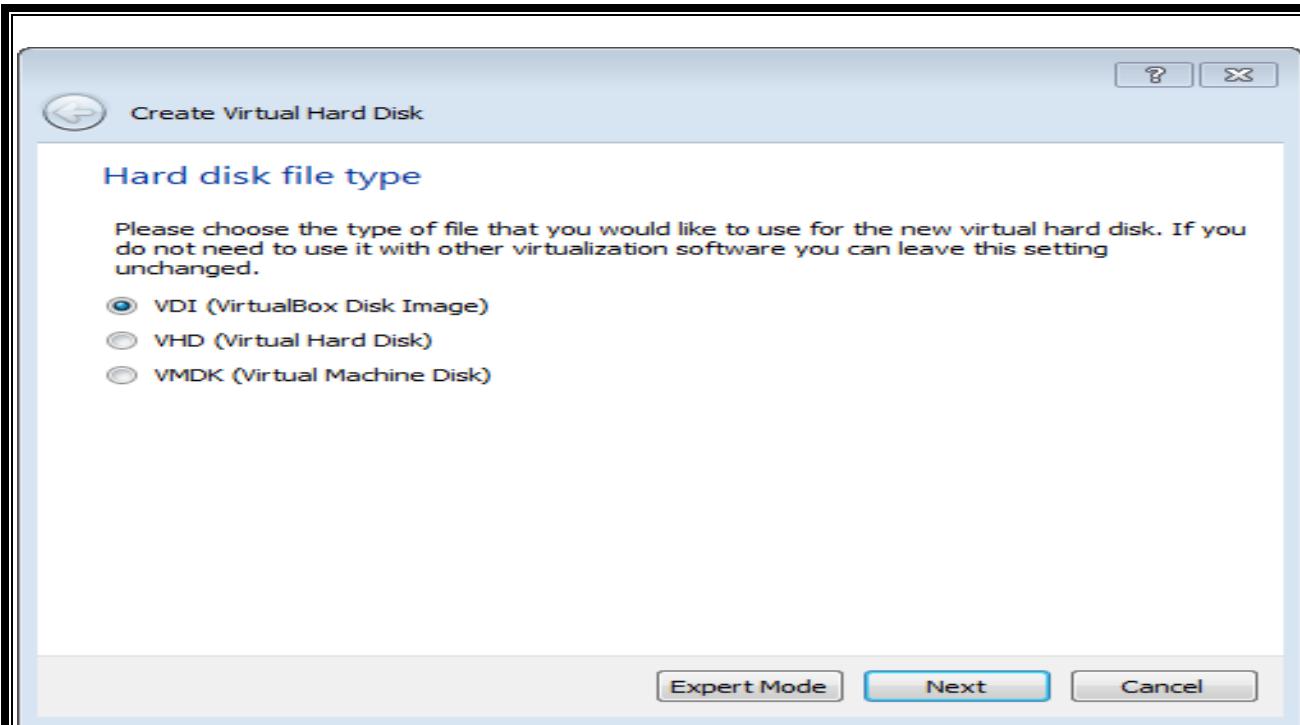


Use “VDI” to create a virtual hard disk

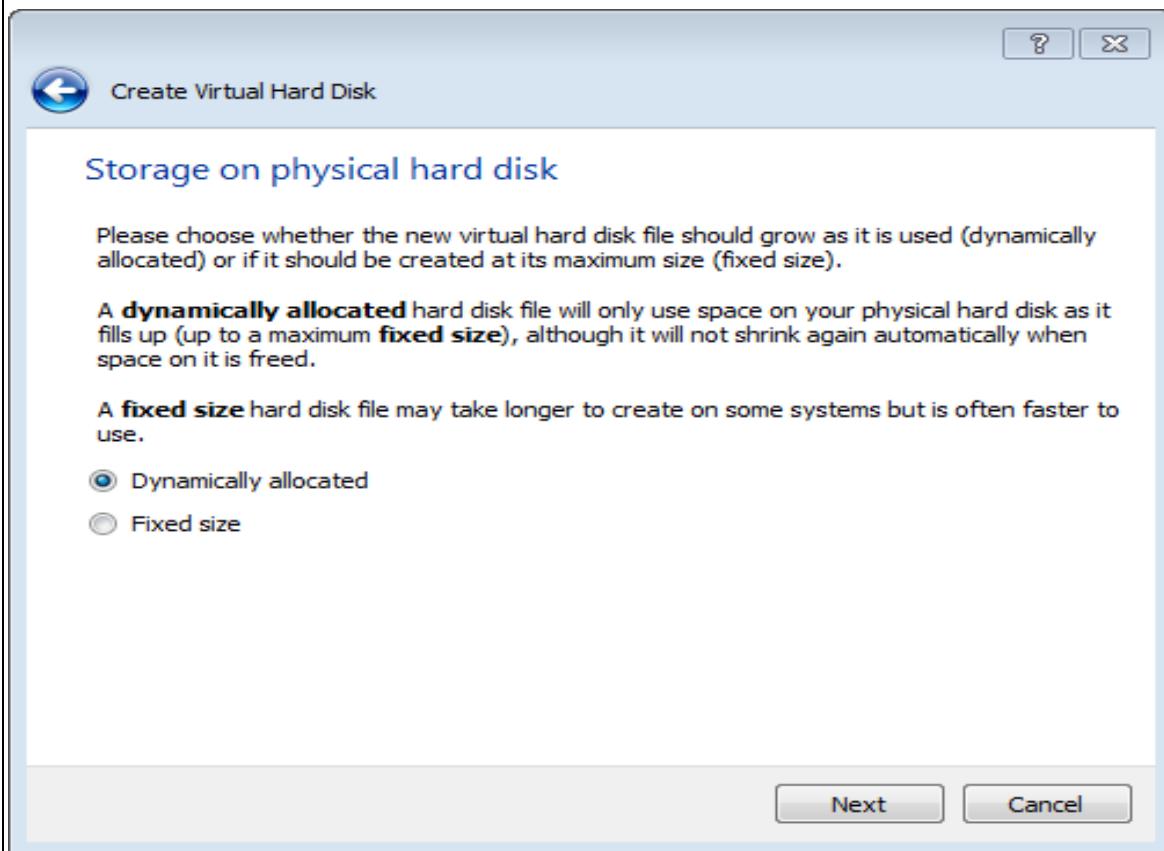

Choose “Dynamically allocated”

Allocate at Minimum 8 GB (recommended 10 or more).

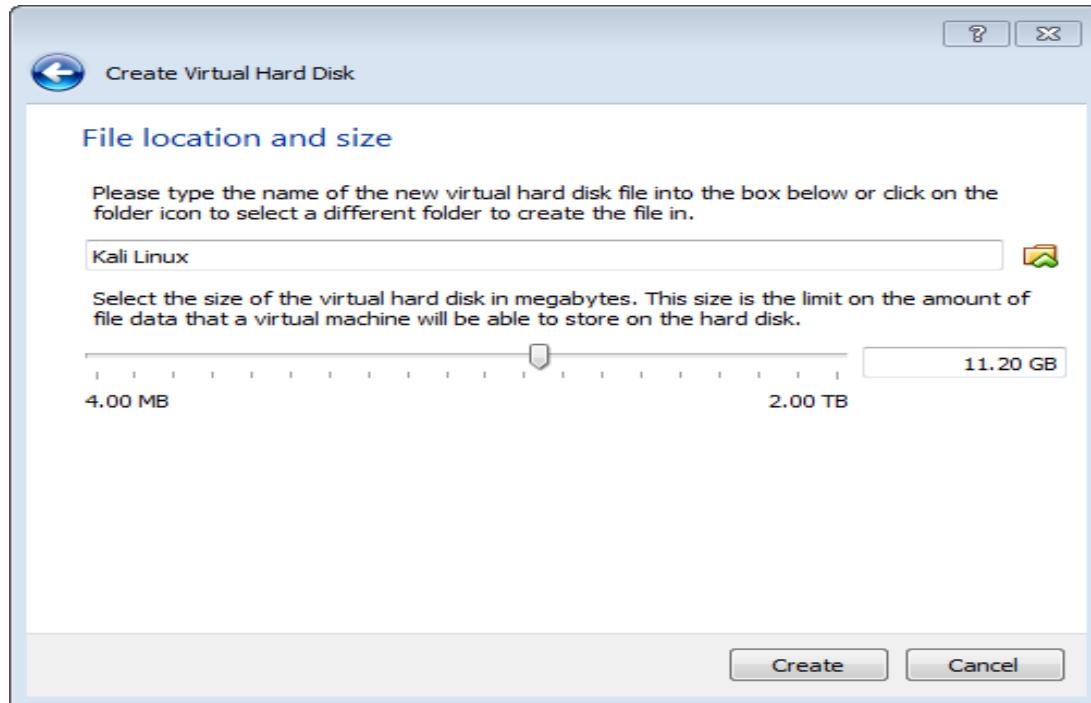

Click **Create**, to create your new virtual machine. The virtual machine is displayed in the list on the left side of the VirtualBox Manager window, with the name that you entered initially.

VMs can run multiple operating system environments on a single physical computer, saving physical space, time and management costs.