Yuvraj Chauhan
20271006
MCA 3A
full Stack

(1)

```html
<html>
<head>
<title> Angular JS Directives </title>
</head>
<body>
<h1> full Stack Question 1 <h1>
<div ng-app = "" ng-init = " countries = [{locale:'en-
                    India', name:' India'},
{locale:'en-GB', name : 'United Kingdom'}, {locale:'en-
                    FR', name:' France'}]">

<p>Hello <span ng-bind = "name"></span>! </p>
<p> List of Countries with locale: </p>
 <ol>
 <li ng-repeat = "country in countries">
  {{'Country:' + country.name + ', Locale:' +
  country.locale }}
     </li>
     </ol>
     </div>
     <script src = "https://ajax.googleapis.com/ajax/
     libs/angularjs/1.3.14/angular.min.js">
      </script>  </body> </html>
```
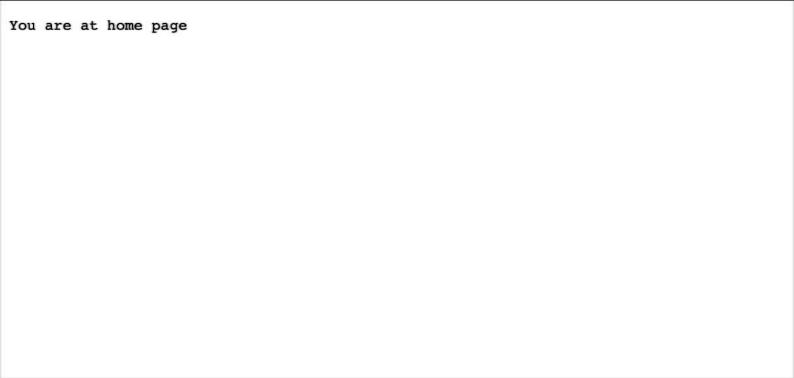
Full Stack Question 1

Hello !

List of Countries with locale:

1. Country: India, Locale: en-India
2. Country: United Kingdom, Locale: en-GB
3. Country: France, Locale: en-FR

```
2). Const http = require ("http")
    Const server = http.CreateServer ((req,res) = >{
    if (req.url == "/")
    res.end (" You are at home page")
    elseif(req.url == "/contact")
    res.end ("You are at contacts")

    else
    res. writeHead (404)
    res. end ()
    3)
    server. listen (4002, "127.0.0.1", () => {
    Console. log ("Listening to the graphic era
    server..."")
    3)
```

You are at home page

```
Last login: Mon Jan 31 10:24:10 on ttys000
[→  ~ nano node.js
[→  ~ node node.js
Listening to the graphic era server....
```