Ans (2) => < html > - HTTP Server </ stitle> lated first Name / lated >

lated total "id="name"/>


lated total "id="name"/>

lated total "lated Name = "name"/>

lated Comail Name (lated >

lated Missage Clased >

Input type = "tot" id = "Idasage"> < Script> \$ (document). Tready (Function () 5 \$ ("#Submit"). click (function()) Var firstName = \$ ("# firstName"). Val (); Var JastName = \$ ("# JastName"). Val (); Vaor email = \$ ("#cmail"). val () 3, Var mussage=\$("#message")- Val(); if ( dirst Name = = " | last Name = = " | | cmail = = " | | metag=" ) } alort ("Please Lil all fields."); return Jalse: \$ - ajax ( ? Type: " POST" Url: "Submission Pap", firstName: forstName, lastName: JastName, email: email, message: message Cotch: false unation (data) { alot (data); }, 3); 3);

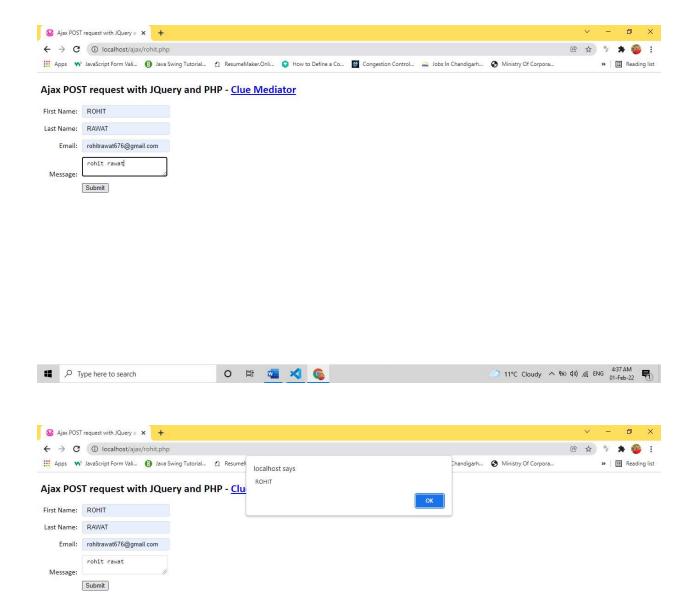



Ans and

<! DOETYPE html >

< div ng-app = "ng-int = "firstName = "Tohn">

< P> Input Something in the Input biox: < /P>
P> Name: < input type = text ng-model = first Name >
P> You wrote: { first Name }

</body>

## Data Birding

<! DOCTTPE html>

< html> "https://ajax.gogleapis.com/ajax/libs/argulars/ < body > script > (script) | Script |

- div data-ng-app=""data-ng-init="quantity=1; price=5">
<h2> Gost Calculator </h2>

Quartity: < input type = "number" ng-model - "quantity" > Brice: < input type



