
```
Mame-teimanshu Saxena
 MCA-8' Sem-3rd
  ID- 2001070
  Rollno-22
Any 1.
     < 1 DOLTYPE html>
        Some = " http://ajan.googleapis.com/ajan/libs/angularijs/1.69/
      < html>
       < script
             angular. min . js >< /script>
         <div neg = app = "ng-int= "name = [
           E name: "Himanshu Sanena", country: "India's,
E name: himanshu, country: 'India's,
E name: Himanshu, country: 'India's]'>
            < U1>
            28 x. name +; 1 + x. country 33 <16>
            </01>
```

</di>

<1 body>

< /html>

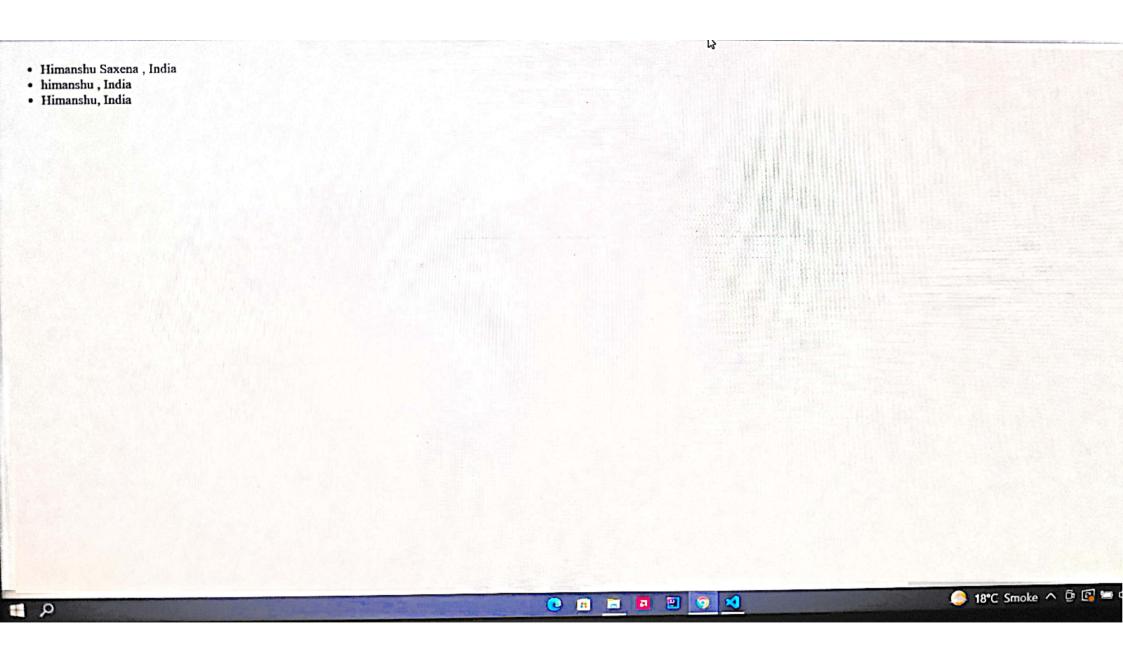

Himanshu Suxeng MCA-<sup>1</sup>C' Sem-3rd ID-2001070 Rollho-22

Au 2. Van http = require ('Attp')

Van Server = http. Create Server ((function (request, response))

2

response. Writtead (2000,

2 "content - Type": "tent / Plain"3);

response. end ("My Name in teinanshu Saxena");

response. end ("My Name in teinanshu Saxena");

Server. listen (7000);

Console. lug ("listening to Naver...");

My name is Himanshu Saxena.