


Name → Deepak Singh
Course → MCA (3rd)
Roll no → 2001052

Full Stack

Ans → (2)

```
const http = require("http");  
const server = http.createServer((req, res) =>  
  res.end("Response from server → " + PORT);  
);
```

```
const PORT = process.env.PORT || 8000;  
const host = "localhost";  
server.listen(PORT, host, () =>  
  console.log("Server listening on port " +  
    PORT);  
);
```

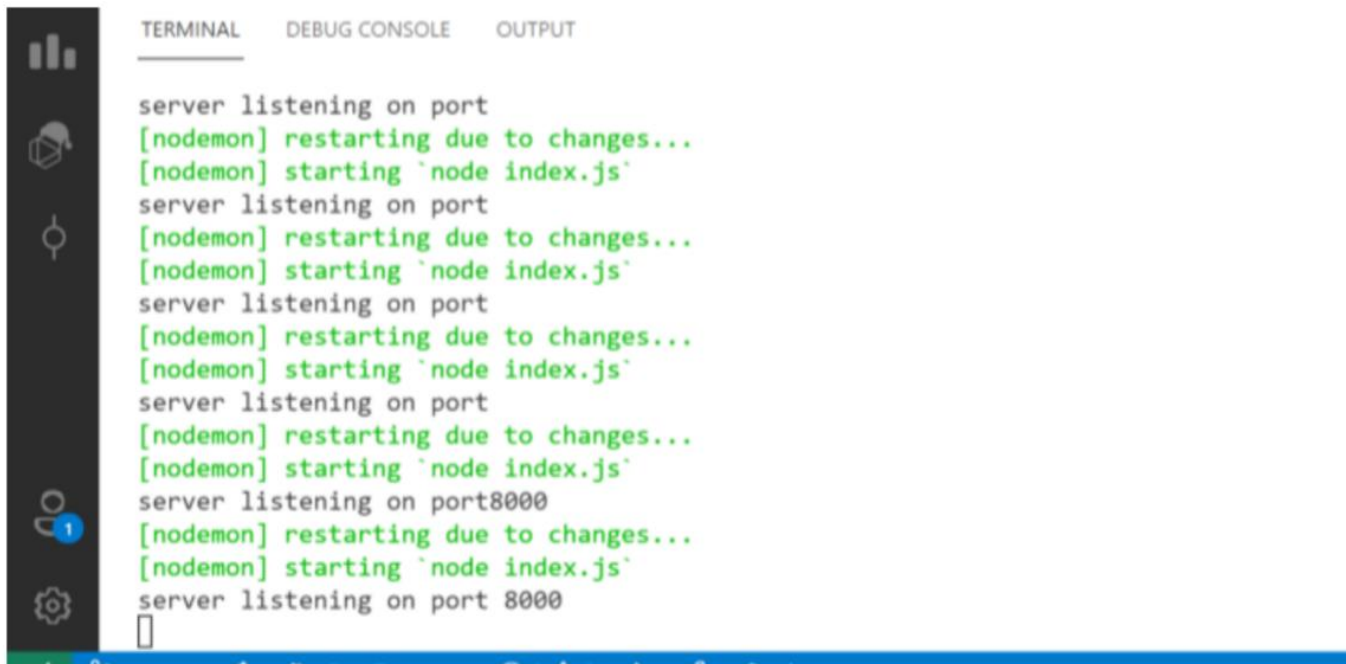

```
TERMINAL  DEBUG CONSOLE  OUTPUT
server listening on port
[nodemon] restarting due to changes...
[nodemon] starting `node index.js`
server listening on port
[nodemon] restarting due to changes...
[nodemon] starting `node index.js`
server listening on port
[nodemon] restarting due to changes...
[nodemon] starting `node index.js`
server listening on port
[nodemon] restarting due to changes...
[nodemon] starting `node index.js`
server listening on port8000
[nodemon] restarting due to changes...
[nodemon] starting `node index.js`
server listening on port 8000
█
```

Output:



Response from server->>>8000

=