

Looping with objects:

- sandeep, india
- rahul, india
- magnus, normay

```
COURTS DESCRIPTION OF THE FIRST STREED FINE STREED FOR THE STREED
```


Sander Singh Negi, mcA-3-A ROU NO. = 100 2001/30 Index. Js <! docty fe html) < h+m1 lang = "en" < head > < meta Charset = "UTF-8"> = +1+1e> Example - example - ngRepeat -+ racking _ Production < 1+i+1e) = link href = "ahimation - css" rel = "stylesheet" e: type = "text | css "> Swift Src = "11 code angular Js. org | Snaps hot) angular.min. 7815 = 1 Scripts < S(rift Stc= 1/1 Code. angularts.org | Snalshot | angular - animate Js"> < 1 Script> < scrift src = "Scrift. Js" > < lscrift) < The ad < body ng - aff = "ng Re Pea+"> C dig hg- controller = "releat controller"> < 604+on hg-click = "remove first 1)" remove first = Guttor ng-Click = "uldate Age()" Juldate age < button hg-Click = "copy()"> (oby < 164) < 1 GUHON < 6r) < 6040 n ng - Click = (1 reset (1") > reset


```
list < 164+ on > = 60-)
< Code ) + back by $id (friend) < Icode) (defauit):
< Ul class = "example-animate - Contair 1)
cliclass = "animate - releat" ng -releat = "friend
in friends ")
 Ssfriend. names is ssfriend gess years old.
 c/lise/us = code +rack by $id (foiend) = loode)
(defauit), with age one-time binding:
Cul class = " example - animate - contains"
Cli class = 4 animate - refeat " ng - refeat = "triend
 If friend name 33 is [ [:: friend age & ] years old.
 C/113 < 1013
 < Idir
  < 1 60dy)
  < [h+mi]
   Script. Js
  (function (angular) [ 'use Strict')
 angular. module ('hg. Refeat', ['ng Animate']).
Controller ( (refleat Controller), function ($scole) {
 var friends = [ [ kame: 'Sardui', age: 211,
Ename: 'Ankit, age 233, J)
```

\$ scale . Te more fixs+ = function () & \$ scole friends-shift (); 3; \$ Scole. Uldate age = function ()[5 scole friends for Each (function (e))? el. age = el. age + 5; 33); 3; I sole (oly = function () s I Scale. Forends = angul ar - coly (I scale. friends); Signale \$ Scope reset = 4 chetion ()S I Scale. Friends = angular. (ofy (friends); 1) \$ Scope - Yese+ (); 33); 33 (Windows - angular)

```
Sandeef Singh Negi, MCA-3-A
       Ro11 No- = 2001130
CI DOCTYPE h+mI)
 < h+m1) without = sep stabil simil
 < Script
 Soc = 4 n++ Ps: 11 atax. google a Pis. com | atax 11:65
  angular 1.6.9 / angular. min-Js"> = / Script
  < 6001,4)
  <div ng-aff="" ng-init = "names=[ [ ham</pre>
  'Sandeep', Country: ' India's,
  [hame, lahor, country: gholia'],
  Ename, magnos, Country: Normway 1971)
  < 1 > looling with objects: < 1P>
   < 01)
   < 11 ng-relear = 4x in names 1)
   [( X-hame + ', ' + x-(ountry )] </11)
   < 1013
    < 16ody )
```

< (h+m1)

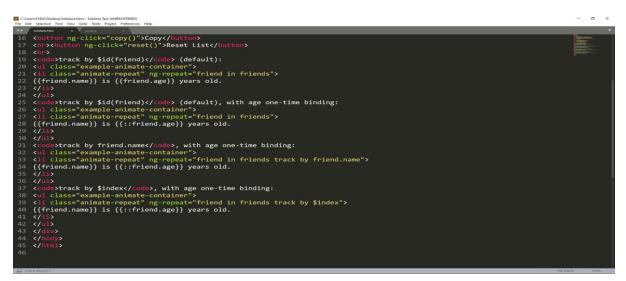



• {{friend.name}} is {{friend.age}} years old.

track by \$id(friend) (default), with age one-time binding:

• {{friend.name}} is {{::friend.age}} years old.

track by friend.name, with age one-time binding:

• {{friend.name}} is {{::friend.age}} years old.

track by \$index, with age one-time binding:

• {{friend.name}} is {{::friend.age}} years old.